


## Product Line Information for Micro-MaTch Board-Board & Ribbon-Board Connectors

---

[Product Feature Selector](#)

# AMP Micro-MaTch Miniature Connector System

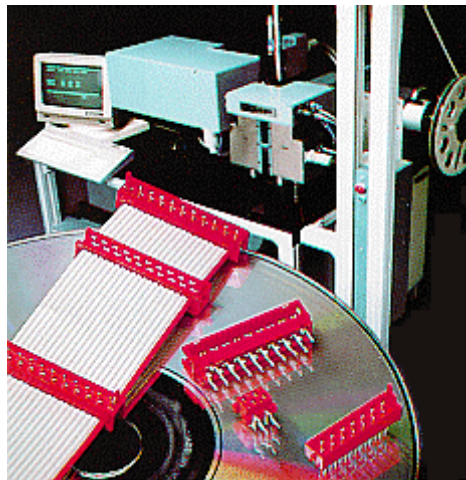

## Product Facts

---


- One of the smallest systems available at 1.27 mm
  - UL-recognized: File No. E28476, Vol. 23, Section 4
  - High performance/cost ratio
  - Wire connectors supplied on-tape and suitable for mass termination of 28 AWG [0.08 mm<sup>2</sup> to 0.09 mm<sup>2</sup>] ribbon cable
  - Tin plated contact design
  - Guaranteed minimum contact force of 2.0 N
  - Fretting corrosion proof thanks to additional positioning spring member
  - Fully plated contacts: no bare edges and no migration of corrosion products
  - Contacts fully protected by polyester housings, except for side-entry female board connector
  - Full range of application tooling from hand tool to fully automated equipment
  - Board connectors supplied on-tape.
- 

## Description

Miniaturization and the trend toward higher density of electronic functions on a substrate led to the introduction of smaller interconnection systems.

---

The AMP Micro-MaTch connector family, with its contact spacing of 1.27mm, fully complies with the electronic packaging requirements of today and the future. The system offers a range of board and wire connectors, enabling a variety of wire-to-board and board-to-board interconnections. The AMP Micro-MaTch contact concept is essentially different from other systems available. By its design, the traditional failure mode in tinplated connections, fretting corrosion, is prevented. Due to an additional positioning spring in the female part, relative movements caused by vibrations/thermal expansion between male and female contacts are absorbed. By preventing movements on the contact spot, a gas tight connection can be guaranteed under all circumstances. The contact spring is located in the board connector and not in the cable connector, which is usually the case. The counterpart, incorporated in the cable connector, is a simple pin, either with an insulation displacement section, suitable for the mass termination of cable or with a kinked solder leg to be soldered onto a pc board. The separation of these two basic functions of the contact system (contact force generation and wire termination), enables the independent optimization of both functions and also leads to relatively simple contact shapes. Because of their shapes, contacts can be post-plated, leaving no bare edges in the contact and wire slot area. The contact spring system features an additional spring member (the positioning spring), which compensates positional tolerances. In this way the contact spring can be fully optimized for its basic function, so that the relatively high contact force, required for tin plated contact systems, can be guaranteed under all circumstances.

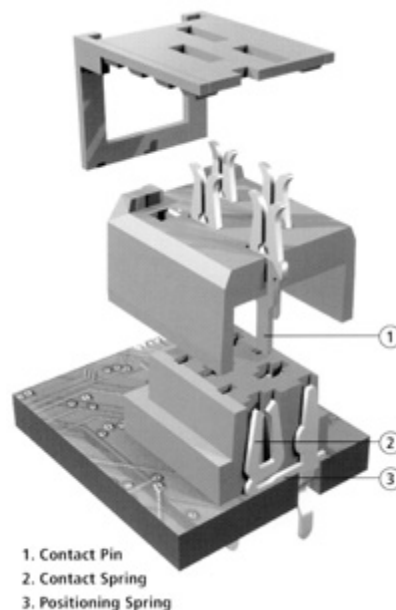

## Technical Data

**Flammability Rating:**

per UL 94 V-0

**Contact Resistance:**

10 m $\Omega$  max.

**Insulation Resistance:**

1,000 M $\Omega$  min.

**Nominal Voltage:**

230 V

**Current Rating:**

1.5 A max.

**Temperature Range:**

-40°C to +105°C (operating)

**Mating Force:**

5 N max. per contact

**Unmating Force:**

1 N min. per contact

# PC Board Connectors

**PC Board Thickness:**

1.6 mm nominal

**PC Board Hole Diameter:**

0.8 mm for solder connectors

# Wire Connectors

**Cable Type:**

Ribbon cable, UL Style 2651

**Conductor Spacing:**

1.27mm (.050")

**Conductor Diameter:**

Solid 0.30 mm diameter

Stranded 0.08 mm<sup>2</sup>

7 x 0.12-0.13 mm

**Insulation Type:**

Semi-rigid PVC

**Insulation Diameter:**

0.9 ± 0.1 mm

# Technical Documents

**AMP Product Specification:**

108-19052

**AMP Application Specification:**

114-19016, 114-19051

(You can search for the above documents using the Document Search option in the left hand navigation of this page.)

---

---

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9