
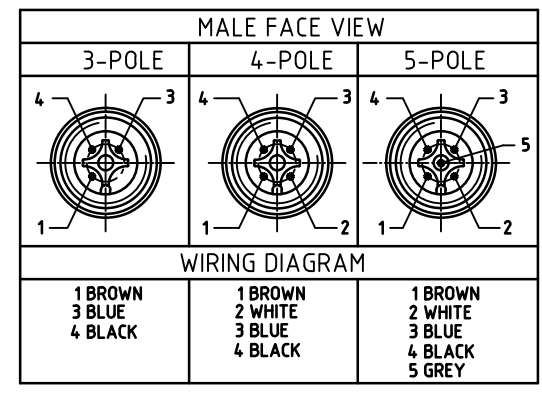
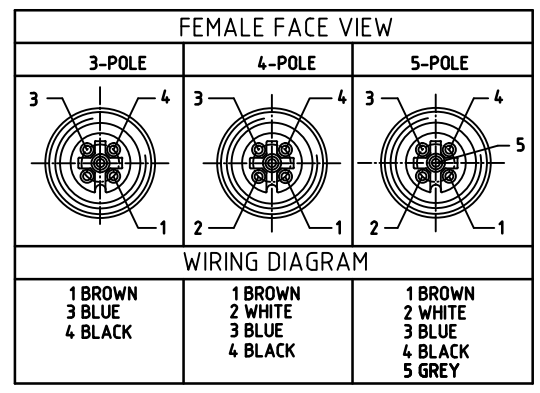
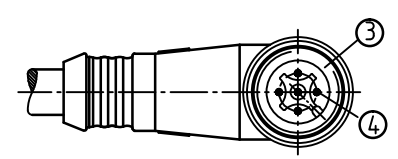


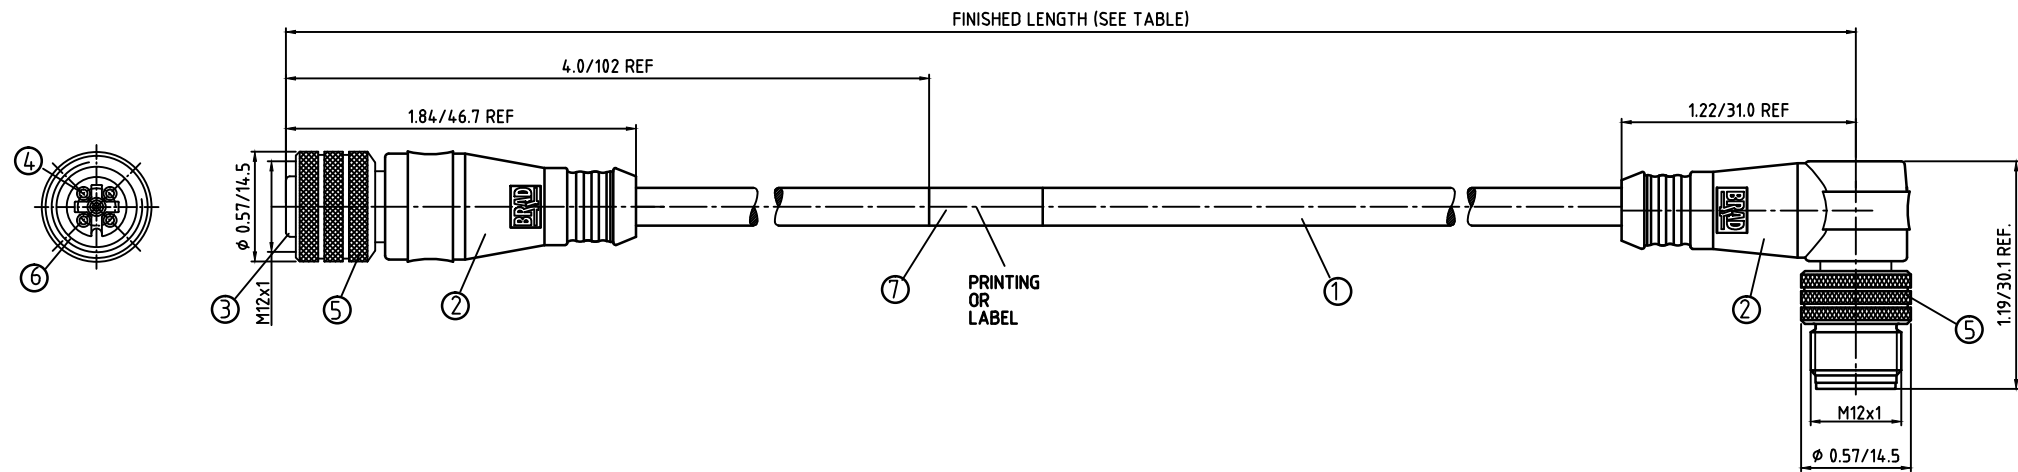

CONNECTOR SPECIFICATION:

VOLTAGE RATING	250 VAC/VDC
AMPERAGE RATING	max. 4 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 105°C

ITEM	COMPONENT	MATERIAL	FINISH
7	LABLE	MYLAR	BLACK/YELLOW
6	O-RING	VITON	RED
5	COUPLER	BRASS	TEFLON
4	SOCKET/PIN CONTACT	COPPER ALLOY	GOLD OVER NICKEL
3	INSERT	NYLON	BLACK
2	OVERMOLD	TPE	YELLOW
1	CABLE- 22/3-5 (COPPER STRANDING) 3/4/5 CONDUCT. 300V	TPE JACKET	YELLOW

ADD "REF" TO HEAD DIMENSIONS
EC NO: WNA2011-0563
DRWN: TWOLDEGE
CH'KD: VOU
APPR: JFMURPHY

5/4/11
2010/02/03

REV
3

QUALITY SYMBOLS
= 0
= 0

DESCRIPTION

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	±---	±---
3 PLACES	±---	±---
2 PLACES	±---	±.01
1 PLACE	±0.3	±---
ANGULAR ± --- °		

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
IN/MM

DRAWN BY	DATE
LSTEMMLE	2010/02/01
CHECKED BY	DATE
REISSNER	2010/02/02
APPROVED BY	DATE
FPACHER	2010/02/03

MATERIAL NO.
SEE TABLE SHEET 2

SIZE
A3

SCALE
1:1

DESIGN UNITS
METRIC

THIRD ANGLE PROJECTION

MICRO-CHANGE CORDSET
3/4/5 P. FE STR/ MA 90
22/3-5 YELLOW TPE CABLE

MOLEX INCORPORATED

DOCUMENT NO.
SD-120066-025

SHEET NO.
1 OF 2

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

	10	9	8	7	6	5	4	3	2	1																																													
F	<table><tr><th>POL</th><th>MATERIAL NUMBER</th><th>ENGINEERING NUMBER</th><th>FINISHED LENGTH</th></tr><tr><td>3</td><td>1200660230</td><td>883032K05M008</td><td>0.8M +44.5 -0 [2.62' +1.75" -0]</td></tr><tr><td>3</td><td>1200660231</td><td>883032K05M010</td><td>1.0M +55.6 -0 [3.27' +2.19" -0]</td></tr><tr><td>3</td><td>1200660232</td><td>883032K05M020</td><td>2.0M +88.9 -0 [6.56' +3.50" -0]</td></tr><tr><td>3</td><td>1200660233</td><td>883032K05M040</td><td>4.0M +165.1 -0 [13.12' +6.50" -0]</td></tr><tr><td>3</td><td>1200660234</td><td>883032K05M050</td><td>5.0M +165.1 -0 [16.40' +6.50" -0]</td></tr></table>										POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH	3	1200660230	883032K05M008	0.8M +44.5 -0 [2.62' +1.75" -0]	3	1200660231	883032K05M010	1.0M +55.6 -0 [3.27' +2.19" -0]	3	1200660232	883032K05M020	2.0M +88.9 -0 [6.56' +3.50" -0]	3	1200660233	883032K05M040	4.0M +165.1 -0 [13.12' +6.50" -0]	3	1200660234	883032K05M050	5.0M +165.1 -0 [16.40' +6.50" -0]	F																				
POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH																																																				
3	1200660230	883032K05M008	0.8M +44.5 -0 [2.62' +1.75" -0]																																																				
3	1200660231	883032K05M010	1.0M +55.6 -0 [3.27' +2.19" -0]																																																				
3	1200660232	883032K05M020	2.0M +88.9 -0 [6.56' +3.50" -0]																																																				
3	1200660233	883032K05M040	4.0M +165.1 -0 [13.12' +6.50" -0]																																																				
3	1200660234	883032K05M050	5.0M +165.1 -0 [16.40' +6.50" -0]																																																				
E	<table><tr><th>POL</th><th>MATERIAL NUMBER</th><th>ENGINEERING NUMBER</th><th>FINISHED LENGTH</th></tr><tr><td>4</td><td>1200660397</td><td>884032K05M003</td><td>0.3M +44.5 -0 [0.98' +1.75" -0]</td></tr><tr><td>4</td><td>1200660398</td><td>884032K05M005</td><td>0.5M +44.5 -0 [1.64' +1.75" -0]</td></tr><tr><td>4</td><td>1200660399</td><td>884032K05M006</td><td>0.6M +44.5 -0 [1.97' +1.75" -0]</td></tr><tr><td>4</td><td>1200660400</td><td>884032K05M010</td><td>1.0M +55.6 -0 [3.27' +2.19" -0]</td></tr><tr><td>4</td><td>1200660401</td><td>884032K05M015</td><td>1.5M +55.6 -0 [4.91' +2.19" -0]</td></tr><tr><td>4</td><td>1200660402</td><td>884032K05M020</td><td>2.0M +88.9 -0 [6.56' +3.50" -0]</td></tr><tr><td>4</td><td>1200660403</td><td>884032K05M030</td><td>3.0M +88.9 -0 [9.84' +3.50" -0]</td></tr><tr><td>4</td><td>1200660404</td><td>884032K05M040</td><td>4.0M +165.1 -0 [13.12' +6.50" -0]</td></tr><tr><td>4</td><td>1200660405</td><td>884032K05M050</td><td>5.0M +165.1 -0 [16.40' +6.50" -0]</td></tr><tr><td>4</td><td>1200660406</td><td>884032K05M060</td><td>6.0M +165.1 -0 [19.69' +6.50" -0]</td></tr></table>										POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH	4	1200660397	884032K05M003	0.3M +44.5 -0 [0.98' +1.75" -0]	4	1200660398	884032K05M005	0.5M +44.5 -0 [1.64' +1.75" -0]	4	1200660399	884032K05M006	0.6M +44.5 -0 [1.97' +1.75" -0]	4	1200660400	884032K05M010	1.0M +55.6 -0 [3.27' +2.19" -0]	4	1200660401	884032K05M015	1.5M +55.6 -0 [4.91' +2.19" -0]	4	1200660402	884032K05M020	2.0M +88.9 -0 [6.56' +3.50" -0]	4	1200660403	884032K05M030	3.0M +88.9 -0 [9.84' +3.50" -0]	4	1200660404	884032K05M040	4.0M +165.1 -0 [13.12' +6.50" -0]	4	1200660405	884032K05M050	5.0M +165.1 -0 [16.40' +6.50" -0]	4	1200660406	884032K05M060	6.0M +165.1 -0 [19.69' +6.50" -0]	E
POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH																																																				
4	1200660397	884032K05M003	0.3M +44.5 -0 [0.98' +1.75" -0]																																																				
4	1200660398	884032K05M005	0.5M +44.5 -0 [1.64' +1.75" -0]																																																				
4	1200660399	884032K05M006	0.6M +44.5 -0 [1.97' +1.75" -0]																																																				
4	1200660400	884032K05M010	1.0M +55.6 -0 [3.27' +2.19" -0]																																																				
4	1200660401	884032K05M015	1.5M +55.6 -0 [4.91' +2.19" -0]																																																				
4	1200660402	884032K05M020	2.0M +88.9 -0 [6.56' +3.50" -0]																																																				
4	1200660403	884032K05M030	3.0M +88.9 -0 [9.84' +3.50" -0]																																																				
4	1200660404	884032K05M040	4.0M +165.1 -0 [13.12' +6.50" -0]																																																				
4	1200660405	884032K05M050	5.0M +165.1 -0 [16.40' +6.50" -0]																																																				
4	1200660406	884032K05M060	6.0M +165.1 -0 [19.69' +6.50" -0]																																																				
D											D																																												
C											C																																												
B											B																																												
A	<table><tr><td rowspan="5">ADD "REF" TO HEAD DIMENSIONS EC NO: WNA2011-0563 DRWN: TWOLDEGE CH'KD: VOU APPR: JFMURPHY</td><td rowspan="5">DESCRIPTION REV</td><td>QUALITY SYMBOLS</td><td colspan="2">GENERAL TOLERANCES (UNLESS SPECIFIED)</td><td colspan="2">DIMENSION STYLE IN/MM</td><td>SCALE 1:1</td><td>DESIGN UNITS METRIC</td><td rowspan="2"> THIRD ANGLE PROJECTION</td></tr><tr><td rowspan="4"> = 0 = 0</td><td></td><td>mm</td><td>INCH</td><td>DRAWN BY LSTEMMLE</td><td>DATE 2010/02/01</td><td colspan="2" rowspan="2">MICRO-CHANGE CORDSET 3/4/5 P. FE STR/ MA 90 22/3-5 YELLOW TPE CABLE</td></tr><tr><td>4 PLACES</td><td>±---</td><td>±---</td><td>CHECKED BY REISSNER</td><td>DATE 2010/02/02</td></tr><tr><td>3 PLACES</td><td>±---</td><td>±---</td><td>APPROVED BY FPACHER</td><td>DATE 2010/02/03</td><td rowspan="2"> MOLEX INCORPORATED</td><td rowspan="2">MATERIAL NO. SEE TABLE</td><td rowspan="2">DOCUMENT NO. SD-120066-025</td><td rowspan="2">SHEET NO. 2 OF 2</td></tr><tr><td>2 PLACES</td><td>±---</td><td>±.01</td></tr><tr><td>1 PLACE</td><td>±0.3</td><td>±---</td><td colspan="2">DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS</td><td colspan="2">THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION</td></tr></table>										ADD "REF" TO HEAD DIMENSIONS EC NO: WNA2011-0563 DRWN: TWOLDEGE CH'KD: VOU APPR: JFMURPHY	DESCRIPTION REV	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	= 0 = 0		mm	INCH	DRAWN BY LSTEMMLE	DATE 2010/02/01	MICRO-CHANGE CORDSET 3/4/5 P. FE STR/ MA 90 22/3-5 YELLOW TPE CABLE		4 PLACES	±---	±---	CHECKED BY REISSNER	DATE 2010/02/02	3 PLACES	±---	±---	APPROVED BY FPACHER	DATE 2010/02/03	MOLEX INCORPORATED	MATERIAL NO. SEE TABLE	DOCUMENT NO. SD-120066-025	SHEET NO. 2 OF 2	2 PLACES	±---	±.01	1 PLACE	±0.3	±---	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		A		
ADD "REF" TO HEAD DIMENSIONS EC NO: WNA2011-0563 DRWN: TWOLDEGE CH'KD: VOU APPR: JFMURPHY	DESCRIPTION REV	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION																																														
		= 0 = 0		mm	INCH	DRAWN BY LSTEMMLE	DATE 2010/02/01	MICRO-CHANGE CORDSET 3/4/5 P. FE STR/ MA 90 22/3-5 YELLOW TPE CABLE																																															
			4 PLACES	±---	±---	CHECKED BY REISSNER	DATE 2010/02/02																																																
			3 PLACES	±---	±---	APPROVED BY FPACHER	DATE 2010/02/03	MOLEX INCORPORATED	MATERIAL NO. SEE TABLE	DOCUMENT NO. SD-120066-025			SHEET NO. 2 OF 2																																										
			2 PLACES	±---	±.01																																																		
1 PLACE	±0.3	±---	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																																																		
	10	9	8	7	6	5	4	3	2	1																																													

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9