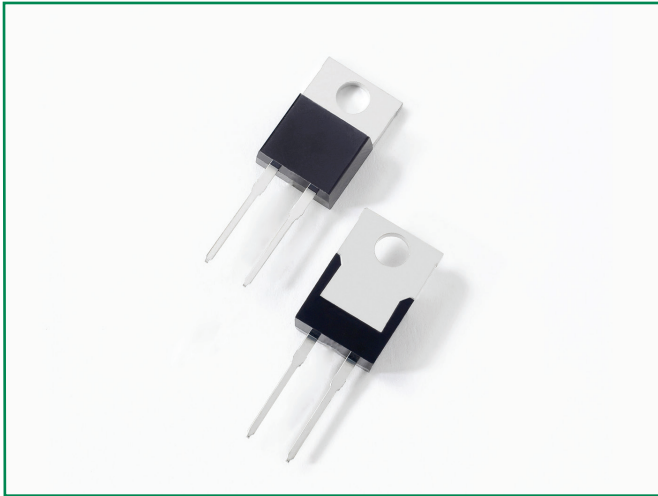


LFUSCD08065A

HF **RoHS** **Pb**


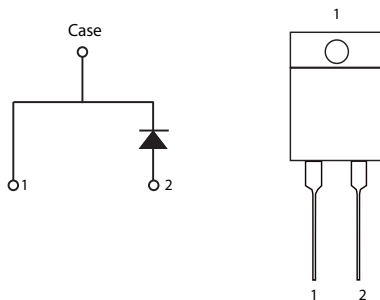
Description

The LFUSCD series of silicon carbide (SiC) Schottky diodes has near-zero recovery current, high surge capability, and a maximum operating junction temperature of 175 °C. The diode series is ideal for applications where improvements in efficiency, reliability, and thermal management are desired.

Features

- Positive temperature coefficient for safe operation and ease of paralleling
- 175 °C maximum operating junction temperature
- Enhanced surge capability
- Extremely fast, temperature-independent switching behavior
- Dramatically reduced switching losses compared to Si bipolar diodes

Circuit Diagram



Applications

- Boost diodes in power factor correction
- Switch-mode power supplies
- Uninterruptible power supplies
- Solar inverters
- Industrial motor drives

Maximum Ratings

Characteristics	Symbol	Conditions	Max.	Unit
DC Blocking Voltage	V_R	-	650	V
Repetitive Peak Reverse Voltage, $T_J = 25\text{ °C}$	V_{RRM}		650	V
Surge Peak Reverse Voltage	V_{RSM}		650	V
Maximum DC Forward Current	I_F	$T_C = 152\text{ °C}$	8	A
Non-Repetitive Forward Surge Current	I_{FSM}	$T_C = 25\text{ °C}$, 8.3 ms, half sine pulse	64	A
Non-Repetitive Peak Forward Current	I_{FMAX}	$T_C = 25\text{ °C}$, 10 μ S	385	A
Non-Repetitive Avalanche Energy	E_{AS}	$T_J = 25\text{ °C}$, $L = 5\text{ mH}$, $I_{pk} = 4.9\text{ A}$, $V_{DD} = 100\text{ V}$	67	mJ
Power Dissipation	P_{Tot}	$T_C = 25\text{ °C}$	115	W
		$T_C = 152\text{ °C}$	17.6	
Maximum Operating Junction Temperature	$T_{J,MAX}$		175	°C
Storage Temperature	T_{STG}		-55 to 175	°C

Electrical Characteristics

Characteristics	Symbol	Conditions	Value			Unit
			Min.	Typ.	Max.	
Forward Voltage	V_F	$I_F = 8 \text{ A}, T_J = 25^\circ \text{C}$	-	1.5	1.7	V
		$I_F = 8 \text{ A}, T_J = 150^\circ \text{C}$	-	1.8	2.1	
		$I_F = 8 \text{ A}, T_J = 175^\circ \text{C}$	-	1.95	2.25	
Reverse Current	I_R	$V_R = 650 \text{ V}, T_J = 25^\circ \text{C}$	-	20	230	μA
		$V_R = 650 \text{ V}, T_J = 175^\circ \text{C}$	-	40	700	
Total Capacitive Charge	Q_C	$V_R = 400 \text{ V}, I_F = 8 \text{ A}, di/dt = 250 \text{ A}/\mu\text{s}$	-	13	-	nC
Total Capacitance	C	$V_R = 1 \text{ V}, f = 1 \text{ MHz}$	-	260	-	pF
		$V_R = 300 \text{ V}, f = 1 \text{ MHz}$	-	29	-	
		$V_R = 600 \text{ V}, f = 1 \text{ MHz}$	-	23	-	

Footnote: $T_J = +25^\circ \text{C}$ unless otherwise specified

Thermal Characteristics

Characteristics	Symbol	Conditions	Value			Unit
			Min.	Typ.	Max.	
Thermal Resistance	$R_{\theta JC}$	-	-	-	1.3	$^\circ\text{C}/\text{W}$

Figure 1: Typical Reverse Characteristics

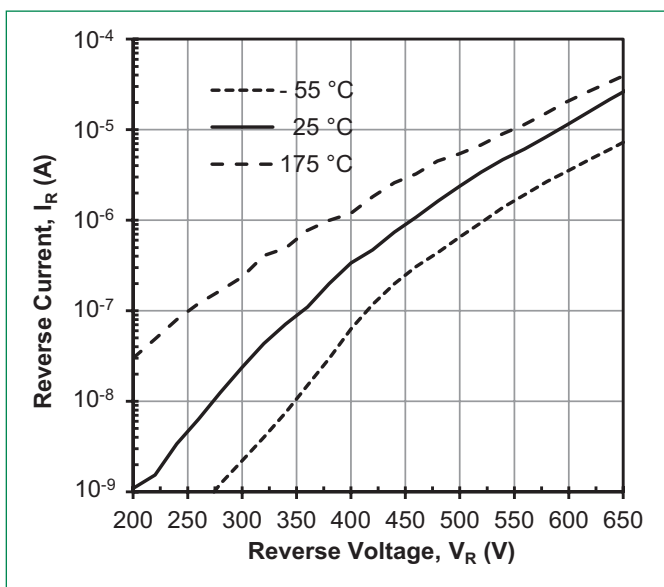


Figure 2: Typical Forward Characteristics

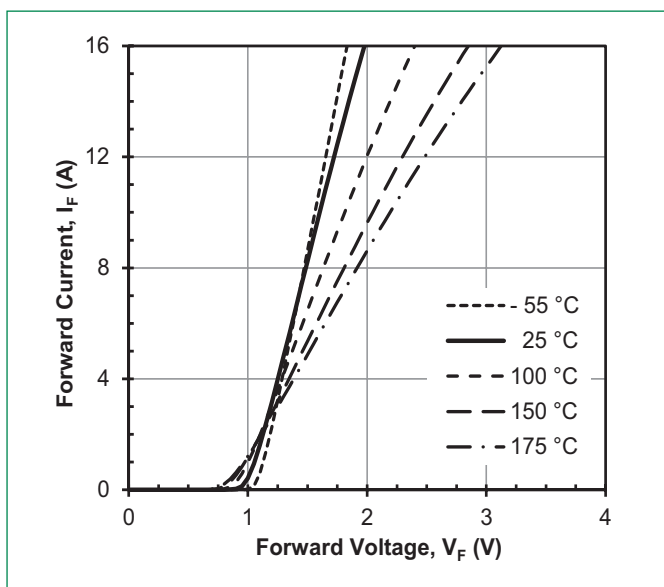


Figure 3: Power Disipation

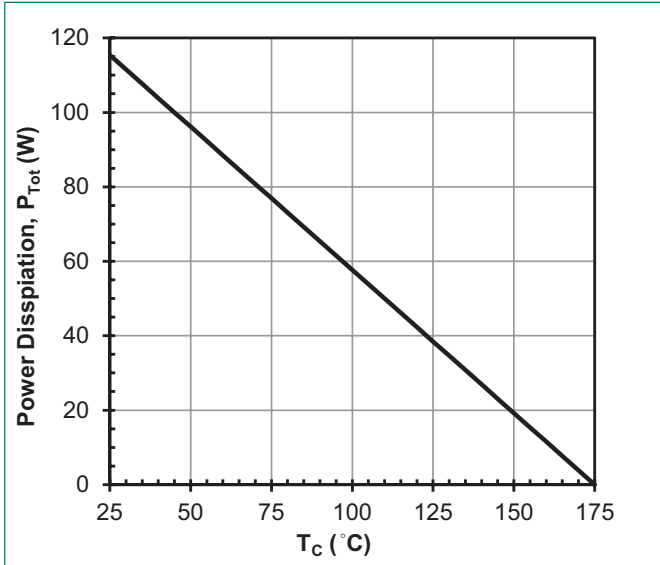


Figure 4: Diode Foward Current

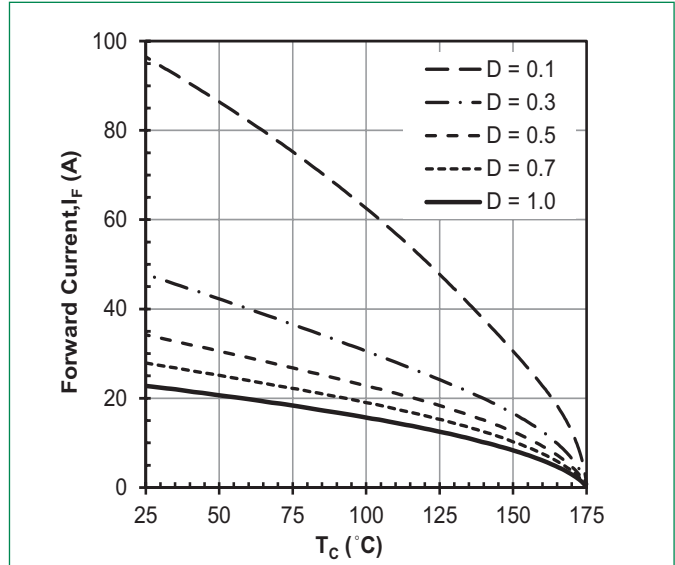


Figure 5: Capacitance vs. Reverse Voltage



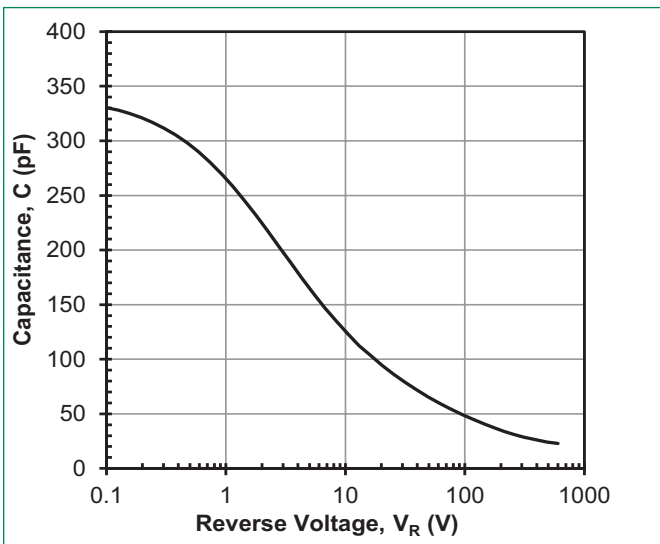


Figure 6: Maximum Transient Thermal Impedance

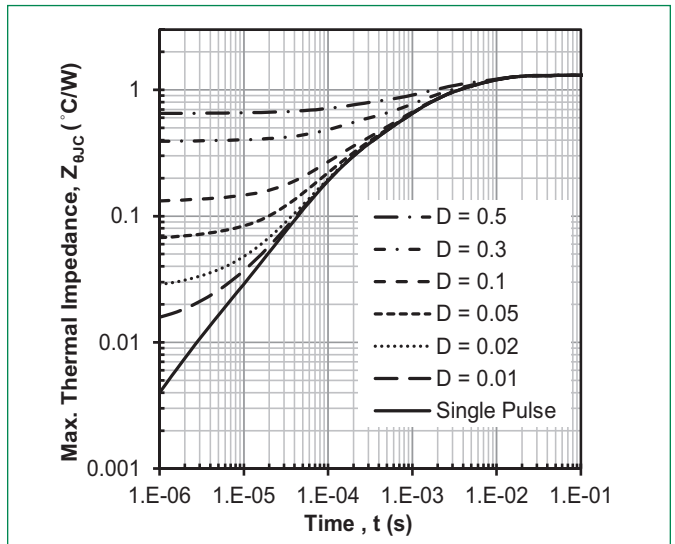

Part Marking System




LFU = Littelfuse
SCD = SiC diode
08 = Current Rating (8 A)
065 = Voltage Rating (650 V)
A = TO-220-2 package
PYWXX = Date Code
ZZZ = Lot Number

Date code notes:
P = assembly code
Y = year
W = week
XX = sequential build number

Packing Options

Part Number	Marking	Packing Mode	M.O.Q
LFUSCD08065A	LFUSCD08065A	50 pcs / Tube	500

Dimensions-Package TO-220 2-lead

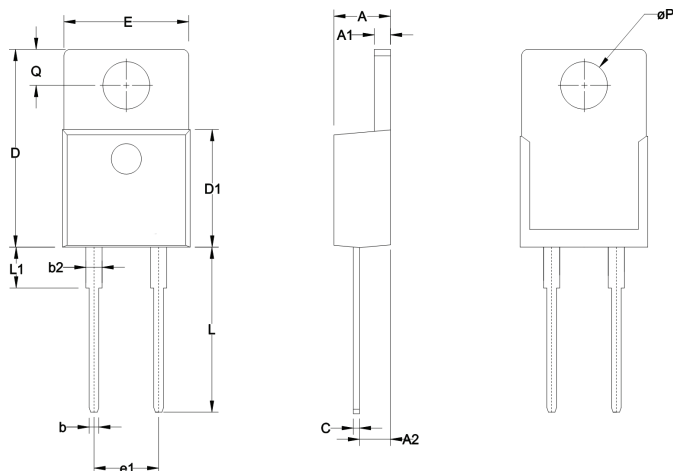


Symbol	Inches		Millimeters	
	Min	Max	Min	Max
A	0.165	0.185	4.19	4.70
A1	0.048	0.052	1.22	1.32
A2	0.094	0.098	2.39	2.49
b	0.025	0.035	0.64	0.89
b2	0.045	0.055	1.14	1.40
C	0.018	0.025	0.46	0.64
D	0.595	0.615	15.11	15.62
D1	0.355	0.365	9.02	9.27
E	0.381	0.391	9.68	9.93
e1	0.198	0.202	5.03	5.13
L	0.500	0.510	12.70	12.95
L1	0.120	0.150	3.05	3.81
øP	0.143	0.147	3.63	3.73
Q	0.100	0.120	2.54	3.05

Mounting	M3/M3.5	1Nm
Torque	Screw	8.8 lbf-in

Packing Specification (Tube for TO-220 2-lead)

Note: All units in Millimeters. Tolerances $\pm 0.25\text{mm}$ unless otherwise specified.

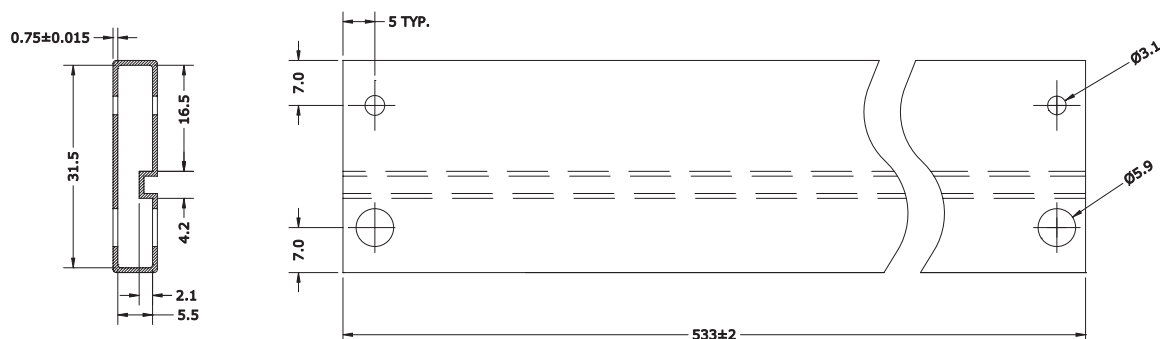

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9