

PRODUCT NUMBER
SEE SHEET 10

Amphenol
FCi

© 2016 AFCi

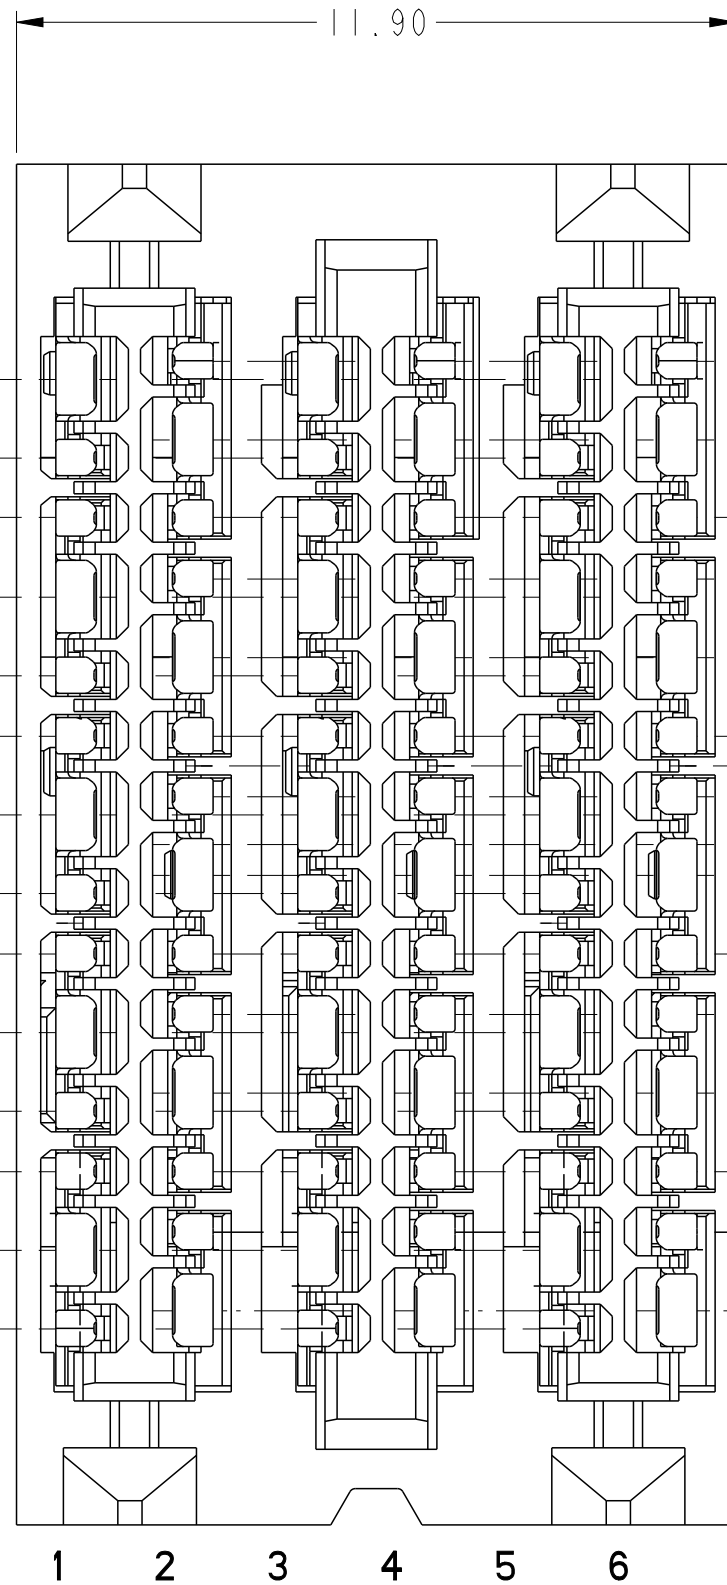
ODD COLUMN
CONTACT ROW ID
ODD AND EVEN
COLUMNS ARE
OFFSET

4X 3.6
GROUND
CENTERS

4X 1.0
SIGNAL PAIR
CENTERS

4X 3.6
SIGNAL
CENTERS
ROW A TO
FIRST GROUND

1.3



COLUMN ID

EVEN COLUMN
CONTACT ROW ID

4X 3.6
SIGNAL CENTERS

4X 3.6
GROUND CENTERS

4X 1.0
SIGNAL PAIR
CENTERS

1.3
ROW A TO
FIRST GROUND

CONNECTOR MATING FACE

(17.90)

(4.60)

TOP SURFACE
OF DCARD

Ø OF ODD COLUMNS

Ø OF EVEN COLUMNS

3.9

4.1

13X 1.20

(6.70)

(23.30)

HOUSING

SEE NOTE 6


IMLA

ORGANIZER

30X 1.60±0.20
GROUNDS
SEE NOTE 18

54X 1.40±0.20
SIGNALS


10125287-101LF
STANDARD MATE CONNECTOR

spec ref		---		dr		N Eppley		2013/04/24		projection				MM		size		A2		scale		1:1					
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED		eng		Peng-Bing Fu		2017/11/08				ecn no		ELX-DG-28221-1		rel level		Released									
ASME Y14.5M				chr		Justin Chen		2017/11/29																			
		appr		Heaven Cen		2017/11/30		product family												ExaMAX							
surface		- 		linear		0.X		±.3		Amphenol FCi		title		ExaMAX R.A. HEADER		dwg no		10125287		rev		B					
																								0.XX		±.10	
																								0.XXX		±.050	
																								angular		0°	
												cat. no.		SEE TABLE		Product - Customer Drw		sheet 1 of 11									

PDS: Rev :B

STATUS:Released

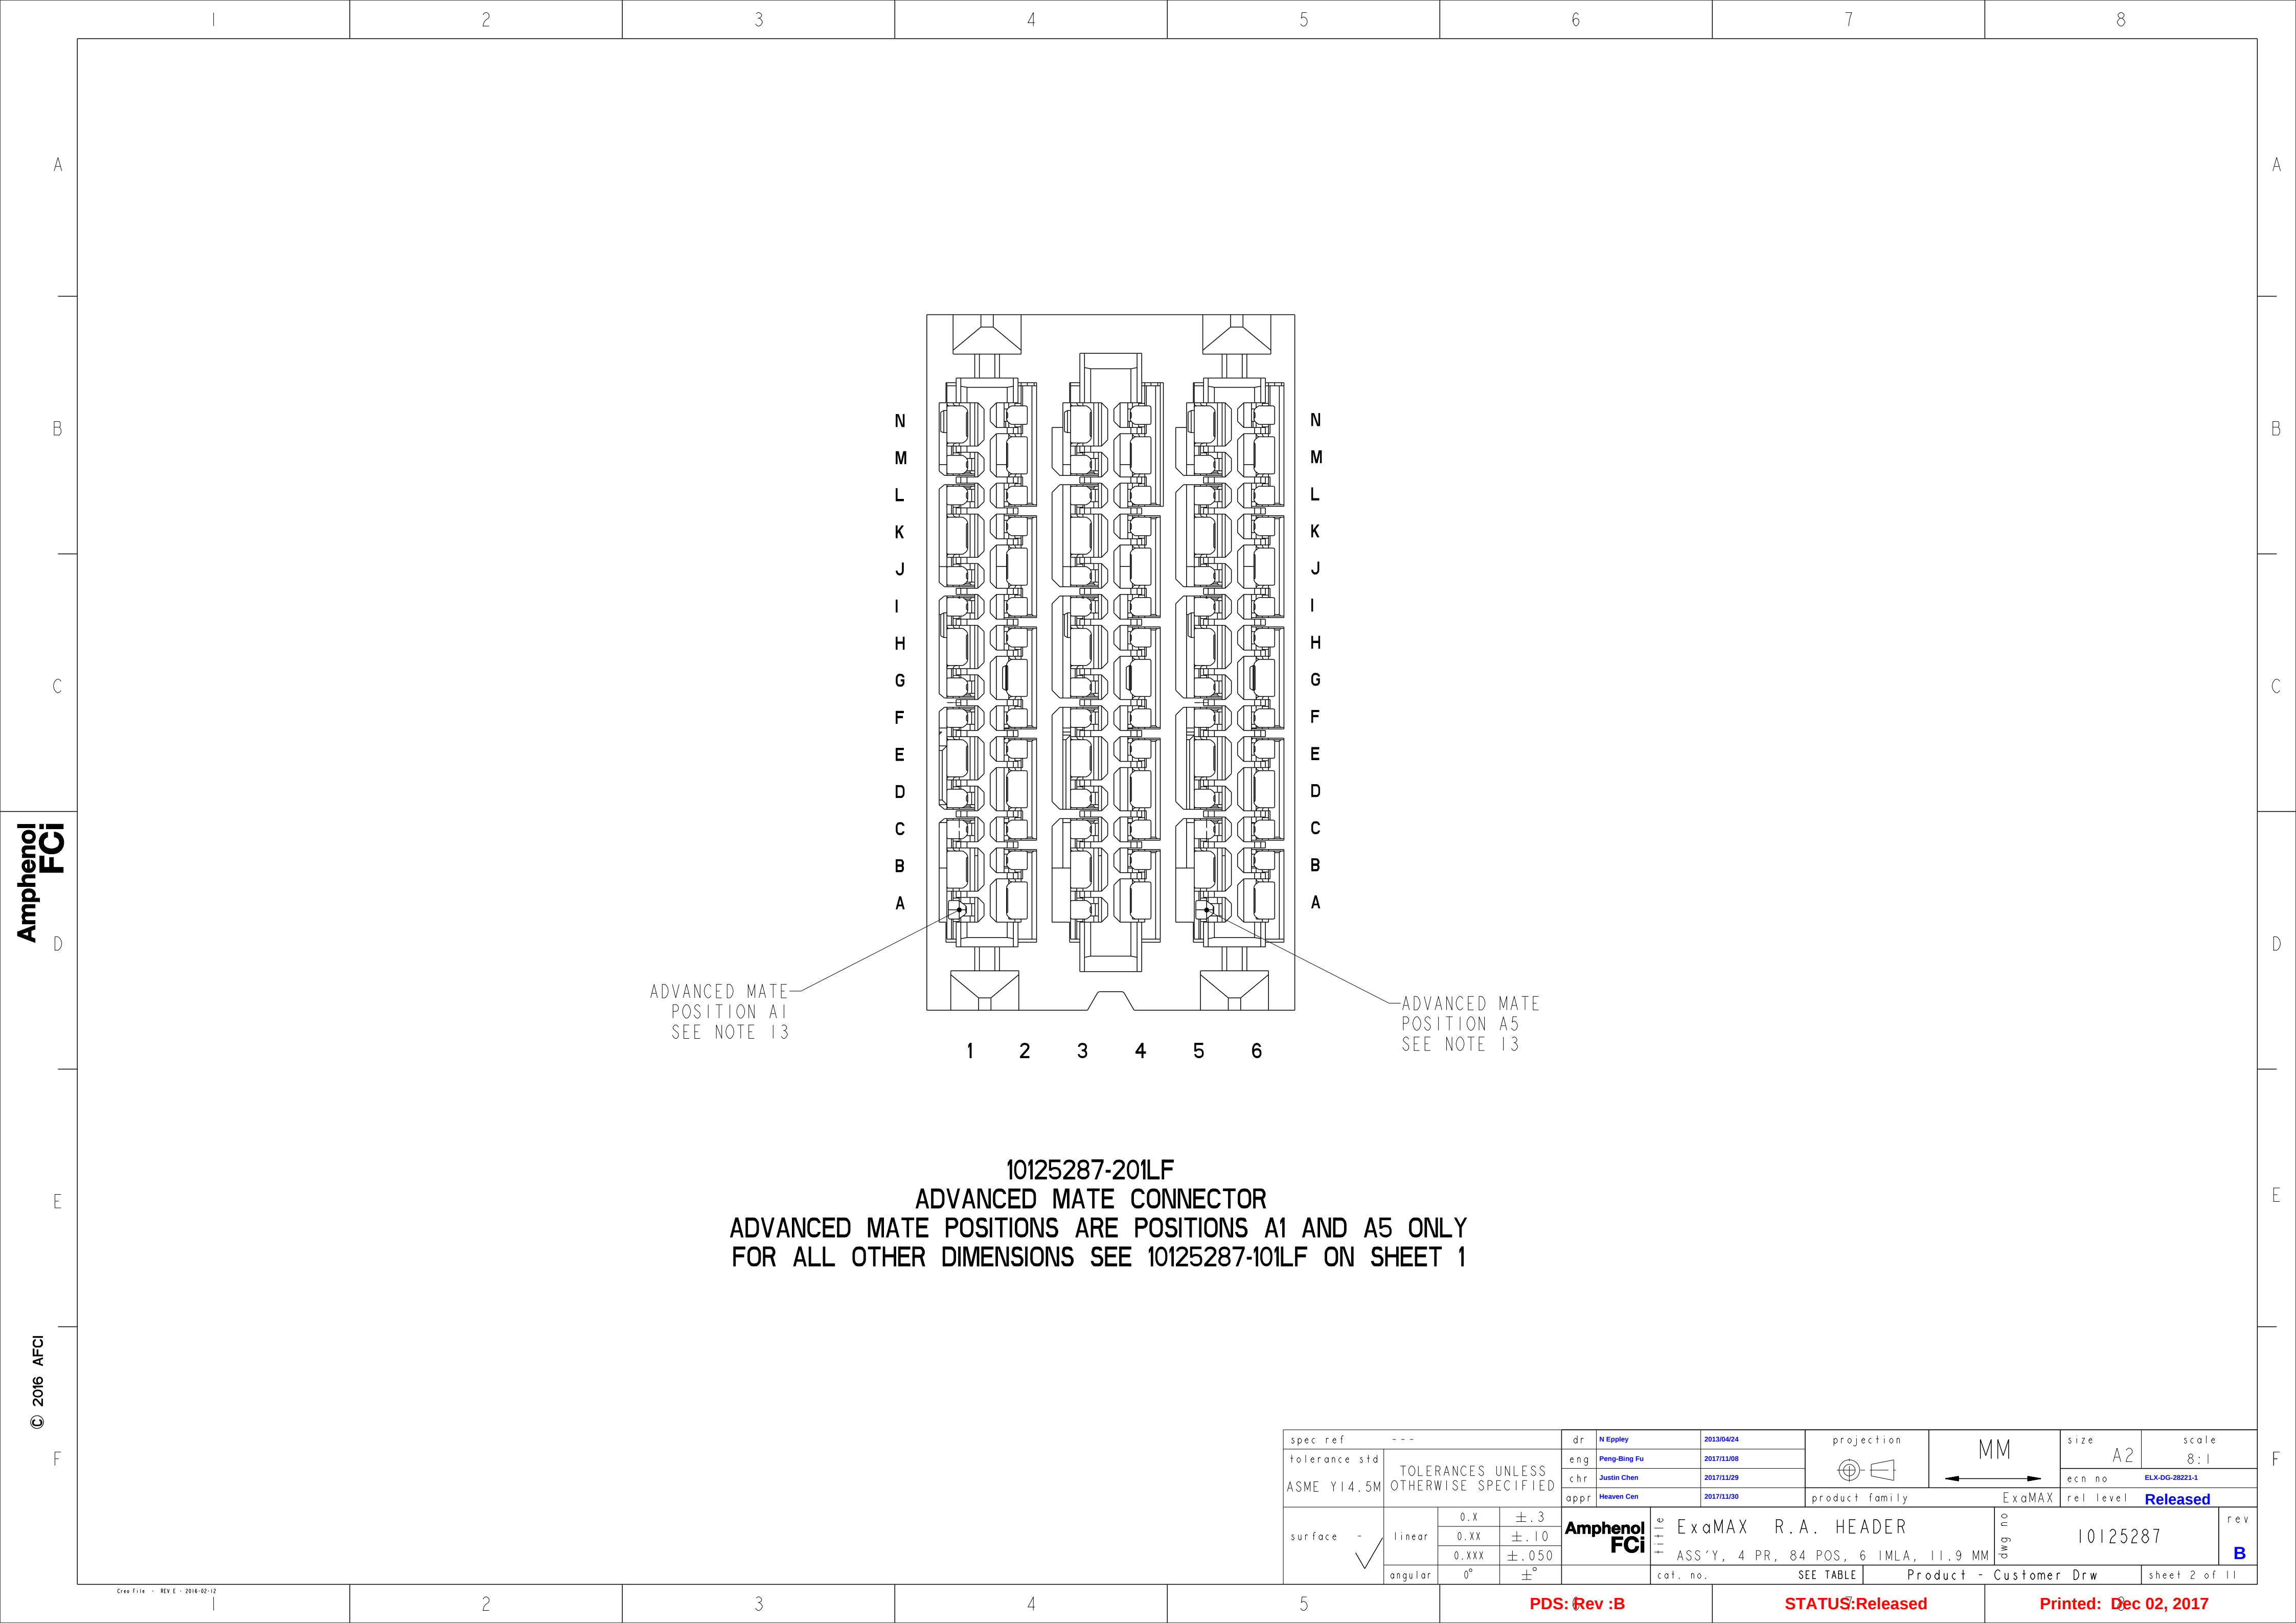Printed: Dec 02, 2017




10125287-201LF
ADVANCED MATE CONNECTOR
ADVANCED MATE POSITIONS ARE POSITIONS A1 AND A5 ONLY
FOR ALL OTHER DIMENSIONS SEE 10125287-101LF ON SHEET 1

spec ref ---				dr N Eppley2013/04/24		projection		MM		size A2		scale 8:1					
tolerance std				eng Peng-Bing Fu2017/11/08						ecn no		ELX-DG-28221-1					
ASME Y14.5M				chr Justin Chen2017/11/29						rel level		Released					
TOLERANCES UNLESS OTHERWISE SPECIFIED				appr Heaven Cen2017/11/30						product family		ExaMAX					
surface - 		linear		Amphenol FCI		title		ExaMAX R.A. HEADER		dwg no		10125287		rev B			
																0.X ±.3	
																0.XX ±.10	
		0.XXX ±.050															
angular		0° ±°		cat. no.		SEE TABLE		Product - Customer Drw		sheet 2 of 11							

PDS: Rev :B


STATUS:Released

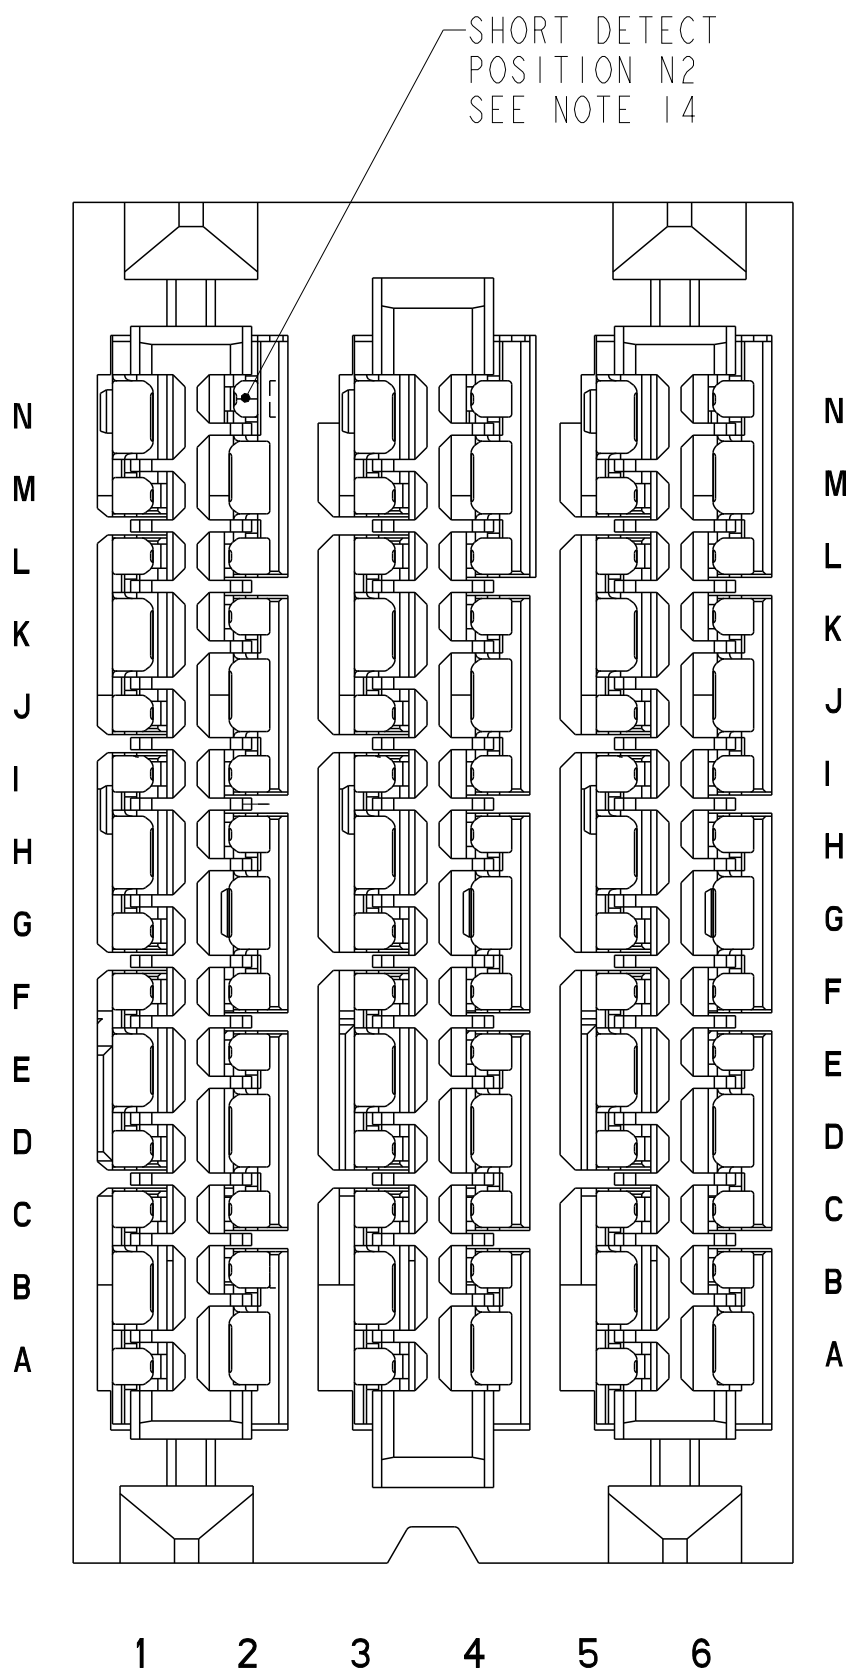Printed: Dec 02, 2017






10125287-301LF
SHORT DETECT CONNECTOR
SHORT DETECT POSITIONS IS N2 ONLY
FOR ALL OTHER DIMENSIONS SEE 10125287-101LF ON SHEET 1

spec ref ---				dr N Eppley2013/04/24		projection		MM		size A2		scale 8:1											
tolerance std				eng Peng-Bing Fu2017/11/08						ecn no		ELX-DG-28221-1											
ASME Y14.5M				chr Justin Chen2017/11/29						rel level		Released											
TOLERANCES UNLESS OTHERWISE SPECIFIED				appr Heaven Cen2017/11/30						product family		ExaMAX											
				surface -		linear		0.X ±.3		0.XX ±.10		0.XXX ±.050											
		angular0° ±°		AmphenolFCi		title		ExaMAX R.A. HEADER		dwg no		10125287		revB									
																cat. no.		SEE TABLE		Product - Customer Drw		sheet 3 of 11	
																ASS'Y, 4 PR, 84 POS, 6 IMLA, 11.9 MM							

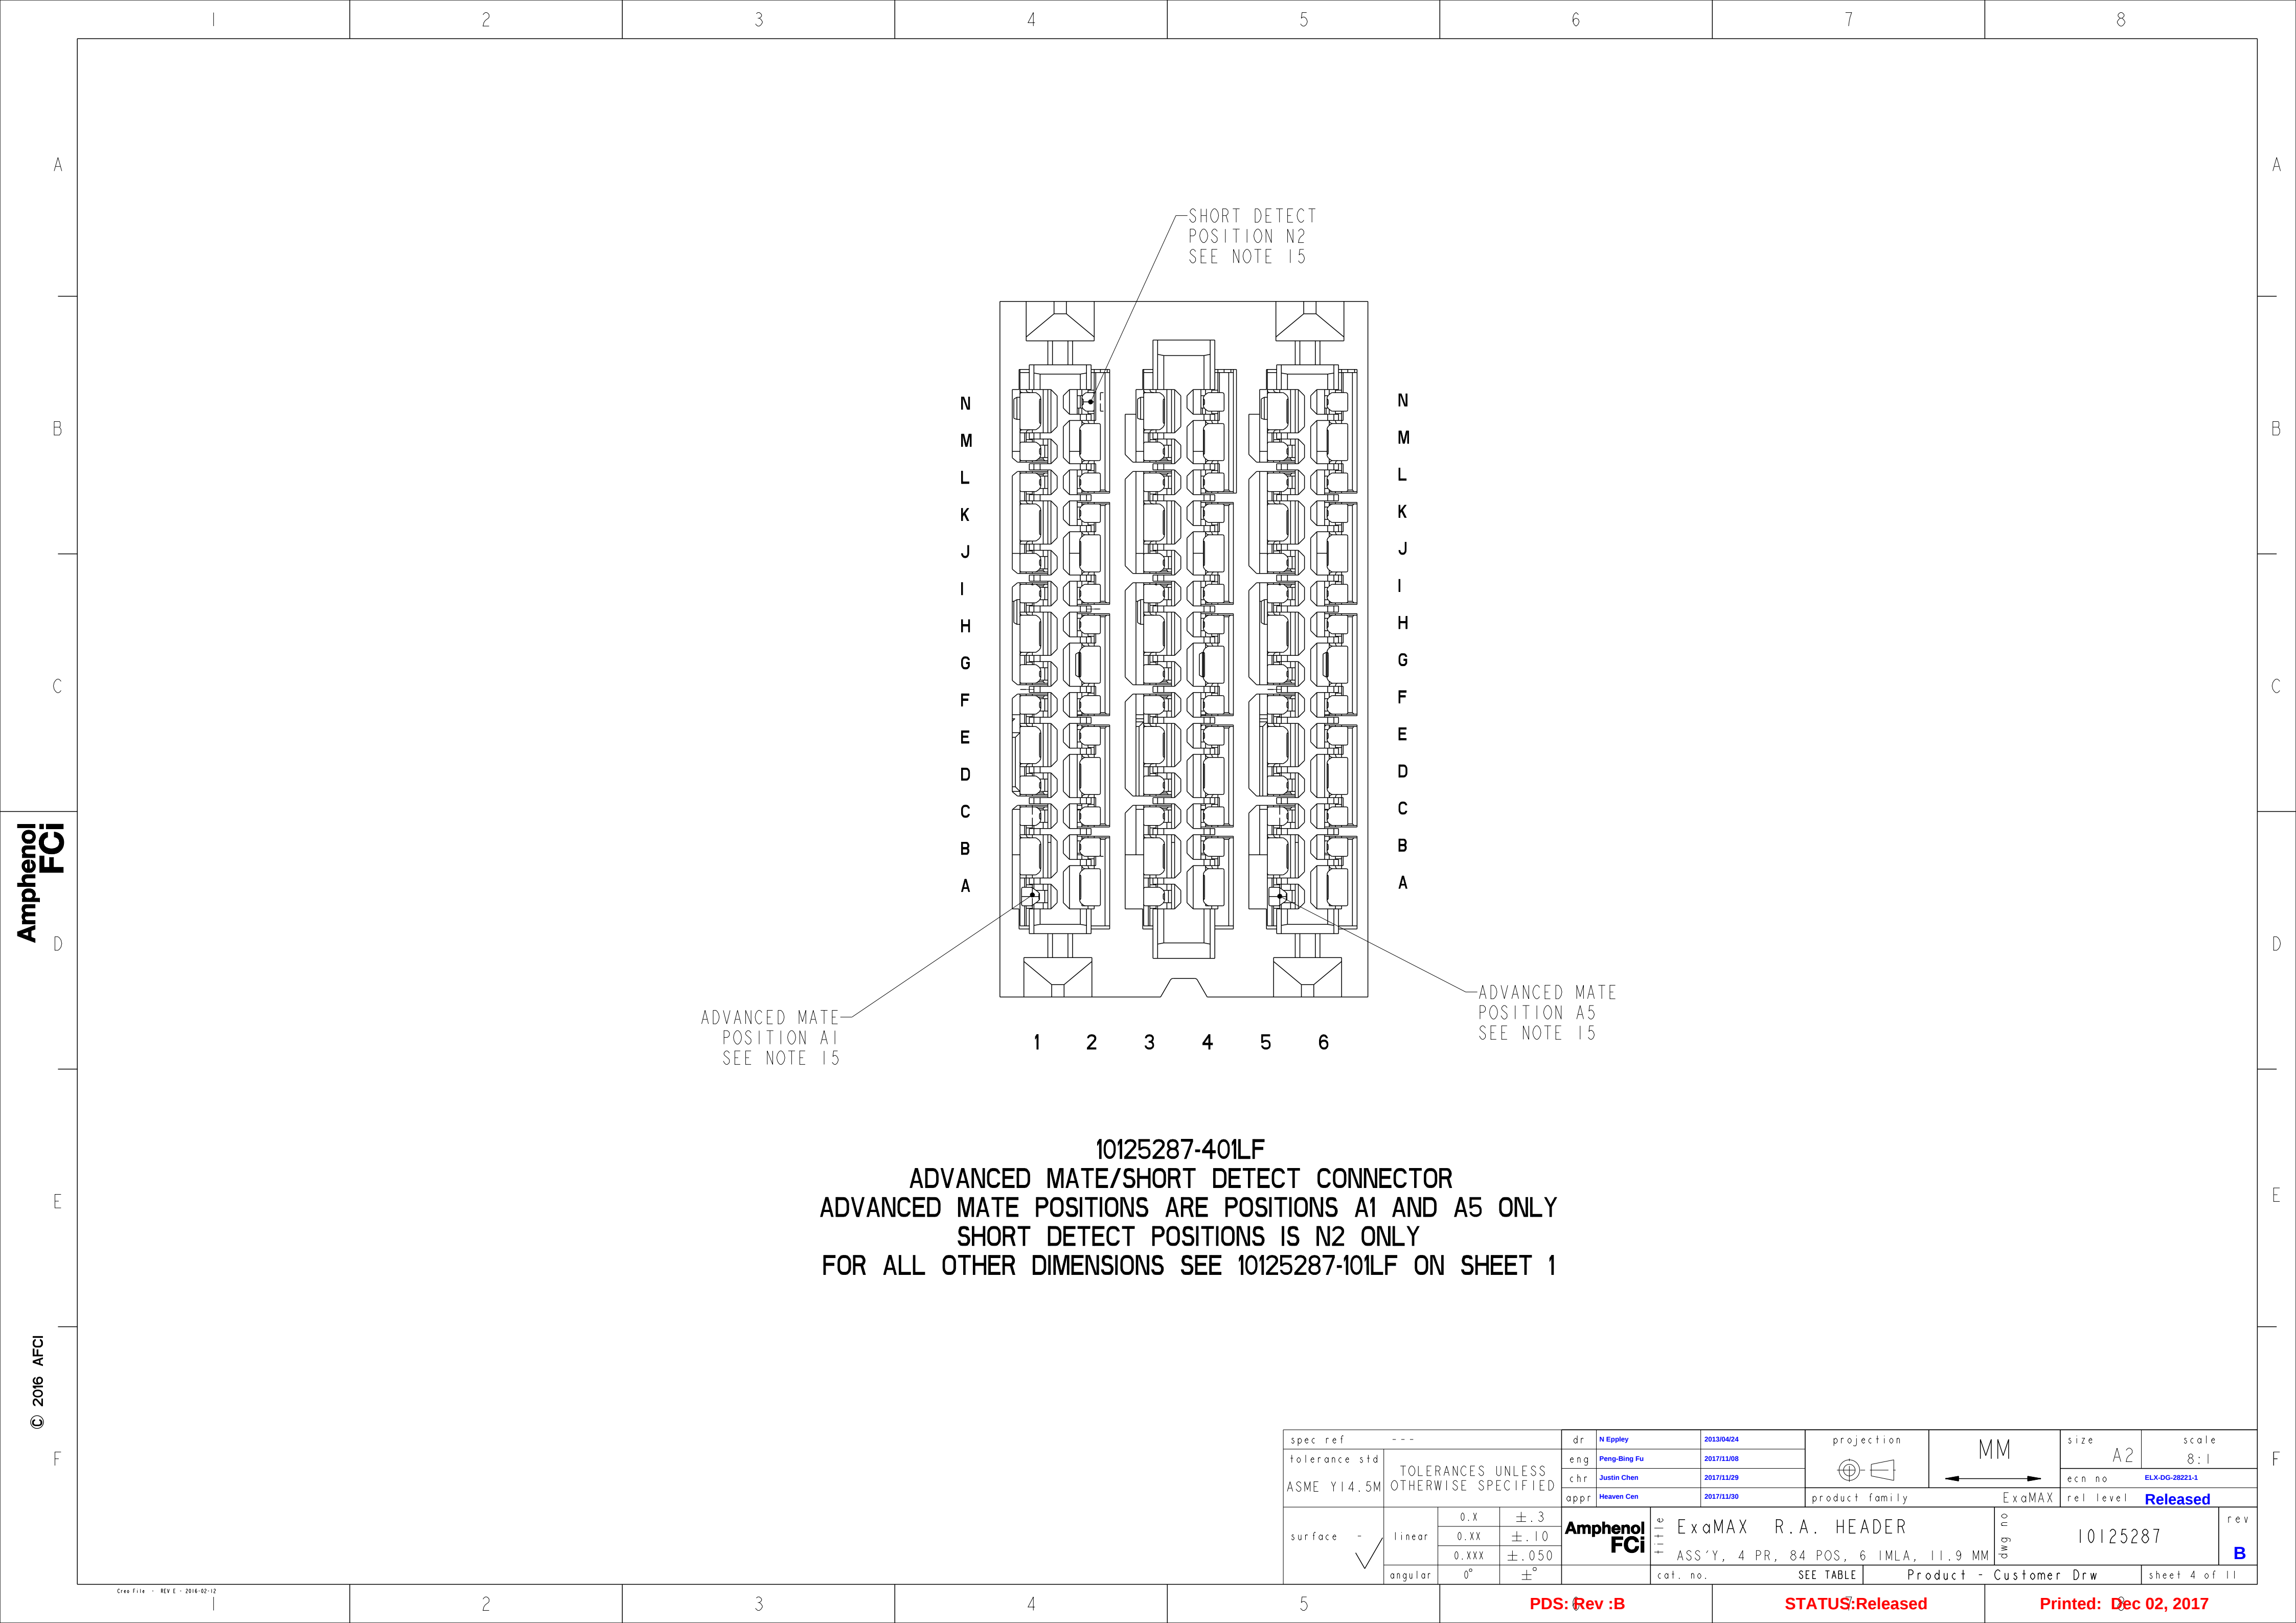


10125287-401LF
ADVANCED MATE/SHORT DETECT CONNECTOR
ADVANCED MATE POSITIONS ARE POSITIONS A1 AND A5 ONLY
SHORT DETECT POSITIONS IS N2 ONLY
FOR ALL OTHER DIMENSIONS SEE 10125287-101LF ON SHEET 1

spec ref		---		dr	N Eppley	2013/04/24			size	A2	scale	8:1			
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED				eng			Peng-Bing Fu	2017/11/08	ecn no	ELX-DG-28221-1			
ASME Y14.5M		chr	Justin Chen		2017/11/29	appr			Heaven Cen	2017/11/30	product family			ExaMAX	rel level
surface	- 	linear	0.X	±.3	Amphenol FCI	title	ExaMAX R.A. HEADER				dwg no	10125287		rev	B
			0.XX	±.10											
			0.XXX	±.050			ASS'Y, 4 PR, 84 POS, 6 IMLA, 11.9 MM								
		angular	0°	±°	cat. no.	SEE TABLE	Product - Customer Drw				sheet 4 of 11				

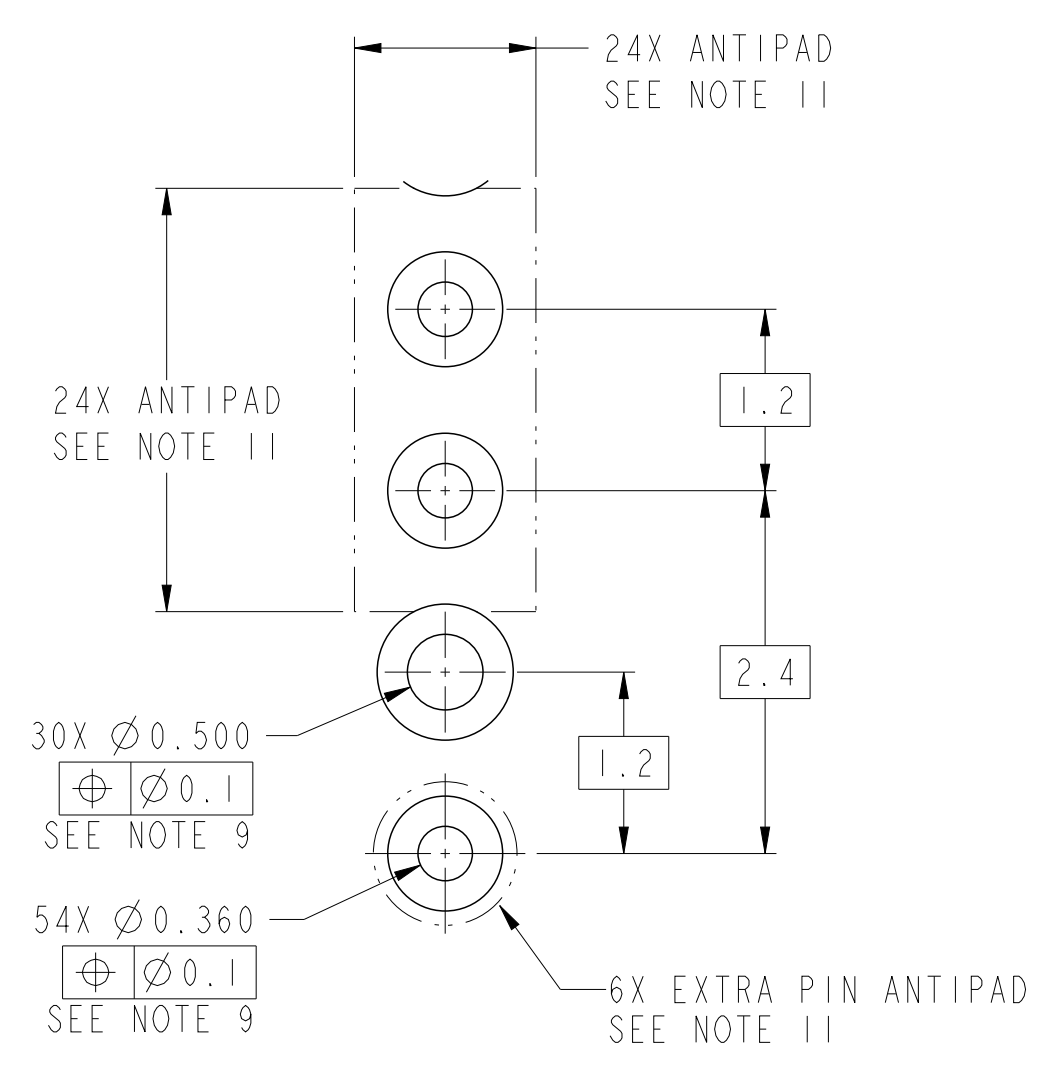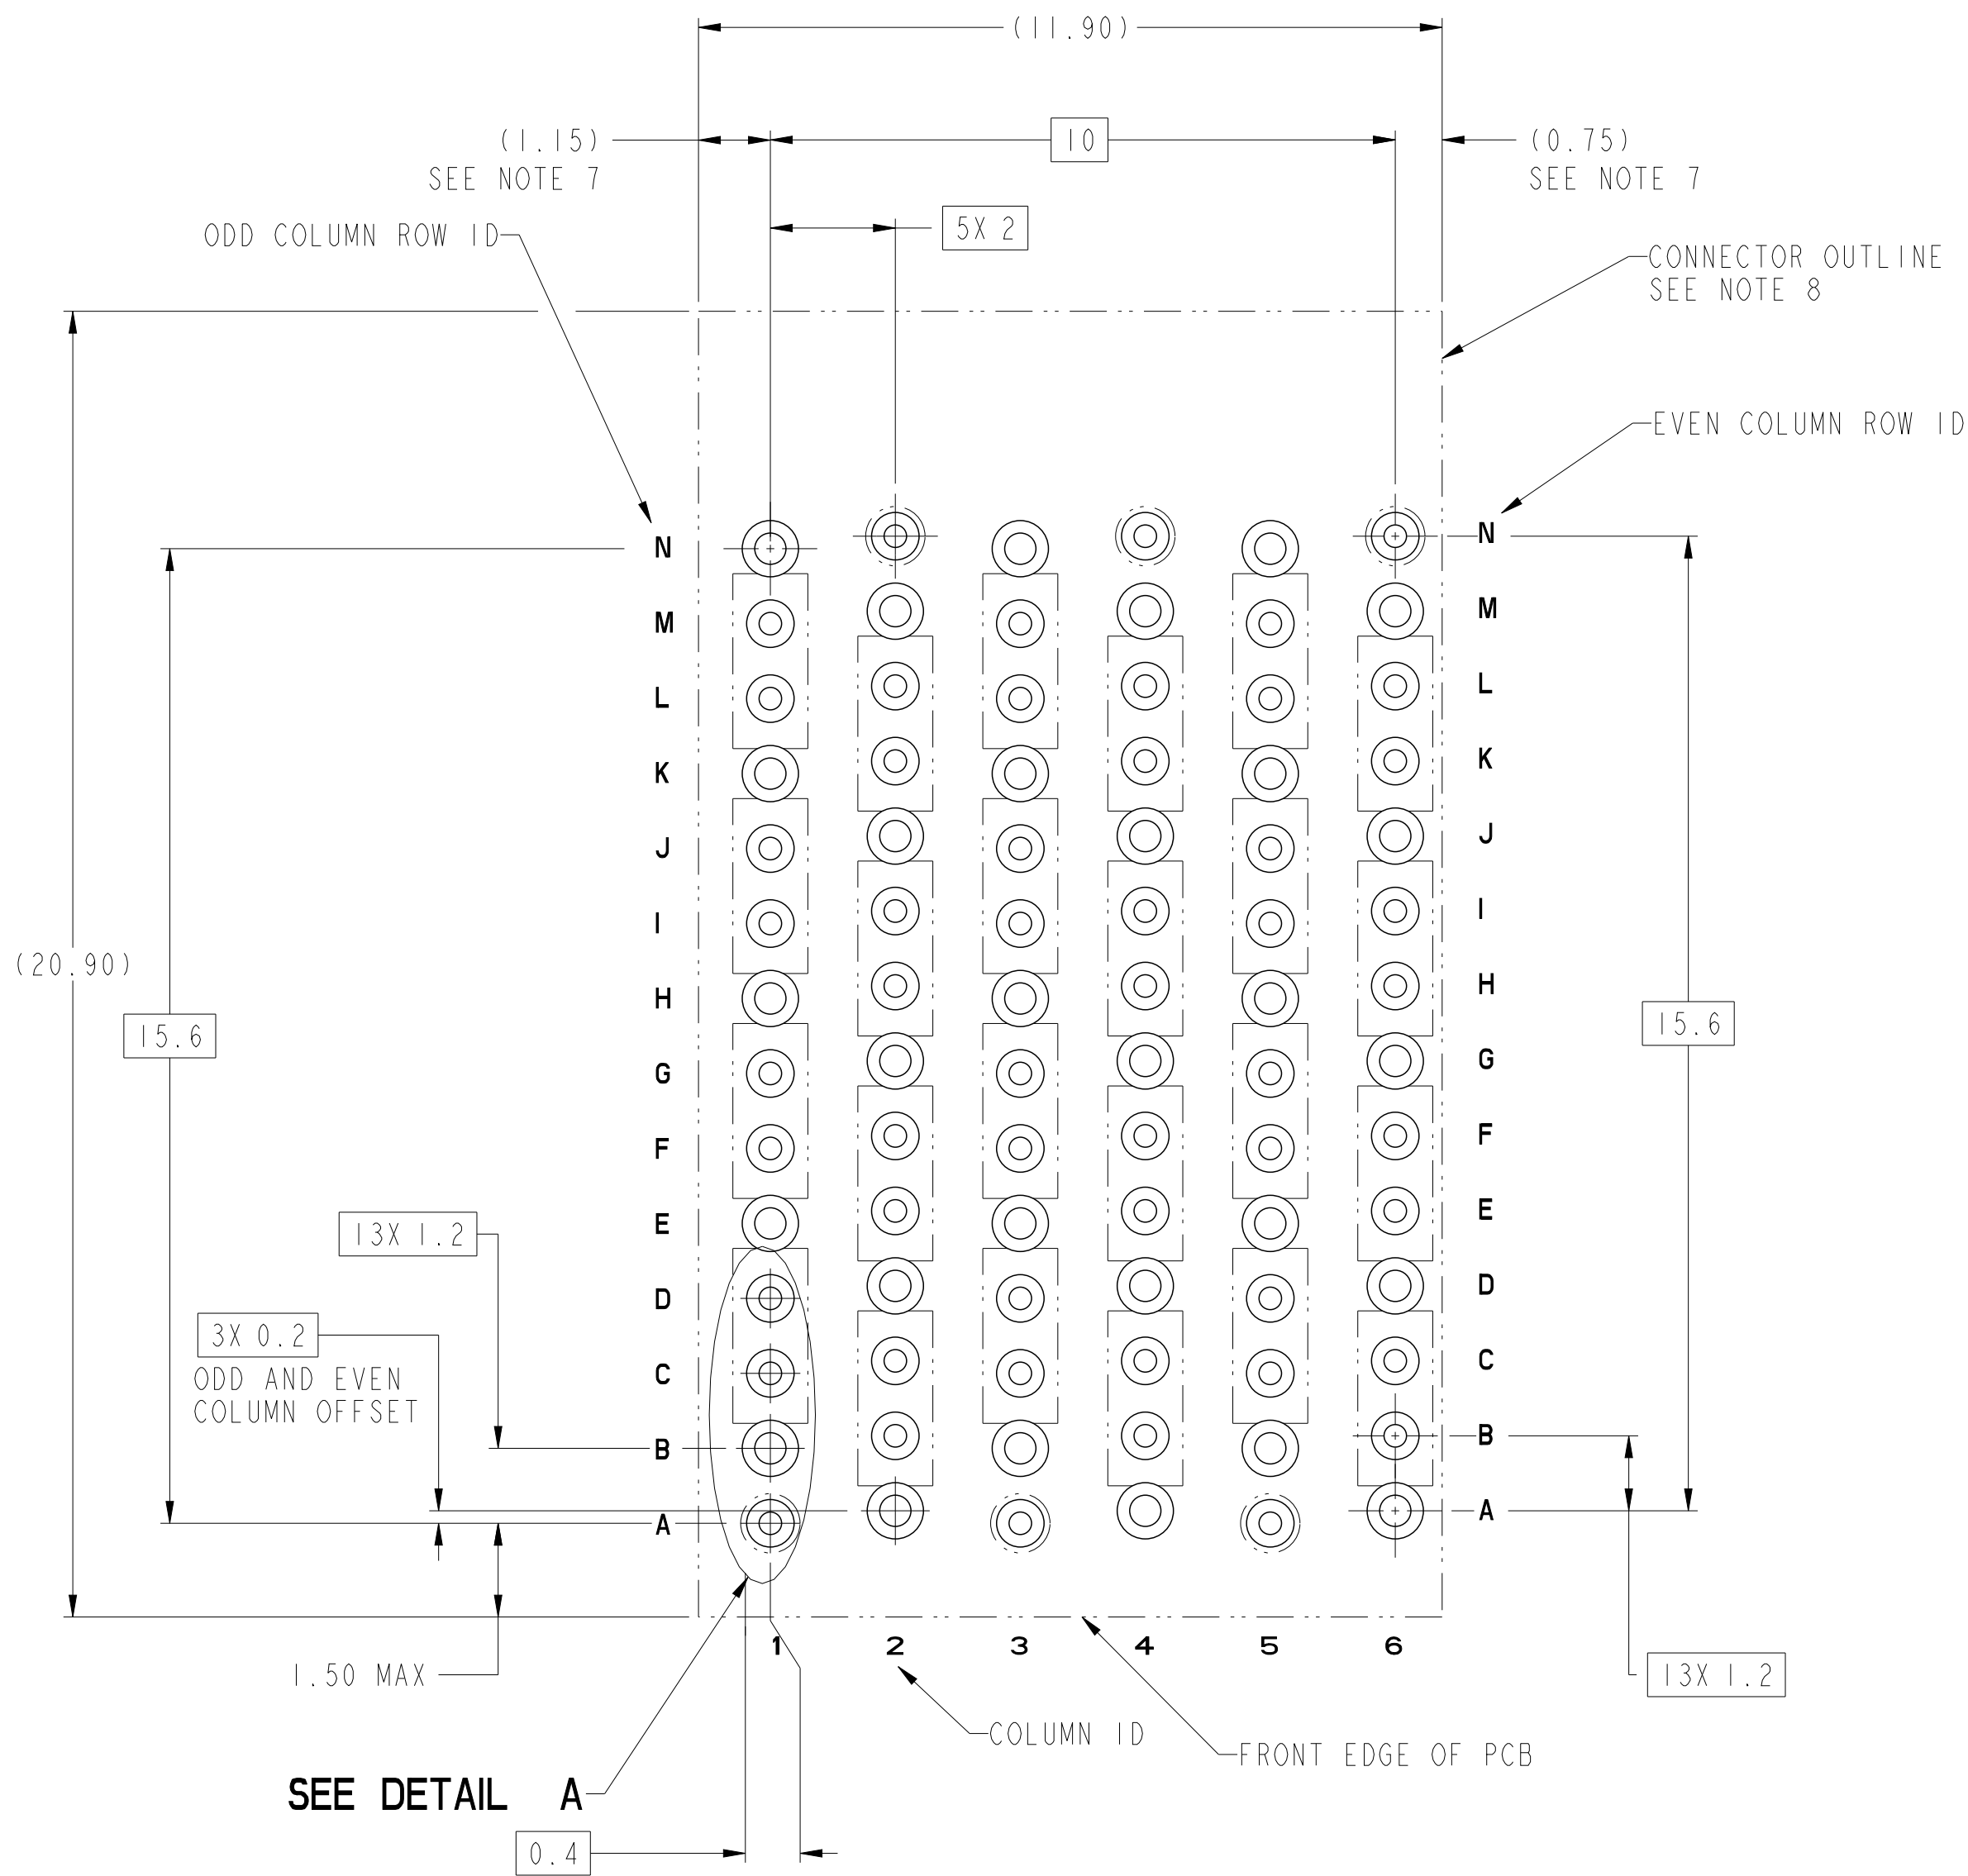

RECOMMENDED PCB LAYOUT
10125287-Y01LF COMPONENT SIDE
SEE NOTES 7, 8, 9 & 11
SCALE 10:1


spec ref	---	dr	N'Eppley	2013/04/24	projection	MM	size	A2	scale	1:1
tolerance std	ASME Y14.5M	eng	Peng-Bing Fu	2017/11/08	chr	Justin Chen	2017/11/29	ecn no	ELX-DG-28221-1	
surface	-	appr	Heaven Cen	2017/11/30	product family	ExaMAX	rel level	Released		
linear	0.X ±.3 0.XX ±.10 0.XXX ±.050	Amphenol FCi	title	ExaMAX R.A. HEADER ASS'Y, 4 PR, 84 POS, 6 IMLA, 11.9 MM	ang no	10125287	rev	B		
angular	0° ±°		cat. no.	SEE TABLE	Product - Customer Drw	sheet 5 of 11				

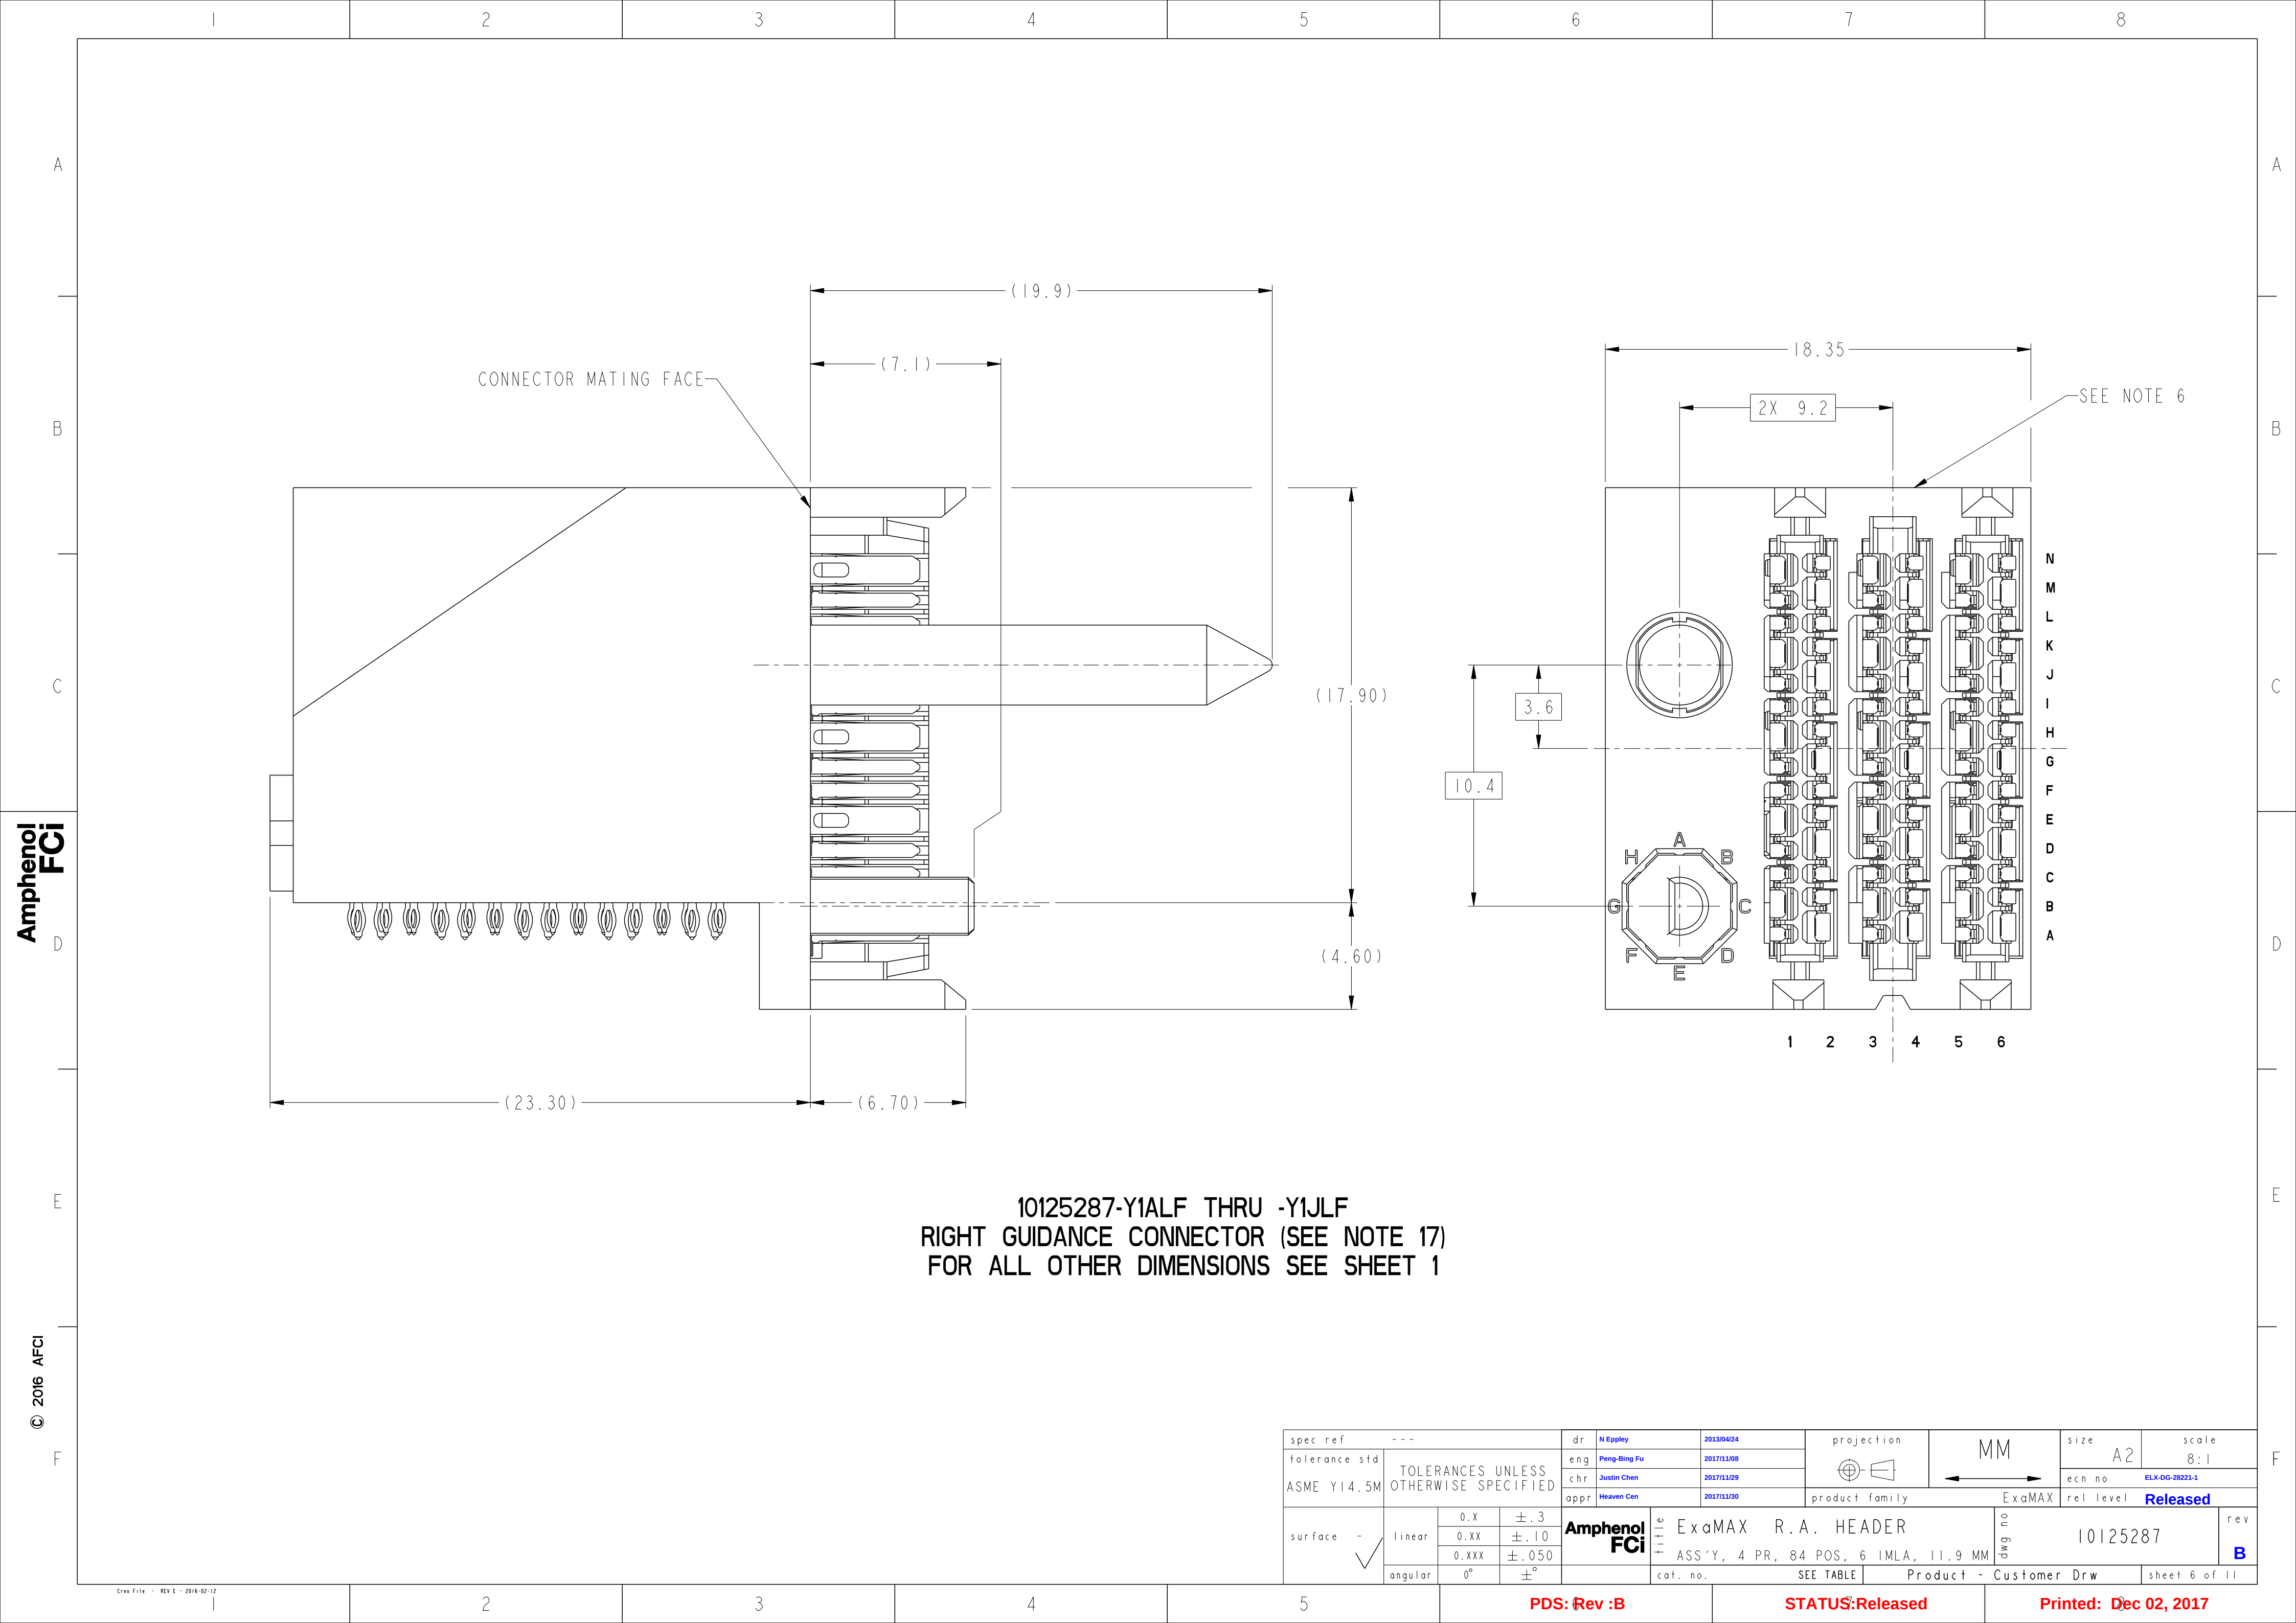

Amphenol
FCi



© 2016 AFCi

spec ref ---				dr	N Eppley	2013/04/24	projection MM	size	A2	scale	8:1				
tolerance std				eng	Peng-Bing Fu	2017/11/08		ecn no	ELX-DG-28221-1						
TOLERANCES UNLESS OTHERWISE SPECIFIED				chr	Justin Chen	2017/11/29			rel level Released						
				appr	Heaven Cen	2017/11/30									
ASME Y14.5M							product family		ExaMAX						
surface - 	linear	0.X	±.3	Amphenol FCi	title	ExaMAX R.A. HEADER ASS'Y, 4 PR, 84 POS, 6 IMLA, 11.9 MM					dwg no	10125287		rev	B
		0.XX	±.10												
		0.XXX	±.050												
	angular	0°	±°												
				cat. no.		SEE TABLE	Product - Customer Drw					sheet 6 of 11			

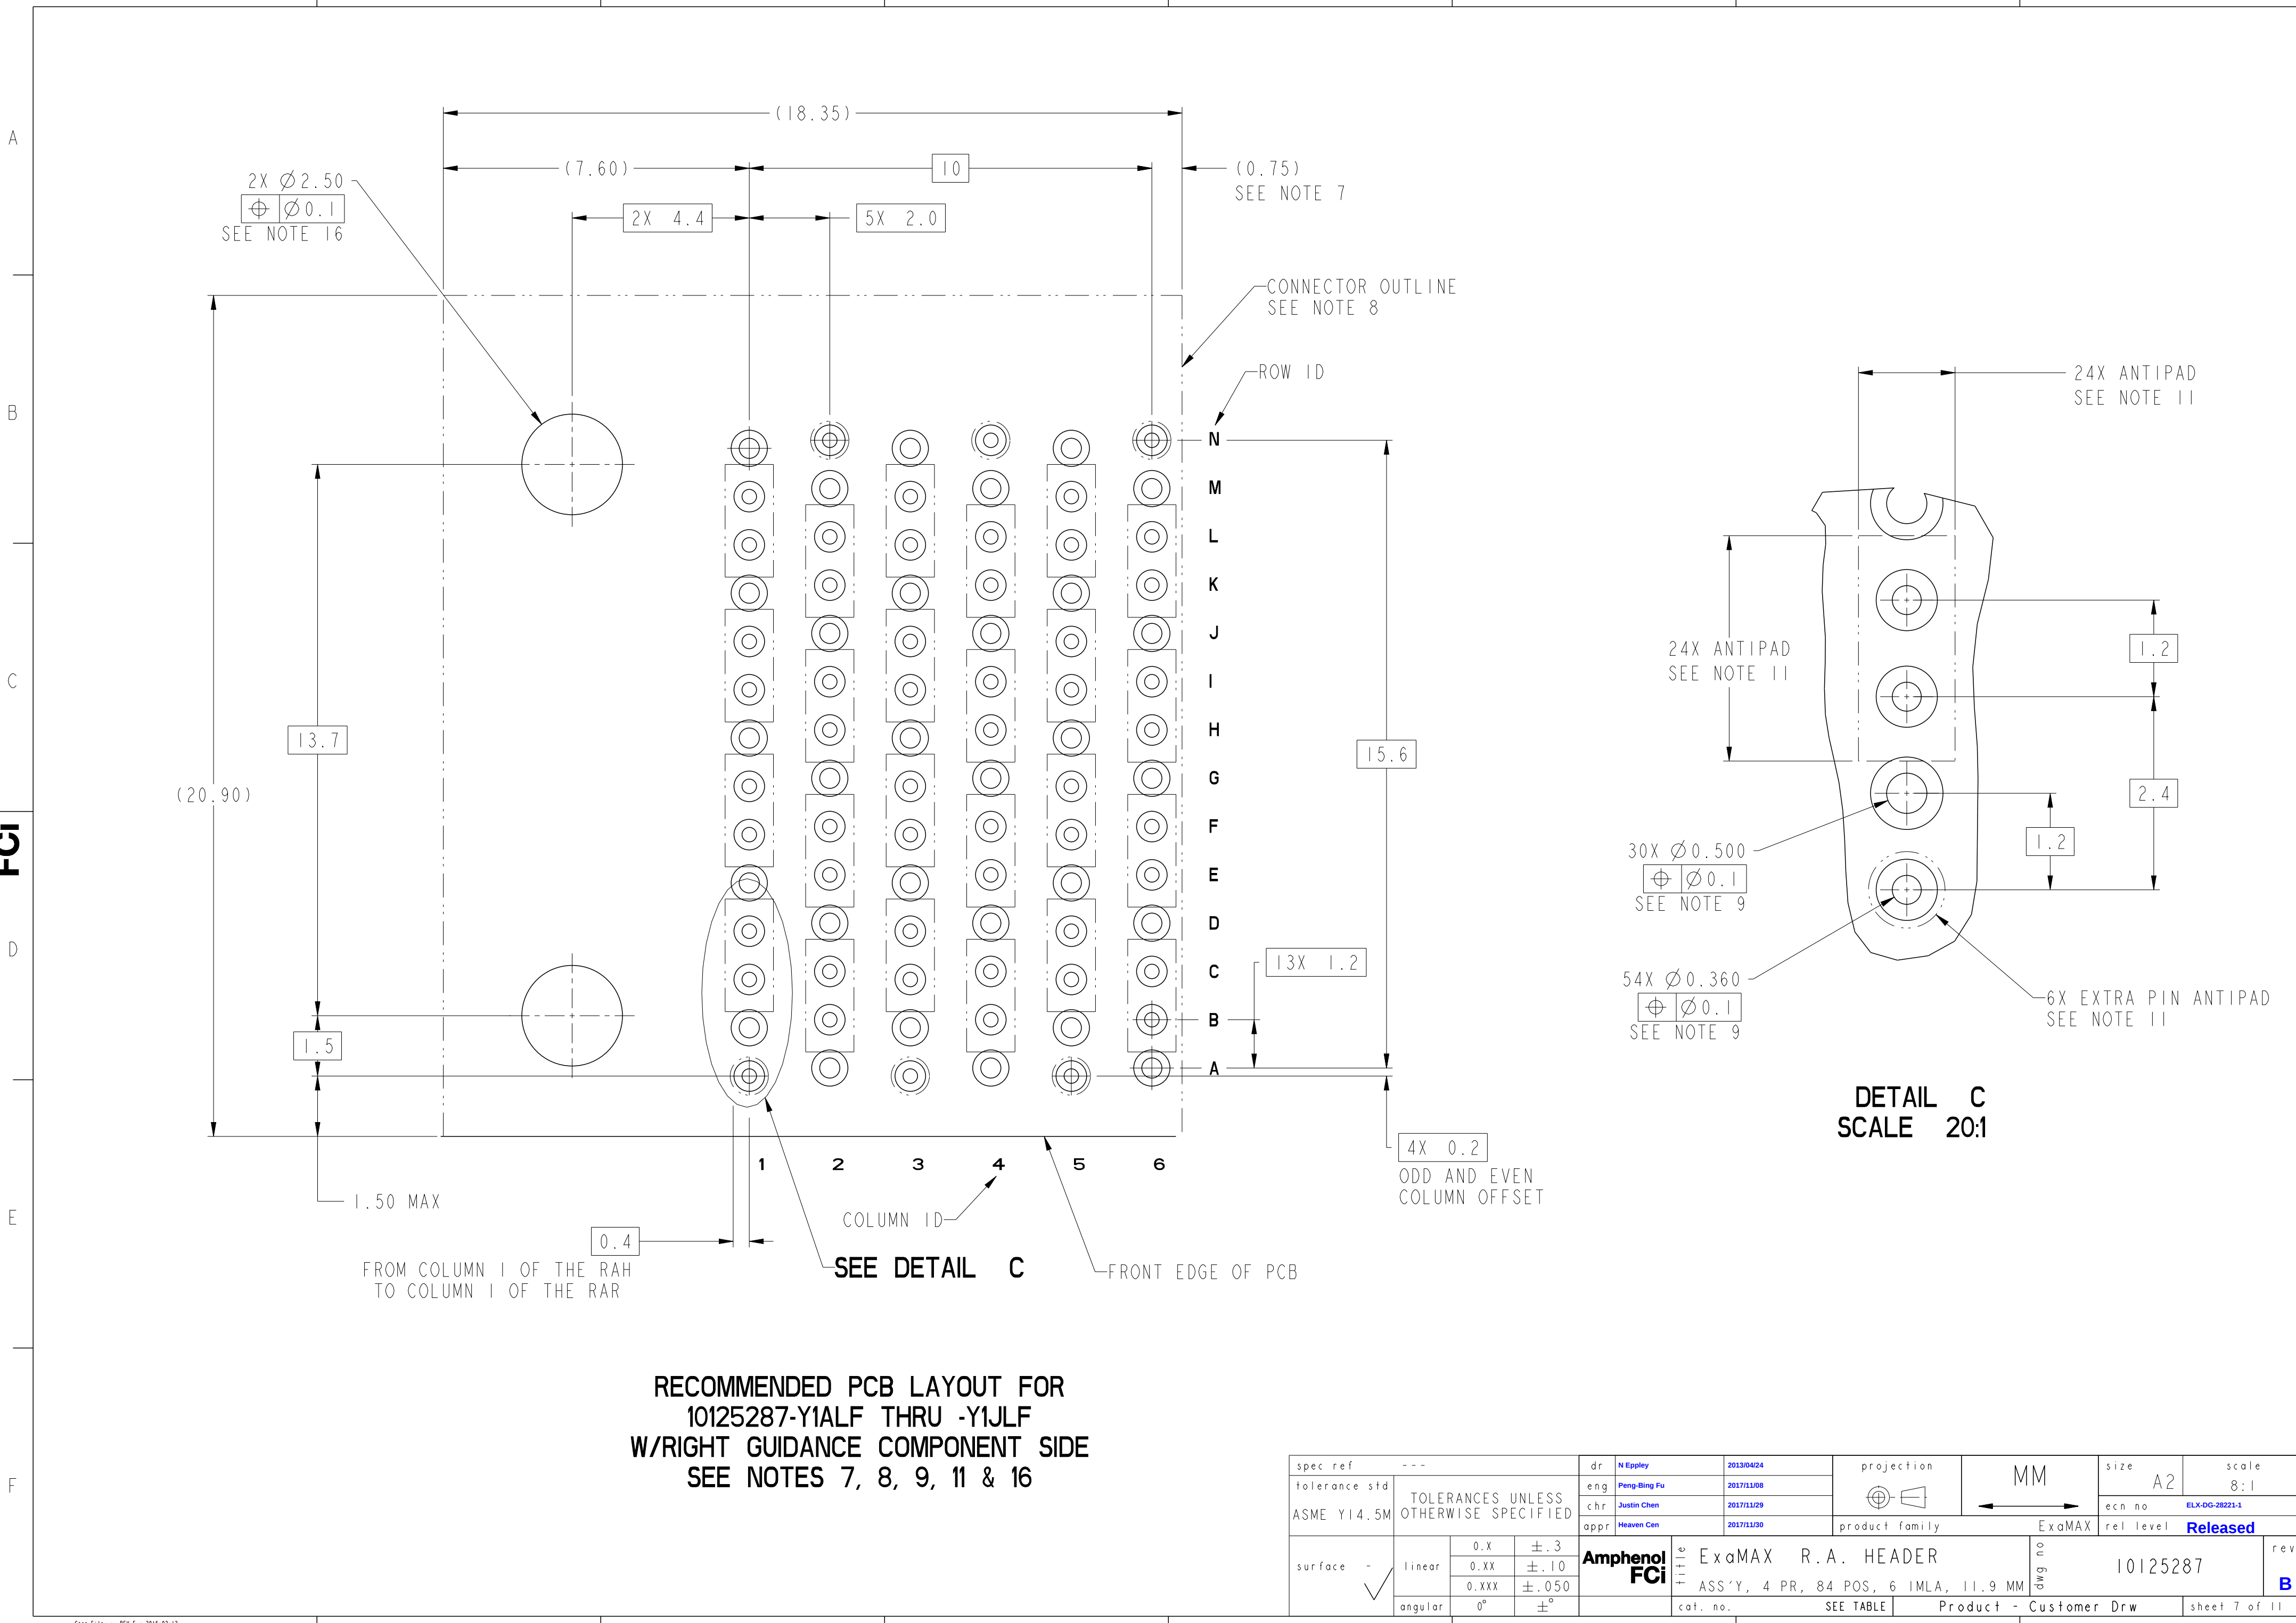



RECOMMENDED PCB LAYOUT FOR
10125287-Y1ALF THRU -Y1JLF
W/RIGHT GUIDANCE COMPONENT SIDE
SEE NOTES 7, 8, 9, 11 & 16

spec ref	---	dr	N'Eppley	2013/04/24	projection	MM	size	A2	scale	8:1
tolerance std	ASME Y14.5M	eng	Peng-Bing Fu	2017/11/08	chr	Justin Chen	2017/11/29	ecn no	ELX-DG-28221-1	
appr	Heaven Cen	2017/11/30	product family	ExaMAX	rel level	Released				
surface	-	linear	0.X ±.3 0.XX ±.10 0.XXX ±.050	angular	0° ±°	Amphenol FCi	title	ExaMAX R.A. HEADER ASS'Y, 4 PR, 84 POS, 6 IMLA, 11.9 MM	cat. no.	SEE TABLE
							Product - Customer Drw	sheet 7 of 11		

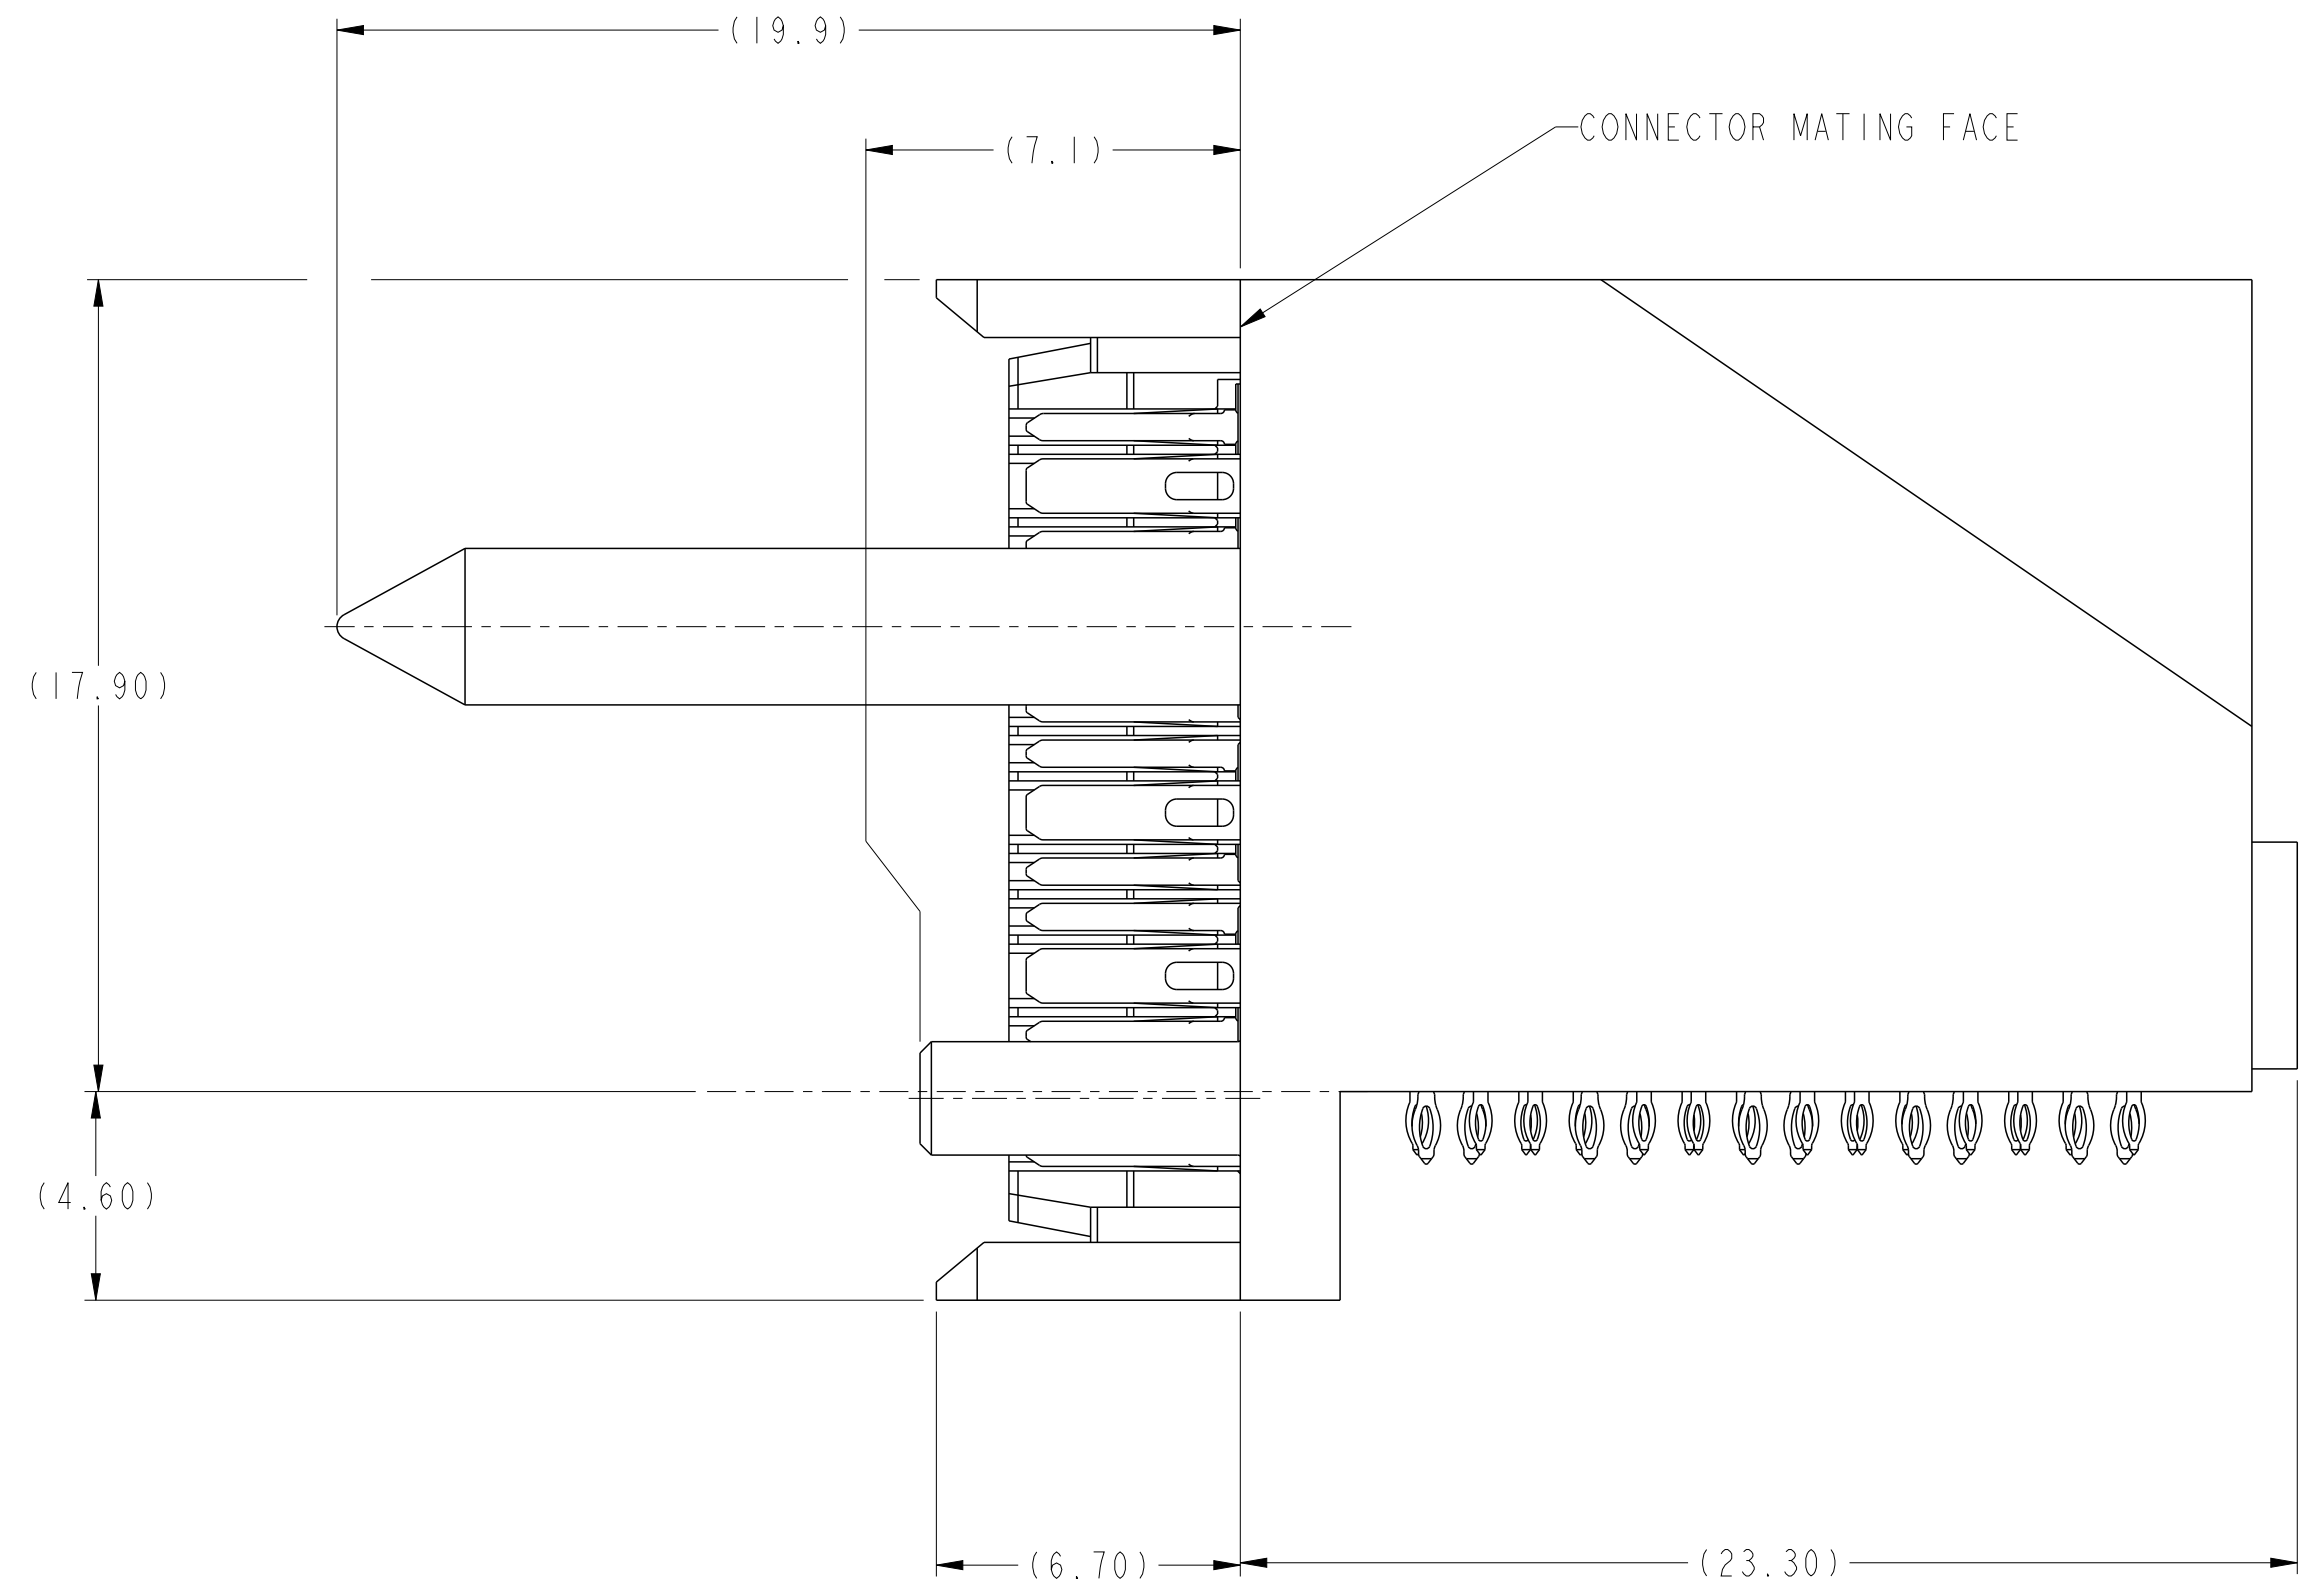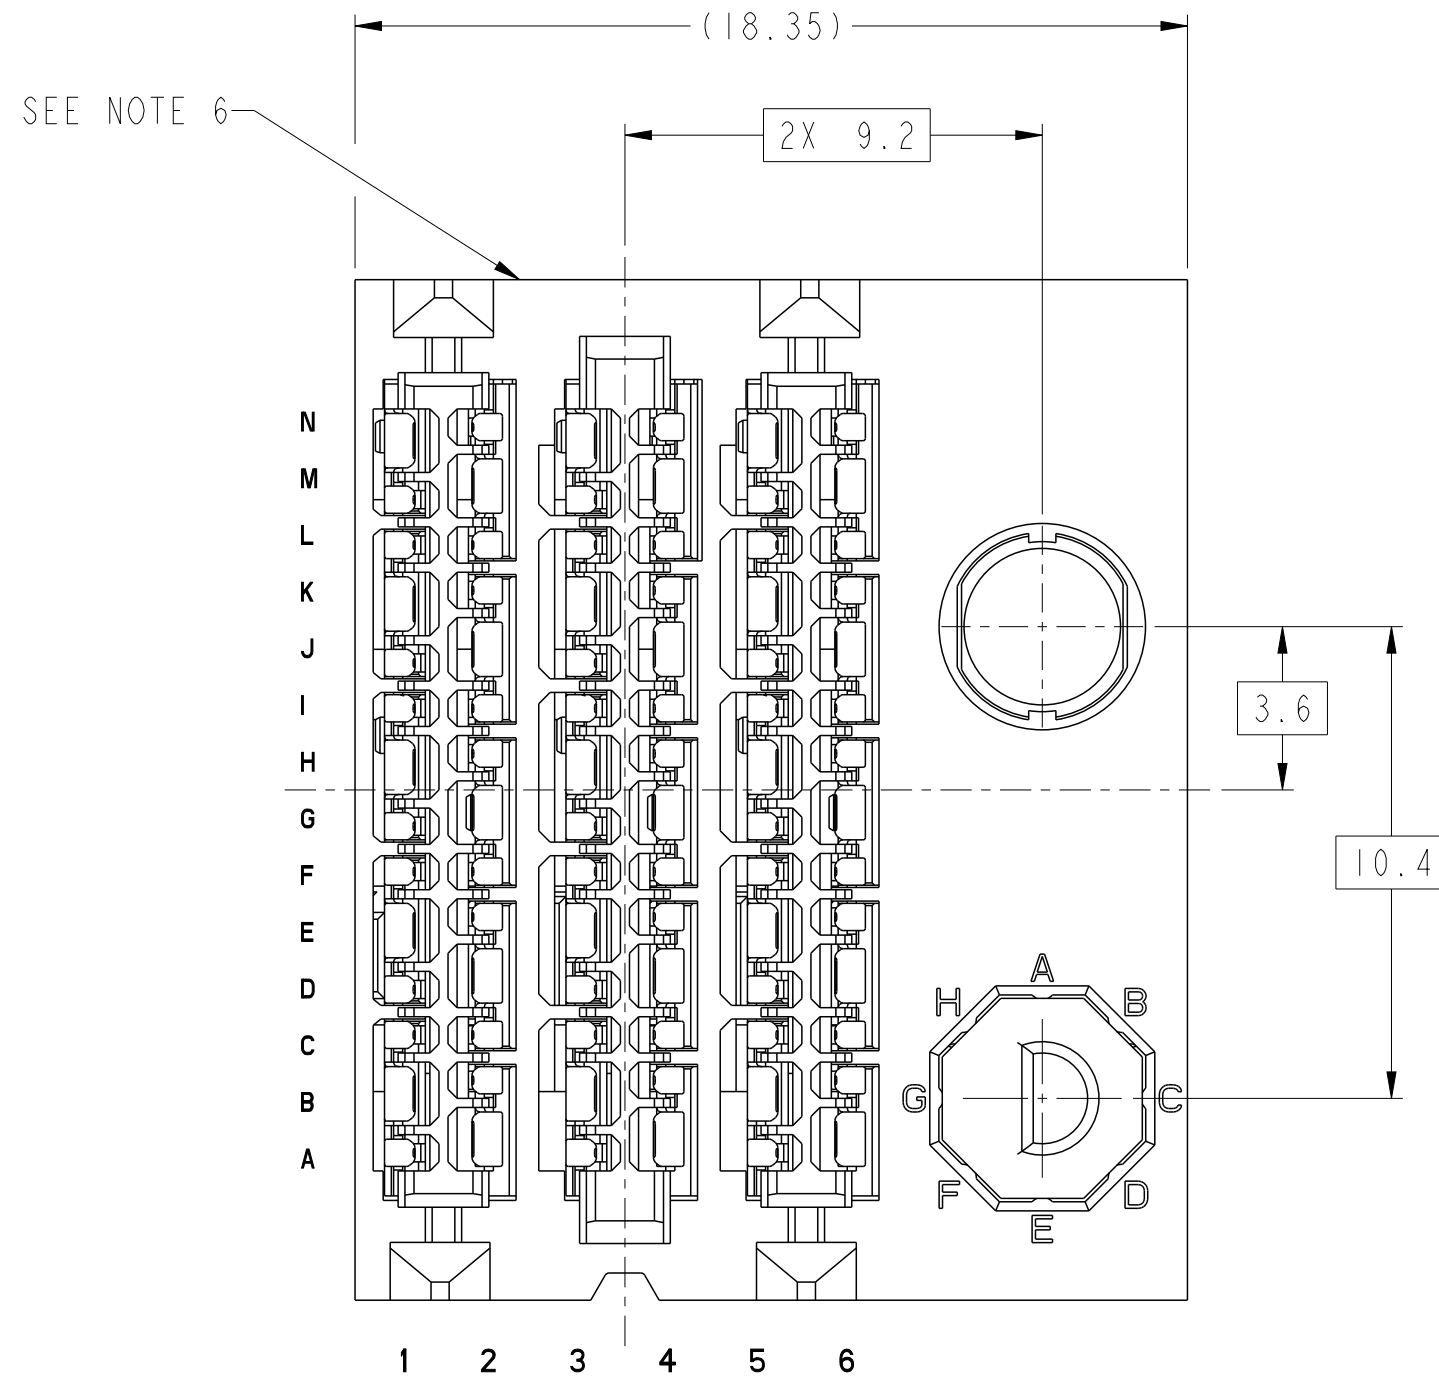

10125287-Y2ALF THRU -Y2JLF
LEFT GUIDANCE CONNECTOR (SEE NOTE 17)
FOR ALL OTHER DIMENSIONS SEE SHEET 1

spec ref	---	dr	N'Eppley	2013/04/24	projection	MM	size	A2	scale	8:1
tolerance std	ASME Y14.5M	eng	Peng-Bing Fu	2017/11/08	chr	Justin Chen	2017/11/29	ecn no	ELX-DG-28221-1	
		appr	Heaven Cen	2017/11/30	product family	ExaMAX	rel level	Released		
surface	-	linear	0.X	±.3	Amphenol FCi	title	ExaMAX R.A. HEADER	dwg no	10125287	rev
			0.XX	±.10			ASS'Y, 4 PR, 84 POS, 6 IMLA, 11.9 MM			B
		angular	0°	±°		cat. no.	SEE TABLE	Product - Customer Drw	sheet 8 of 11	




















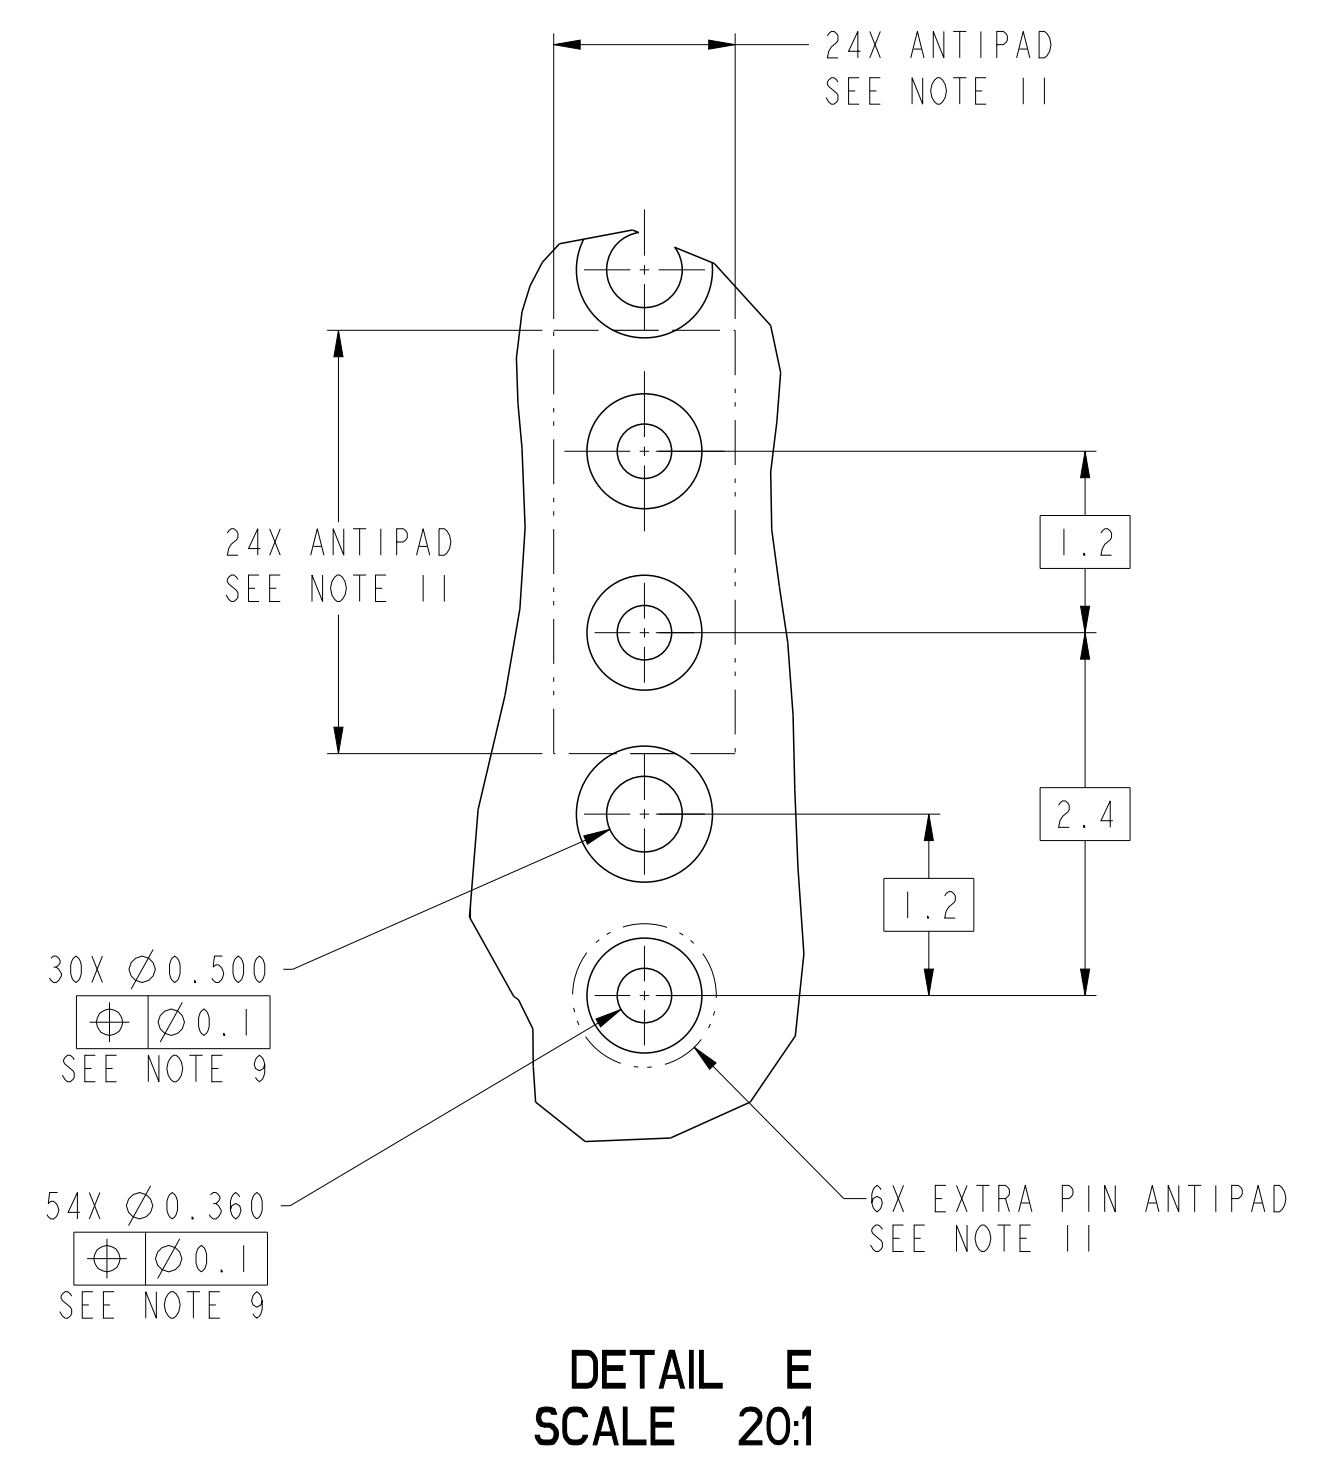
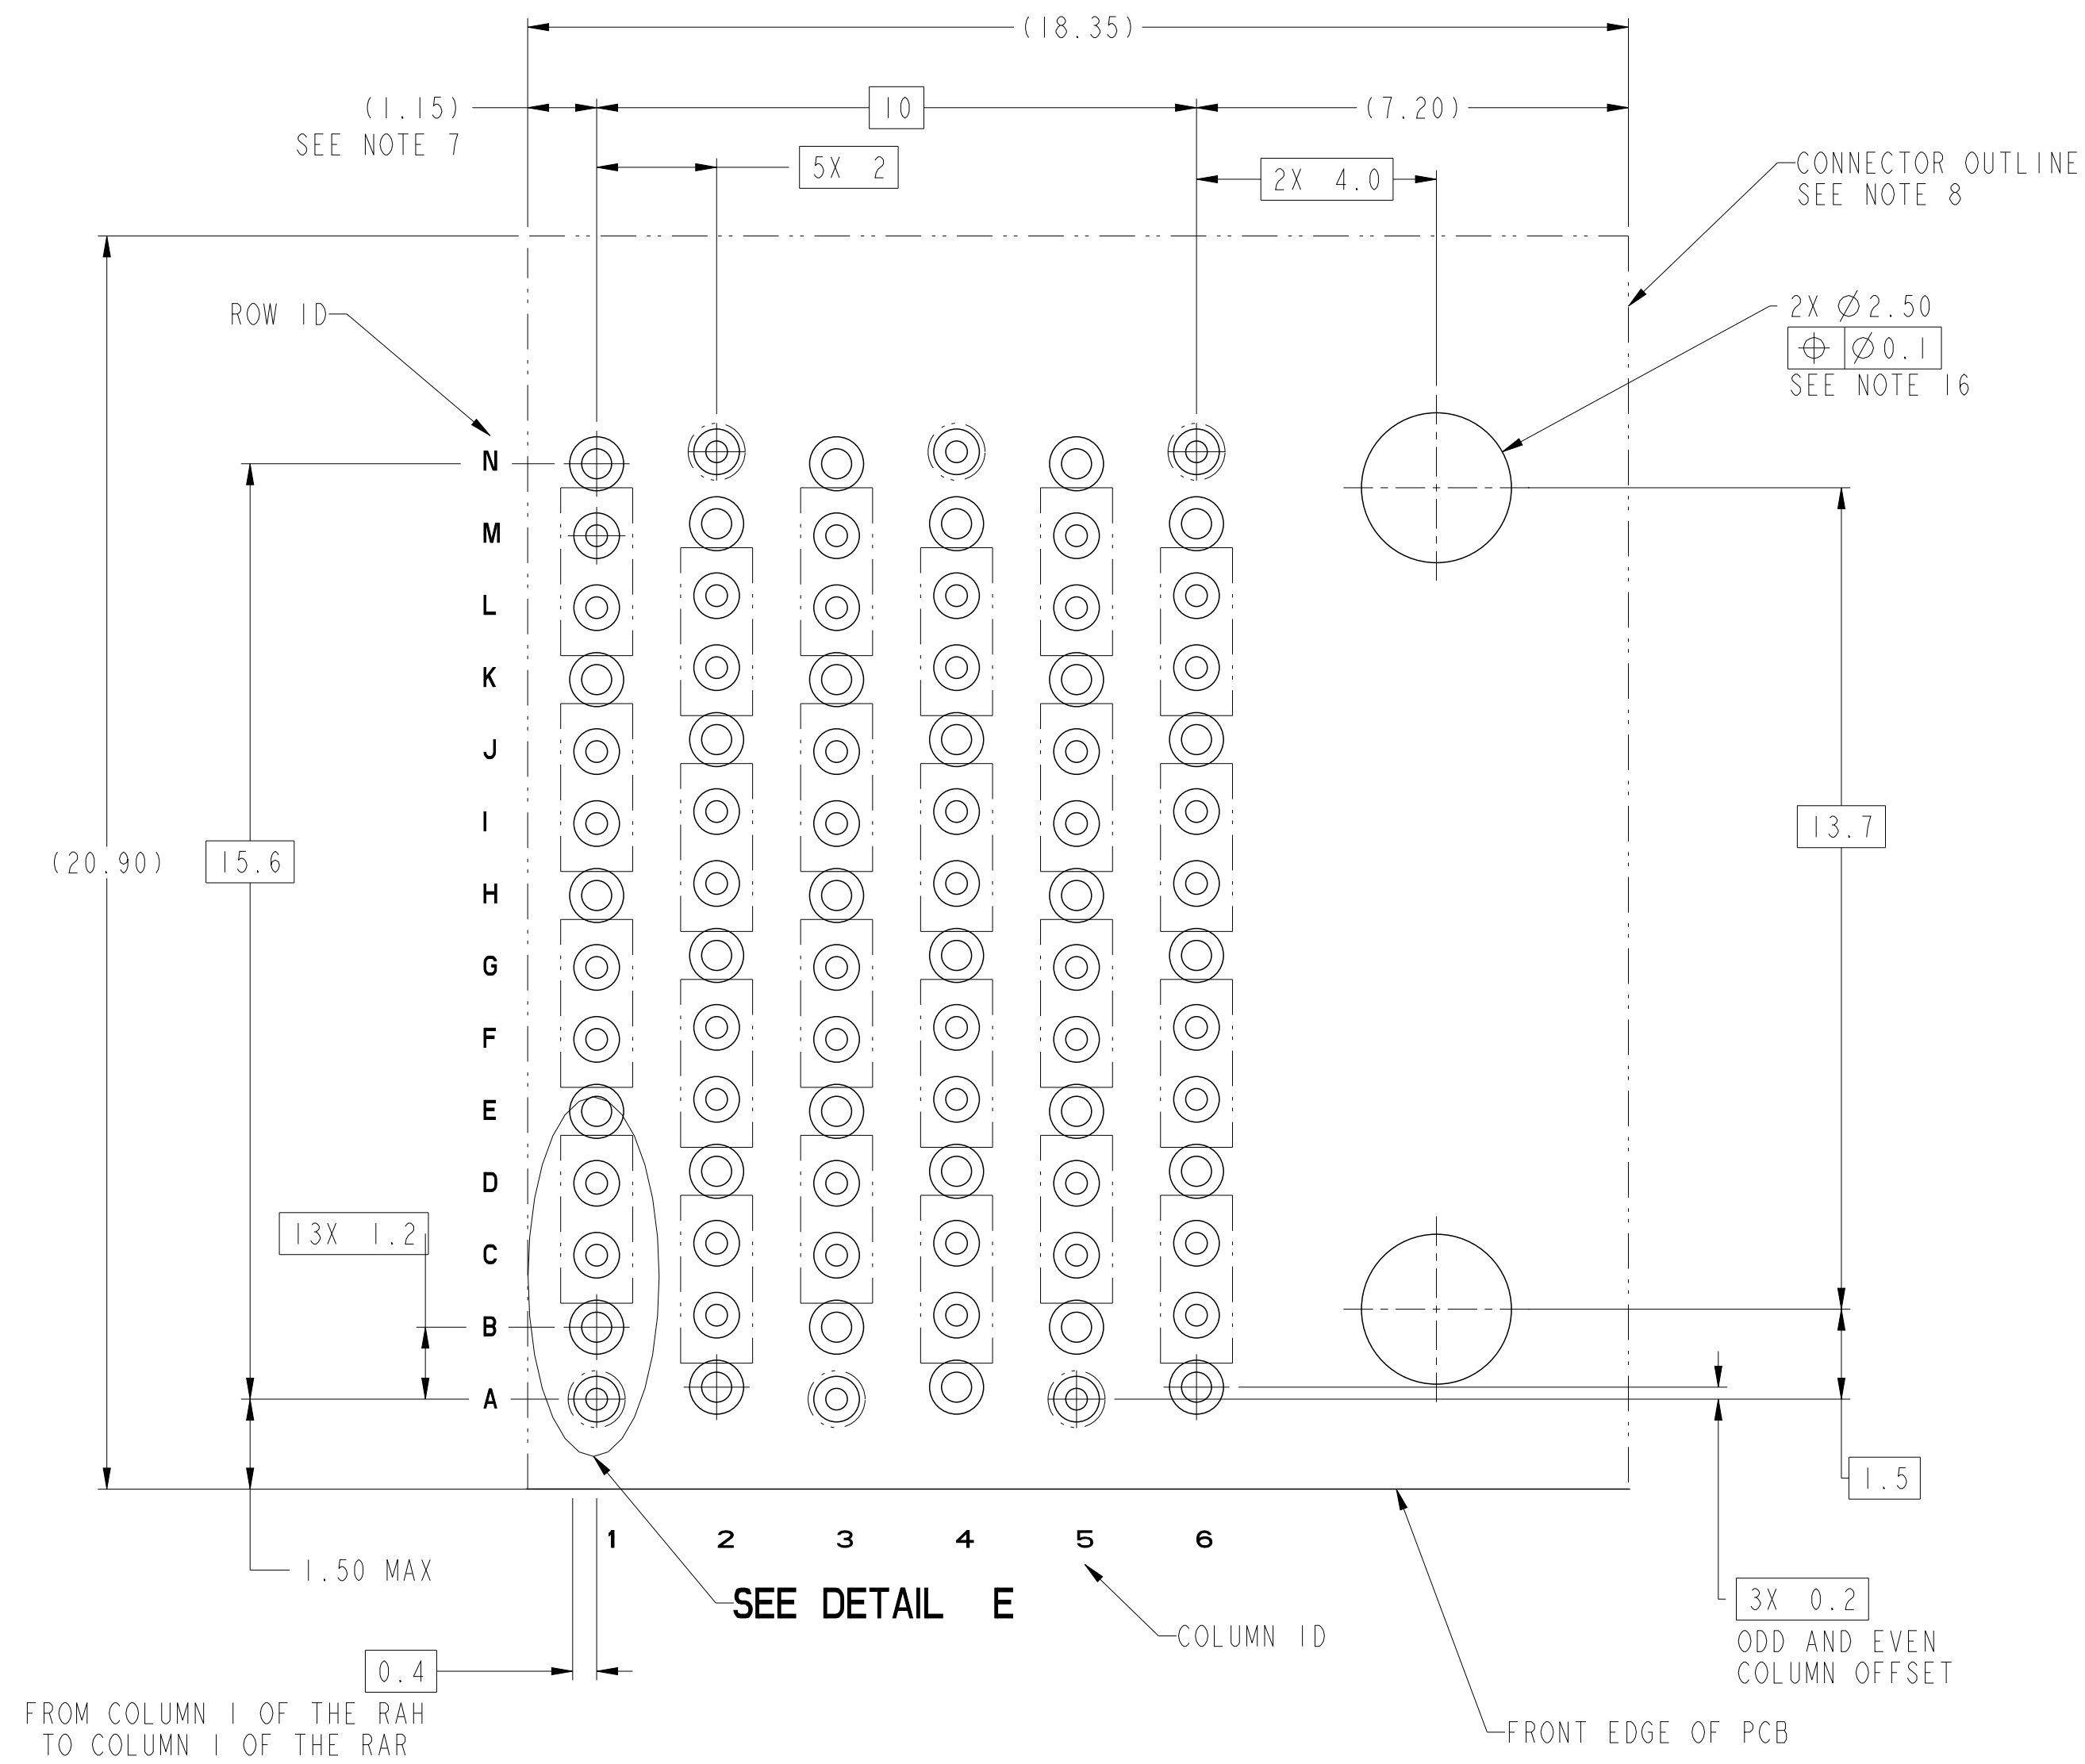


RECOMMENDED PCB LAYOUT FOR
10125287-Y2ALF THRU -Y2JLF
W/LEFT GUIDANCE COMPONENT SIDE
SEE NOTES 7, 8, 9, 11 & 16

spec ref	---	dr	N'Eppley	2013/04/24	projection	MM	size	A2	scale	8:1
tolerance std	ASME Y14.5M	eng	Peng-Bing Fu	2017/11/08	chr	Justin Chen	2017/11/29	ecn no	ELX-DG-28221-1	
surface	-	appr	Heaven Cen	2017/11/30	product family	ExaMAX	rel level	Released		
linear	0.X ±.3 0.XX ±.10 0.XXX ±.050	Amphenol FCI	title	ExaMAX R.A. HEADER	cat. no.	SEE TABLE	Product - Customer Drw	sheet 9 of 11		
angular	0° ±°									

10125287 - Y Y Y L F

ASSEMBLY PART NUMBER	DESCRIPTION
10125287-1YYLF	STANDARD MATE
10125287-2YYLF	ADVANCED MATE
10125287-3YYLF	SHORT DETECT
10125287-4YYLF	ADVANCED MATE & SHORT DETECT

MODULE DESCRIPTION	DESIGNATION REPRESENTED IN DASH NUMBER									BASE MODULE
STANDARD NO GUIDANCE (SEE SHEET 1)	01									
RIGHT GUIDANCE MODULE (SEE SHEET 6)	1A	1B	1C	1D	1E	1F	1G	1H	1J (NO KEY)	
										
LEFT GUIDANCE MODULE (SEE SHEET 8)	2A	2B	2C	2D	2E	2F	2G	2H	2J (NO KEY)	
										

spec ref		---		dr		N Eppley		2013/04/24		projection				size		A2		scale		1:1											
tolerance std		ASME Y14.5M		TOLERANCES UNLESS OTHERWISE SPECIFIED		eng		Peng-Bing Fu		2017/11/08				ecn no		ELX-DG-28221-1															
						chr		Justin Chen		2017/11/29				rel level		Released															
						appr		Heaven Cen		2017/11/30				product family		ExaMAX															
surface		-		linear		0.X		±.3				title		ExaMAX R.A. HEADER										dwg no		10125287		rev		B	
						0.XX		±.10				ASS'Y, 4 PR, 84 POS, 6 IMLA, 11.9 MM																			
						0.XXX		±.050																							
				angular		0°		±°				cat. no.		SEE TABLE		Product - Customer Drw										sheet 10 of 11					

	1	2	3	4	5	6	7	8								
Amphenol FCi	NOTES:															
	① - CONNECTOR MATERIALS: HOUSING: HIGH TEMP THERMOPLASTIC, BLACK, UL94-V0 IMLA PLASTIC: HIGH TEMP THERMOPLASTIC, BLACK, UL94-V0 CONTACT: COPPER ALLOY ORGANIZER: HIGH TEMP THERMOPLASTIC, BLACK, UL94-V0															
	2 - CONTACT PLATING: SEPARABLE INTERFACE: PERFORMANCE-BASED PLATING, QUALIFIED TO MEET THE REQUIREMENTS OF FCI PRODUCT SPECIFICATION GS-12-1096 INCLUDING TELCORDIA GR-1217-CORE (NOVEMBER 1995) CENTRAL OFFICE TEST SEQUENCE PRESS-FIT TAILS: TIN OVER NICKEL (LEAD FREE)															
	3 - PRODUCT SPECIFICATION: GS-12-1096															
	4 - APPLICATION SPECIFICATION: GS-20-0361															
	5 - PACKAGING MEETS GS-14-920 LEAD FREE LABELING SPECIFICATION.															
Amphenol FCi	⑥ - PRODUCT MARKING, (PROTOTYPE, PART NUMBER & LOT CODE), ON THIS SURFACE.															
	⑦ - THE MINIMUM VIA SPACING BETWEEN STACKED CONNECTORS WILL BE 2.0 mm OR 3.0 mm AS DEFINED BY NOTE 7 ON THE MATING RECEPTACLE CUSTOMER DRAWING. REFER TO THE APPLICATION SPECIFICATION FOR DETAILS.															
	⑧ - CONNECTOR OUTLINE MAY BE SCREEN PRINTED ONTO CUSTOMER PCB TO BE USED AS A GUIDE FOR MANUAL CONNECTOR PLACEMENT.															
	⑨ - REFER TO CUSTOMER DRAWING 10119933 FOR INFORMATION ON PCB HOLE DIAMETERS AND PLATING OPTIONS															
	10 - THIS PRODUCT MEETS THE EUROPEAN UNION DIRECTIVES & OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-47-0004															
	⑪ - REFER TO ROUTING GUIDE GS-20-0511 FOR RECOMMENDATIONS ON OPTIMIZATION OF FOOTPRINT AND TRACE ROUTING LAYOUT.															
Amphenol FCi	12 - THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10-30 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.															
	⑬ - THE ADVANCED MATE HEADER, 10125287-2YYLF, WHEN MATED WITH AN ADVANCED MATE RECEPTACLE WILL PROVIDE 2 PAIRS OF MATING CONTACTS THAT MATE 0.75MM BEFORE THE REMAINDER OF THE SIGNAL AND GROUND CONTACTS.															
	⑭ - THE SHORT DETECT HEADER, 10125287-3YYLF, WHEN MATED WITH A STANDARD MATE RECEPTACLE WILL PROVIDE 1 PAIR OF MATING CONTACTS THAT MATE 1.00 MM AFTER THE REMAINDER OF THE SIGNAL AND GROUND CONTACTS.															
	⑮ - THE ADVANCED MATE/SHORT DETECT HEADER, 10125287-4YYLF, WHEN MATED WITH AN ADVANCED MATE RECEPTACLE WILL PROVIDE 2 PAIRS OF MATING CONTACTS THAT MATE 0.75 MM BEFORE THE REMAINDER OF THE SIGNAL AND GROUND CONTACTS AND 1 PAIR OF MATING CONTACTS THAT MATE 1.00 MM AFTER THE REMAINDER OF THE SIGNAL AND GROUND CONTACTS.															
	⑯ - FOR CONNECTORS WITH EITHER A RIGHT OR LEFT GUIDE MODULE, TWO PHILLIPS PAN HEAD M2 HOLD-DOWN SCREWS MUST BE USED TO SECURE THE CONNECTOR TO THE PCB. THE SCREW LENGTH SHALL BE 2.0-6.0MM PLUS THE THICKNESS OF THE PCB. SCREWS ARE NOT PROVIDED WITH CONNECTOR.															
	⑰ - LEFT / RIGHT INTEGRATED GUIDE ORIENTATION IS DETERMINED BY THE LOCATION OF THE GUIDE FEATURES WHEN LOOKING AT THE MATING FACE OF THE RIGHT ANGEL RECEPTACLE. THE LEFT / RIGHT DESIGNATION OF THE MATING HEADER IS DEFINED BY THE RIGHT ANGEL RECEPTACLE THAT IT MATES WITH (i. e. A RIGHT GUIDE RIGHT ANGEL HEADER MATES WITH A RIGHT ANGEL RECEPTACLE.)															
Amphenol FCi	⑱ - ALL GROUND CONTACTS ARE COMMONED WITHIN A COLUMN.															
spec ref		---		dr	N'Eppley	2013/04/24	projection	MM	size	A2	scale	1:1				
tolerance std		ASME Y14.5M		eng	Peng-Bing Fu	2017/11/08			ecn no				ELX-DG-28221-1			
		TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	Justin Chen	2017/11/29			rel level				Released			
				appr	Heaven Cen	2017/11/30			product family				ExaMAX			
surface		- 	linear	0.X	±.3	Amphenol FCi	title		ExaMAX R.A. HEADER		dwg no	10125287		rev	B	
				0.XX	±.10											
				0.XXX	±.050											
			angular	0°	±°				cat. no.	SEE TABLE	Product - Customer Drw		sheet 11 of 11			
Crea File - REV E - 2016-02-12							PDS: Rev :B		STATUS:Released		Printed: Dec 02, 2017					

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9