
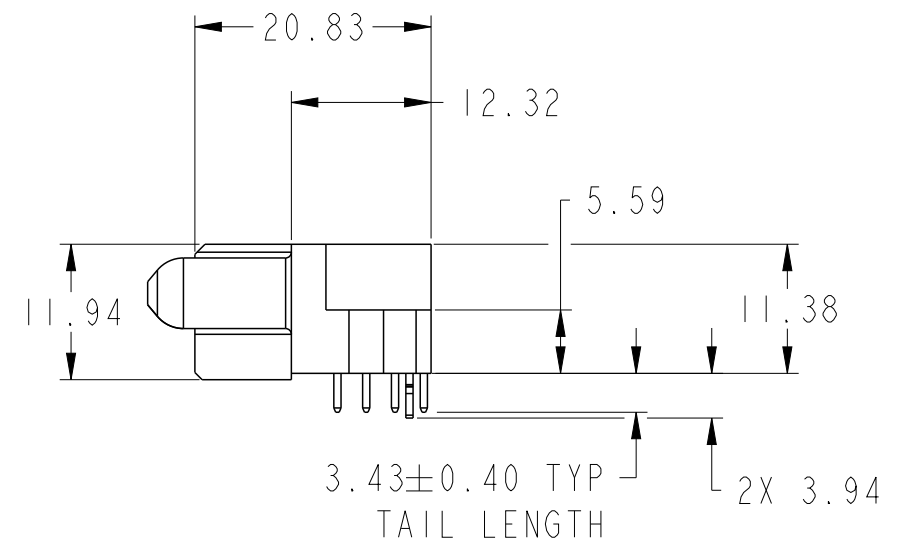
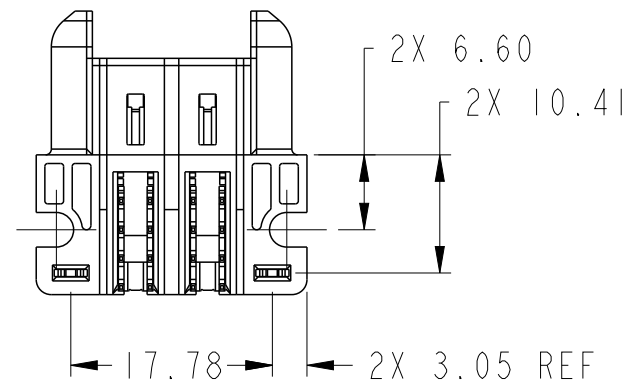
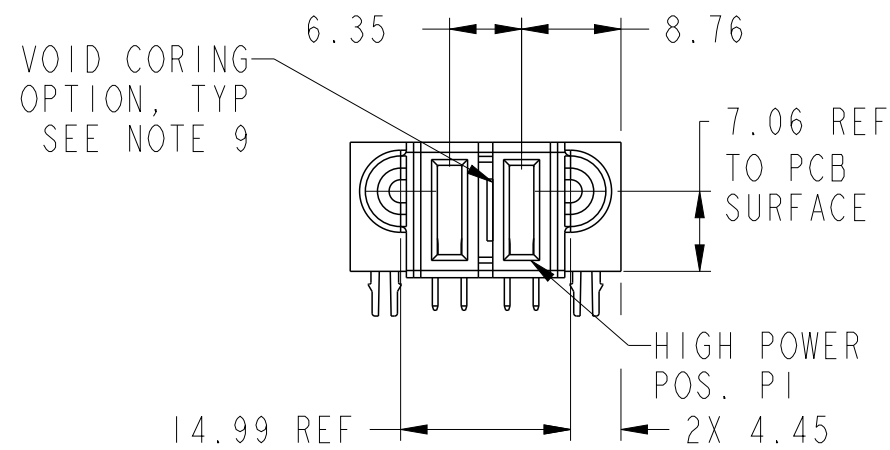


PRODUCT NUMBER SEE SHEET 2

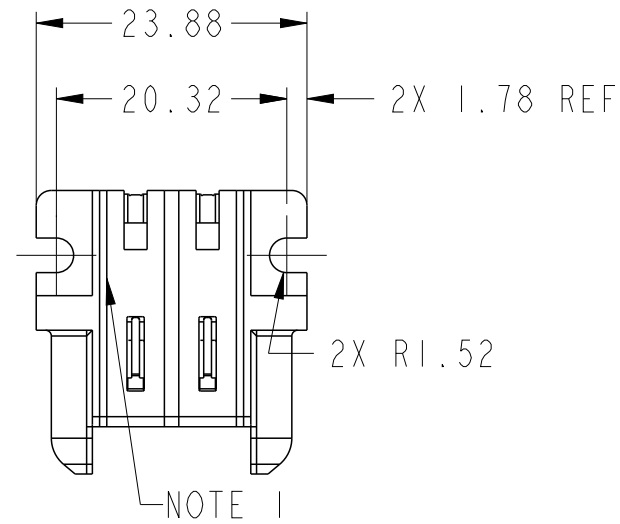

spec ref				dr	Sunny2 Liu	2017/03/14	projection	MM	size	A3	scale	3:2
tolerance std ISO 406 ISO 1101	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Sunny2 Liu	2017/08/18			ecn no -			
				chr	Kaka Zhang	2017/08/18			rel level Released			
				appr	Pei-Ming Zheng	2017/08/18			product family PwrBlade+			
surface ISO 1302	linear	0.X	±0.5	Amphenol FCi	title 2HP RA STB RECEPTACLE				dwg no 10106126-2000001	rev A		
		0.XX	±0.25									
		0.XXX	±0.10									
	angular	0°	±2°		cat. no.		Product - Customer Drw				sheet 1 of 3	


A

B

C

D

PRODUCT NO.	ROW S	HP			
		E1	P2	P1	E2
10106126-2000001LF	D C B A				

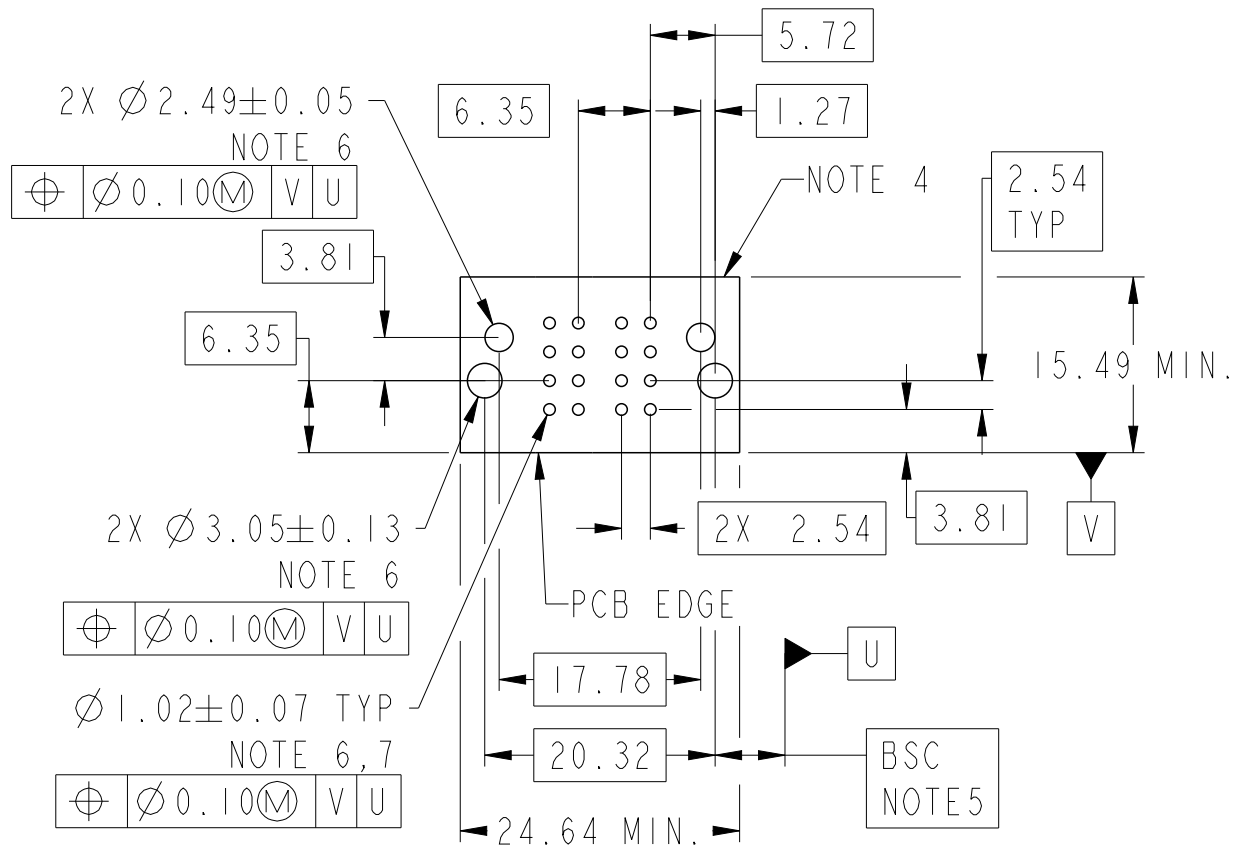

CODE	DESCRIPTION
H3	STD HIGH POWER CONTACT(3.43)
HA	METAL HOLD DOWN

A

B

C

D

spec ref				dr		Sunny2 Liu		2017/03/14		projection				MM		size		A3		scale		3:2													
tolerance std				TOLERANCES UNLESS OTHERWISE SPECIFIED				eng		Sunny2 Liu		2017/08/18																							
ISO 406																																			
ISO 1101								chr		Kaka Zhang		2017/08/18		appr		Pei-Ming Zheng		2017/08/18		product family						PwrBlade+		ecn no		-					
surface ISO 1302				linear		0.X		±0.5		Amphenol FCi						title		2HP RA STB RECEPTACLE						dwg no		10106126-2000001						rev		A	
						0.XX		±0.25																											
						0.XXX		±0.10																											
				angular		0°		±2°		cat. no.		Product - Customer Drw						sheet 2 of 3																	

NOTES:

- 1) PRODUCT MARK:
PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE .
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING : HIGH TEMP THERMOPLASTIC WITH GLASS FIBER, UL94V-0, BLACK.
-POWER CONTACT : HIGH CONDUCTIVITY COPPER ALLOY.
-SIGNAL CONTACT : COPPER ALLOY.
- 3) PLATING SPECIFICATION : 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS ARE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15+/-0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN SN
OVER 0.0254-0.0762MM CU PLATING TO ACHIEVE A 1.02+/-0.07MM HOLE.
- 8) THE HOUSING WILL WITHSTAND EXPOSURE TO 265 °C PEAK TEMPERATURE
FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.
- 9) THE VOID CORING IN BETWEEN POWER MODULES, SIGNAL MODULES AND
END MODULES ARE OPTIONAL AND THE SHAPE MAY BE DIFFERENT FOR
OPTIMIZE THE MOLDING PROCESS. THE VOID CORING WILL NOT EFFECT
TO PRODUCT FUNCTION.
- 10) THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY
REGULATIONS AS DESCRIBED IN GS-47-0004.
- 11) PRODUCT SPECIFICATION : GS-12-658.
APPLICATION SPECIFICATION : GS-20-141.
PRODUCT PACKAGE SPECIFICATION: GS-14-1502.

spec ref				dr		Sunny2 Liu	2017/03/14	projection		MM		size		A3	scale		3:2						
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED				eng		Sunny2 Liu	2017/08/18					ecn no				-					
ISO 406						chr		Kaka Zhang	2017/08/18					rel level				Released					
ISO 1101						appr		Pei-Ming Zheng	2017/08/18					product family				PwrBlade+					
surface ISO 1302 		linear		0.X		±0.5		Amphenol FCi		title		2HP		dwg no		10106126-2000001		rev		A			
																				0.XX		±0.25	
																				0.XXX		±0.10	
		angular		0°		±2°				cat. no.		Product - Customer Drw				sheet 3 of 3							

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9