

LDO03C Series

15 Watts

Total Power: 15 Watts
Input Voltage: 3-13.8 Vdc
No. of Outputs: Single

Special Features

- 3 A output current rating
- Input voltage range: 3-13.8 Vdc
- Adjustable out voltage: 0.59-5.1 V
- Optional factory setting with power good
- Excellent transient response
- Power enable
- Minimum airflow
- Small package
- Termination voltage capability
- RoHS compliant

Safety

UL, cUL 60950-1
TÜV Product Service (EN60950)
Certificate No. TBD
CB Report and
Certificate to IEC60950



Electrical Specifications

| Output | | |
|--------------------------|---|--|
| Output voltage | See Note 5 | 0.59-5.1 V |
| Output setpoint accuracy | 0.1% trim resistors | ±1.0% |
| Line regulation | Low line to high line | ±0.5% |
| Load regulation | Full load to min. load | ±0.5% |
| Min./max. load | | 0 A/3 A |
| Overshoot | At turn-on | 0.5% max. |
| Undershoot | At turn-off | 100 mV max. |
| Ripple and noise | See Note 1 | 25 mV Vin=5 V, Vout=2.5 V |
| Transient response | See Notes 1, 2 | 235 mV max. deviation 20 μs recovery to within regulation band |
| Input | | |
| Input voltage range | | 3-13.8 Vdc |
| Input current | Minimum load Remote OFF | 50 mA 5 mA |
| Input current (max.) | See Note 3 | 3 A @ Io max. |
| Start-up time | Power up Remote ON/OFF | 3 ms 2 ms |
| General | | |
| Efficiency (high input) | Vin=5 V, Vo=2.5 V, Io=3 A | 90% |
| Switching frequency | Fixed | 1.5 MHz |
| Material flammability | | UL94V-0 |
| Weight | | 1.7 g (0.06 oz.) |
| MTBF | 12 V @ 40 °C, 100% load Bellcore 332 | 10,000,000 hours |
| Coplanarity | Surface mount models | 150 μm |

Environmental Specifications

| | | |
|-----------------------------------|--|---------------------------------------|
| Thermal performance See Note 5 | Operating ambient Non-operating ambient | -40 °C to +85 °C -40 °C to +125 °C |
|-----------------------------------|--|---------------------------------------|

Protection

| | |
|------------------------|----------------------|
| Short-circuit | Hiccup, non-latching |
| Overvoltage protection | Hiccup, non-latching |

Recommended System Capacitance

| | | |
|--------|------------|------|
| Input | See Note 6 | 0 μF |
| Output | See Note 7 | 0 μF |

Ordering Information

| Output Power (Max.) | Input Voltage | Output Voltage | Output Current (Min.) | Output Current (Max.) | Efficiency (Typical) | Regulation Line | Regulation Load | Model Number ^(3,5) |
|---------------------|---------------|----------------|-----------------------|-----------------------|----------------------|-----------------|-----------------|-------------------------------|
| 15W | 3-13.8 Vdc | 0.59-5.1 V | 0 A | 3 A | 90% | ±0.2% | ±0.5% | LDO03C-005W05-VJ |
| 15W | 3-13.8 Vdc | 0.59-5.1 V | 0 A | 3 A | 90% | ±0.2% | ±0.5% | LDO03C-005W05-HJ |
| 15W | 3-13.8 Vdc | 0.59-5.1 V | 0 A | 3 A | 90% | ±0.2% | ±0.5% | LDO03C-005W05-SJ |

Part Number System with Options

| Product Family | Rated Output Current | Performance | Input Voltage | Number of Pins Type of Output | Output Voltage | Mounting Option | Custom Option | RoHS Compliance |
|------------------------------------|------------------------------------|-----------------------------------|--------------------------------|---|-----------------------------------|--|---------------|---|
| LDO | 03 | C | 00 | 5W | 05 | V | X | J |
| Product Family LDO = LDO Series | Rated Output Current 03 = 3 Amp | Performance C = Cost Optimized | Input Voltage 00 = 3-13.8 V | Type of Output 5W = 5 Pins and Wide Output | Output Voltage 05 = 0.59-5.1 V | Mounting Option V = Vertical H = Horizontal S = Horizontal SMT VS = Vertical SMT | Custom Option | RoHS Compliance J = Pb free (RoHS 6/6 compliant) |

Output Voltage Adjustment of the LDO03C Series

The ultra-wide output voltage trim range offers major advantages to users who select the LDO03C series. It is no longer necessary to purchase a variety of modules in order to cover different output voltages. The output voltage can be trimmed in a range of 0.59-5.1 Vdc. When the LDO03C converter leaves the factory, the output has been adjusted to the default voltage of 0.59 V.


Notes:

1. Measured as per recommended system capacitance. See Technical Reference Note.
2. $di/dt = 10 \text{ A}/\mu\text{s}$, $V_{in} = \text{Nom}$, $T_c = 25 \text{ }^\circ\text{C}$, load change = 0.50 I_o to full I_o and full I_o to 0.50 I_o.
3. External input fusing is recommended.
4. Additional part numbers may be available with different output voltages.
5. Airflow dependent, 100 LFM minimum required.
6. No capacitors needed for ripple current stability.
7. No capacitors needed for stability.
8. TSE RoHS 5/6 (non Pb-free) compliant versions may be available on special request, please consult your local sales representative for details.
9. NOTICE: Some models do not support all options. Please contact your local Emerson Network Power representative or use the on-line model number search tool at <http://www.powerconversion.com/powergroup/products.htm> to find a suitable alternative.


Mechanical Drawings

Vertical Mount

Dimensions in inches (mm). Tolerances es (unless otherwise specified) 2 Places ± 0.030 (± 0.76) 3 Places ± 0.010 (± 0.25)

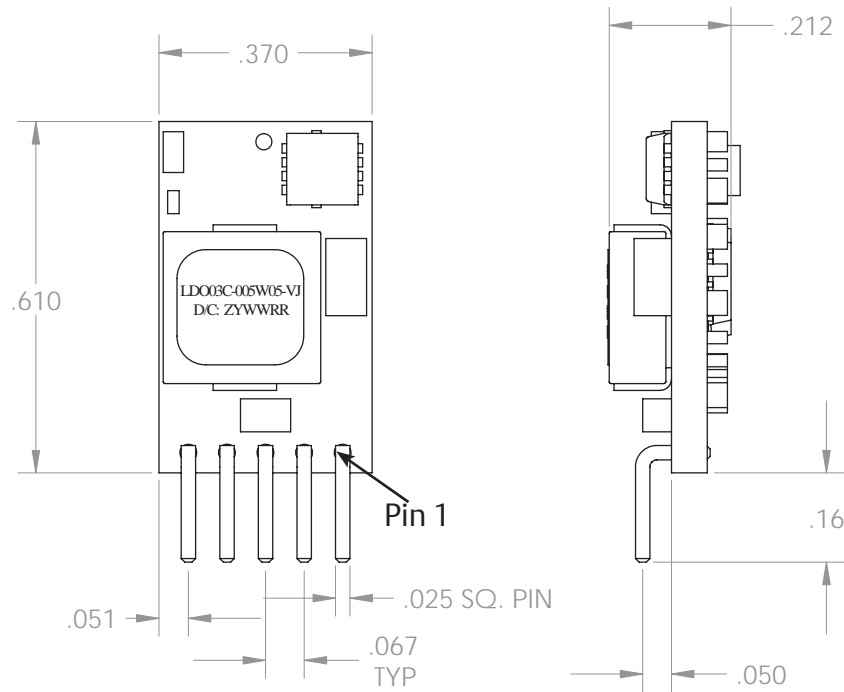


Horizontal Mount

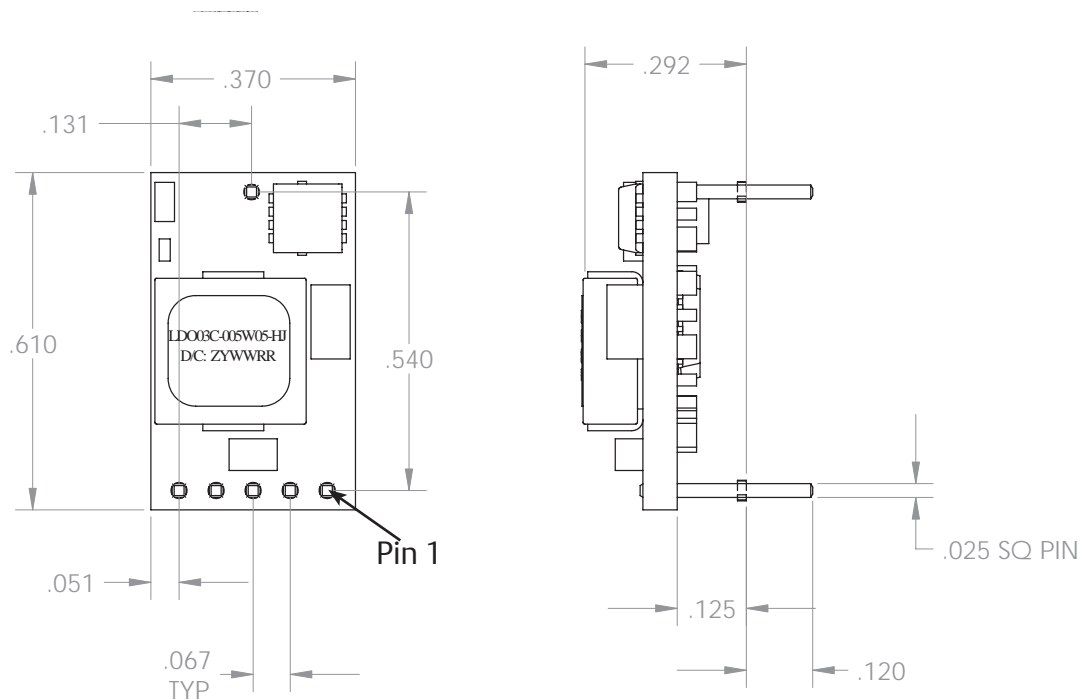

Mechanical Drawings (Cont'd)

Horizontal Surface Mount

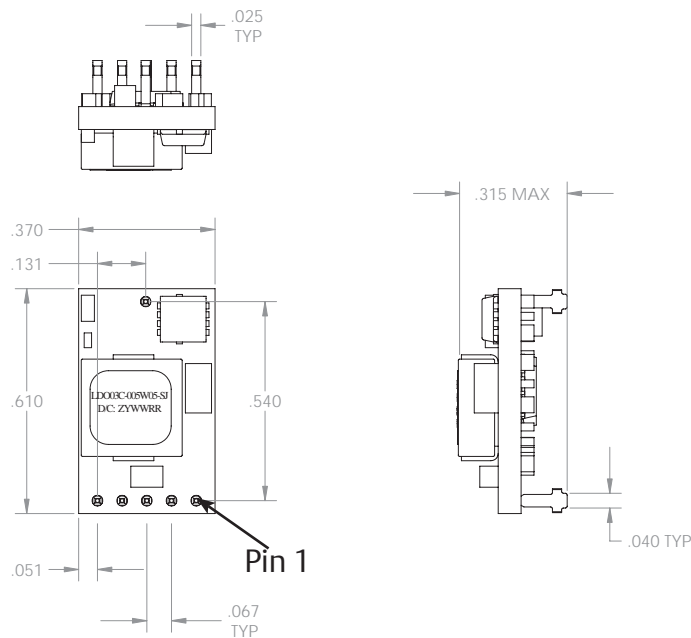

Pin Assignments

Single Output

1. Enable
2. Vin
3. Common/RTN
4. Vout
5. PG/Trim
6. Mech Pin (Horz/SMT only)

*This is a Preliminary Datasheet. Emerson Network Power reserves the right to make changes to the information contained herein without notice and assumes no liability as a result of its use or application.

Americas

5810 Van Allen Way
Carlsbad, CA 92008
USA
Telephone: +1 760 930 4600
Facsimile: +1 760 930 0698

Europe (UK)

Waterfront Business Park
Merry Hill, Dudley
West Midlands, DY5 1LX
United Kingdom
Telephone: +44 (0) 1384 842 211
Facsimile: +44 (0) 1384 843 355

Asia (HK)

16th - 17th Floors, Lu Plaza
2 Wing Yip Street, Kwun Tong
Kowloon, Hong Kong
Telephone: +852 2176 3333
Facsimile: +852 2176 3888

For global contact, visit:

www.powerconversion.com

For technical support, visit:

<http://www.powerconversion.com/support/product/technical-support.php>

While every precaution has been taken to ensure accuracy and completeness in this literature, Emerson Network Power assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

Printed in U.S.A.
Issue 5F3

Emerson Network Power.
The global leader in enabling
business-critical continuity.

- AC Power
- Connectivity
- DC Power
- Embedded Power**
- Inbound Power
- Integrated Cabinet Solutions
- Outside Plant
- Precision Cooling
- Site Monitoring and Services

EmersonNetworkPower.com

Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co.
©2008 Emerson Electric Co.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9