

DESCRIPTION

The PUP96N3/PUP120N3 series of AC/DC switching power supplies are for 96-120 watts of continuous output power. They are enclosed in a 94V-0 rated plastic case with an inlet of the IEC320/C14 or IEC320/C6 to mate with interchangeable cord for world-wide use. All models meet EN55032 and FCC class B emission limits, and comply with UL, CSA, IEC and CE requirements.

PUP96N3/PUP120N3 SERIES

CE
RoHS



FEATURES

- No load power consumption less than 0.15 W
- Compliant with DoE level VI requirements
- Meet Energy Star EPS2.0 /ErP EC No 278/2009 (Lot 7)
- Meet EU CoC EPS V5 Tier 2
- Operating altitude up to 5000 meters
- Overvoltage protection (latch)
- Short-circuit protection (auto-recovery)
- Overpower protection (auto-recovery)
- Over temperature protection (latch)
- High Efficiency $\geq 89\%$
- With PFC circuit
- 100% burn-in at full rated load
- Compliant with RoHS requirements

SAFETY STANDARD APPROVALS



UL 62368-1, CSA C22.2 No. 62368-1
File No. E190414



TUV EN 62368-1

INPUT SPECIFICATIONS

| | |
|------------------------|--|
| Input voltage: | 90-264 VAC |
| Input frequency: | 47-63 Hz |
| Input current: | 1.3 A (rms) for 115 VAC 0.7 A (rms) for 230 VAC |
| Earth Leakage current: | 250 μ A max. @ 264 VAC, 60 Hz |

OUTPUT SPECIFICATIONS

| | |
|--------------------------|--|
| Output voltage /current: | See rating chart. |
| Maximum output power: | See rating chart. |
| Ripple and noise: | 350 mV peak to peak maximum |
| Overvoltage protection: | Set at 125-155% of its nominal output voltage |
| Overcurrent protection: | All models protected to short circuit conditions (auto-recovery) |
| Temperature coefficient: | All outputs $\pm 0.04\%$ / $^{\circ}$ C maximum |
| Transient response: | Maximum excursion of 4% or better on all models, recovering to 1% of final value within 500 μ s after a 25% step load change |

ENVIRONMENTAL SPECIFICATIONS

| | |
|------------------------|--------------------------------------|
| Operating temperature: | 0 $^{\circ}$ C to +40 $^{\circ}$ C |
| Storage temperature: | -20 $^{\circ}$ C to +80 $^{\circ}$ C |
| Operating humidity: | 20% to 80% non-condensing |
| Storage humidity: | 10% to 90% non-condensing |

GENERAL SPECIFICATIONS

| | |
|---------------------|---|
| Hold-up time: | 10 ms minimum at 100 VAC |
| Turn on delay time: | 3 s maximum at 100 VAC |
| Power factor: | 0.95 typical |
| Efficiency: | 89% minimum at 110 VAC or 240 VAC. |
| Line regulation: | $\pm 0.5\%$ maximum at full load |
| Inrush current: | 100 A @ 115 Vac or 200 A @ 230 Vac at 25 $^{\circ}$ C cold start |
| Withstand voltage: | 4242 VDC from input to output 2500 VDC from input to ground |
| MTBF: | 200,000 hours at full load at 25 $^{\circ}$ C ambient, calculated per SR332 |

EMC Performance

| | |
|---------------|--|
| EN55032: | Class B conducted, Class B radiated |
| FCC: | Class B conducted, Class B radiated |
| VCCI: | Class B conducted, Class B radiated |
| EN61000-3-2: | Harmonic distortion, Class D |
| EN61000-3-3: | Line flicker |
| EN55024 | |
| EN61000-4-2: | ESD, ± 8 KV air and ± 4 KV contact |
| EN61000-4-3: | Radiated immunity, 3 V/m |
| EN61000-4-4: | Fast transient/burst, ± 1 KV |
| EN61000-4-5: | Surge, ± 1 KV diff., ± 2 KV com. |
| EN61000-4-6: | Conducted immunity, 3 Vrms |
| EN61000-4-8: | Magnetic field immunity, 1 A/m |
| EN61000-4-11: | Voltage dip immunity, 30% reduction for 500 ms, and >95% reduction for 10 ms |


OUTPUT VOLTAGE/CURRENT RATING CHART

| Model ⁽¹⁾ | Output | | | | | | Average Active efficiency (typical) @ 115 / 230 Vac |
|----------------------|--------|--------------|--------------|------|-------------------------------|------------|---|
| | V1 | Min. Current | Max. Current | Tol. | Ripple & Noise ⁽²⁾ | Max. Power | |
| PUP96N3-12 | 12 V | 0 A | 8.00 A | ±5% | 350 mV | 96 W | 89 / 90% |
| PUP96N3S-12 | 12 V | 0 A | 8.00 A | ±5% | 350 mV | 96 W | 89 / 90% |
| PUP120N3-12 | 12 V | 0 A | 10.00 A | ±5% | 350 mV | 120 W | 89 / 90% |
| PUP120N3S-12 | 12 V | 0 A | 10.00 A | ±5% | 350 mV | 120 W | 89 / 90% |
| PUP120N3-14 | 24 V | 0 A | 5.00 A | ±5% | 350 mV | 120 W | 89 / 91% |
| PUP120N3S-14 | 24 V | 0 A | 5.00 A | ±5% | 350 mV | 120 W | 89 / 91% |
| PUP120N3-18 | 48 V | 0 A | 2.50 A | ±5% | 350 mV | 120 W | 89 / 91% |
| PUP120N3S-18 | 48 V | 0 A | 2.50 A | ±5% | 350 mV | 120 W | 89 / 91% |
| PUP120N3-19 | 54 V | 0 A | 2.22 A | ±5% | 350 mV | 120 W | 89 / 91% |
| PUP120N3S-19 | 54 V | 0 A | 2.22 A | ±5% | 350 mV | 120 W | 89 / 91% |

NOTES:

- PUP120N3 models are equipped with IEC320/C14 inlet, and PUP120N3S models are equipped with IEC320/C6 inlet.
- Ripple and noise is maximum peak-to-peak voltage value measured at output within 20 MHz bandwidth, at rated line voltage and output load ranges, and with a 47 µF tantalum capacitor in parallel with a 0.1 µF ceramic capacitor across the output.

MECHANICAL SPECIFICATIONS

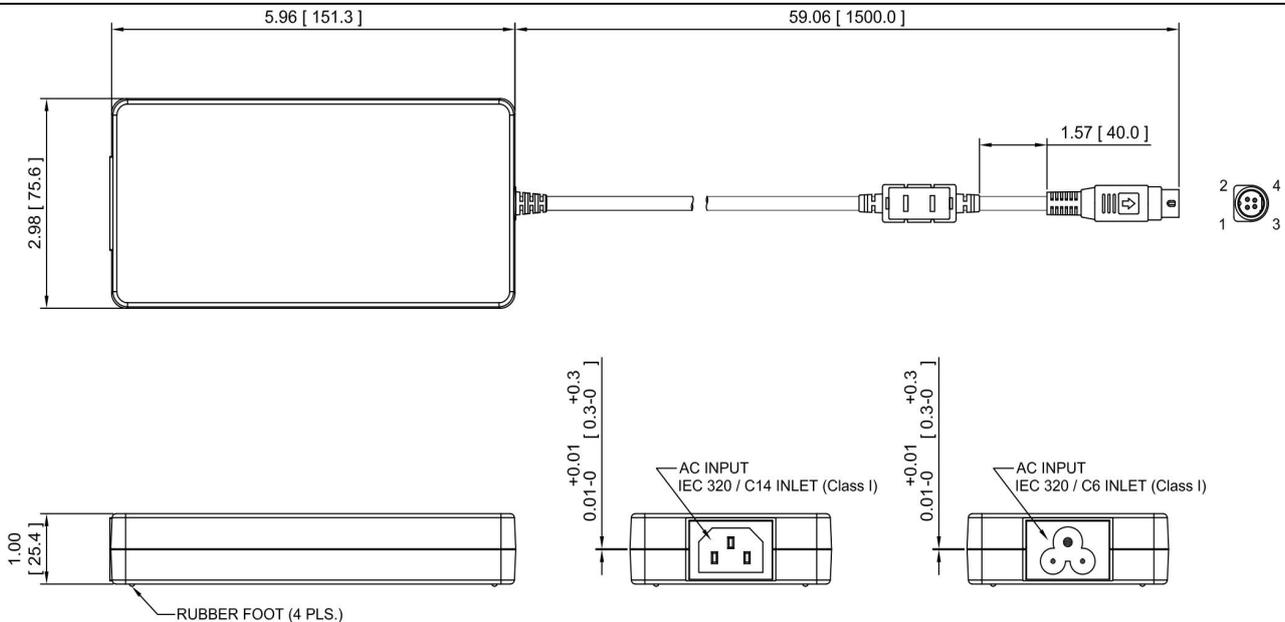

NOTES:

- Dimensions shown in inches [mm]
- Tolerance 0.02 [0.5] maximum
- Weight: 417 grams (0.92 lbs.) approx.
- V1 return (-) is electrically connected to incoming Earth Ground through a 1M ohm resistor as standard.

PIN CHART

| PIN NO. | 1 | 2 | 3 | 4 | SHELL OF CONNECTOR |
|----------|-----|-----|-----------|-----------|--------------------|
| Polarity | +V1 | +V1 | V1 Return | V1 Return | V1 Return |

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9