

# LDN20 Series

## 20W DIN Rail Switching Power Supply

LDN20 Series are single phase DIN Rail Switching Power Supplies, ideal mainly for general purposes such as home automation, simple automation in machines, survey systems, telecom, but also the renewable energy field.

Its compact size, high efficiency, excellent reliability and excellent power/volume ratio, together with easy installation makes it ideal for various industrial applications.

LDN20 Series are Class II isolation devices suitable for SELV and PELV circuitry and are designed to be mounted on DIN rail and installed inside a protective enclosure.



### Key Features & Benefits

- Single phase AC input 90 - 264 VAC (110 - 345 VDC)
- High efficiency and compact size
- Plastic enclosure, circuit breaker shape
- Class II, simplified wiring (no PE connection)
- Overload 170%
- High operating temperature with no derating
- RoHS Compliant

### Applications

- Industrial Automation
- Telecom
- Survey Systems
- Process Control



**bel** POWER SOLUTIONS & PROTECTION

a bel group

[belpowersolutions.com](http://belpowersolutions.com)

## 1. MODEL SELECTION

MODEL	INPUT VOLTAGE	# of PHASES	OUTPUT VOLTAGE	OUTPUT CURRENT
LDN20-12	120 - 240 VAC (110 - 345 VDC)	1	12 VDC	1.65 A
LDN20-24	120 - 240 VAC (110 - 345 VDC)	1	24 VDC	0.85 A

## 2. INPUT SPECIFICATIONS

Technical parameters are typical, measured in laboratory environment at 25°C and 240 VAC / 50 Hz, at nominal values, after minimum 5 minutes of operation.

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Input AC Voltage Range	Rated (UL certified) Operating	120 - 240 VAC 90 - 264 VAC
Input DC Voltage Range	Rated	110 - 345 VDC
Input Frequency		47 - 63 Hz
Input AC Current	LDN20-12 / LDN20-24	Vin = 120 VAC 0.4 A Vin = 240 VAC 0.3 A
Input DC Current	LDN20-12 / LDN20-24	Vin = 110 VDC 0.3 A Vin = 345 VDC < 0.1 A
Inrush Peak Current		≤ 50 A
Touch (Leakage) Current		≤ 0.2 mA
Internal Protection Fuse	Not user replaceable	Fuse 1AT
Recommended External Protection	It is strongly recommended to provide external surge arresters (SPD) according to local regulations	MCB 6 A C curve

## 3. OUTPUT SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Output Power		20 W
Rated Voltage	LDN20-12 LDN20-24	12 VDC (Fixed) 24 VDC (Fixed)
Continuous Current	LDN20-12 LDN20-24	1.65 A 0.85 A
Overload Limit	LDN20-12 LDN20-24	Vin = 120 VAC 2.60 A Vin = 240 VAC 3.25 A Vin = 120 VAC 1.3 A Vin = 240 VAC 1.7 A
Short Circuit Peak Current	LDN20-12 LDN20-24	8 A 4 A
Load Regulation		≤ 1%
Ripple & Noise <sup>1</sup>		≤ 100 mVpp
Hold up Time		≥ 5 ms
Protections	Overload/short circuit: Hiccup mode Thermal protection Output overvoltage	
Status Signals	Green LED = DC OK	
Parallel Connection	Possible for redundancy (with external ORing module)	
Efficiency		> 80%
Dissipated Power		< 6 W

<sup>1</sup> Ripple and Noise are measured with 20MHz bandwidth, probe terminated with a 0.1µF MKP parallel capacitor.

**NOTE:** Power rating, losses, efficiency, ripple, thermal behaviour and start-up may change outside of the nominal rated input range. Contact factory for details.

## 4. ENVIRONMENTAL, EMC & SAFETY SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Operating Temperature	UL certified up to 50°C (Start-up type tested: - 40°C) <sup>2</sup>	- 40 to + 70°C
Storage Temperature		- 40°C to + 80°C
Derating		- 0.5 W / °C over 50°C
Humidity	Non-condensing	5 - 95% RH
Life Time Expectancy	At 25°C ambient, full load	58629 h (6.6 years)
Overvoltage Category		III (EN50178)
Pollution Degree		2 (IEC60664-1)
Protection Class		Class II
Isolation Voltage	Input to Output	4.2 kVDC
Safety Standards & Approvals	UL508 (certified)	
	EN60950 (reference) EN50178 (reference)	
EMC Emission	EN55011 (CISPR11)	Class A
	EN55022 (CISPR22)	Class A
EMC Immunity	EN61000-4-2	Level 3
	EN61000-4-3	Level 3
	EN61000-4-4	Level 3
	EN61000-4-5	Level 3
	EN61000-4-11	Level 2
Protection Degree	EN60529	IP20
Vibration sinusoidal	IEC 60068-2-6	5-17.8 Hz: ±1.6 mm; 17.8-500 Hz: 2g 2Hours / axis (X,Y,Z)
Shock	IEC 60068-2-27	30 g 6 ms, 20 g 11 ms; 3 bumps / direction, 18 bumps total

<sup>2</sup> Possible at nominal voltage with load derating

## 5. PIN LAYOUT & DESCRIPTION



PIN	DESCRIPTION
1	AC/DC input
2	DC output (load)
3	Green LED: Output OK

INPUT CONNECTION	OUTPUT CONNECTION
Single phase: L = Line (1) N = Neutral (2)	+ = Positive DC (7) - = Negative DC (8)
DC: L = + Positive DC (1) N = - Negative DC (2)	

## 6. MECHANICAL SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Weight		100 g
Dimensions (W x H x D)		35 x 90 x 61.5 mm
Rail Mounting		IEC 60715/H15/TH35-7.5(-15)
Connection Terminals	Screw type Header (24 - 12 AWG)	2.5 mm <sup>2</sup>
Case Material	ABS, Flame retardant UL94 V-0	

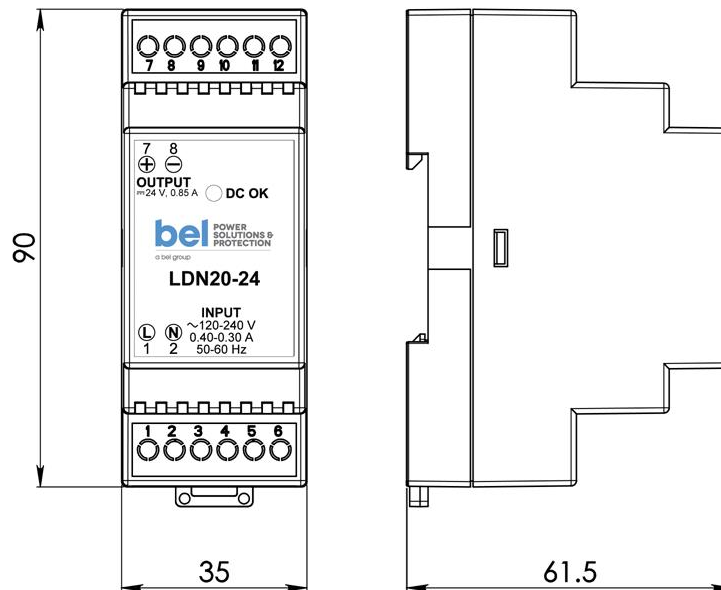


Figure 1. Mechanical Drawing

**For more information on these products consult: [tech.support@psbel.com](mailto:tech.support@psbel.com)**

**NUCLEAR AND MEDICAL APPLICATIONS** - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

**TECHNICAL REVISIONS** - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9