




MICRO SWITCH™
General Purpose Limit Switches
SZL-WL Series

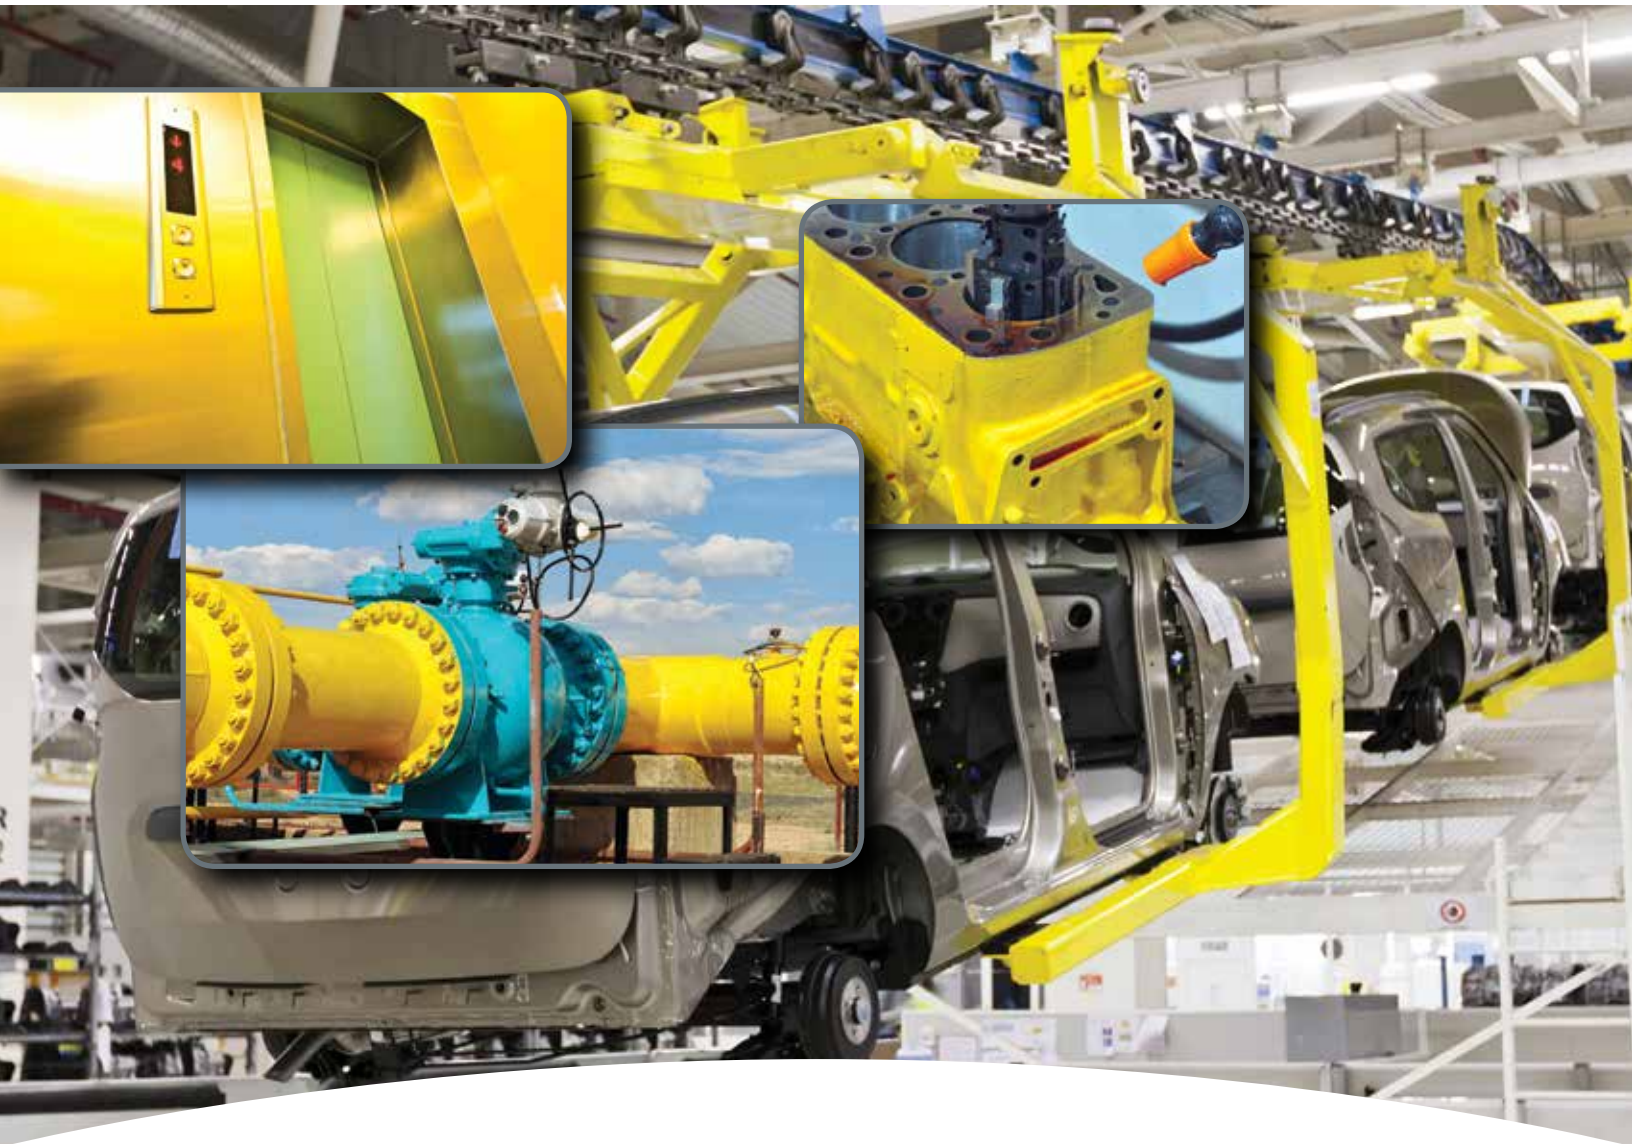

MICRO SWITCH™ SZL-WL Series

General Purpose Limit Switches

MICRO SWITCH™ SZL-WL Series general purpose limit switches are cost effective switches that may be used in a wide range of applications from general purpose conveyors to heavy-duty machinery. Rugged and reliable, the SZL-WL Series switches are specially designed for world-wide use and supported by Honeywell's vast experience in serving industries around the globe.

High quality product offerings combined with Honeywell's global sales and service resources makes the SZL-WL Series the smart choice for industries whose goal is to minimize plant downtime and reduce overall maintenance costs.

What makes our switches better?

- Small size and universal mounting footprint typically allows for use in constricted spaces and reduces replacement costs by providing interchangeability with similar style switches
- Wide variety of actuator heads and an assortment of actuators typically allows the SZL-WL Series to be applied in many types of applications
- IP67 construction often allows for use in dusty and dirty indoor and outdoor applications
- Mechanical service life of up to 10,000,000 operations promotes the durability required for use in many types of industries from factory floor to agriculture and/or machinery



COST OPTIMIZATION • EASE OF USE
RELIABILITY • GLOBAL ACCEPTANCE

Features and Benefits

INDUSTRIAL GLOBAL DESIGN

The SZL-WL Series is designed to the EN50041 mounting standard which promotes interchangeability between other brands of limit switches.

Robust and reliable.

TWO CIRCUIT DOUBLE BREAK CONTACTS

The SZL-WL Series promotes reliable switching under industrial 10 amp current loads and typically allows end users the ability to control two circuits within one switch.

WIDE CHOICE OF ACTUATORS

Honeywell's SZL-WL Series offers side rotary, top and side plunger, and wobble stick style actuators that makes the switch reasonably adaptable to numerous types of applications.

OIL TIGHT, WATER TIGHT, DUST TIGHT

IP67 sealing protects against dust and moisture, and allows the SZL-WL Series to be used in dirty and rugged environments found in both indoor and outdoor applications.

Potential Applications



INDUSTRIAL

- Counting and position sensing on conveyors and assembly lines
- Fixture and tooling position sensing on automated metal removing machines
- Position indication on electric valves on pipelines
- Position indication on dampers, fume hoods, and HVAC/R equipment
- Truck ramp position and elevator car position/leveling control



SZL-WL Series

PRODUCT NOMENCLATURE

Figure 1. SZL-WL for Asia-Pacific Use Only


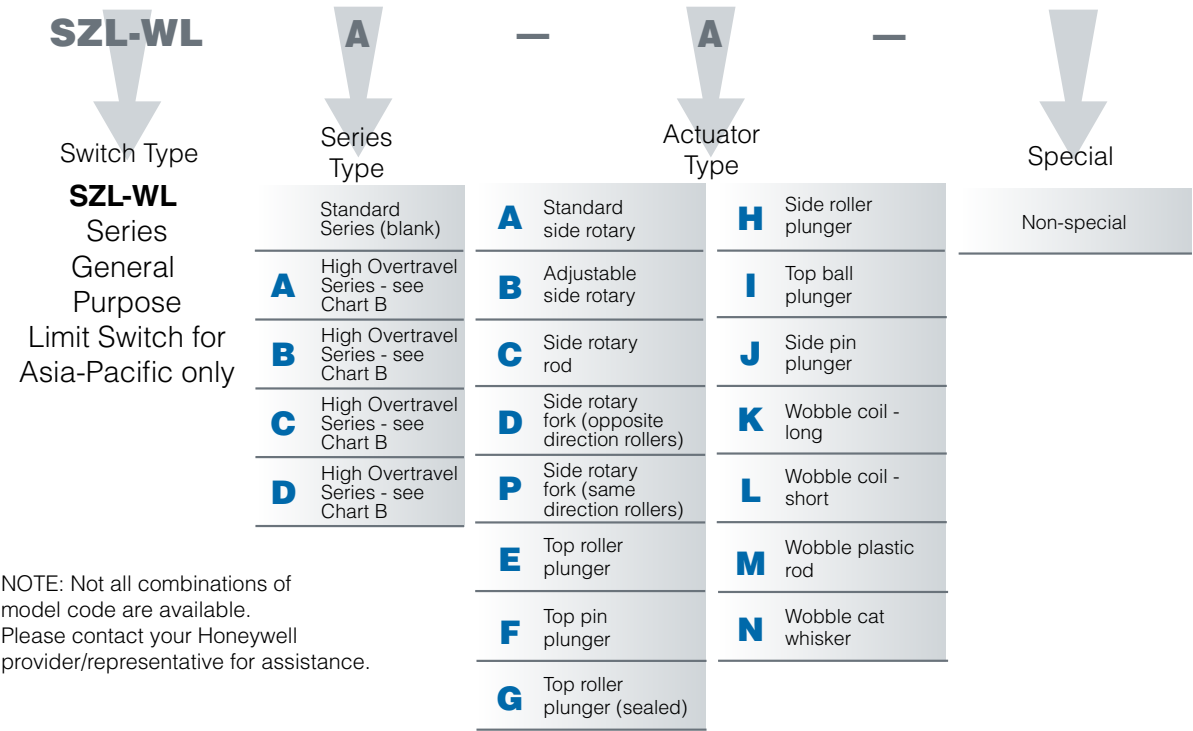


Figure 2. SZL-WL for North American Use Only

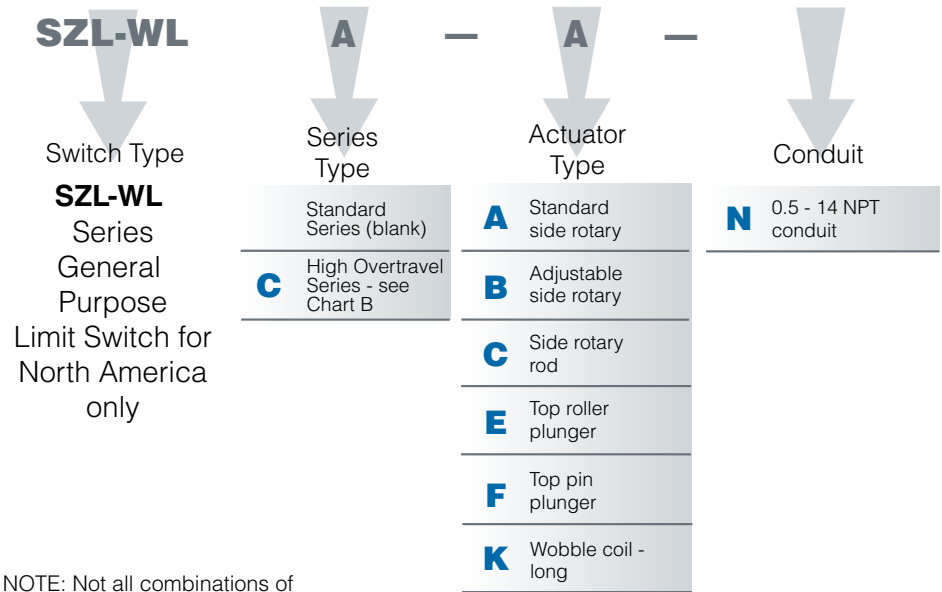

MICRO SWITCH™ General Purpose Limit Switches

Table 1. Chart A • Standard Type

	WL-A	WL-B ¹	WL-C ²	WL-D, P	WL-E	WL-F	WL-G
Pretravel	15° ±5°	15° ±5°	15° ±5°	50° ±5°	1,7 mm [0.07 in] max.	1,7 mm [0.07 in] max.	1,7 mm [0.07 in] max.
Differential Travel	12°	12°	12°	–	1 mm [0.04 in]	1 mm [0.04 in]	1 mm [0.04 in]
Overtravel	30°	30°	30°	35°	5,6 mm [0.22]	6,4 mm [0.25]	5,6 mm [0.22]
Total travel	40°	40°	40°	90°	–	–	–
Operating torque	0,51 Nm [4.5 in-lb]	0,51 Nm [4.5 in-lb]	0,195 Nm [1.72 in-lb]	0,447 Nm [4.0 in-lb]	26,67 N [6 lb] (force)	26,67 N [6 lb] (force)	16,67 N [3.75 lb] (force)

	WL-H	WL-I	WL-J	WL-K ³	WL-L ³	WL-M ³	WL-N ³
Pretravel	2,8 mm [0.11 in]	1,7 mm [0.07 in] max.	2,8 mm [0.11 in] max.	20 mm ±10 mm [0.79 in ±0.039 in]	20 mm ±10 mm [0.79 in ±0.039 in]	40 mm ±20 mm [1.57 in ±0.79 in]	40 mm ±20 mm [1.57 in ±0.79 in]
Differential travel	1 mm [0.04 in]	1 mm [0.04 in]	1 mm [0.04 in]	–	–	–	–
Overtravel	5,6 mm [0.22 in]	6,4 mm [0.25 in]	4,0 mm [0.16 in]	–	–	–	–
Total travel	8,4 mm [0.33 in]	9,2 mm [0.36 in]	5,7 mm [0.22 in]	–	–	–	–
Operating force max.	40,03 N [9 lb]	26,67 N [6 lb]	40,03 N [9 lb]	1,47 N [0.33 lb]	1,47 N [0.33 lb]	1,47 N [0.33 lb]	0,28 N [0.06 lb]

¹ Operating characteristics of the WL-B are measured at the arm length of 38 mm [1.5 in]

² Operating characteristics of the WL-C are measured at the lever length of 140 mm [5.5 in]

³ Operating characteristics of these types are measured at the tip of the actuator

Table 2. Chart B • Overtravel/High Precision Type

	WLA-A	WLB-A	WLA-B ¹	WLB-B ¹	WLA-C ²	WLB-C ²	WLC-A
Pretravel	18° ±4°	10° (-1°/+2°)	18° ±4°	10° (-1°/+2°)	18° ±4°	10° (-1°/+2°)	25° ±5°
Differential travel	10°	7°	10°	–	10°	7°	16°
Overtravel	55°	65°	55°	65°	55°	65°	60°
Total travel	80°	80°	80°	80°	80°	80°	90°
Operating torque max.	0,37 Nm [3.3 in-lb]	0,37 Nm [3.3 in-lb]	0,37 Nm [3.3 in-lb]	0,37 Nm [3.3 in-lb]	0,398 Nm [3.52 in-lb]	0,398 Nm [3.52 in-lb]	0,34 Nm [3.0 in-lb]

	WLC-B ¹	WLC-C ²	WLD-A	WLD-B ¹	WLD-C ²	WLE-A	WLE-B	WLE-C
Pretravel	25° ± 5°	25° ± 5°	20° max.	20° max.	20° max.	6° ±1°	5° (+2°/-0°)	5° (+2°/-0°)
Differential travel	16°	16°	10°	10°	10°	3°	3°	3°
Overtravel	60°	60°	70°	70°	70°	40°	40°	40°
Total travel	90°	90°	90°	90°	90°	40°	40°	40°
Operating torque max.	0,34 Nm [3.0 in-lb]	0,36 Nm [3.16 in-lb]	0,365 Nm [3.23 in-lb]	0,365 Nm [3.23 in-lb]	0,398 Nm [3.52 in-lb]	0,51 Nm [4.5 in-lb]	0,51 Nm [4.5 in-lb]	0,195 Nm [1.72 in-lb]


¹ Operating characteristics are measured at the arm length of 38 mm [1.5 in]

² Operating characteristics are measured at the lever length of 140 mm [5.5 in]

SZL-WL Series

Table 3. Specifications

Characteristic	Parameter
Product type	Honeywell General Purpose Limit Switch
Actuators	side rotary, top roller plunger, top plunger, sealed top roller plunger, side roller plunger, side pin plunger, top ball plunger, wobble/cat whisker, wobble/plastic rod, wobble/coil spring
Circuitry	single pole double throw double break
Electrical	10 A
Housing material	aluminum die-cast
Housing type	industrial
Conduit	PF 1/2, 1/2 in-14 NPT
Sealing	IP67
Operating temperature	-10 °C to 80 °C [14 °F to 176 °F]
Mechanical life	10,000,000 operations
Agency approvals and standards	UL, CE, CSA
Sealed	Industrial

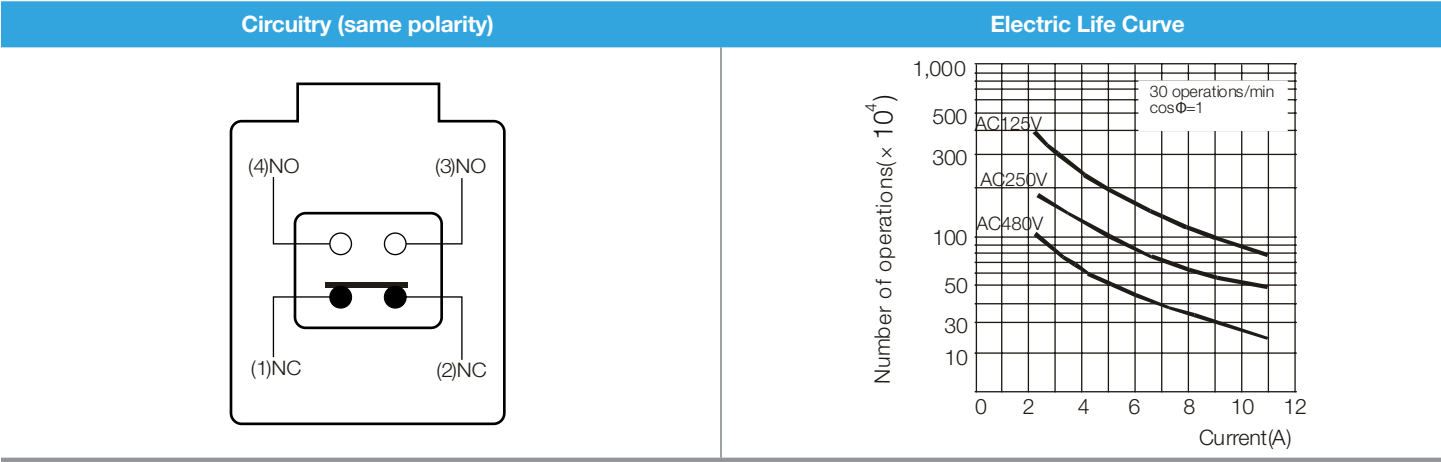

MICRO SWITCH™ General Purpose Limit Switches

ORDER GUIDE/RECOMMENDED LISTINGS

Table 4. Product listings

O.T. • Operating torque
O.F. • Operating force
P.T. • Pretravel
O.T. • Overtravel
D.T. • Differential travel

	Part Number	Actuation	Note	O.T. Nm [in-lb]	Bar chart	P.T. (max.)	O.T.	D.T. (max.)	Conduit
	SZL-WL-A	side rotary standard lever, standard	—	0,51 [4.5]	0° 20° 50° 1-2 3-4	20°	30°	12°	PF 1/2
	SZL-WL-A-N				0° 8° 50° 3-4 1-2				1/2 in NPT
	SZL-WLA-A	side rotary standard lever, high overtravel	—	0,37 [3.3]	0° 22° 77° 1-2 3-4 0° 12° 77° 3-4 1-2	22°	55°	10°	PF 1/2
	SZL-WLB-A	side rotary standard lever, high overtravel	—	0,37 [3.3]	0° 12° 77° 1-2 3-4 0° 5° 77° 3-4 1-2	12°	65°	7°	PF 1/2
	SZL-WLC-A	side rotary standard lever, high overtravel	—	0,34 [3.0]	0° 30° 90° 1-2 3-4	30°	60°	16°	PF 1/2
	SZL-WLC-A-N				0° 14° 90° 3-4 1-2				1/2 in NPT
	SZL-WLD-A	side rotary standard lever, high overtravel	—	0,37 [3.23]	0° 20° 90° 1-2 3-4 0° 10° 90° 3-4 1-2	20°	70°	10°	PF 1/2
	SZL-WLE-A	side rotary standard lever, high precision	1	0,51 [4.5]	0° 7° 47° 1-2 3-4 0° 4° 47° 3-4 1-2	7°	40°	3°	PF 1/2

Note:

1. Operating characteristics are measured at the actuator arm length of 38 mm [1.5 in]

SZL-WL Series

O.T. • Operating torque
O.F. • Operating force
P.T. • Pretravel
O.T. • Overtravel
D.T. • Differential travel

Table 4. Product listings, continued

	Part Number	Actuation	Note	O.T. Nm [in-lb]	Bar chart	P.T. (max.)	O.T.	D.T. (max.)	Conduit
	SZL-WL-B	side rotary adjustable lever, standard	1	0,51 [4.5]	0° 20° 50° 1-2 3-4	20°	30°	12°	PF 1/2
	SZL-WL-B-N				0° 8° 50° 3-4 1-2				1/2 in NPT
	SZL-WLA-B	side rotary adjustable lever, high overtravel	1	0,37 [3.3]	0° 22° 77° 1-2 3-4 0° 12° 77° 3-4 1-2	22°	55°	10°	PF 1/2
	SZL-WLB-B	side rotary adjustable lever, high overtravel	1	0,37 [3.3]	0° 12° 77° 1-2 3-4 0° 5° 77° 3-4 1-2	12°	65°	7°	PF 1/2
	SZL-WLC-B	side rotary adjustable lever, high overtravel	1	0,34 [3.0]	0° 30° 90° 1-2 3-4	30°	60°	16°	PF 1/2
	SZL-WLC-B-N				0° 14° 90° 3-4 1-2				1/2 in NPT
	SZL-WLD-B	side rotary adjustable lever, high overtravel	1	0,37 [3.23]	0° 20° 90° 1-2 3-4 0° 10° 90° 3-4 1-2	20°	70°	10°	PF 1/2
	SZL-WLE-B	side rotary adjustable lever, high precision	2	0,51 [4.5]	0° 5° 45° 1-2 3-4 0° 2° 45° 3-4 1-2	5°	40°	3°	PF 1/2



Notes:

1. Operating characteristics are measured at the actuator arm length of 38 mm [1.5 in]
2. Operating characteristics are measured at the actuator arm length of 140 mm [5.5 in]

MICRO SWITCH™ General Purpose Limit Switches

O.T. • Operating torque
O.F. • Operating force
P.T. • Pretravel
O.T. • Overtravel
D.T. • Differential travel

Table 4. Product listings, continued

	Part Number	Actuation	Note	O.T. Nm [in-lb]	Bar chart	P.T. (max.)	O.T.	D.T. (max.)	Conduit
	SZL-WL-C	side rotary rod adjustable, standard	2	0,195 [1.72]	0° 20° 50° 1-2 3-4 →	20°	30°	12°	PF 1/2
	SZL-WL-C-N				0° 8° 50° 3-4 1-2 ←				1/2 in NPT
	SZL-WLA-C	side rotary rod adjustable, high overtravel	2	0,398 [3.52]	0° 22° 77° 1-2 3-4 → 0° 12° 77° 3-4 1-2 ←	22°	55°	10°	PF 1/2
	SZL-WLB-C	side rotary rod adjustable, high overtravel	2	0,398 [3.52]	0° 12° 77° 1-2 3-4 → 0° 5° 77° 3-4 1-2 ←	12°	65°	7°	PF 1/2
	SZL-WLC-C	side rotary rod adjustable, high overtravel	2	0,38 [3.16]	0° 30° 70° 1-2 3-4 →	30°	40	16°	PF 1/2
	SZL-WLC-C-N				0° 14° 70° 3-4 1-2 ←				1/2 in NPT
	SZL-WLD-C	side rotary rod adjustable, high overtravel	2	0,398 [3.52]	0° 20° 90° 1-2 3-4 → 0° 10° 90° 3-4 1-2 ←	20°	70°	10°	PF 1/2
	SZL-WLE-C	Side rotary rod adjustable, high precision	1	0,195 [1.72]	0° 5° 45° 1-2 3-4 → 0° 2° 45° 3-4 1-2 ←	5°	40°	3°	PF 1/2
	SZL-WL-D SZL-WL-P	fork lock lever, opposite direction rollers (-D); same direction rollers (-P)  		0,447 [4.0]	0° 55° 90° 1-2 3-4 → 0° 55° 90° 3-4 1-2 ←	55°	35°	–	PF 1/2









Notes:

1. Operating characteristics are measured at the actuator arm length of 38 mm [1.5 in]
2. Operating characteristics are measured at the actuator arm length of 140 mm [5.5 in]

SZL-WL Series

O.T. • Operating torque
O.F. • Operating force
P.T. • Pretravel
O.T. • Overtravel
D.T. • Differential travel

Table 4. Product listings, continued

	Part Number	Actuation	Note	O.F. N [lb]	Bar chart	P.T. (max.)	O.T.	D.T. (max.)	Conduit
	SZL-WL-E	top roller plunger	–	26,67 [6.0]		1,7 mm [0.07 in]	5,6 mm [0.22 in]	1 mm [0.04 in]	PF 1/2
	SZL-WL-E-N								1/2 in NPT
	SZL-WL-F	top plunger	–	26,67 [6.0]		1,7 mm [0.07 in]	6,4mm [0.25 in]	1 mm [0.04 in]	PF 1/2
	SZL-WL-F-N								1/2 in NPT
	SZL-WL-G	top roller plunger, sealed	–	16,67 [3.75]		1,7 mm [0.07 in]	5,6 mm [0.22 in]	1 mm [0.04 in]	PF 1/2
	SZL-WL-H	side roller plunger	–	40,03 [9.0]		2,8 mm [0.11 in]	5,6 mm [0.22 in]	1 mm [0.04 in]	PF 1/2
	SZL-WL-I	top ball plunger	–	26,67 [6.0]		1,7 mm [0.07 in]	4 mm [0.157 in]	1 mm [0.04 in]	PF 1/2
	SZL-WL-J	side plunger	–	40,03 [9.0]		2,8 mm [0.11 in]	6,4 mm [0.25 in]	1 mm [0.04 in]	PF 1/2

MICRO SWITCH™ General Purpose Limit Switches

O.T. • Operating torque
O.F. • Operating force
P.T. • Pretravel
O.T. • Overtravel
D.T. • Differential travel

Table 4. Product listings, continued

	Part Number	Actuation	Note	O.F. N [lb]	Bar chart	P.T. (max.)	O.T.	D.T. (max.)	Conduit
	SZL-WL-K	wobble-coil spring Ø 6,5 mm [Ø 0.256 in]	3, 4	1,47 [0.33]	–	20 mm ±10 mm [0.79 in ±0.39 in]	–	–	PF 1/2
	SZL-WL-K-N								1/2 in NPT
	SZL-WL-L	wobble-coil spring Ø 4,8 mm [Ø 0.189 in]	3, 4	1,47 [0.33]	–	20 mm ±10 mm [0.79 in ±0.39 in]	–	–	PF 1/2
	SZL-WL-M	wobble-plastic rod Ø 8,0 mm [Ø 0.315 in]	3, 4	1,47 [0.33]	–	40 mm ±20 mm [1.57 in ±0.79 in]	–	–	PF 1/2
	SZL-WL-N	wobble-steel wire Ø 1,0 mm [Ø 0.04 in]	3, 4	0,28 [0.06]	–	40 mm ±20 mm [1.57 in ±0.79 in]	–	–	PF 1/2

Notes:

1. Operating characteristics are measured at the actuator arm length of 38 mm [1.5 in]
2. Operating characteristics are measured at the actuator arm length of 140 mm [5.5 in]
3. Operating characteristics are measured at the tip of the actuator
4. Operating force is measured from the tip of the wobble

DIMENSIONS mm [in]

[illegible]

KS B 0221 (PF 1/2) 4 threads min.

Dimensions:

- Ø 17,5 mm [0.69 in] x 7 mm [0.28 in] stainless steel roller
- Adjustable range: 25 mm to 89 mm [1.0 in to 3.5 in]
- 4 - M3.5 x 27.5 head mounting screw and spring washer
- M5 x 16 hexagon socket head bolts
- 4 - Ø 5,20 mm [0.21 in] mounting holes
- Adjustable plate
- Cover
- 3 - M4 x 13 cover mounting screw
- KS B 0221 (PF 1/2) 4 threads min.
- 4 - M6 x 1,0 15 depth min.

Labels:

- LABEL POSITION

Other Dimensions:

- 67,0 mm [2.64 in] max.
- 60,0 mm [2.36 in]
- 13,1 mm [0.52 in]
- 25,4 mm [1.00 in]
- 12,7 mm [0.50 in]
- 25,4 mm [1.00 in]
- 13,0 mm [0.51 in]
- 5,0 mm [0.20 in]
- 68,7 mm [2.70 in]
- 94,1 mm [3.70 in]
- 21,6 mm [0.85 in]
- 29,2 mm [1.15 in]
- 35,0 mm [1.38 in]
- 41,5 mm [1.63 in] max.
- 14,7 mm [0.58 in]
- 58,7 mm [2.31 in]
- 5,0 mm [0.20 in]
- 15,1 mm [0.59 in]
- 30,2 mm [1.19 in]
- 40,0 mm [1.57 in]
- Ø 10,0 mm [0.39 in]
- 45°
- 25°
- 25°
- 45°

Technical drawing of the KS B 0221 (PF 1/2) 4 threads min. limit switch. The drawing includes a side view and a top view.

Side View Dimensions:

- Top mounting hole: 9.0 mm [0.35 in]
- Stainless steel lever adjustable range: 25 mm to 140 mm [1.0 in to 5.5 in]
- 4 - M3.5 x 27,5 head mounting screw and spring washer
- M8 x 12 Allen set screw
- 2 - M5 x 16 hexagon socket head bolts
- 4 - Ø 5,20 mm [0.21 in] mounting holes
- 3 - M4 x 13 cover mounting screw
- Adjustable plate
- Cover
- Label position
- 4 - M6 x 1.0 15 depth min.
- 55,9 mm [2.17 in] max.
- 46 mm [1.81 in]
- 13,1 mm [0.52 in]
- 25,4 mm [1.00 in]
- 12,7 mm [0.50 in]
- 26,4 mm [1.00 in]
- 3,0 mm [0.12 in]
- 68,7 mm [2.70 in]
- 94,1 mm [3.70 in]
- 5,0 mm [0.20 in]
- 4,9 mm [0.19 in]
- 58,7 mm [2.31 in]
- 14,7 mm [0.58 in]
- 140 mm [5.5 in] max.
- Ø 3,0 mm x 160 mm [0.12 in x 6.30 in]
- Ø 19,0 mm [0.75 in]
- 25,25°
- 45°
- 45°
- 45°

Top View Dimensions:

- 15,1 mm [0.59 in]
- 30,2 mm [1.19 in]
- 40,0 mm [1.57 in]
- 21,6 mm [0.85 in]
- 29,2 mm [1.15 in]
- 35,0 mm [1.38 in]
- 41,5 mm [1.63 in] max.

Switch Specifications:

- Limit Switch
- SZL-WL-C
- 10A 125-250V AC
- 50A 125VDC
- 0.4A 250VDC
- 1.0W 125VDC
- 1HP 250VDC

Ø 17.5 mm x 7 mm [Ø 0.69 in x 0.28 in]
stainless steel roller

90.0°

4 - M3.5 x 27.5
head mounting
screw and spring washer

M5 x 16 hexagon
socket head bolts

4 - Ø 5.20 mm [0.21 in]
mounting holes

3 - M4 x 13
cover mounting screw

15.1 mm
[0.59 in]

30.2 mm [1.19 in]

40.0 mm [1.57 in]

4.9 mm
[0.19 in]

5.0 mm [0.20 in]

58.7 mm [2.31 in]

14.7 mm [0.58 in]

62.5 mm [2.46 in] max

56.4 mm [2.22 in]

42.8 mm [1.69 in]

13.1 mm [0.52 in]

25.4 mm [1.00 in]

12.7 mm [0.50 in]

31.4 mm [1.24 in]

3.0 mm [0.12 in]

68.7 mm [2.70 in]

5.0 mm [0.20 in]

21.6 mm [0.85 in]

29.2 mm [1.15 in]

35.0 mm [1.38 in]

41.5 mm [1.63 in] max

4 - M6 x 1.0
15 depth min

KS B 0221 (PF 1/2)
4 threads min

Cover

LABEL POSITION

◆

SZL-WL-D

SZL-WL-P

MICRO SWITCH™ General Purpose Limit Switches

DIMENSIONS mm [in]

Figure 5. SZL-VL-E

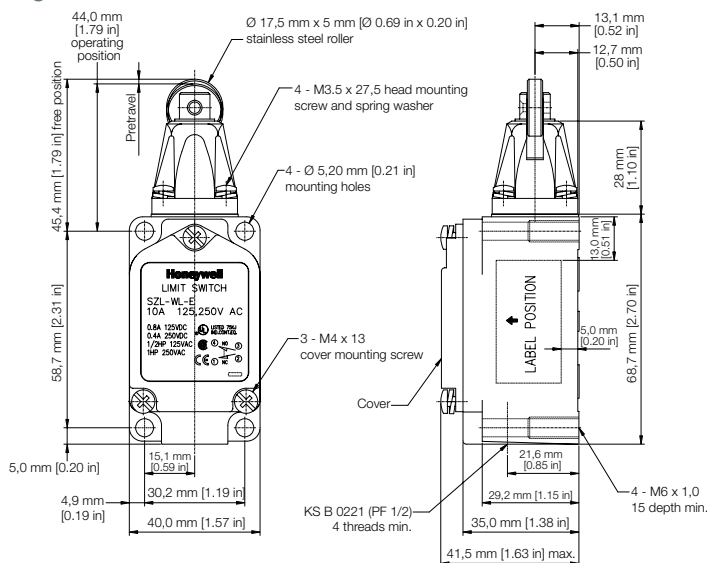


Figure 6. SZL-WL-F

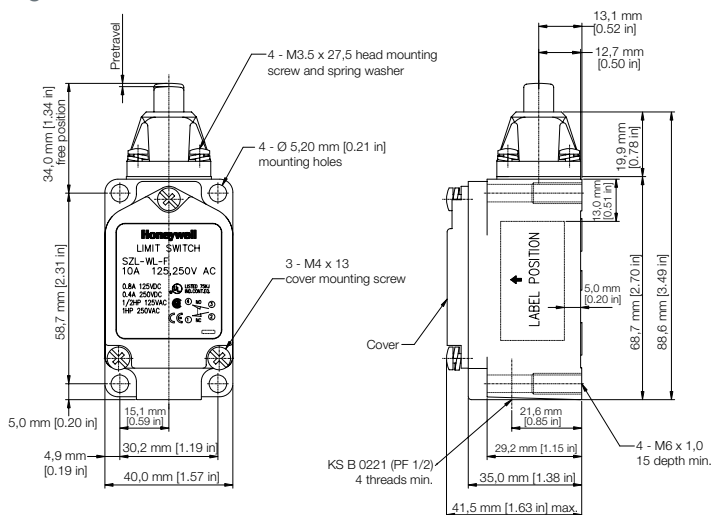


Figure 7. SZL-WL-G


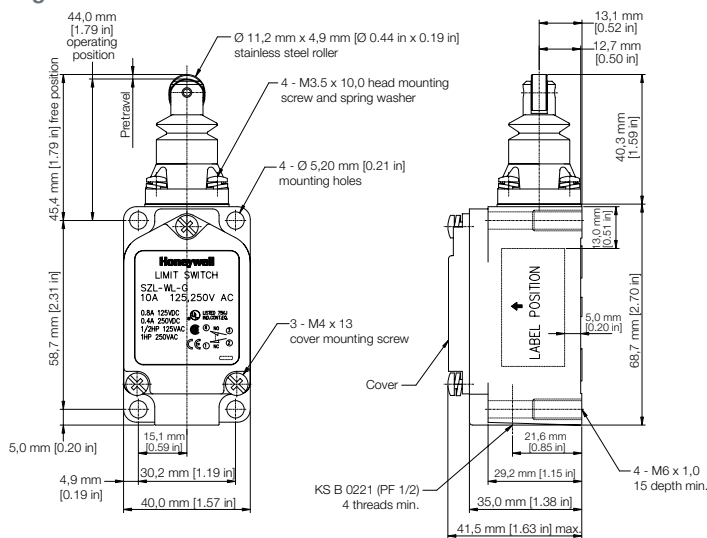


Figure 8. SZL-WL-H

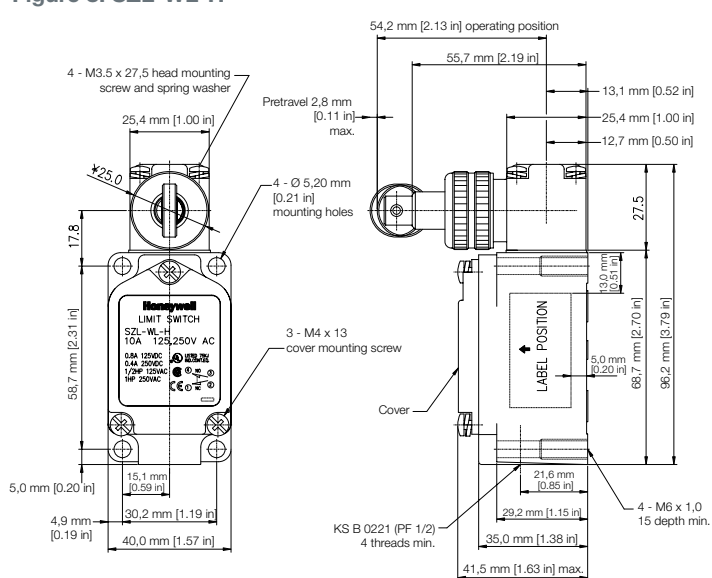

DIMENSIONS mm [in]

Technical drawing of the KS B 0221 (PF 1/2) 4 threads min. switch, showing front and side views with dimensions in mm and inches.

Front View Dimensions:

- Top mounting: $\varnothing 12.7 \text{ mm}$ [0.50 in] stainless ball
- Pretravel: 44.5 mm [1.75 in] operating position
- Free position: 46.2 mm [1.82 in]
- Mounting holes: 4 - $\varnothing 5.20 \text{ mm}$ [0.21 in]
- Cover mounting screw: 3 - M4 x 13
- Label position: 5.0 mm [0.20 in]
- Bottom mounting: 15.1 mm [0.59 in]
- Base width: 40.0 mm [1.57 in]
- Base height: 58.7 mm [2.31 in]
- Base depth: 4.9 mm [0.19 in]
- Base hole spacing: 30.2 mm [1.19 in]

Side View Dimensions:

- Top mounting: 13.1 mm [0.52 in]
- Mounting hole offset: 12.7 mm [0.50 in]
- Mounting hole diameter: 19.9 mm [0.78 in]
- Mounting hole offset (inner): 3.0 mm [0.51 in]
- Label position: 5.0 mm [0.20 in]
- Base height: 68.7 mm [2.70 in]
- Base depth: 88.6 mm [3.49 in]
- Base hole spacing: 21.6 mm [0.85 in]
- Base hole diameter: 29.2 mm [1.15 in]
- Base hole offset: 35.0 mm [1.38 in]
- Base hole diameter (max): 41.5 mm [1.63 in] max.
- Base hole offset (min): 4.15 mm [0.16 in] min.

Label Text:

Honeywell
LIMIT SWITCH
S2L-WL-1
10A 125/250V AC
0.8A 125/200V
0.4A 250/200V
1/2PF 125/240V
HF 250VAC
UL 508
CSA 250VAC
VDE 250VAC
IEC 250VAC

Label Position: LABEL POSITION

KS B 0221 (PF 1/2) 4 threads min.

Technical drawing of the Honeywell SZL-WL-1 limit switch, showing front and side views with dimensions in mm and inches.

Front View Dimensions:

- Top mounting: 4 - M3.5 x 27.5 head mounting screw and spring washer
- Top flange diameter: $\varnothing 25$ mm [0.98 in]
- Top flange thickness: 25.4 mm [1.00 in]
- Top flange hole diameter: 4 - $\varnothing 5.20$ mm [0.21 in] mounting holes
- Top flange hole spacing: 17.8 mm [0.70 in]
- Top flange hole diameter: 5.87 mm [2.31 in]
- Top flange hole diameter: 5.0 mm [0.20 in]
- Top flange hole diameter: 4.9 mm [0.19 in]
- Top flange hole diameter: 40.0 mm [1.57 in]
- Top flange hole diameter: 15.1 mm [0.59 in]
- Top flange hole diameter: 30.2 mm [1.19 in]

Side View Dimensions:

- Top flange thickness: 40.6 mm [1.60 in]
- Top flange hole diameter: 46.6 mm [1.83 in]
- Top flange hole diameter: 13.1 mm [0.52 in]
- Top flange hole diameter: 25.4 mm [1.00 in]
- Top flange hole diameter: 12.7 mm [0.50 in]
- Top flange hole diameter: 27.5 mm [1.08 in]
- Top flange hole diameter: 13.0 mm [0.51 in]
- Top flange hole diameter: 5.0 mm [0.20 in]
- Top flange hole diameter: 68.7 mm [2.70 in]
- Top flange hole diameter: 98.2 mm [3.79 in]
- Top flange hole diameter: 21.6 mm [0.85 in]
- Top flange hole diameter: 29.2 mm [1.15 in]
- Top flange hole diameter: 35.0 mm [1.38 in]
- Top flange hole diameter: 41.5 mm [1.63 in] max.

Other Dimensions:

- Pretravel: 2.8 mm [0.11 in] max.
- 3 - M4 x 13 cover mounting screw
- Cover
- KS B 0221 (PF 1/2) 4 threads min.
- 4 - M6 x 1,0 15 depth min.

Label Information:

Honeywell
LIMIT SWITCH
SZL-WL-1
10A 125/250V AC
0.6A 125VDC
0.4A 250VDC
1/2HP 125VAC
HP 250VAC
UL 508
CSA 22.2
NEMA 1
NEMA 3
NEMA 4
NEMA 4X
NEMA 6
NEMA 6P
NEMA 7
NEMA 7D
NEMA 8
NEMA 9
NEMA 12
NEMA 13
NEMA 14
NEMA 15
NEMA 16
NEMA 17
NEMA 18
NEMA 19
NEMA 20
NEMA 21
NEMA 22
NEMA 23
NEMA 24
NEMA 25
NEMA 26
NEMA 27
NEMA 28
NEMA 29
NEMA 30
NEMA 31
NEMA 32
NEMA 33
NEMA 34
NEMA 35
NEMA 36
NEMA 37
NEMA 38
NEMA 39
NEMA 40
NEMA 41
NEMA 42
NEMA 43
NEMA 44
NEMA 45
NEMA 46
NEMA 47
NEMA 48
NEMA 49
NEMA 50
NEMA 51
NEMA 52
NEMA 53
NEMA 54
NEMA 55
NEMA 56
NEMA 57
NEMA 58
NEMA 59
NEMA 60
NEMA 61
NEMA 62
NEMA 63
NEMA 64
NEMA 65
NEMA 66
NEMA 67
NEMA 68
NEMA 69
NEMA 70
NEMA 71
NEMA 72
NEMA 73
NEMA 74
NEMA 75
NEMA 76
NEMA 77
NEMA 78
NEMA 79
NEMA 80
NEMA 81
NEMA 82
NEMA 83
NEMA 84
NEMA 85
NEMA 86
NEMA 87
NEMA 88
NEMA 89
NEMA 90
NEMA 91
NEMA 92
NEMA 93
NEMA 94
NEMA 95
NEMA 96
NEMA 97
NEMA 98
NEMA 99
NEMA 100
NEMA 101
NEMA 102
NEMA 103
NEMA 104
NEMA 105
NEMA 106
NEMA 107
NEMA 108
NEMA 109
NEMA 110
NEMA 111
NEMA 112
NEMA 113
NEMA 114
NEMA 115
NEMA 116
NEMA 117
NEMA 118
NEMA 119
NEMA 120
NEMA 121
NEMA 122
NEMA 123
NEMA 124
NEMA 125
NEMA 126
NEMA 127
NEMA 128
NEMA 129
NEMA 130
NEMA 131
NEMA 132
NEMA 133
NEMA 134
NEMA 135
NEMA 136
NEMA 137
NEMA 138
NEMA 139
NEMA 140
NEMA 141
NEMA 142
NEMA 143
NEMA 144
NEMA 145
NEMA 146
NEMA 147
NEMA 148
NEMA 149
NEMA 150
NEMA 151
NEMA 152
NEMA 153
NEMA 154
NEMA 155
NEMA 156
NEMA 157
NEMA 158
NEMA 159
NEMA 160
NEMA 161
NEMA 162
NEMA 163
NEMA 164
NEMA 165
NEMA 166
NEMA 167
NEMA 168
NEMA 169
NEMA 170
NEMA 171
NEMA 172
NEMA 173
NEMA 174
NEMA 175
NEMA 176
NEMA 177
NEMA 178
NEMA 179
NEMA 180
NEMA 181
NEMA 182
NEMA 183
NEMA 184
NEMA 185
NEMA 186
NEMA 187
NEMA 188
NEMA 189
NEMA 190
NEMA 191
NEMA 192
NEMA 193
NEMA 194
NEMA 195
NEMA 196
NEMA 197
NEMA 198
NEMA 199
NEMA 200
NEMA 201
NEMA 202
NEMA 203
NEMA 204
NEMA 205
NEMA 206
NEMA 207
NEMA 208
NEMA 209
NEMA 210
NEMA 211
NEMA 212
NEMA 213
NEMA 214
NEMA 215
NEMA 216
NEMA 217
NEMA 218
NEMA 219
NEMA 220
NEMA 221
NEMA 222
NEMA 223
NEMA 224
NEMA 225
NEMA 226
NEMA 227
NEMA 228
NEMA 229
NEMA 230
NEMA 231
NEMA 232
NEMA 233
NEMA 234
NEMA 235
NEMA 236
NEMA 237
NEMA 238
NEMA 239
NEMA 240
NEMA 241
NEMA 242
NEMA 243
NEMA 244
NEMA 245
NEMA 246
NEMA 247
NEMA 248
NEMA 249
NEMA 250
NEMA 251
NEMA 252
NEMA 253
NEMA 254
NEMA 255
NEMA 256
NEMA 257
NEMA 258
NEMA 259
NEMA 260
NEMA 261
NEMA 262
NEMA 263
NEMA 264
NEMA 265
NEMA 266
NEMA 267
NEMA 268
NEMA 269
NEMA 270
NEMA 271
NEMA 272
NEMA 273
NEMA 274
NEMA 275
NEMA 276
NEMA 277
NEMA 278
NEMA 279
NEMA 280
NEMA 281
NEMA 282
NEMA 283
NEMA 284
NEMA 285
NEMA 286
NEMA 287
NEMA 288
NEMA 289
NEMA 290
NEMA 291
NEMA 292
NEMA 293
NEMA 294
NEMA 295
NEMA 296
NEMA 297
NEMA 298
NEMA 299
NEMA 300
NEMA 301
NEMA 302
NEMA 303
NEMA 304
NEMA 305
NEMA 306
NEMA 307
NEMA 308
NEMA 309
NEMA 310
NEMA 311
NEMA 312
NEMA 313
NEMA 314
NEMA 315
NEMA 316
NEMA 317
NEMA 318
NEMA 319
NEMA 320
NEMA 321
NEMA 322
NEMA 323
NEMA 324
NEMA 325
NEMA 326
NEMA 327
NEMA 328
NEMA 329
NEMA 330
NEMA 331
NEMA 332
NEMA 333
NEMA 334
NEMA 335
NEMA 336
NEMA 337
NEMA 338
NEMA 339
NEMA 340
NEMA 341
NEMA 342
NEMA 343
NEMA 344
NEMA 345
NEMA 346
NEMA 347
NEMA 348
NEMA 349
NEMA 350
NEMA 351
NEMA 352
NEMA 353
NEMA 354
NEMA 355
NEMA 356
NEMA 357
NEMA 358
NEMA 359
NEMA 360
NEMA 361
NEMA 362
NEMA 363
NEMA 364
NEMA 365
NEMA 366
NEMA 367
NEMA 368
NEMA 369
NEMA 370
NEMA 371
NEMA 372
NEMA 373
NEMA 374
NEMA 375
NEMA 376
NEMA 377
NEMA 378
NEMA 379
NEMA 380
NEMA 381
NEMA 382
NEMA 383
NEMA 384
NEMA 385
NEMA 386
NEMA 387
NEMA 388
NEMA 389
NEMA 390
NEMA 391
NEMA 392
NEMA 393
NEMA 394
NEMA 395
NEMA 396
NEMA 397
NEMA 398
NEMA 399
NEMA 400
NEMA 401
NEMA 402
NEMA 403
NEMA 404
NEMA 405
NEMA 406
NEMA 407
NEMA 408
NEMA 409

Technical drawings of the KS B 0221 (PF 1/2) 4 threads min. device, showing front and side views with dimensions in mm and inches.

Front View Dimensions:

- Pretravel: 20,0 mm [0.79 in]
- Ø 6,5 mm [Ø 0.26 in]
- 140 mm [5.51 in]
- Rubber and mounting band
- 4 - Ø 5,20 mm [0.21 in] mounting holes
- 58,7 mm [2.31 in]
- 5,0 mm [0.20 in]
- 4,9 mm [0.19 in]
- 30,2 mm [1.19 in]
- 40,0 mm [1.57 in]
- 15,1 mm [0.59 in]
- 3 - M4 x 13 cover mounting screw

Label Information:

Hamswell
LIMIT SWITCH
 SZL-WL-K
 10A 125,250V AC
 0.8A 125VAC
 0.4A 250VAC
 1/2PF 125VAC
 1PF 250VAC
 CE

Side View Dimensions:

- 13,1 mm [0.52 in]
- 13,0 mm [0.51 in]
- 5,0 mm [0.20 in]
- 68,7 mm [2.70 in]
- 21,6 mm [0.85 in]
- 29,2 mm [1.15 in]
- 35,0 mm [1.38 in]
- 41,5 mm [1.63 in] max.
- 4 - M6 x 1.0 15 depth min.
- KS B 0221 (PF 1/2) 4 threads min.
- Cover
- Label POSITION

Technical drawings of the KS B221 (PF 1/2) 4 threads min. limit switch. The left drawing is a front view, and the right drawing is a side view.

Front View Dimensions:

- Top cable length: 20,0 mm [0.79 in] pretravel
- Total height: 128 mm [5.04 in]
- Body height: 58,7 mm [2.31 in]
- Bottom flange width: 40,0 mm [1.57 in]
- Bottom flange thickness: 4,9 mm [0.19 in]
- Bottom flange hole diameter: 5,0 mm [0.20 in]
- Bottom flange hole spacing: 30,2 mm [1.19 in]
- Bottom flange hole diameter: 15,1 mm [0.59 in]
- Label dimensions: 40,0 mm [1.57 in] x 30,2 mm [1.19 in]
- Label text:
 - Limitswitch
 - LIMIT SWITCH
 - SZL-WL-L
 - 10A 125,250V AC
 - 0.8A 1250C
 - 0.4A 2500C
 - 1/2PF 1250C
 - 1PF 2500C
- Mounting holes: 4 - Ø 5,20 mm [0.21 in] mounting holes
- Cable: 3 - M4 x 13 cover mounting screw
- Label position: 5,0 mm [0.20 in]

Side View Dimensions:

- Top cable length: 4,8 mm [0.19 in]
- Body height: 13,1 mm [0.52 in]
- Body width: 68,7 mm [2.70 in]
- Body thickness: 13,0 mm [0.51 in]
- Label position: 5,0 mm [0.20 in]
- Label text: LABEL POSITION
- Mounting holes: 4 - M6 x 1,0 15 depth min.
- Mounting hole spacing: 35,0 mm [1.38 in]
- Mounting hole diameter: 21,6 mm [0.85 in]
- Mounting hole depth: 29,2 mm [1.15 in]
- Mounting hole diameter: 41,5 mm [1.63 in] max.

MICRO SWITCH™ General Purpose Limit Switches

DIMENSIONS mm [in]

Figure 13. SZL-WL-M


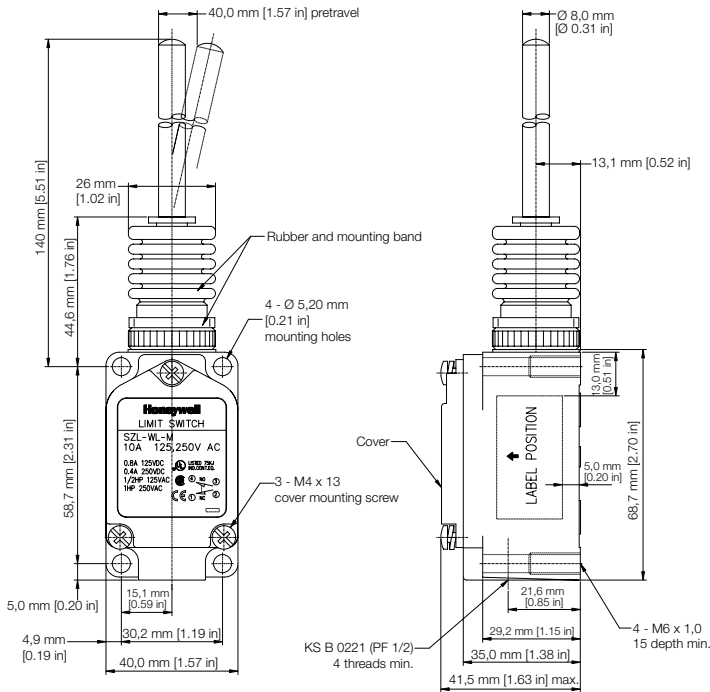


Figure 14. SZL-WL-N

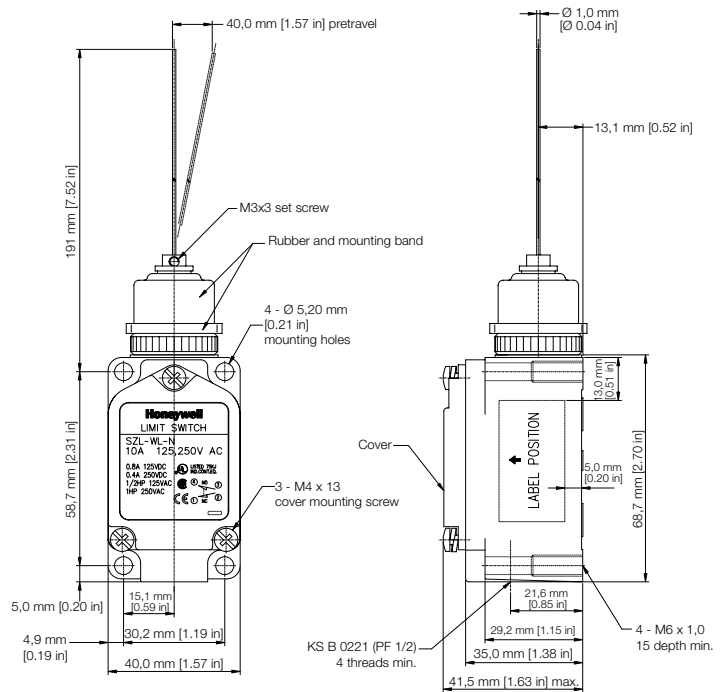


SET POSITION INDICATOR

Proper Operation Zone

- The two convex indicators on the shaft housing show the operating zones for proper operation, thereby, simplifying installation and maintenance.
- Too much over-travel may cause shortened mechanical life due to possible damage to the switch mechanism.

Figure 15. Side Rotary Proper Operation Zone

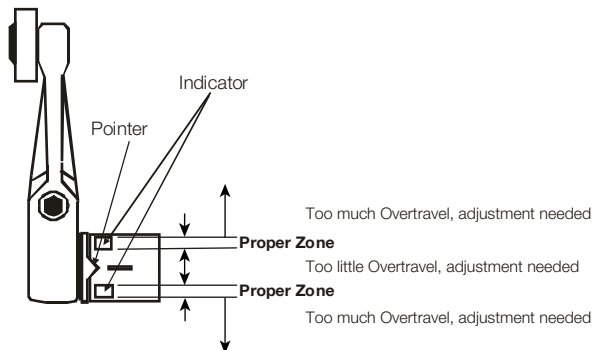

MOUNTING DIMENSIONS

Figure 16. Surface Mount

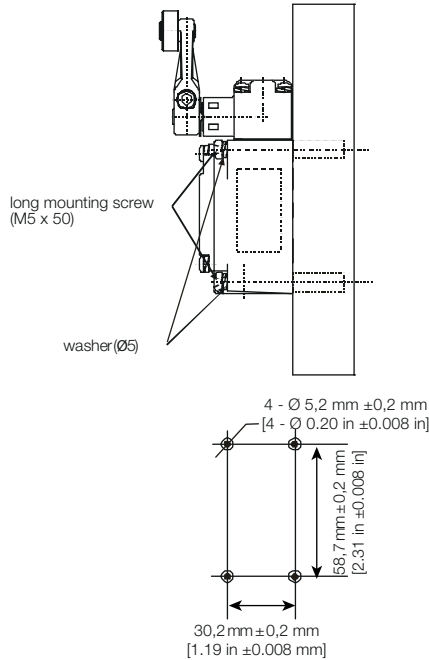


Figure 17. Through-Hole Mount


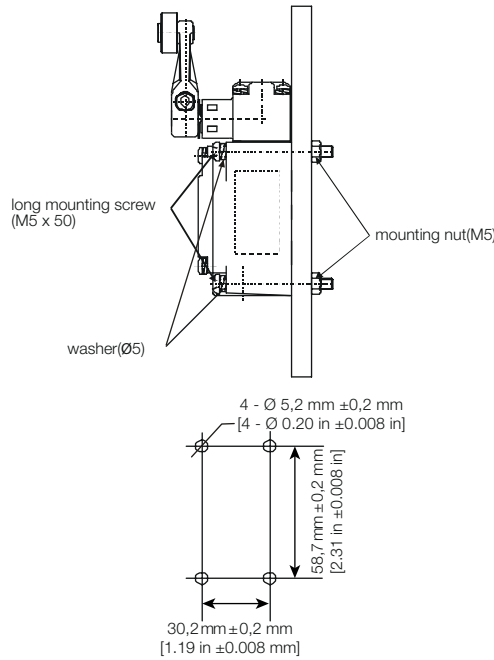


Figure 18. Rear Mount

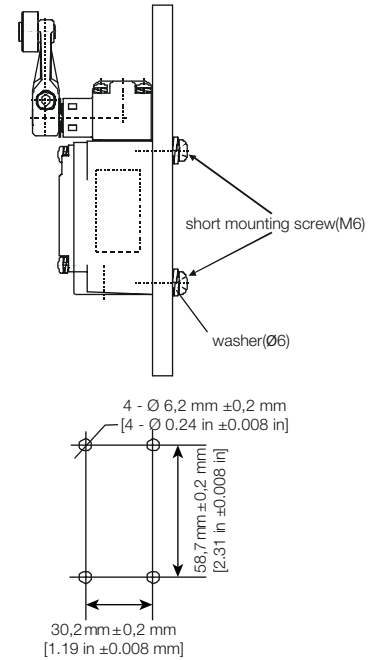


ADJUSTABLE OPERATING CHARACTERISTICS

Standard/High Precision Series

- All side rotary switches of Standard and High Precision models can be set to actuate on one side only. Clockwise and counterclockwise mode is available by rotating the plunger inside the operating head as shown below.

Figure 19. Standard/High Precision Type Switches

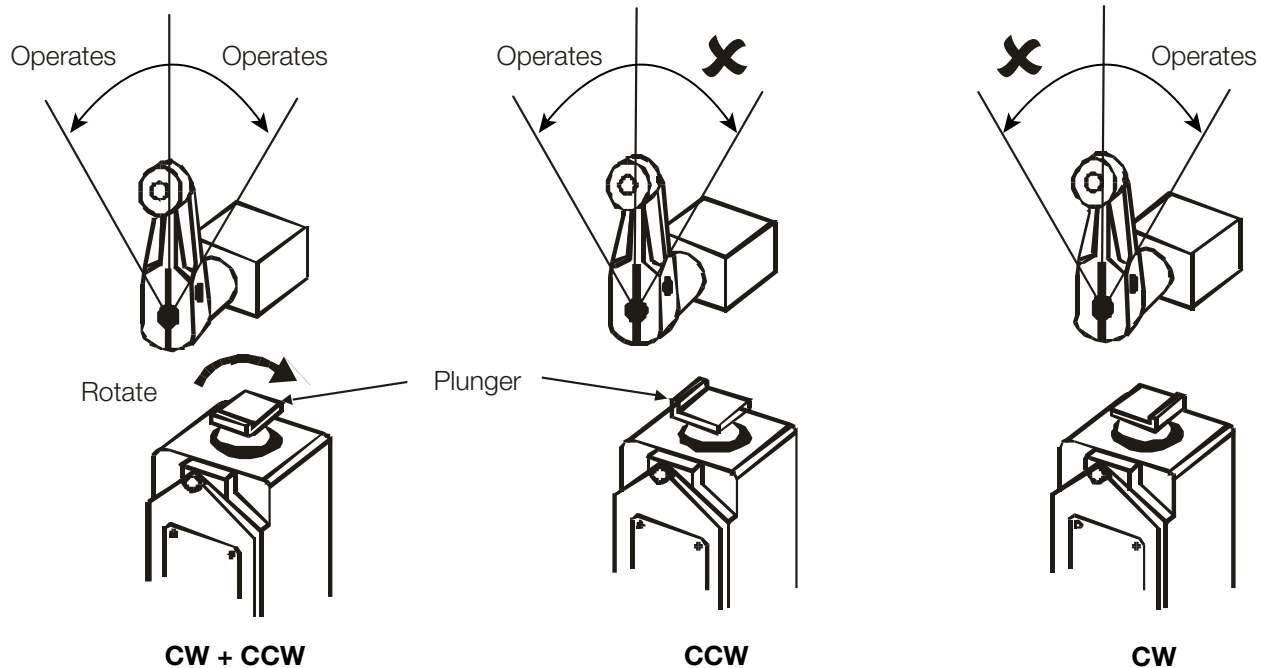


MICRO SWITCH™ General Purpose Limit Switches

OVERTRAVEL “D” SERIES

- The Overtravel “D” Series switches can be set to one side actuation mode by rotating the cam located inside the operating head as shown below.

Figure 20. Overtravel “D” Series

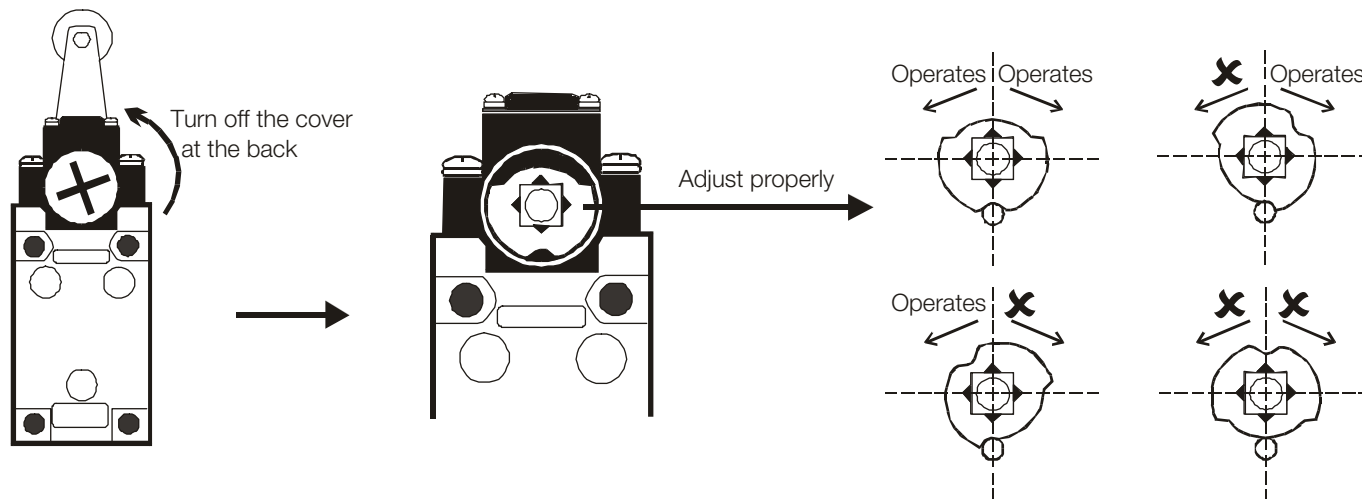


OPERATING HEAD DIRECTION CHANGE

90° Incremental Rotation

- Most SZL-WL –D, P, E, G, H, and J Series switches allow for the operating head to be rotated to any of the four positions indicated below. Loosen the four head lock screws and rotate the head to the desired position.

Note* The head of the Overtravel “D” Series can be set **ONLY** to directions **1** and **3**.

Figure 21. SZL-WL Head Rotation

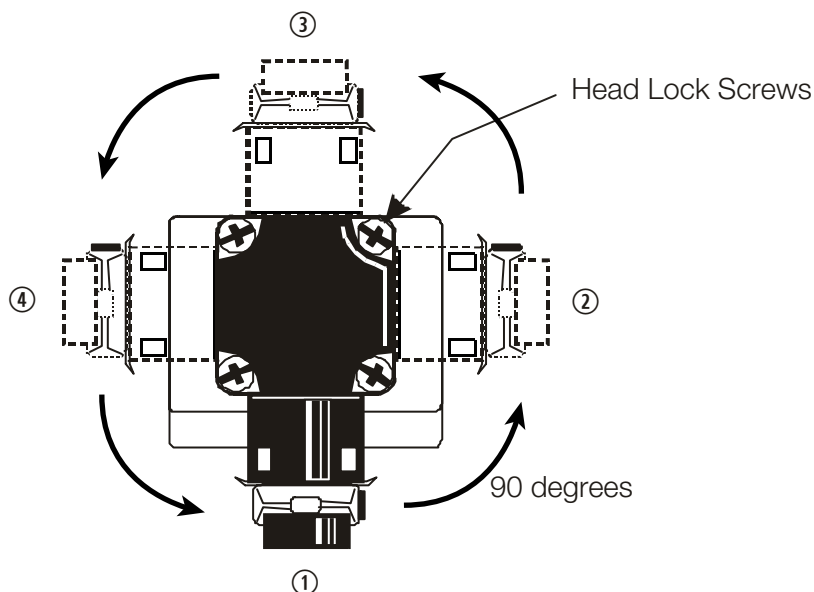

SZL-WL Series

CABLES

Product Nomenclature

ZLC	—	4	D	S	D	—	3	
Cable		Number of Strands	Voltage	Shape	Type		Actuator Type	
ZLC Series		2 Two (2) strands	A ac	S Straight	F Female		03 0,3 m [11.80 in]	Terminal number and wire color Terminal 1: Brown Terminal 2: White Terminal 3: Blue Terminal 4: Black
Cable for use with SZL-WL Series Limit Switches		3 Three (3) strands	D dc	L Elbow shape	M Male		2 2 m [6.56 ft]	
		4 Four (4) strands					3 3 m [9.84 ft]	
							5 5 m [16.40 ft]	
							7 7 m [22.96 ft]	

Figure 22. ZLC-4DLF-__

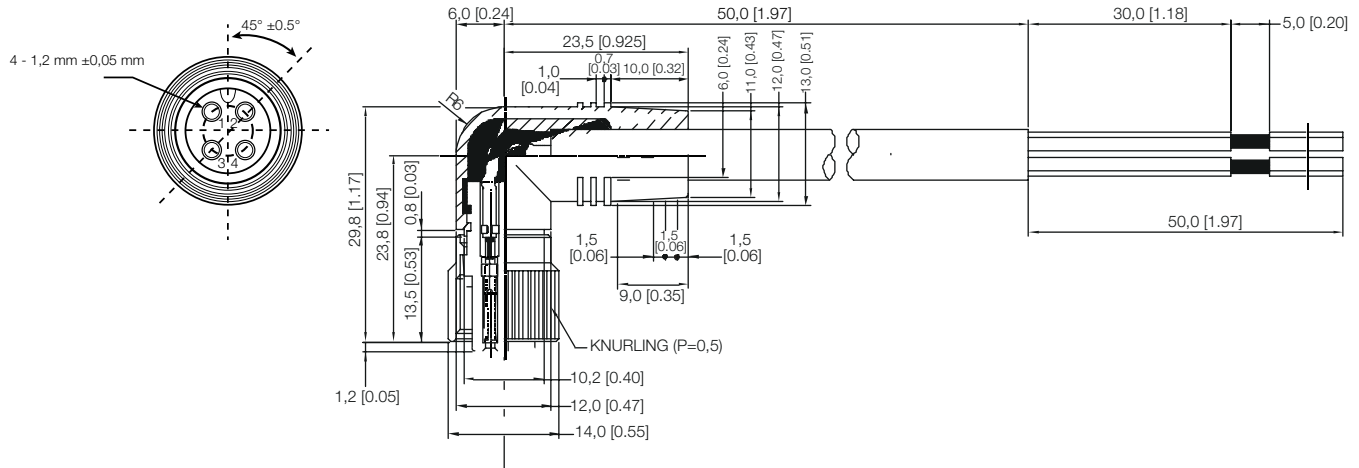


Figure 23. ZLC-4DSF-__

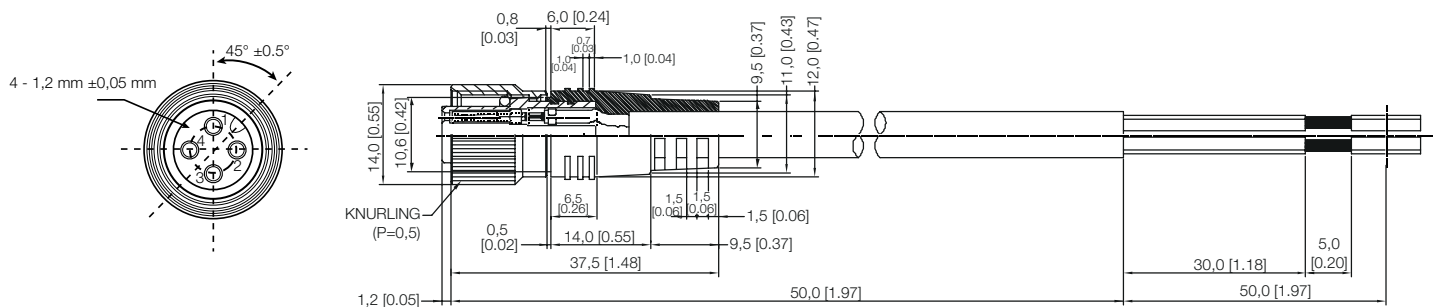


Figure 24. ZLC-4DSM-



SZL-WL Series

SEAL CONNECTOR

Product Nomenclature


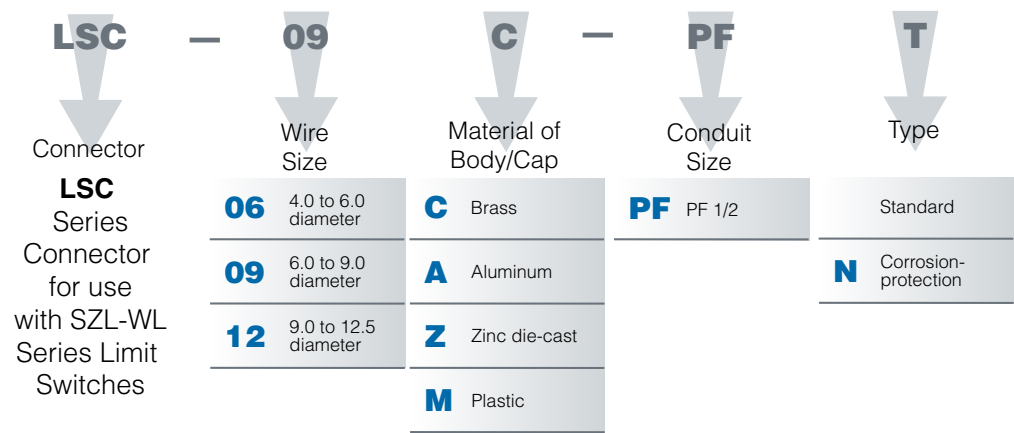


Figure 25. LSC-09C-PFT

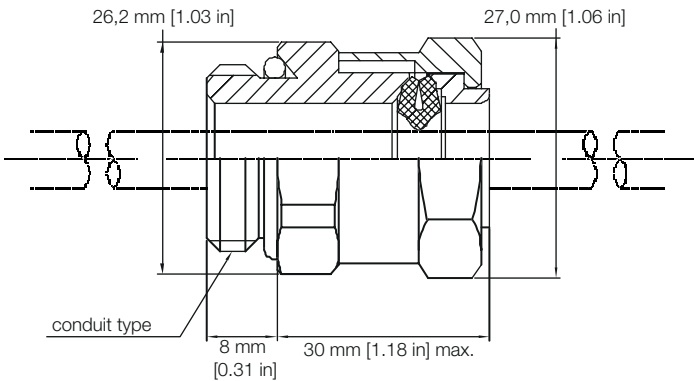

MICRO SWITCH™ General Purpose Limit Switches

ADDITIONAL INFORMATION

The following associated literature is available on the Web at sensing.honeywell.com:

- Product installation instructions
- Product range guide
- Product nomenclature tree
- Product application-specific information
 - Application Note: Application in Injection Molding Machine (IJM)

This Honeywell datasheet supports the following MICRO SWITCH™ SZL-WL Series listings:

SZL-WL-A	SZL-WLD-B	SZL-WL-G
SZL-WL-A-N	SZL-WLE-B	SZL-WL-H
SZL-WL-B-N	SZL-WL-C	SZL-WL-I
SZL-WL-C-N	SZL-WLA-C	SZL-WL-J
SZL-WL-E-N	SZL-WLB-C	SZL-WL-K
SZL-WL-F-N	SZL-WLC-A-N	SZL-WL-L
SZL-WLA-A	SZL-WLC-B-N	SZL-WL-M
SZL-WLB-A	SZL-WLC-C	SZL-WL-N
SZL-WLC-A	SZL-WLC-C-N	SZL-WL-P
SZL-WLD-A	SZL-WLD-C	SZL-WL-A-LEVER
SZL-WLE-A	SZL-WLE-C	SZL-WL-A-LEVER-P
SZL-WL-B	SZL-WL-D	SZL-WL-B-LEVER
SZL-WLA-B	SZL-WL-E	SZL-WL-B-LEVER-P
SZL-WLB-B	SZL-WL-F	SZL-WL-C-LEVER
SZL-WLC-B		

WARNING

PERSONAL INJURY

DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

Failure to comply with these instructions could result in death or serious injury.

WARNING

MISUSE OF DOCUMENTATION

- The information presented in this product sheet is for reference only. Do not use this document as a product installation guide.
- Complete installation, operation, and maintenance information is provided in the instructions supplied with each product.

Failure to comply with these instructions could result in death or serious injury.

WARRANTY/REMEDY

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgement or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items it finds defective. **The foregoing is buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.**

While we provide application assistance personally, through our literature and the Honeywell website, it is up to the customer to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

Find out more

Honeywell serves its customers through a worldwide network of sales offices, representatives and distributors. For application assistance, current specifications, pricing or name of the nearest Authorized Distributor, contact your local sales office.

To learn more about Honeywell's sensing and control products, call **+1-815-235-6847** or **1-800-537-6945**, visit **sensing.honeywell.com**, or e-mail inquiries to **info.sc@honeywell.com**

Sensing and Control
Honeywell
1985 Douglas Drive North
Golden Valley, MN 55422
honeywell.com

The Honeywell logo, consisting of the word "Honeywell" in a bold, red, sans-serif font.

002392-1-EN IL50 GLO
January 2015
Copyright © 2015 Honeywell International Inc. All rights reserved.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9