




MICRO SWITCH™
General Purpose Limit Switches
SZL-WL Series

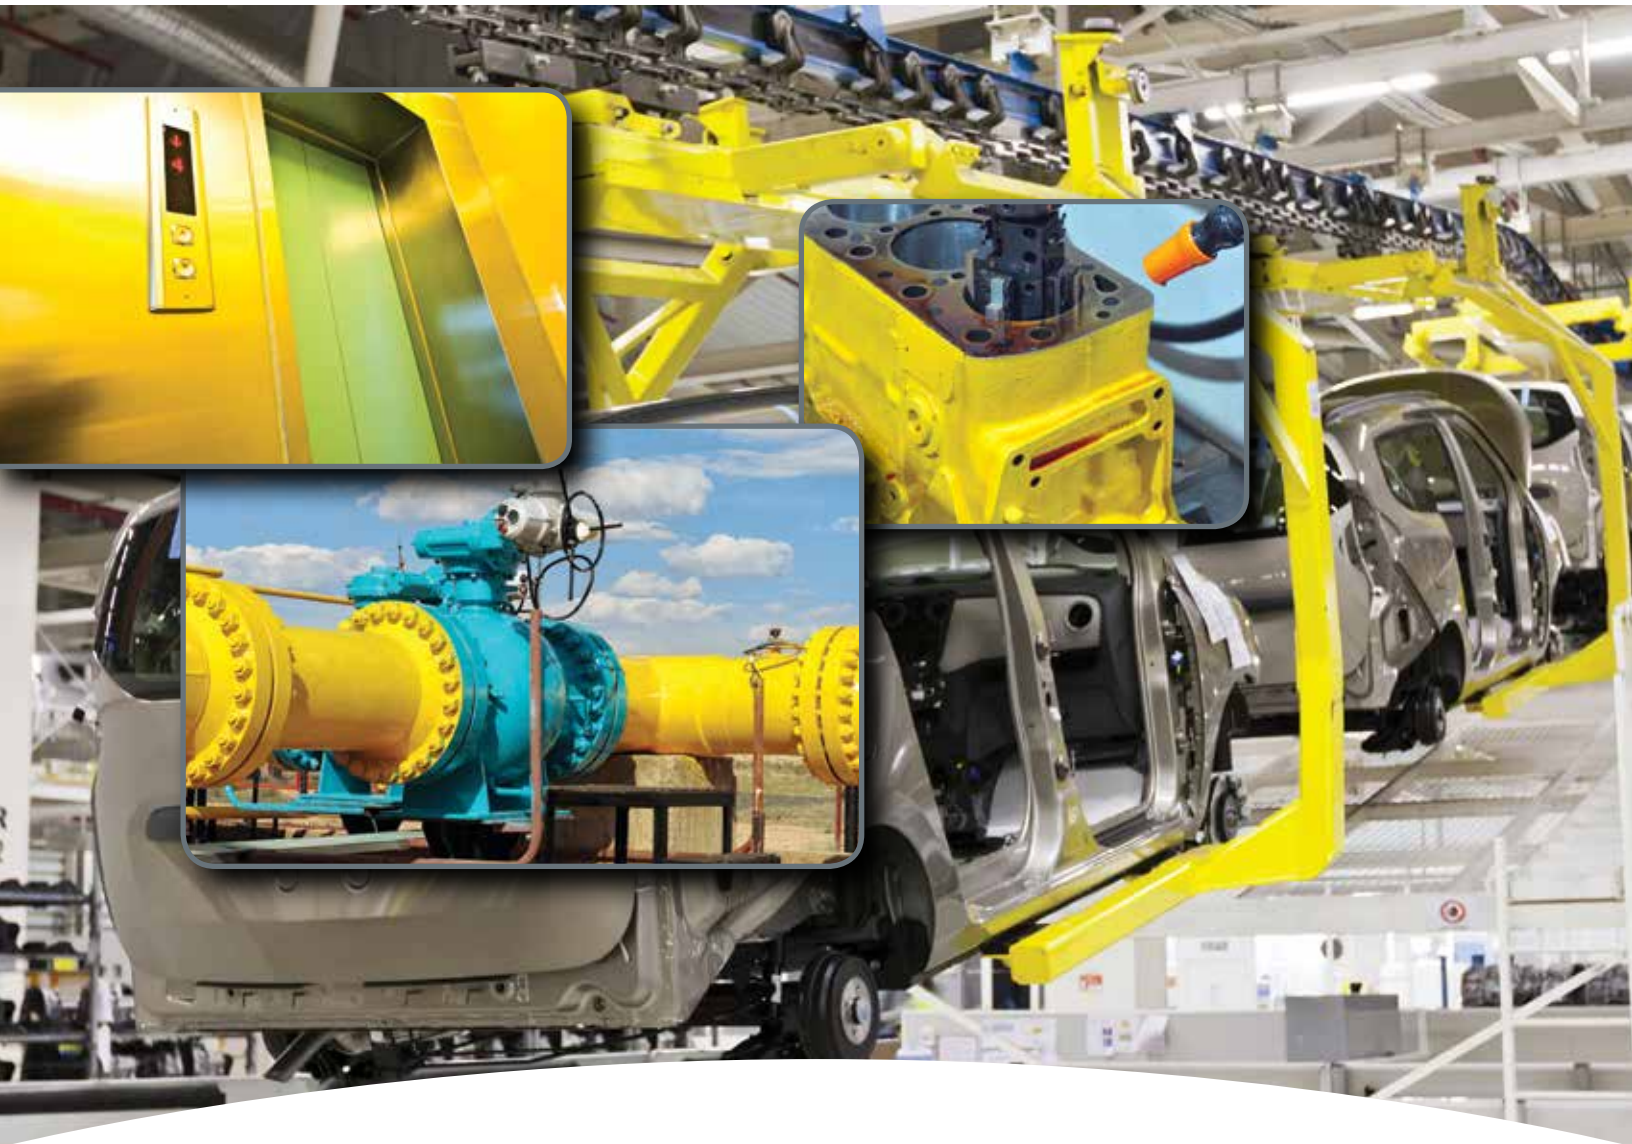

MICRO SWITCH™ SZL-WL Series

General Purpose Limit Switches

MICRO SWITCH™ SZL-WL Series general purpose limit switches are cost effective switches that may be used in a wide range of applications from general purpose conveyors to heavy-duty machinery. Rugged and reliable, the SZL-WL Series switches are specially designed for world-wide use and supported by Honeywell's vast experience in serving industries around the globe.

High quality product offerings combined with Honeywell's global sales and service resources makes the SZL-WL Series the smart choice for industries whose goal is to minimize plant downtime and reduce overall maintenance costs.

What makes our switches better?

- Small size and universal mounting footprint typically allows for use in constricted spaces and reduces replacement costs by providing interchangeability with similar style switches
- Wide variety of actuator heads and an assortment of actuators typically allows the SZL-WL Series to be applied in many types of applications
- IP67 construction often allows for use in dusty and dirty indoor and outdoor applications
- Mechanical service life of up to 10,000,000 operations promotes the durability required for use in many types of industries from factory floor to agriculture and/or machinery



COST OPTIMIZATION • EASE OF USE
RELIABILITY • GLOBAL ACCEPTANCE

Features and Benefits

INDUSTRIAL GLOBAL DESIGN

The SZL-WL Series is designed to the EN50041 mounting standard which promotes interchangeability between other brands of limit switches.

Robust and reliable.

TWO CIRCUIT DOUBLE BREAK CONTACTS

The SZL-WL Series promotes reliable switching under industrial 10 amp current loads and typically allows end users the ability to control two circuits within one switch.

WIDE CHOICE OF ACTUATORS

Honeywell's SZL-WL Series offers side rotary, top and side plunger, and wobble stick style actuators that makes the switch reasonably adaptable to numerous types of applications.

OIL TIGHT, WATER TIGHT, DUST TIGHT

IP67 sealing protects against dust and moisture, and allows the SZL-WL Series to be used in dirty and rugged environments found in both indoor and outdoor applications.

Potential Applications



INDUSTRIAL

- Counting and position sensing on conveyors and assembly lines
- Fixture and tooling position sensing on automated metal removing machines
- Position indication on electric valves on pipelines
- Position indication on dampers, fume hoods, and HVAC/R equipment
- Truck ramp position and elevator car position/leveling control



SZL-WL Series

PRODUCT NOMENCLATURE

Figure 1. SZL-WL for Asia-Pacific Use Only


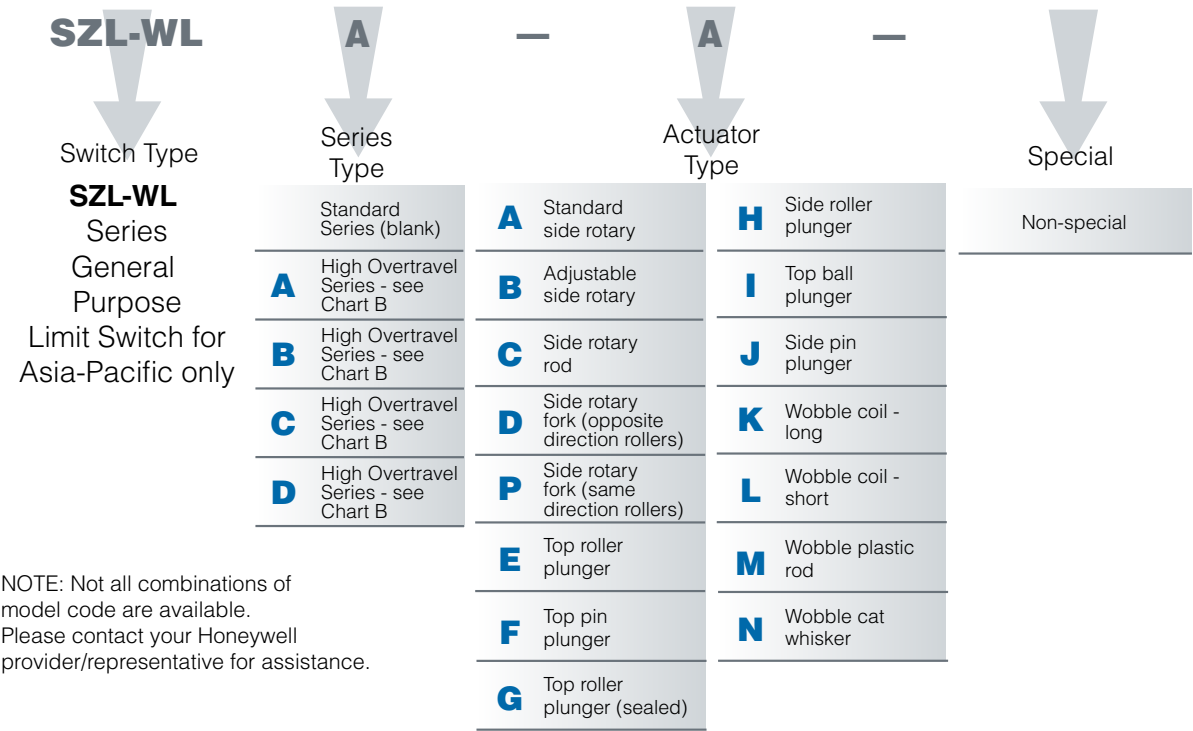


Figure 2. SZL-WL for North American Use Only

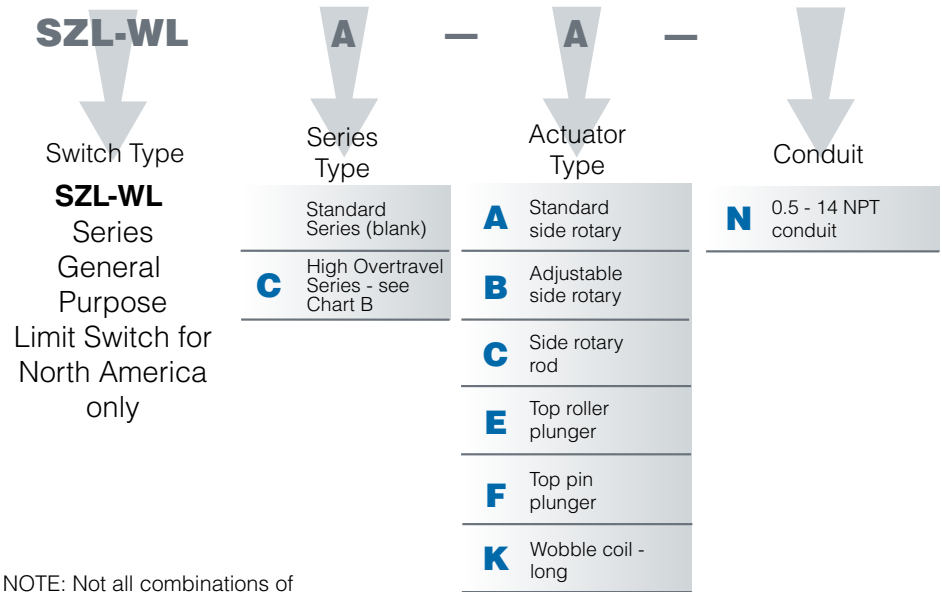

MICRO SWITCH™ General Purpose Limit Switches

Table 1. Chart A • Standard Type

	WL-A	WL-B ¹	WL-C ²	WL-D, P	WL-E	WL-F	WL-G
Pretravel	15° ±5°	15° ±5°	15° ±5°	50° ±5°	1,7 mm [0.07 in] max.	1,7 mm [0.07 in] max.	1,7 mm [0.07 in] max.
Differential Travel	12°	12°	12°	–	1 mm [0.04 in]	1 mm [0.04 in]	1 mm [0.04 in]
Overtravel	30°	30°	30°	35°	5,6 mm [0.22]	6,4 mm [0.25]	5,6 mm [0.22]
Total travel	40°	40°	40°	90°	–	–	–
Operating torque	0,51 Nm [4.5 in-lb]	0,51 Nm [4.5 in-lb]	0,195 Nm [1.72 in-lb]	0,447 Nm [4.0 in-lb]	26,67 N [6 lb] (force)	26,67 N [6 lb] (force)	16,67 N [3.75 lb] (force)

	WL-H	WL-I	WL-J	WL-K ³	WL-L ³	WL-M ³	WL-N ³
Pretravel	2,8 mm [0.11 in]	1,7 mm [0.07 in] max.	2,8 mm [0.11 in] max.	20 mm ±10 mm [0.79 in ±0.039 in]	20 mm ±10 mm [0.79 in ±0.039 in]	40 mm ±20 mm [1.57 in ±0.79 in]	40 mm ±20 mm [1.57 in ±0.79 in]
Differential travel	1 mm [0.04 in]	1 mm [0.04 in]	1 mm [0.04 in]	–	–	–	–
Overtravel	5,6 mm [0.22 in]	6,4 mm [0.25 in]	4,0 mm [0.16 in]	–	–	–	–
Total travel	8,4 mm [0.33 in]	9,2 mm [0.36 in]	5,7 mm [0.22 in]	–	–	–	–
Operating force max.	40,03 N [9 lb]	26,67 N [6 lb]	40,03 N [9 lb]	1,47 N [0.33 lb]	1,47 N [0.33 lb]	1,47 N [0.33 lb]	0,28 N [0.06 lb]

¹ Operating characteristics of the WL-B are measured at the arm length of 38 mm [1.5 in]

² Operating characteristics of the WL-C are measured at the lever length of 140 mm [5.5 in]

³ Operating characteristics of these types are measured at the tip of the actuator

Table 2. Chart B • Overtravel/High Precision Type

	WLA-A	WLB-A	WLA-B ¹	WLB-B ¹	WLA-C ²	WLB-C ²	WLC-A
Pretravel	18° ±4°	10° (-1°/+2°)	18° ±4°	10° (-1°/+2°)	18° ±4°	10° (-1°/+2°)	25° ±5°
Differential travel	10°	7°	10°	–	10°	7°	16°
Overtravel	55°	65°	55°	65°	55°	65°	60°
Total travel	80°	80°	80°	80°	80°	80°	90°
Operating torque max.	0,37 Nm [3.3 in-lb]	0,37 Nm [3.3 in-lb]	0,37 Nm [3.3 in-lb]	0,37 Nm [3.3 in-lb]	0,398 Nm [3.52 in-lb]	0,398 Nm [3.52 in-lb]	0,34 Nm [3.0 in-lb]

	WLC-B ¹	WLC-C ²	WLD-A	WLD-B ¹	WLD-C ²	WLE-A	WLE-B	WLE-C
Pretravel	25° ± 5°	25° ± 5°	20° max.	20° max.	20° max.	6° ±1°	5° (+2°/-0°)	5° (+2°/-0°)
Differential travel	16°	16°	10°	10°	10°	3°	3°	3°
Overtravel	60°	60°	70°	70°	70°	40°	40°	40°
Total travel	90°	90°	90°	90°	90°	40°	40°	40°
Operating torque max.	0,34 Nm [3.0 in-lb]	0,36 Nm [3.16 in-lb]	0,365 Nm [3.23 in-lb]	0,365 Nm [3.23 in-lb]	0,398 Nm [3.52 in-lb]	0,51 Nm [4.5 in-lb]	0,51 Nm [4.5 in-lb]	0,195 Nm [1.72 in-lb]


¹ Operating characteristics are measured at the arm length of 38 mm [1.5 in]

² Operating characteristics are measured at the lever length of 140 mm [5.5 in]

SZL-WL Series

Table 3. Specifications

Characteristic	Parameter
Product type	Honeywell General Purpose Limit Switch
Actuators	side rotary, top roller plunger, top plunger, sealed top roller plunger, side roller plunger, side pin plunger, top ball plunger, wobble/cat whisker, wobble/plastic rod, wobble/coil spring
Circuitry	single pole double throw double break
Electrical	10 A
Housing material	aluminum die-cast
Housing type	industrial
Conduit	PF 1/2, 1/2 in-14 NPT
Sealing	IP67
Operating temperature	-10 °C to 80 °C [14 °F to 176 °F]
Mechanical life	10,000,000 operations
Agency approvals and standards	UL, CE, CSA
Sealed	Industrial

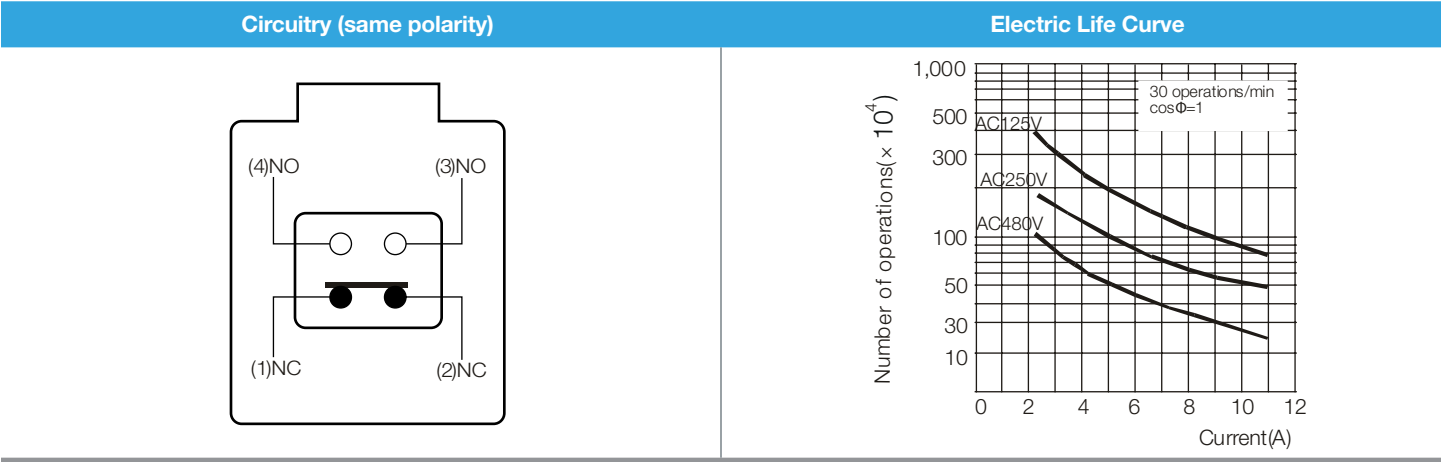

MICRO SWITCH™ General Purpose Limit Switches

ORDER GUIDE/RECOMMENDED LISTINGS

Table 4. Product listings

O.T. • Operating torque
O.F. • Operating force
P.T. • Pretravel
O.T. • Overtravel
D.T. • Differential travel

	Part Number	Actuation	Note	O.T. Nm [in-lb]	Bar chart	P.T. (max.)	O.T.	D.T. (max.)	Conduit
	SZL-WL-A	side rotary standard lever, standard	—	0,51 [4.5]	0° 20° 50° 1-2 3-4	20°	30°	12°	PF 1/2
	SZL-WL-A-N				0° 8° 50° 3-4 1-2				1/2 in NPT
	SZL-WLA-A	side rotary standard lever, high overtravel	—	0,37 [3.3]	0° 22° 77° 1-2 3-4 0° 12° 77° 3-4 1-2	22°	55°	10°	PF 1/2
	SZL-WLB-A	side rotary standard lever, high overtravel	—	0,37 [3.3]	0° 12° 77° 1-2 3-4 0° 5° 77° 3-4 1-2	12°	65°	7°	PF 1/2
	SZL-WLC-A	side rotary standard lever, high overtravel	—	0,34 [3.0]	0° 30° 90° 1-2 3-4	30°	60°	16°	PF 1/2
	SZL-WLC-A-N				0° 14° 90° 3-4 1-2				1/2 in NPT
	SZL-WLD-A	side rotary standard lever, high overtravel	—	0,37 [3.23]	0° 20° 90° 1-2 3-4 0° 10° 90° 3-4 1-2	20°	70°	10°	PF 1/2
	SZL-WLE-A	side rotary standard lever, high precision	1	0,51 [4.5]	0° 7° 47° 1-2 3-4 0° 4° 47° 3-4 1-2	7°	40°	3°	PF 1/2

Note:

1. Operating characteristics are measured at the actuator arm length of 38 mm [1.5 in]

SZL-WL Series

O.T. • Operating torque
O.F. • Operating force
P.T. • Pretravel
O.T. • Overtravel
D.T. • Differential travel

Table 4. Product listings, continued

	Part Number	Actuation	Note	O.T. Nm [in-lb]	Bar chart	P.T. (max.)	O.T.	D.T. (max.)	Conduit
	SZL-WL-B	side rotary adjustable lever, standard	1	0,51 [4.5]	0° 20° 50° 1-2 3-4	20°	30°	12°	PF 1/2
	SZL-WL-B-N				0° 8° 50° 3-4 1-2				1/2 in NPT
	SZL-WLA-B	side rotary adjustable lever, high overtravel	1	0,37 [3.3]	0° 22° 77° 1-2 3-4 0° 12° 77° 3-4 1-2	22°	55°	10°	PF 1/2
	SZL-WLB-B	side rotary adjustable lever, high overtravel	1	0,37 [3.3]	0° 12° 77° 1-2 3-4 0° 5° 77° 3-4 1-2	12°	65°	7°	PF 1/2
	SZL-WLC-B	side rotary adjustable lever, high overtravel	1	0,34 [3.0]	0° 30° 90° 1-2 3-4	30°	60°	16°	PF 1/2
	SZL-WLC-B-N				0° 14° 90° 3-4 1-2				1/2 in NPT
	SZL-WLD-B	side rotary adjustable lever, high overtravel	1	0,37 [3.23]	0° 20° 90° 1-2 3-4 0° 10° 90° 3-4 1-2	20°	70°	10°	PF 1/2
	SZL-WLE-B	side rotary adjustable lever, high precision	2	0,51 [4.5]	0° 5° 45° 1-2 3-4 0° 2° 45° 3-4 1-2	5°	40°	3°	PF 1/2

Notes:

1. Operating characteristics are measured at the actuator arm length of 38 mm [1.5 in]
2. Operating characteristics are measured at the actuator arm length of 140 mm [5.5 in]

MICRO SWITCH™ General Purpose Limit Switches

O.T. • Operating torque
O.F. • Operating force
P.T. • Pretravel
O.T. • Overtravel
D.T. • Differential travel

Table 4. Product listings, continued

	Part Number	Actuation	Note	O.T. Nm [in-lb]	Bar chart	P.T. (max.)	O.T.	D.T. (max.)	Conduit
	SZL-WL-C	side rotary rod adjustable, standard	2	0,195 [1.72]	0° 20° 50° 1-2 3-4	20°	30°	12°	PF 1/2
	SZL-WL-C-N				0° 8° 50° 3-4 1-2				1/2 in NPT
	SZL-WLA-C	side rotary rod adjustable, high overtravel	2	0,398 [3.52]	0° 22° 77° 1-2 3-4 0° 12° 77° 3-4 1-2	22°	55°	10°	PF 1/2
	SZL-WLB-C	side rotary rod adjustable, high overtravel	2	0,398 [3.52]	0° 12° 77° 1-2 3-4 0° 5° 77° 3-4 1-2	12°	65°	7°	PF 1/2
	SZL-WLC-C	side rotary rod adjustable, high overtravel	2	0,38 [3.16]	0° 30° 70° 1-2 3-4	30°	40	16°	PF 1/2
	SZL-WLC-C-N				0° 14° 70° 3-4 1-2				1/2 in NPT
	SZL-WLD-C	side rotary rod adjustable, high overtravel	2	0,398 [3.52]	0° 20° 90° 1-2 3-4 0° 10° 90° 3-4 1-2	20°	70°	10°	PF 1/2
	SZL-WLE-C	Side rotary rod adjustable, high precision	1	0,195 [1.72]	0° 5° 45° 1-2 3-4 0° 2° 45° 3-4 1-2	5°	40°	3°	PF 1/2
	SZL-WL-D SZL-WL-P	fork lock lever, opposite direction rollers (-D); same direction rollers (-P)  		0,447 [4.0]	0° 55° 90° 1-2 3-4 0° 55° 90° 3-4 1-2	55°	35°	–	PF 1/2






Notes:

1. Operating characteristics are measured at the actuator arm length of 38 mm [1.5 in]
2. Operating characteristics are measured at the actuator arm length of 140 mm [5.5 in]

SZL-WL Series

O.T. • Operating torque
O.F. • Operating force
P.T. • Pretravel
O.T. • Overtravel
D.T. • Differential travel

Table 4. Product listings, continued

	Part Number	Actuation	Note	O.F. N [lb]	Bar chart	P.T. (max.)	O.T.	D.T. (max.)	Conduit
	SZL-WL-E	top roller plunger	–	26,67 [6.0]		1,7 mm [0.07 in]	5,6 mm [0.22 in]	1 mm [0.04 in]	PF 1/2
	SZL-WL-E-N								1/2 in NPT
	SZL-WL-F	top plunger	–	26,67 [6.0]		1,7 mm [0.07 in]	6,4mm [0.25 in]	1 mm [0.04 in]	PF 1/2
	SZL-WL-F-N								1/2 in NPT
	SZL-WL-G	top roller plunger, sealed	–	16,67 [3.75]		1,7 mm [0.07 in]	5,6 mm [0.22 in]	1 mm [0.04 in]	PF 1/2
	SZL-WL-H	side roller plunger	–	40,03 [9.0]		2,8 mm [0.11 in]	5,6 mm [0.22 in]	1 mm [0.04 in]	PF 1/2
	SZL-WL-I	top ball plunger	–	26,67 [6.0]		1,7 mm [0.07 in]	4 mm [0.157 in]	1 mm [0.04 in]	PF 1/2
	SZL-WL-J	side plunger	–	40,03 [9.0]		2,8 mm [0.11 in]	6,4 mm [0.25 in]	1 mm [0.04 in]	PF 1/2

MICRO SWITCH™ General Purpose Limit Switches

O.T. • Operating torque
O.F. • Operating force
P.T. • Pretravel
O.T. • Overtravel
D.T. • Differential travel

Table 4. Product listings, continued

	Part Number	Actuation	Note	O.F. N [lb]	Bar chart	P.T. (max.)	O.T.	D.T. (max.)	Conduit
	SZL-WL-K	wobble-coil spring Ø 6,5 mm [Ø 0.256 in]	3, 4	1,47 [0.33]	–	20 mm ±10 mm [0.79 in ±0.39 in]	–	–	PF 1/2
	SZL-WL-K-N								1/2 in NPT
	SZL-WL-L	wobble-coil spring Ø 4,8 mm [Ø 0.189 in]	3, 4	1,47 [0.33]	–	20 mm ±10 mm [0.79 in ±0.39 in]	–	–	PF 1/2
	SZL-WL-M	wobble-plastic rod Ø 8,0 mm [Ø 0.315 in]	3, 4	1,47 [0.33]	–	40 mm ±20 mm [1.57 in ±0.79 in]	–	–	PF 1/2
	SZL-WL-N	wobble-steel wire Ø 1,0 mm [Ø 0.04 in]	3, 4	0,28 [0.06]	–	40 mm ±20 mm [1.57 in ±0.79 in]	–	–	PF 1/2

Notes:

1. Operating characteristics are measured at the actuator arm length of 38 mm [1.5 in]
2. Operating characteristics are measured at the actuator arm length of 140 mm [5.5 in]
3. Operating characteristics are measured at the tip of the actuator
4. Operating force is measured from the tip of the wobble

DIMENSIONS mm [in]

Technical drawing of the SZL-WLA-A limit switch, showing front, side, and top views with dimensions and labels.

Front View Dimensions:

- Top mounting: Ø 17.5 mm x 7 mm [Ø 0.69 in x 0.28 in], stainless steel roller
- Mounting holes: 4 - Ø 5.20 mm [0.21 in] mounting holes
- Label area: 58.7 mm [2.31 in] (height), 40.0 mm [1.57 in] (width)
- Label text: **Homwell** LIMIT SWITCH, SZL-WLA-A, 10A 125/250V AC, 0.5A 125VDC, 0.4A 250VDC, 1/2HP 120VAC, 1HP 250VAC, CE, RoHS
- Mounting screws: 3 - M4 x 13 cover mounting screw
- Bottom dimensions: 5.0 mm [0.20 in] (left), 4.9 mm [0.19 in] (left), 15.1 mm [0.59 in] (center), 30.2 mm [1.19 in] (right), 40.0 mm [1.57 in] (right)

Side View Dimensions:

- Top mounting: 59.0 mm [2.32 in] max. (overall), 53.0 mm [2.09 in] (base)
- Adjustable plate: 13.1 mm [0.52 in] (height), 25.4 mm [1.00 in] (height), 12.7 mm [0.50 in] (height)
- Label position: 68.7 mm [3.70 in] (height), 5.0 mm [0.20 in] (offset), 13.0 mm [0.51 in] (offset)
- Overall height: 94.1 mm [3.70 in]

Top View Dimensions:

- Mounting holes: Ø 18.0 mm [Ø 0.71 in] (center), Ø 7.1 mm (hole diameter)
- Mounting holes: 4 - M6 x 1.0 15 depth min. (spacing)
- Mounting holes: KS B 0221 (PF 1/2) 4 threads min. (spacing)
- Overall width: 41.5 mm [1.63 in] max.
- Overall height: 35.0 mm [1.38 in]
- Label position: 29.2 mm [1.15 in] (width), 21.6 mm [0.85 in] (height)

Technical drawing of the KS B 0221 (PF 1/2) 4 threads min. device, showing front, side, and top views with dimensions in mm and inches.

Front View Dimensions:

- Top mounting hole: $\varnothing 17.5 \text{ mm}$ [7 mm] ($\varnothing 0.69 \text{ in} \times 0.28 \text{ in}$) stainless steel roller
- Adjustable range: 25 mm to 89 mm [1.0 in to 3.5 in]
- 4 - M3.5 x 27.5 head mounting screw and spring washer
- M5 x 16 hexagon socket head bolts
- 4 - $\varnothing 5.20 \text{ mm}$ [0.21 in] mounting holes
- 3 - M4 x 13 cover mounting screw
- Adjustable plate
- Cover
- Label position: 5.0 mm [0.20 in]
- Top mounting hole: $\varnothing 17.5 \text{ mm}$ [7 mm] ($\varnothing 0.69 \text{ in} \times 0.28 \text{ in}$) stainless steel roller
- Adjustable range: 25 mm to 89 mm [1.0 in to 3.5 in]
- 4 - M3.5 x 27.5 head mounting screw and spring washer
- M5 x 16 hexagon socket head bolts
- 4 - $\varnothing 5.20 \text{ mm}$ [0.21 in] mounting holes
- 3 - M4 x 13 cover mounting screw
- Adjustable plate
- Cover
- Label position: 5.0 mm [0.20 in]

Side View Dimensions:

- Top mounting hole: $\varnothing 17.5 \text{ mm}$ [7 mm] ($\varnothing 0.69 \text{ in} \times 0.28 \text{ in}$) stainless steel roller
- Adjustable range: 25 mm to 89 mm [1.0 in to 3.5 in]
- 4 - M3.5 x 27.5 head mounting screw and spring washer
- M5 x 16 hexagon socket head bolts
- 4 - $\varnothing 5.20 \text{ mm}$ [0.21 in] mounting holes
- 3 - M4 x 13 cover mounting screw
- Adjustable plate
- Cover
- Label position: 5.0 mm [0.20 in]
- Top mounting hole: $\varnothing 17.5 \text{ mm}$ [7 mm] ($\varnothing 0.69 \text{ in} \times 0.28 \text{ in}$) stainless steel roller
- Adjustable range: 25 mm to 89 mm [1.0 in to 3.5 in]
- 4 - M3.5 x 27.5 head mounting screw and spring washer
- M5 x 16 hexagon socket head bolts
- 4 - $\varnothing 5.20 \text{ mm}$ [0.21 in] mounting holes
- 3 - M4 x 13 cover mounting screw
- Adjustable plate
- Cover
- Label position: 5.0 mm [0.20 in]

Top View Dimensions:

- Top mounting hole: $\varnothing 17.5 \text{ mm}$ [7 mm] ($\varnothing 0.69 \text{ in} \times 0.28 \text{ in}$) stainless steel roller
- Adjustable range: 25 mm to 89 mm [1.0 in to 3.5 in]
- 4 - M3.5 x 27.5 head mounting screw and spring washer
- M5 x 16 hexagon socket head bolts
- 4 - $\varnothing 5.20 \text{ mm}$ [0.21 in] mounting holes
- 3 - M4 x 13 cover mounting screw
- Adjustable plate
- Cover
- Label position: 5.0 mm [0.20 in]
- Top mounting hole: $\varnothing 17.5 \text{ mm}$ [7 mm] ($\varnothing 0.69 \text{ in} \times 0.28 \text{ in}$) stainless steel roller
- Adjustable range: 25 mm to 89 mm [1.0 in to 3.5 in]
- 4 - M3.5 x 27.5 head mounting screw and spring washer
- M5 x 16 hexagon socket head bolts
- 4 - $\varnothing 5.20 \text{ mm}$ [0.21 in] mounting holes
- 3 - M4 x 13 cover mounting screw
- Adjustable plate
- Cover
- Label position: 5.0 mm [0.20 in]

[illegible]

Technical drawing of the SZL-WL-D and SZL-WL-P switches, showing dimensions and component specifications.

Front View Dimensions (SZL-WL-D):

- Top mounting holes: $\varnothing 17.5$ mm $\times$ 7 mm [$\varnothing 0.69$ in $\times$ 0.28 in] stainless steel roller
- Head mounting screw and spring washer: 4 - M3.5 $\times$ 27.5
- Socket head bolts: M5 $\times$ 16 hexagon
- Mounting holes: 4 - $\varnothing 5.20$ mm [$\varnothing 0.21$ in]
- Cover mounting screw: 3 - M4 $\times$ 13
- Switch label: Hammerhead, 125 250V AC, 10A, 125V, 1/4 HP 250VAC, 1/2 HP 250VAC, 1/4 HP 250VAC, 1/2 HP 250VAC
- Bottom dimensions: 14.7 mm [$\varnothing 0.58$ in], 59.7 mm [$\varnothing 2.31$ in], 5.0 mm [$\varnothing 0.20$ in], 4.9 mm [$\varnothing 0.19$ in], 15.1 mm [$\varnothing 0.59$ in], 30.2 mm [$\varnothing 1.19$ in], 40.0 mm [$\varnothing 1.57$ in]

Side View Dimensions (SZL-WL-P):

- Top dimensions: 62.5 mm [$\varnothing 2.46$ in] max., 56.4 mm [$\varnothing 2.22$ in], 42.8 mm [$\varnothing 1.69$ in]
- Right side dimensions: 13.1 mm [$\varnothing 0.52$ in], 25.4 mm [$\varnothing 1.00$ in], 12.7 mm [$\varnothing 0.50$ in], 31.4 mm [$\varnothing 1.24$ in], 3.0 mm [$\varnothing 0.12$ in], 5.0 mm [$\varnothing 0.20$ in], 68.7 mm [$\varnothing 2.70$ in], 21.6 mm [$\varnothing 0.85$ in], 29.2 mm [$\varnothing 1.15$ in], 35.0 mm [$\varnothing 1.38$ in], 41.5 mm [$\varnothing 1.63$ in] max.
- Bottom dimensions: 4.9 mm [$\varnothing 0.19$ in], 30.2 mm [$\varnothing 1.19$ in], 40.0 mm [$\varnothing 1.57$ in]
- Label position: LABEL POSITION
- Thread specification: KS B 0221 (PF 1/2) 4 threads min.
- Bottom screw: 4 - M6 $\times$ 1.0 15 depth min.

Component Specifications:

- Hammerhead
- 125 250V AC
- 10A
- 125V
- 1/4 HP 250VAC
- 1/2 HP 250VAC
- 1/4 HP 250VAC
- 1/2 HP 250VAC

Labels:

- SZL-WL-D
- SZL-WL-P

MICRO SWITCH™ General Purpose Limit Switches

DIMENSIONS mm [in]

Figure 5. SZL-VL-E

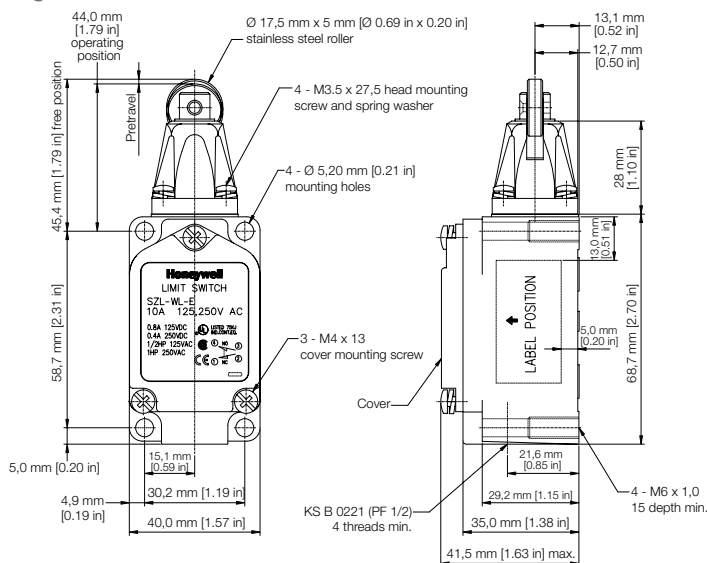


Figure 6. SZL-WL-F

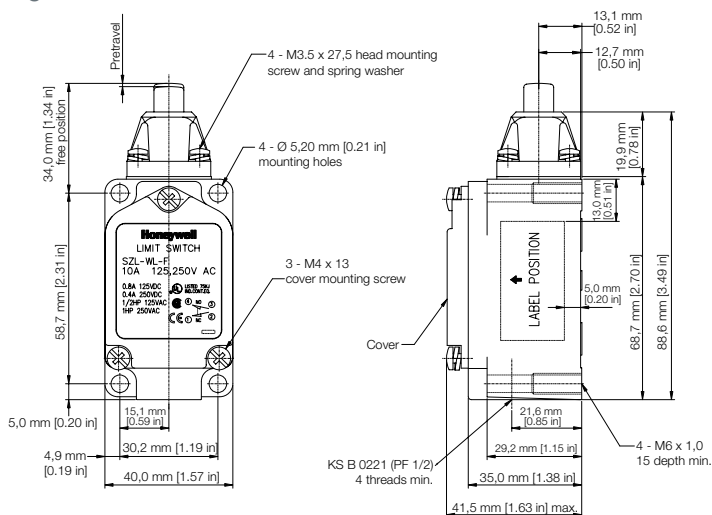


Figure 7. SZL-WL-G


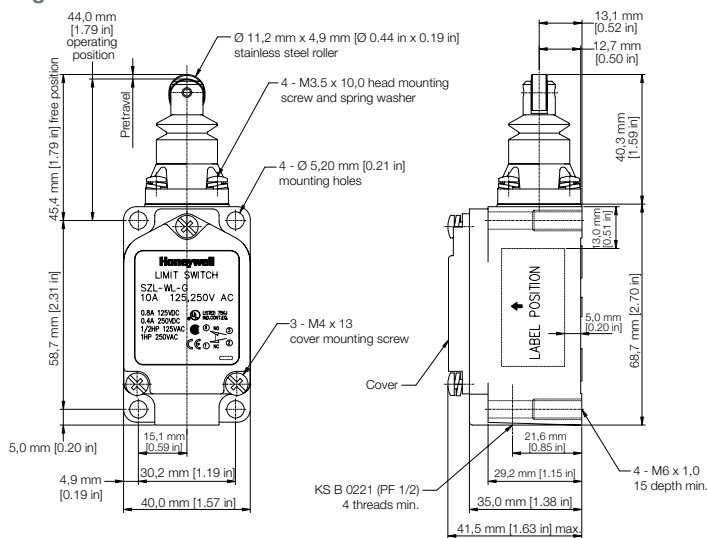


Figure 8. SZL-WL-H

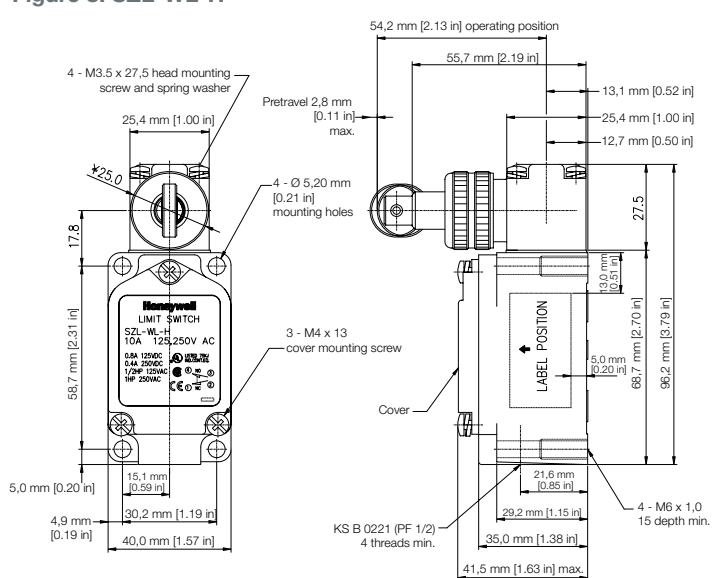

DIMENSIONS mm [in]

Technical drawing of the KS B 0221 (PF 1/2) 4 threads min. switch, showing front and side views with dimensions in mm and inches.

Front View Dimensions:

- Top mounting: $\varnothing 12.7 \text{ mm}$ [0.50 in] stainless ball
- Mounting holes: 4 - $\varnothing 5.20 \text{ mm}$ [0.21 in]
- Cover mounting: 3 - M4 x 13 cover mounting screw
- Label: "Honeywell LIMIT SWITCH S2L-WL-1 10A 125/250V AC 0.8A 1250VAC 0.4A 250VAC 1/2PF 125VAC HP 250VAC"
- Dimensions: 44.5 mm [1.75 in] operating position, 46.2 mm [1.82 in] free position, 58.7 mm [2.31 in] total height, 5.0 mm [0.20 in] base thickness, 15.1 mm [0.59 in] base width, 30.2 mm [1.19 in] base width, 40.0 mm [1.57 in] base width, 4.9 mm [0.19 in] base width.

Side View Dimensions:

- Top mounting: 13.1 mm [0.52 in]
- Mounting holes: 12.7 mm [0.50 in]
- Mounting holes: 19.9 mm [0.78 in]
- Label: "LABEL POSITION"
- Dimensions: 3.0 mm [0.12 in] label height, 5.0 mm [0.20 in] label height, 68.7 mm [2.70 in] total height, 88.6 mm [3.49 in] total height, 21.6 mm [0.85 in] base width, 29.2 mm [1.15 in] base width, 35.0 mm [1.38 in] base width, 41.5 mm [1.63 in] max. base width.

Technical drawing of the Honeywell SZL-WL-1 limit switch, showing front and side views with dimensions in mm and inches.

Front View Dimensions:

- Top mounting: 4 - M3.5 x 27.5 head mounting screw and spring washer
- Top flange diameter: $\varnothing 25$ mm [0.98 in]
- Top flange thickness: 25.4 mm [1.00 in]
- Top flange to label top: 17.8 mm [0.70 in]
- Label top to bottom mounting holes: 58.7 mm [2.31 in]
- Bottom mounting holes: 4 - $\varnothing 5, 20$ mm [0.21 in] mounting holes
- Bottom mounting holes to bottom flange: 5.0 mm [0.20 in]
- Bottom flange diameter: 40.0 mm [1.57 in]
- Bottom flange thickness: 4.9 mm [0.19 in]
- Label dimensions: 30.2 mm [1.19 in] (width), 15.1 mm [0.59 in] (height)
- Label text: Honeywell, LIMIT SWITCH, SZL-WL-1, 10A 125/250V AC, 0.8A 125VDC, 0.4A 250VDC, 1/2HP 125VAC, 1HP 200VAC, $\varnothing$ 1/2, 1/4, 3/8, 1/2, 3/4, 1, 1 1/2, 2, 2 1/2, 3, 4, 6, 8, 10, 12, 15, 20, 25, 30, 35, 40, 45, 50, 60, 70, 80, 90, 100, 125, 150, 175, 200, 225, 250, 275, 300, 325, 350, 375, 400, 425, 450, 475, 500, 525, 550, 575, 600, 625, 650, 675, 700, 725, 750, 775, 800, 825, 850, 875, 900, 925, 950, 975, 1000

Side View Dimensions:

- Top flange to top of housing: 40.6 mm [1.60 in]
- Top flange to center of mounting holes: 46.6 mm [1.83 in]
- Pretravel: 2.8 mm [0.11 in] max.
- Top flange to bottom of housing: 27.5 mm [1.08 in]
- Top flange to bottom of housing (alternative): 13.1 mm [0.52 in]
- Top flange to bottom of housing (alternative): 25.4 mm [1.00 in]
- Top flange to bottom of housing (alternative): 12.7 mm [0.50 in]
- Top flange to bottom of housing (alternative): 13.0 mm [0.51 in]
- Top flange to bottom of housing (alternative): 5.0 mm [0.20 in]
- Top flange to bottom of housing (alternative): 68.7 mm [2.70 in]
- Top flange to bottom of housing (alternative): 98.2 mm [3.79 in]
- Top flange to bottom of housing (alternative): 21.6 mm [0.85 in]
- Top flange to bottom of housing (alternative): 29.2 mm [1.15 in]
- Top flange to bottom of housing (alternative): 35.0 mm [1.38 in]
- Top flange to bottom of housing (alternative): 41.5 mm [1.63 in] max.
- Top flange to bottom of housing (alternative): 4 - M6 x 1, 0 15 depth min.

Other Labels:

- 3 - M4 x 13 cover mounting screw
- Cover
- KS B 0221 (PF 1/2) 4 threads min.
- LABEL POSITION

Technical drawings of the SZL-WL-K limit switch, showing front and side views with dimensions in mm and inches.

Front View Dimensions:

- Pretravel: 20,0 mm [0.79 in]
- Top cable diameter: Ø 6,5 mm [Ø 0.26 in]
- Total height: 140 mm [5.51 in]
- Mounting holes: 4 - Ø 5,20 mm [0.21 in]
- Label dimensions: 58,7 mm [2.31 in] (height), 40,0 mm [1.57 in] (width)
- Label text:
 - Limit Switch
 - SZL-WL-K
 - 10A 125,250V AC
 - 0.8A 125VAC
 - 0.4A 250VAC
 - 1/2HP 125VAC
 - 1HP 250VAC
 - CE, UL, and other certification marks
- Bottom mounting holes: 3 - M4 x 13 cover mounting screw
- Bottom dimensions: 15,1 mm [0.59 in] (width), 30,2 mm [1.19 in] (width), 4,9 mm [0.19 in] (height), 5,0 mm [0.20 in] (height)

Side View Dimensions:

- Top cable diameter: Ø 6,5 mm [Ø 0.26 in]
- Top cable length: 13,1 mm [0.52 in]
- Label position: 5,0 mm [0.20 in] (width), 68,7 mm [2.70 in] (height)
- Label text: LABEL POSITION
- Bottom dimensions: 21,6 mm [0.85 in] (width), 29,2 mm [1.15 in] (width), 35,0 mm [1.38 in] (width), 41,5 mm [1.63 in] max. (width), 4 - M6 x 1.0 15 depth min. (screws)
- Bottom screw: KS B 021 (PF 1/2) 4 threads min.

Technical drawing of the KS B221 (PF 1/2) 4 threads min. limit switch, showing front and side views with dimensions in mm and inches.

Front View Dimensions:

- Top cable travel: 20,0 mm [0.79 in]
- Total height: 128 mm [5.04 in]
- Mounting holes: 4 - Ø 5,20 mm [0.21 in]
- Label dimensions: 40,0 mm [1.57 in] (width), 58,7 mm [2.31 in] (height)
- Label text: **Homagwell**, **LIMIT SWITCH**, SZL-WL-L, 10A 125,250V AC, 0.8A 1250°C, 0.4A 2500°C, 1/2" 1250°C, 10P 2500°C, CE, RoHS
- Mounting screws: 3 - M4 x 13 cover mounting screw
- Bottom mounting holes: 4 - Ø 5,20 mm [0.21 in]
- Bottom dimensions: 4,9 mm [0.19 in] (left), 5,0 mm [0.20 in] (left), 15,1 mm [0.59 in] (center), 30,2 mm [1.19 in] (right), 40,0 mm [1.57 in] (total width)

Side View Dimensions:

- Top cable travel: 4,8 mm [0.19 in]
- Mounting holes: 13,1 mm [0.52 in]
- Label position: 68,7 mm [2.70 in] (height), 5,0 mm [0.20 in] (width)
- Label text: **LABEL POSITION**
- Mounting holes: 4 - M6 x 1,0 15 depth min.
- Bottom dimensions: 21,6 mm [0.85 in] (width), 29,2 mm [1.15 in] (width), 35,0 mm [1.38 in] (width), 41,5 mm [1.63 in] max. (width)

MICRO SWITCH™ General Purpose Limit Switches

DIMENSIONS mm [in]

Figure 13. SZL-WL-M


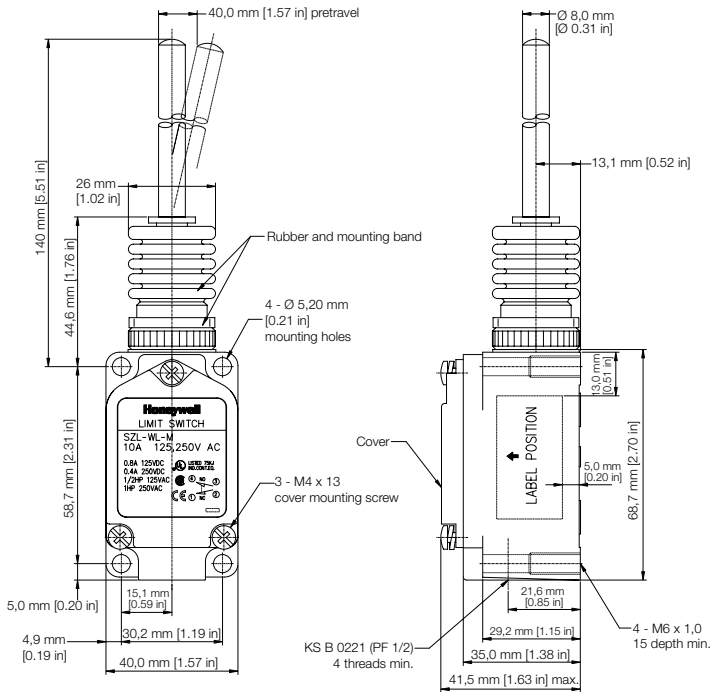


Figure 14. SZL-WL-N

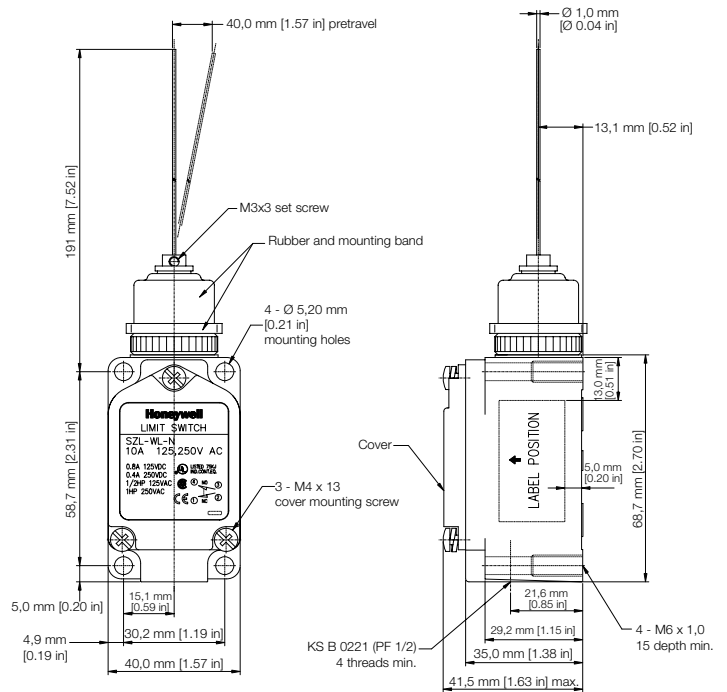


SET POSITION INDICATOR

Proper Operation Zone

- The two convex indicators on the shaft housing show the operating zones for proper operation, thereby, simplifying installation and maintenance.
- Too much over-travel may cause shortened mechanical life due to possible damage to the switch mechanism.

Figure 15. Side Rotary Proper Operation Zone

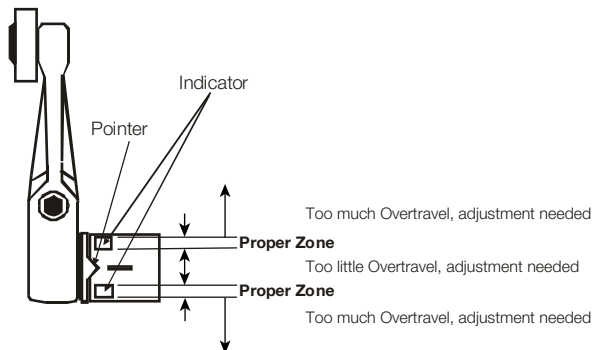

MOUNTING DIMENSIONS

Figure 16. Surface Mount

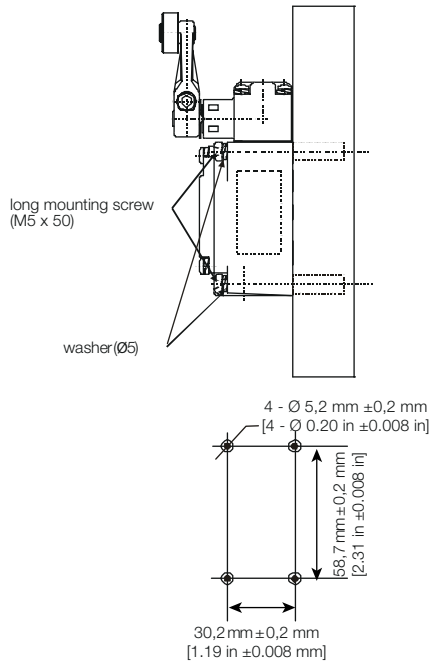


Figure 17. Through-Hole Mount


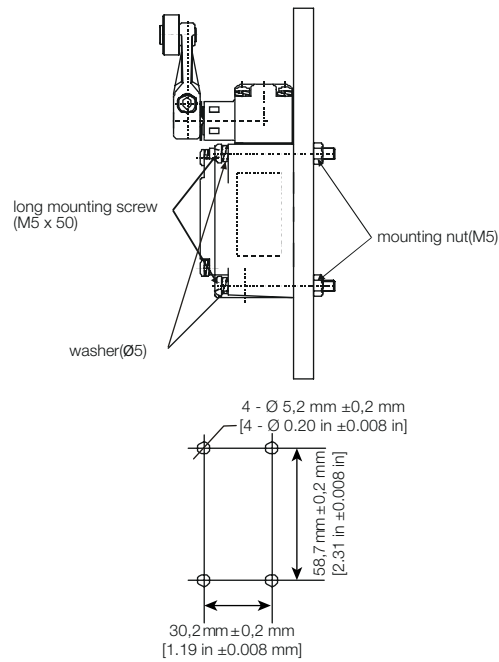


Figure 18. Rear Mount

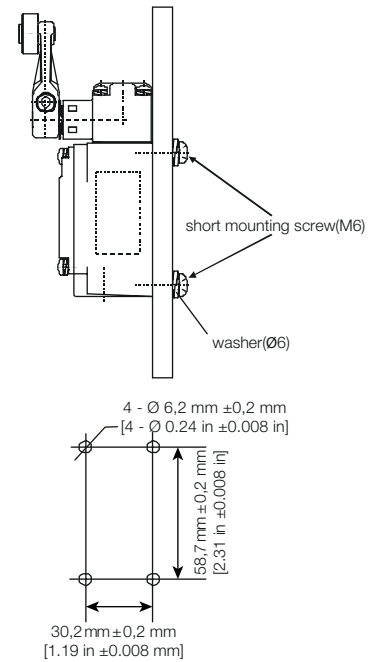


ADJUSTABLE OPERATING CHARACTERISTICS

Standard/High Precision Series

- All side rotary switches of Standard and High Precision models can be set to actuate on one side only. Clockwise and counterclockwise mode is available by rotating the plunger inside the operating head as shown below.

Figure 19. Standard/High Precision Type Switches

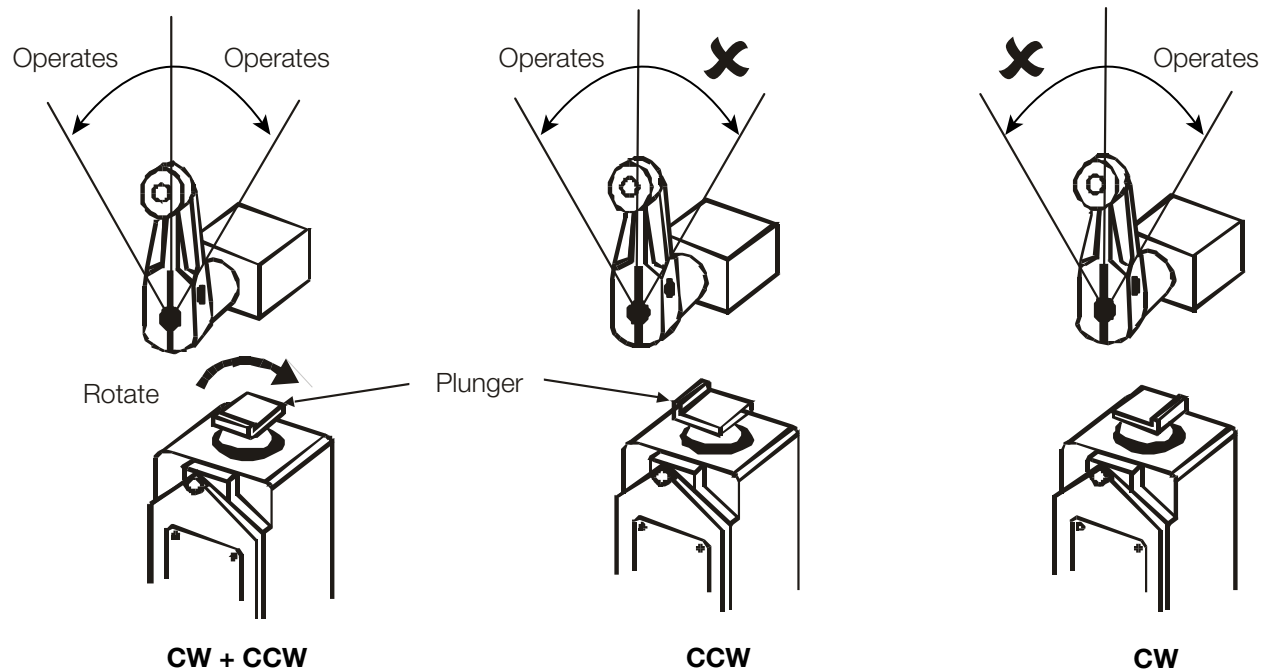


MICRO SWITCH™ General Purpose Limit Switches

OVERTRAVEL “D” SERIES

- The Overtravel “D” Series switches can be set to one side actuation mode by rotating the cam located inside the operating head as shown below.

Figure 20. Overtravel “D” Series

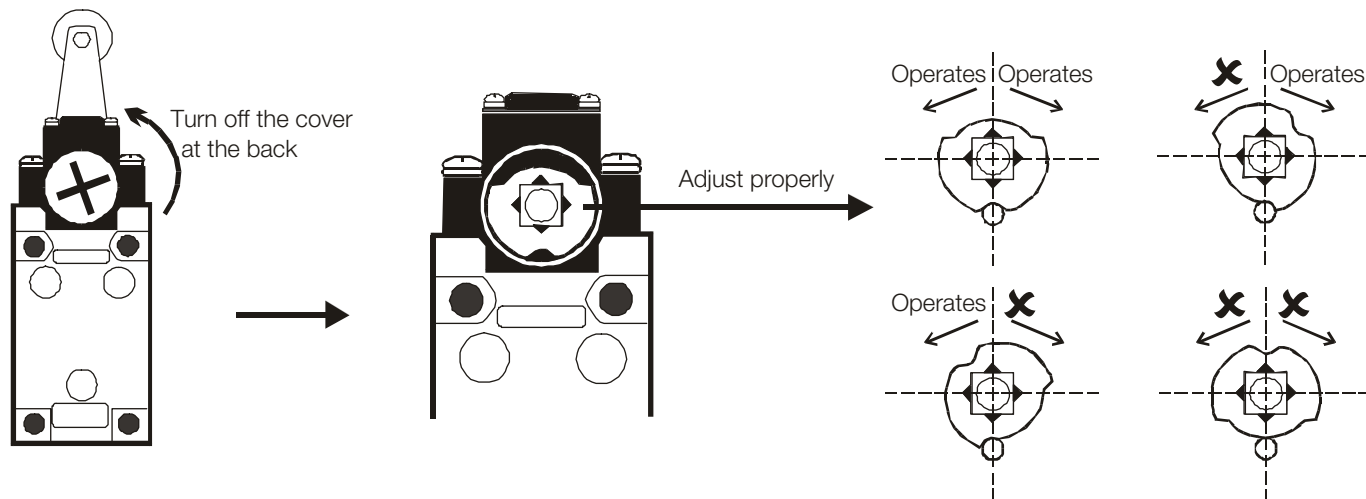


OPERATING HEAD DIRECTION CHANGE

90° Incremental Rotation

- Most SZL-WL –D, P, E, G, H, and J Series switches allow for the operating head to be rotated to any of the four positions indicated below. Loosen the four head lock screws and rotate the head to the desired position.


Note* The head of the Overtravel “D” Series can be set **ONLY** to directions **1** and **3**.

Figure 21. SZL-WL Head Rotation

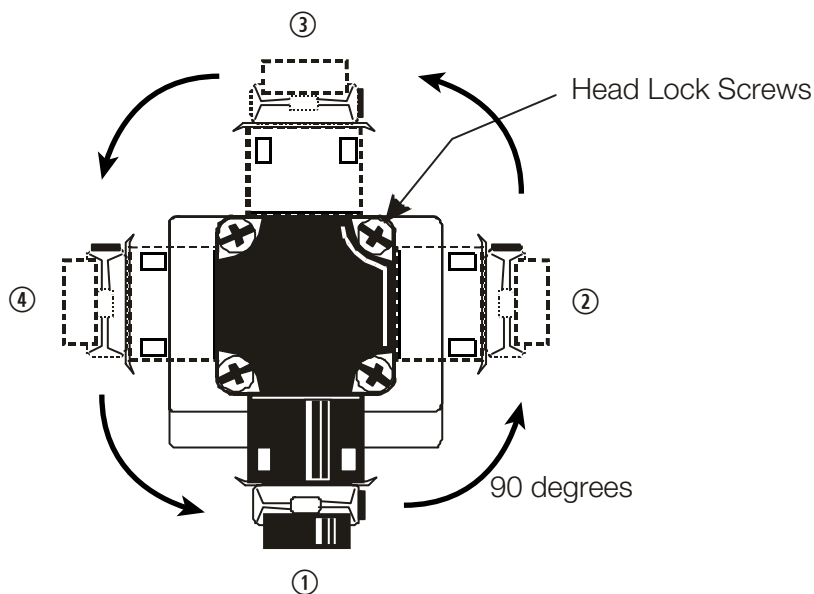

MICRO SWITCH™ General Purpose Limit Switches

Figure 24. ZLC-4DSM-__

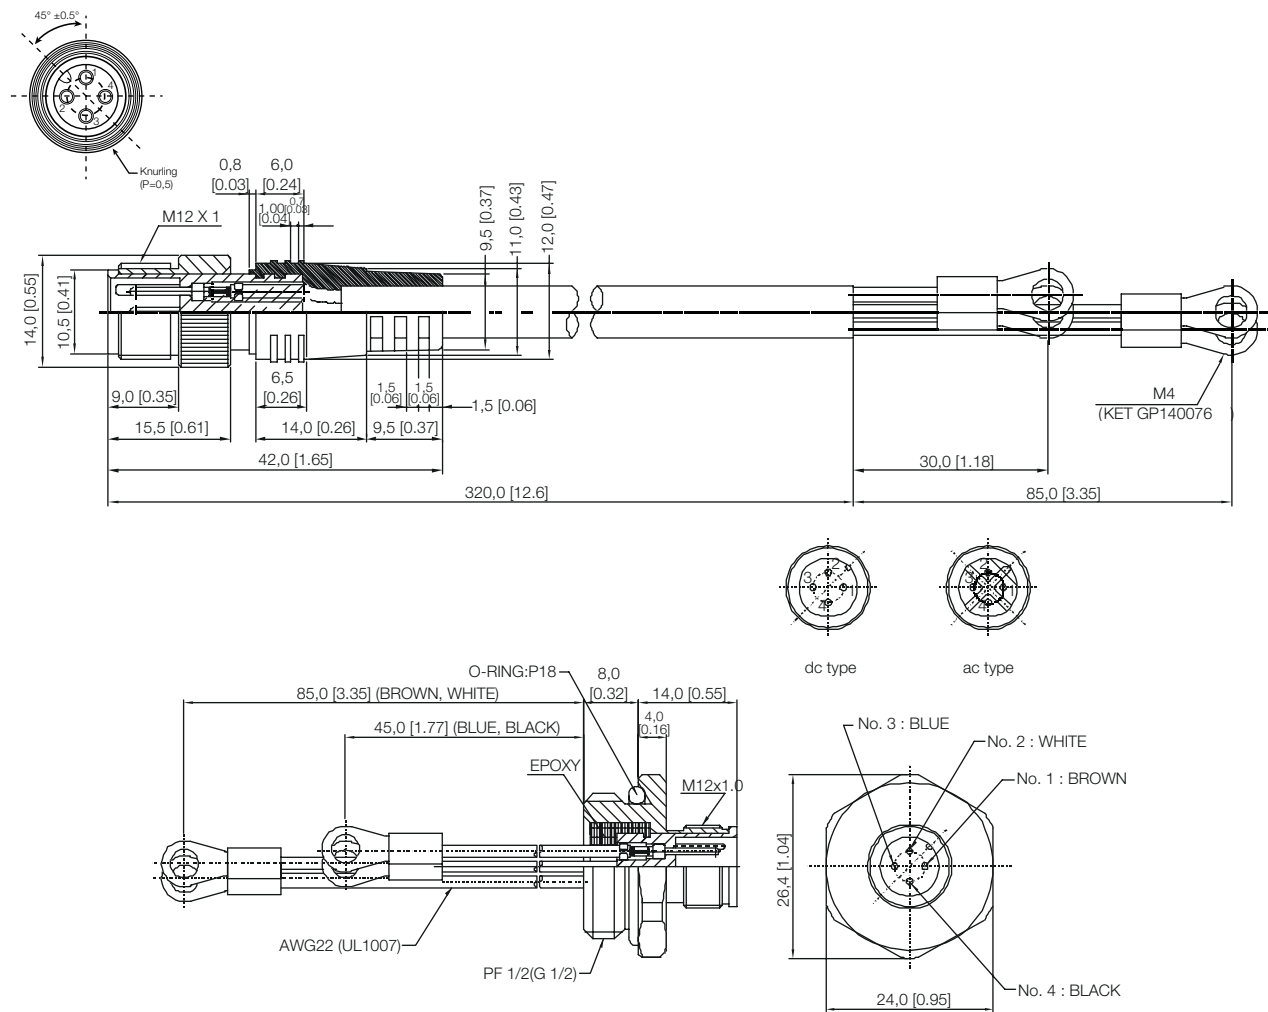

NOTE: Receptacle required for using cables. Order part number ZLC-4DRM-85.

SZL-WL Series

SEAL CONNECTOR

Product Nomenclature


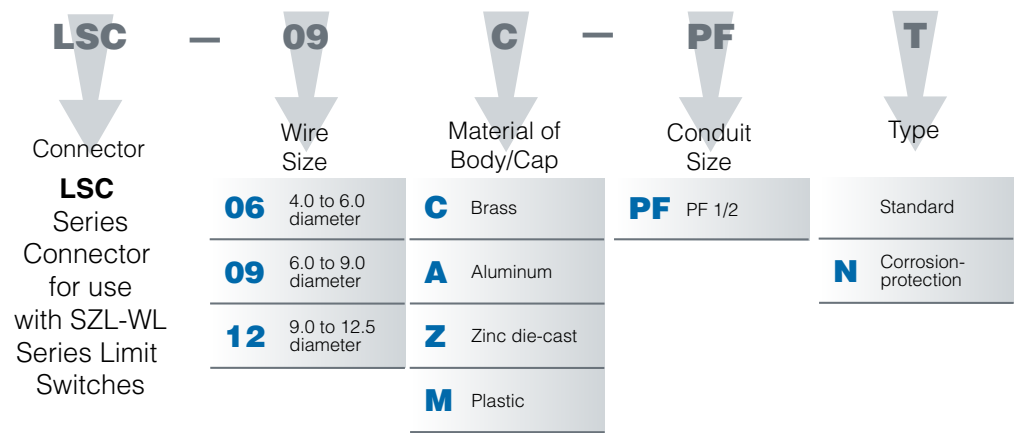


Figure 25. LSC-09C-PFT

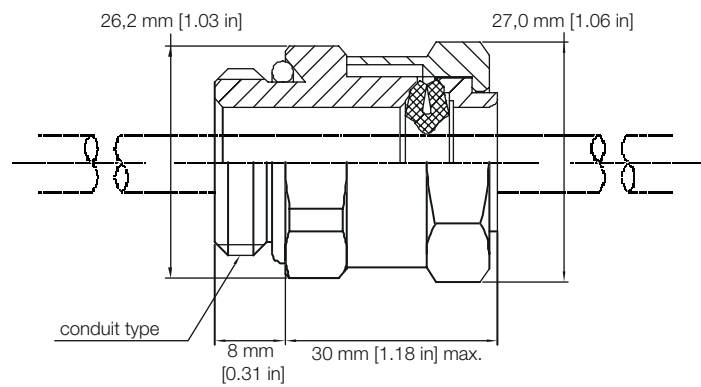

MICRO SWITCH™ General Purpose Limit Switches

ADDITIONAL INFORMATION

The following associated literature is available on the Web at sensing.honeywell.com:

- Product installation instructions
- Product range guide
- Product nomenclature tree
- Product application-specific information
 - Application Note: Application in Injection Molding Machine (IJM)

This Honeywell datasheet supports the following MICRO SWITCH™ SZL-WL Series listings:

SZL-WL-A	SZL-WLD-B	SZL-WL-G
SZL-WL-A-N	SZL-WLE-B	SZL-WL-H
SZL-WL-B-N	SZL-WL-C	SZL-WL-I
SZL-WL-C-N	SZL-WLA-C	SZL-WL-J
SZL-WL-E-N	SZL-WLB-C	SZL-WL-K
SZL-WL-F-N	SZL-WLC-A-N	SZL-WL-L
SZL-WLA-A	SZL-WLC-B-N	SZL-WL-M
SZL-WLB-A	SZL-WLC-C	SZL-WL-N
SZL-WLC-A	SZL-WLC-C-N	SZL-WL-P
SZL-WLD-A	SZL-WLD-C	SZL-WL-A-LEVER
SZL-WLE-A	SZL-WLE-C	SZL-WL-A-LEVER-P
SZL-WL-B	SZL-WL-D	SZL-WL-B-LEVER
SZL-WLA-B	SZL-WL-E	SZL-WL-B-LEVER-P
SZL-WLB-B	SZL-WL-F	SZL-WL-C-LEVER
SZL-WLC-B		

WARNING

PERSONAL INJURY

DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

Failure to comply with these instructions could result in death or serious injury.

WARNING

MISUSE OF DOCUMENTATION

- The information presented in this product sheet is for reference only. Do not use this document as a product installation guide.
- Complete installation, operation, and maintenance information is provided in the instructions supplied with each product.

Failure to comply with these instructions could result in death or serious injury.

WARRANTY/REMEDY

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgement or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items it finds defective. **The foregoing is buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.**

While we provide application assistance personally, through our literature and the Honeywell website, it is up to the customer to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

Find out more

Honeywell serves its customers through a worldwide network of sales offices, representatives and distributors. For application assistance, current specifications, pricing or name of the nearest Authorized Distributor, contact your local sales office.

To learn more about Honeywell's sensing and control products, call **+1-815-235-6847** or **1-800-537-6945**, visit **sensing.honeywell.com**, or e-mail inquiries to **info.sc@honeywell.com**

Sensing and Control
Honeywell
1985 Douglas Drive North
Golden Valley, MN 55422
honeywell.com

The Honeywell logo, consisting of the word "Honeywell" in a bold, red, sans-serif font.

002392-1-EN IL50 GLO
January 2015
Copyright © 2015 Honeywell International Inc. All rights reserved.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9