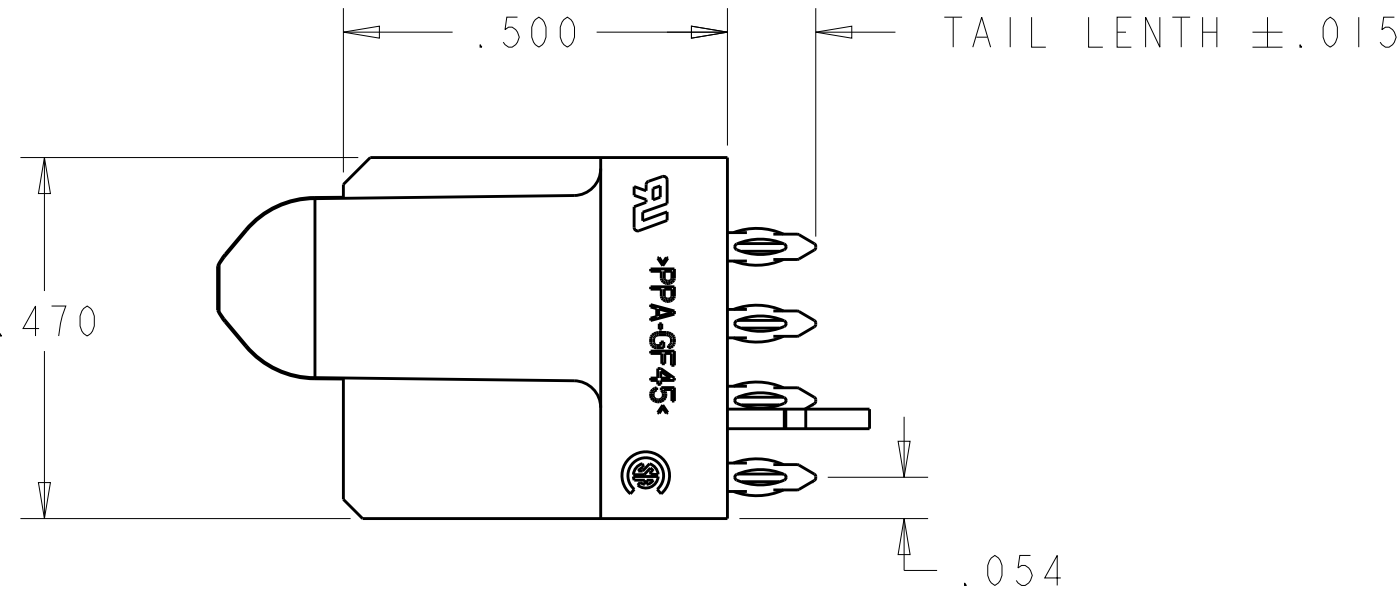
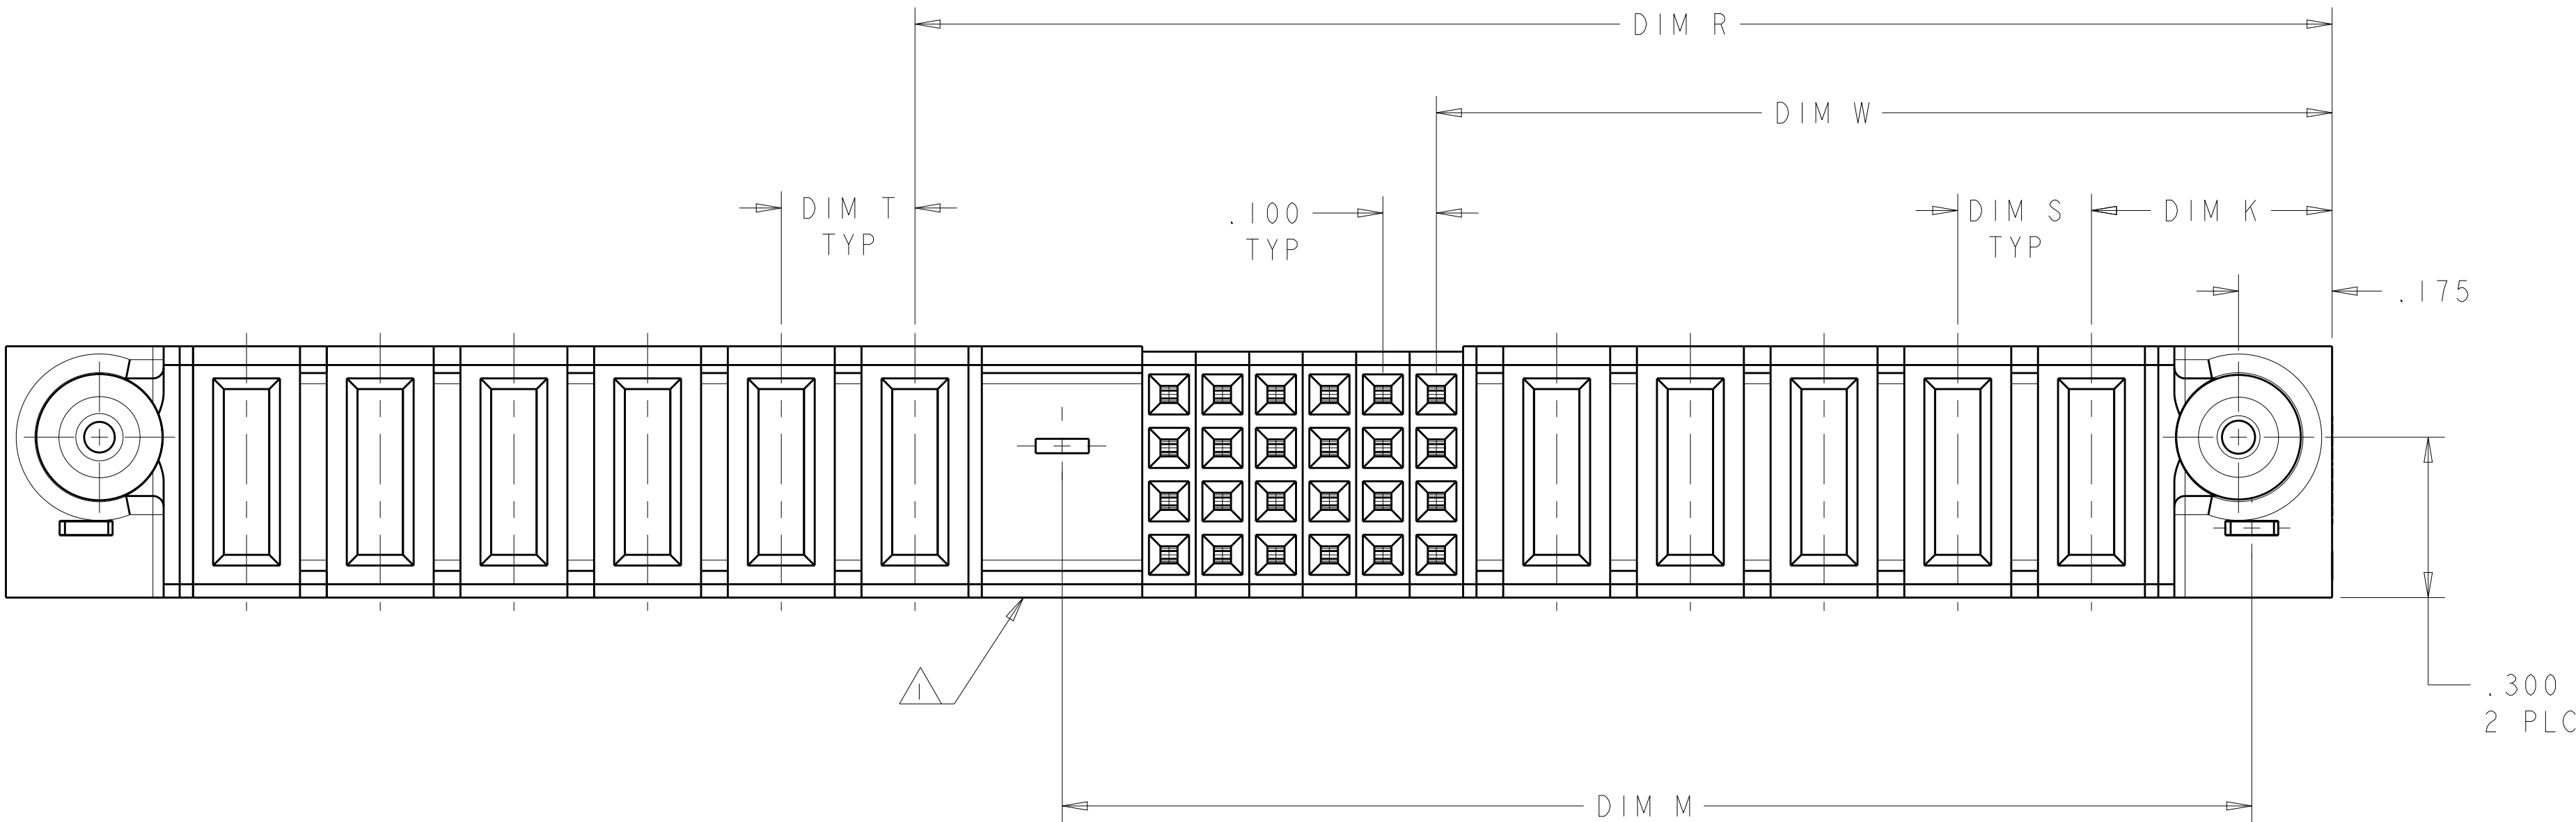
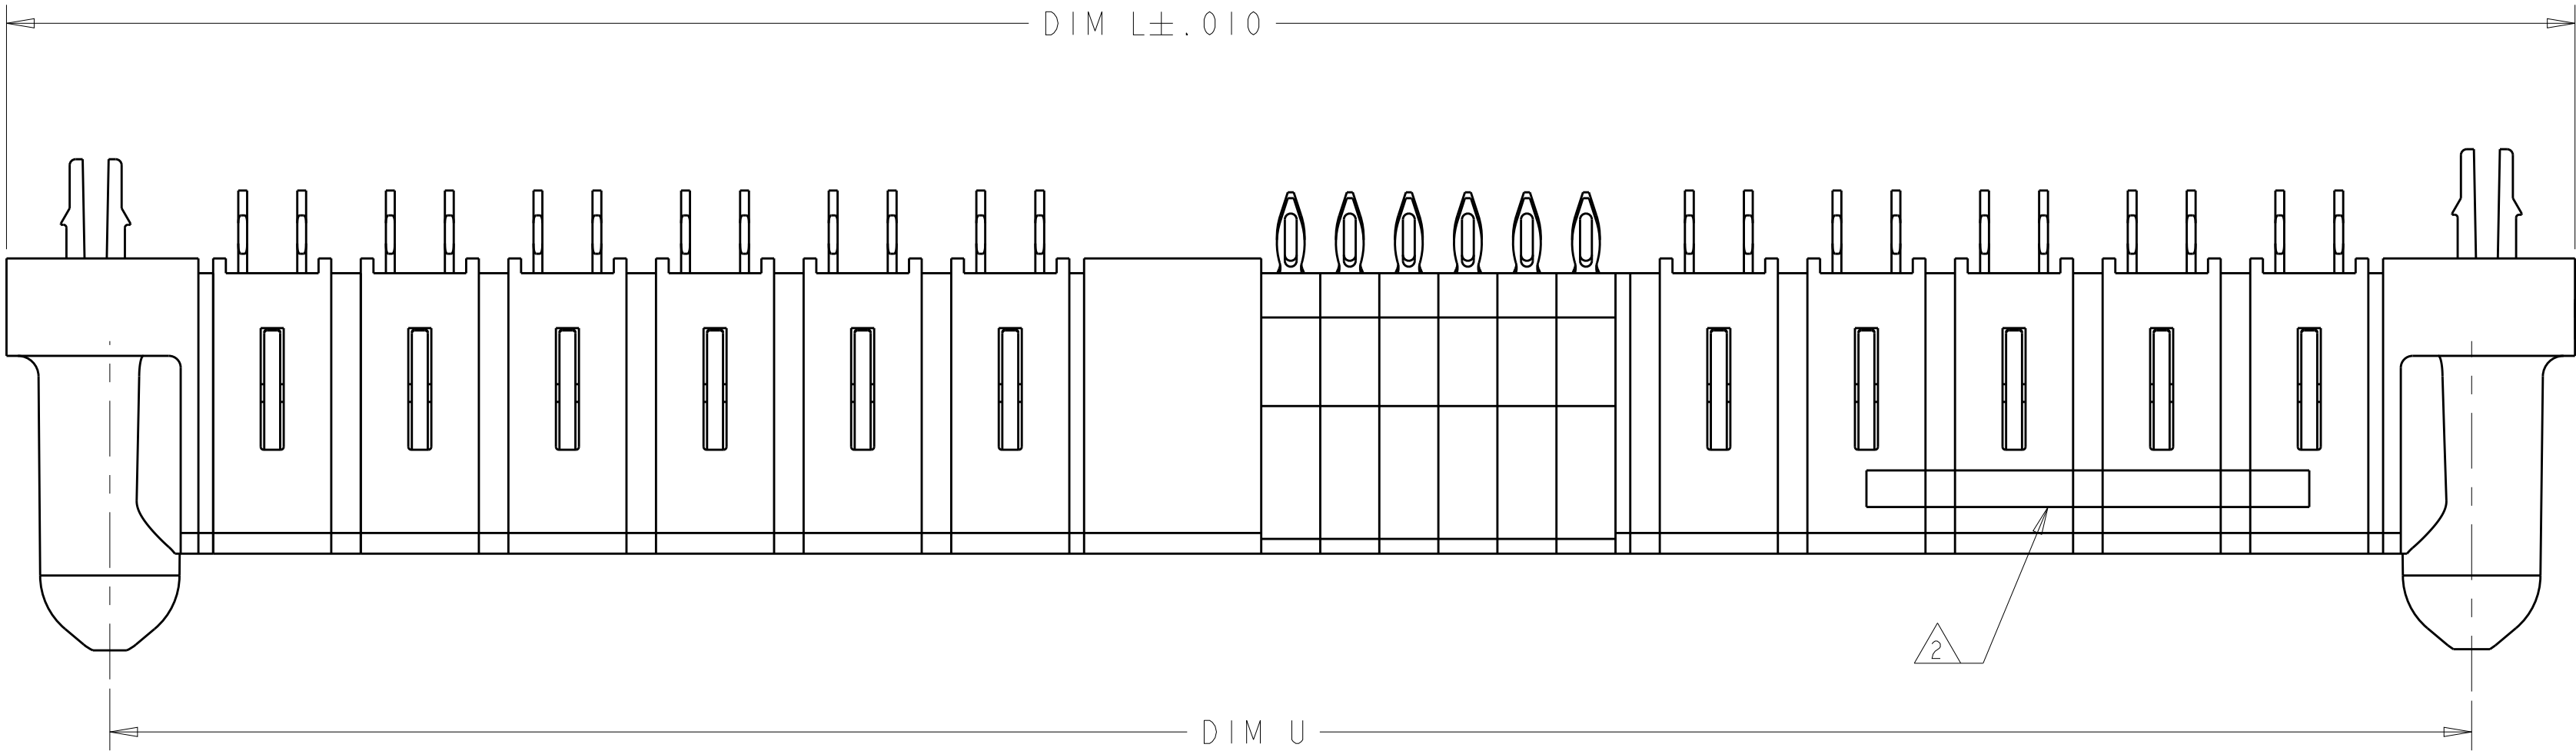
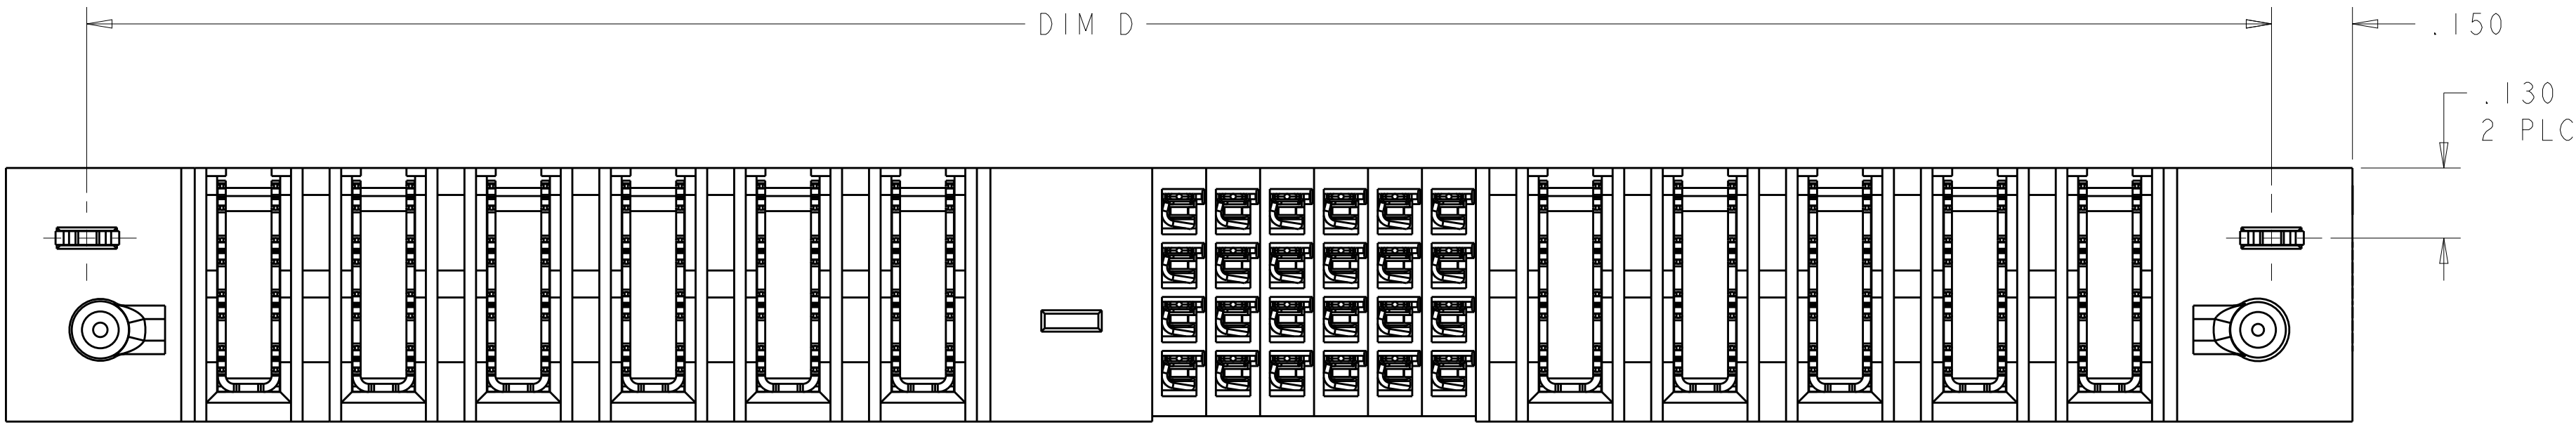



LOC		DIST		REVISIONS				
ES	00	P	LYR	DESCRIPTION	DATE	DWN	APVD	
		K9		REV PER ECR-12-018831	30OCT2012	AY	SZ	



- 1 OPTIONAL CENTER MODULE, WITH Ø.150 THRU HOLE OR HOLD DOWN FEATURE
- 2 "AMP", PART NUMBER AND DATE CODE TO BE MARKED IN AREA SHOWN
PARTS UNDER 2.00 LONG MAY BE MARKED ON BOTH SIDES
- 3 MATERIAL: HOUSING - GLASS FILLED HIGH TEMP THERMO PLASTIC, UL94 V-O
SIGNAL CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
- 4 CONTACT PLATING: NOBLE METAL PLATING ON CONTACT FUNCTIONAL AREA
OF POWER CONTACTS AND SIGNAL CONTACTS.
- 5 MECHANICAL CONNECTOR KEEP OUT ZONE
- 6 DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- 7 PCB - ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES
- 8 PCB - 0.0453 ±.0010 DRILLED HOLES PLATED WITH .0003 MIN Sn
OVER .001 TO .003 Cu PLATING TO ACHIEVE A .040 HOLE
- 9 VARIABLE DIMENSION SHOWN VIEW (SHEET 6)


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI 29APR05	 TE Connectivity		NAME	
		CHK M. PERCHERKE 29APR05				
DIMENSIONS:		APVD M. PERCHERKE	PRODUCT SPEC	VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL		
INCHES						
		0 PLC ±"	108-1973	APPLICATION SPEC 114-13038		
		1 PLC ±.01				
		2 PLC ±.005				
		3 PLC ±.0020				
		4 PLC ±.0020	114-13038	RESTRICTED TO		
		ANGLES ±.0020				
		FINISH #2	114-13038	114-13038		
MATERIAL		WEIGHT	SIZE		CAGE CODE	
3		4	A100779C=6450540		DRAWING NO	
					RESTRICTED TO	

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

K9	1.350	1.300	-	-	1.200	.625	-	1.650	.450	1P + 20S + 1P	6-6450540-6
	2.550	2.500	.250	.250	1.650	1.375	-	2.85	.450	4P + 8S + 4P	6-6450540-5
	1.350	1.300	-	-	1.200	.625	-	1.650	.450	1P + 20S + 1P	6-6450540-2
	-	3.300	.200	.200	2.200	1.625	-	3.650	.450	6P + 20S + 6P	6-6450540-1
	2.950	2.900	.250	.250	2.050	1.375	-	3.250	.450	4P + 24S + 4P	6-6450540-0
	2.050	2.000	.250	.250	1.650	.925	-	2.350	.450	2P + 24S + 2P	5-6450540-9
	2.050	2.000	.250	.250	1.400	1.125	-	2.350	.450	3P + 8S + 3P	5-6450540-5
	2.500	2.450	.250	.250	1.850	1.375	-	2.800	.450	4P + 16S + 3P	5-6450540-4
	2.950	2.900	.250	.250	2.050	1.375	-	3.250	.450	4P + 24S + 4P	5-6450540-3
	1.350	1.300	-	-	1.200	.675	-	1.650	.450	1P + 16S + 1P	5-6450540-2
	1.750	1.700	.250	.250	1.350	.875	-	2.050	.450	2P + 16S + 2P	5-6450540-1
	5.950	5.900	.250	.250	3.550	2.8750	-	6.250	.450	10P + 24S + 10P	5-6450540-0
	5.150	5.100	.250	.250	3.250	2.375	-	5.450	.450	8P + 32S + 8P	4-6450540-9
	1.250	1.200	-	-	1.100	.625	-	1.550	.450	1P + 16S + 1P	4-6450540-8
	2.150	2.100	.250	.250	1.500	1.175	-	2.450	.450	3P + 8S + 3P	4-6450540-7
	1.150	1.100	-	-	1.000	.675	-	1.450	.450	1P + 8S + 1P	4-6450540-6
	-	-	-	.200	-	-	-	2.820	.450	12HDP	4-6450540-5
	-	-	.200	.200	2.600	1.625	-	3.970	.450	6HDP + 36S + 7HDP	4-6450540-4
	2.65	2.60	.250	.250	2.250	1.625	-	2.950	.450	5P + 20S + 2P	(E)4-6450540-3
	-	-	-	.200	-	-	-	2.620	.450	11HDP	(E)4-6450540-2
	-	-	.200	.200	2.600	1.625	-	3.770	.450	6P + 36S + 6P	4-6450540-1
	-	-	.200	.200	4.500	3.425	-	7.470	.450	15P + 40S + 15P	4-6450540-0
	-	-	.200	.200	-	-	-	7.470	-	15P + 40S + 15P	(D)3-6450540-9
	4.650	4.600	.250	.250	3.250	1.875	-	4.950	.450	6P + 52S + 6P	(D)2-6450540-7
	1.950	1.900	-	-	1.550	.875	-	2.250	.450	2P + 24S + 2P	(D)2-6450540-5
	2.450	2.400	.250	.250	1.800	1.125	-	2.750	.450	3P + 24S + 3P	(D)2-6450540-0
	-	1.575	-	-	1.425	.700	-	1.925	.475	1P + 24S + 1P	(E)1-6450540-8
	-	5.450			3.075	2.425	-	5.800	.425	10P + 24S + 12P	1-6450540-4
	3.250	3.200	.200	.200	2.125	1.575	-	3.550	.425	6P + 20S + 6P	1-6450540-2
	-	2.850	.250	.250	2.000	1.125	-	3.200	.450	3P + 32S + 4P	1-6450540-1
	1.950	1.900	.250	.250	1.550	.875	-	2.250	.450	2P + 24S + 2P	1-6450540-0
	-	1.400	.250	.250	1.300	.625	-	1.750	.450	1P + 24S + 1P	6450540-7
	-	2.400	.250	.250	2.050	1.375	-	2.750	.450	4P + 24S + 2P	6450540-6
	-	3.100	.250	.250	2.000	1.625	-	3.450	.450	5P + 12S + 5P	6450540-5
	-	3.400	.250	.250	2.050	1.375	-	3.750	.450	4P + 24S + 6P	6450540-4
	-	7.400	.250	.250	5.050	2.875	-	7.750	.450	10P + 84S + 10P	6450540-3
	-	4.000	.250	.250	2.650	1.675	2.225	4.350	.450	5P+24S+1M+6P	6450540-2
	-	1.575	-	-	1.425	.700	-	1.925	.475	1P + 24S + 1P	6450540-1
	D	U	T	S	R	W	M	L	K	DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.
TOLERANCES UNLESS OTHERWISE SPECIFIED:

DIMENSIONS:
INCHES



MATERIAL

0 PLC ±.1
1 PLC ±.01
2 PLC ±.005
3 PLC ±.005
4 PLC ±.0020
ANGLES ±.2°
FINISH

0 PLC ±.1
1 PLC ±.01
2 PLC ±.005
3 PLC ±.005
4 PLC ±.0020
ANGLES ±.2°
FINISH

DWN
R. GRZYBOWSKI
CHK
M. PERCHERKE
APVD
M. PERCHERKE

29APR05
29APR05

PRODUCT SPEC
108-1973
APPLICATION SPEC
114-13038
WEIGHT
-

CUSTOMER DRAWING

NAME
VERTICAL RECEPTACLE ASSEMBLY
WITH GUIDES
MULTI-BEAM XL

SIZE
A1

CAGE CODE
100779

DRAWING NO
6450540

RESTRICTED TO
-

SCALE
2:1



SHEET
2

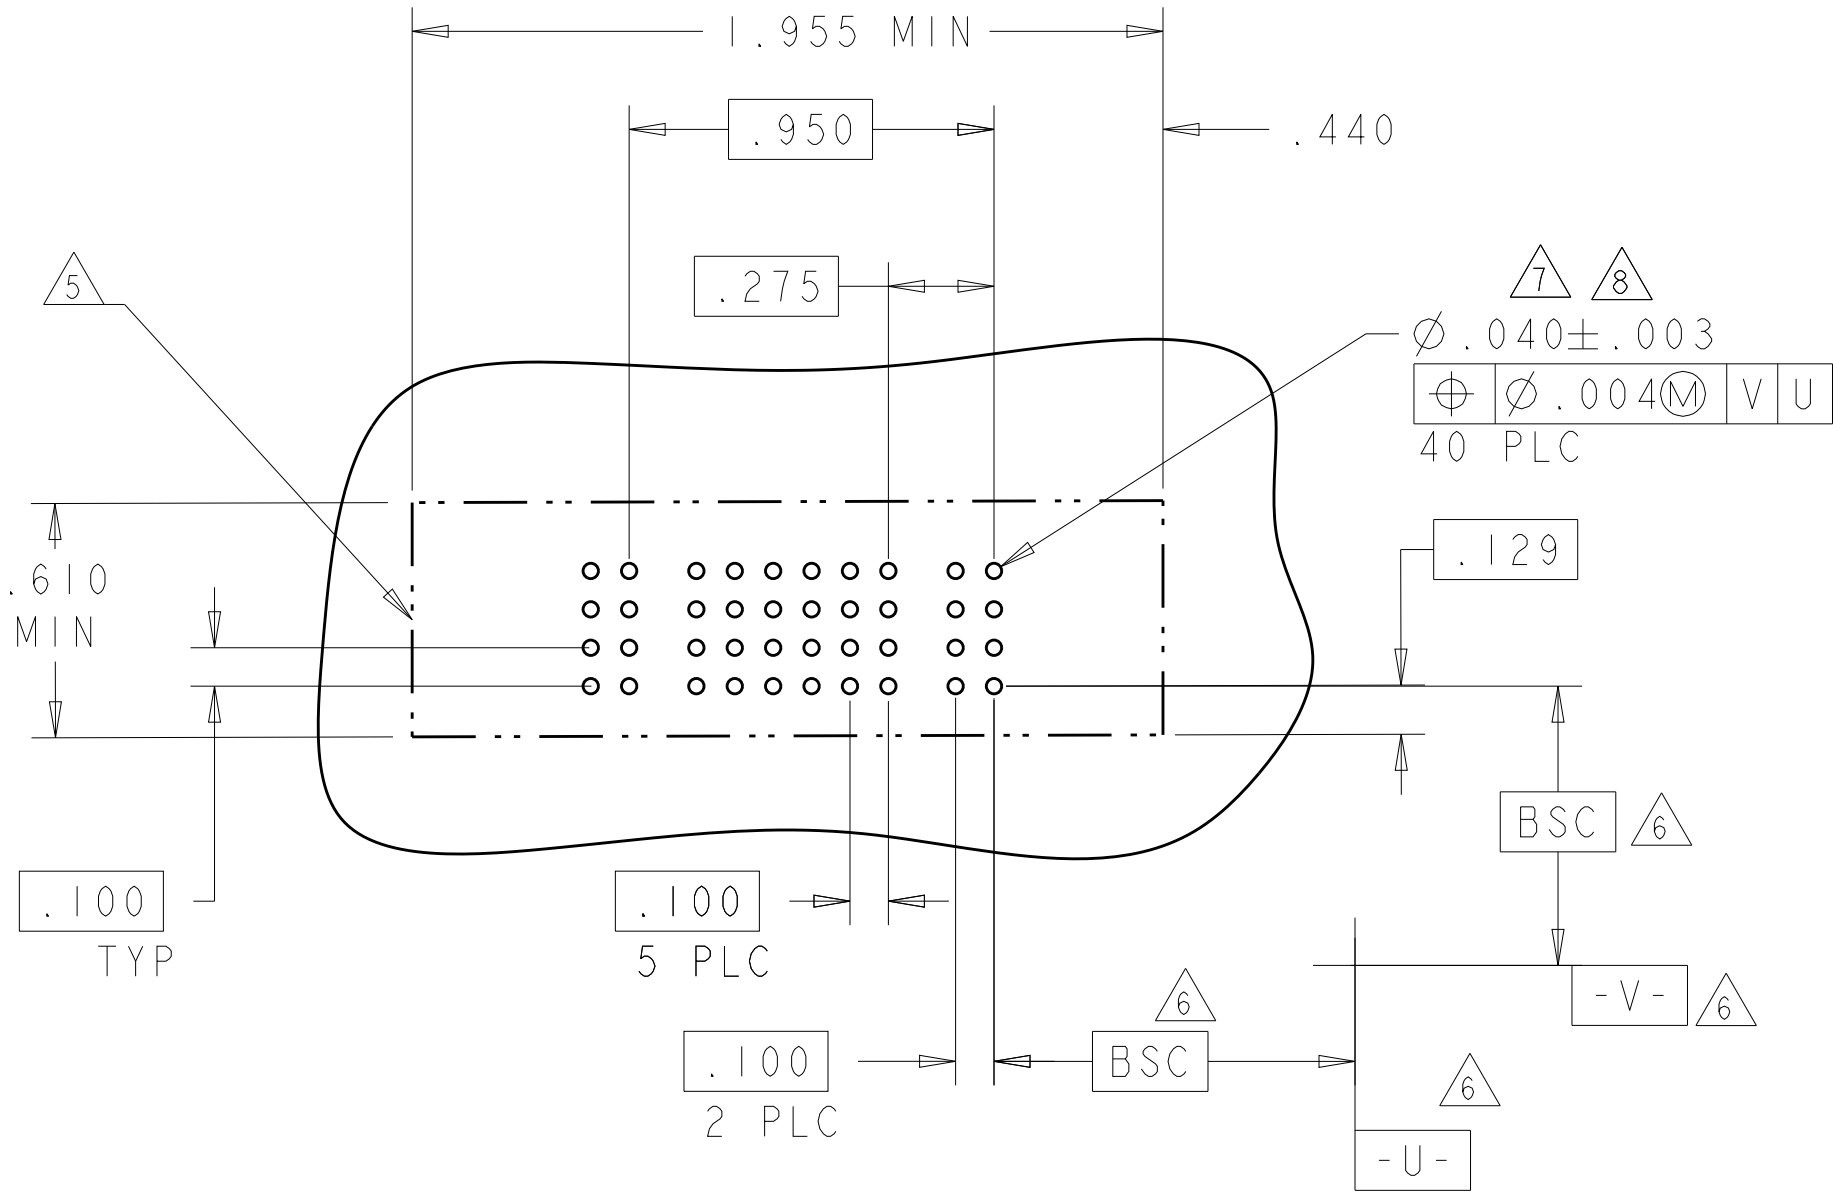
OF
19

REV
K9

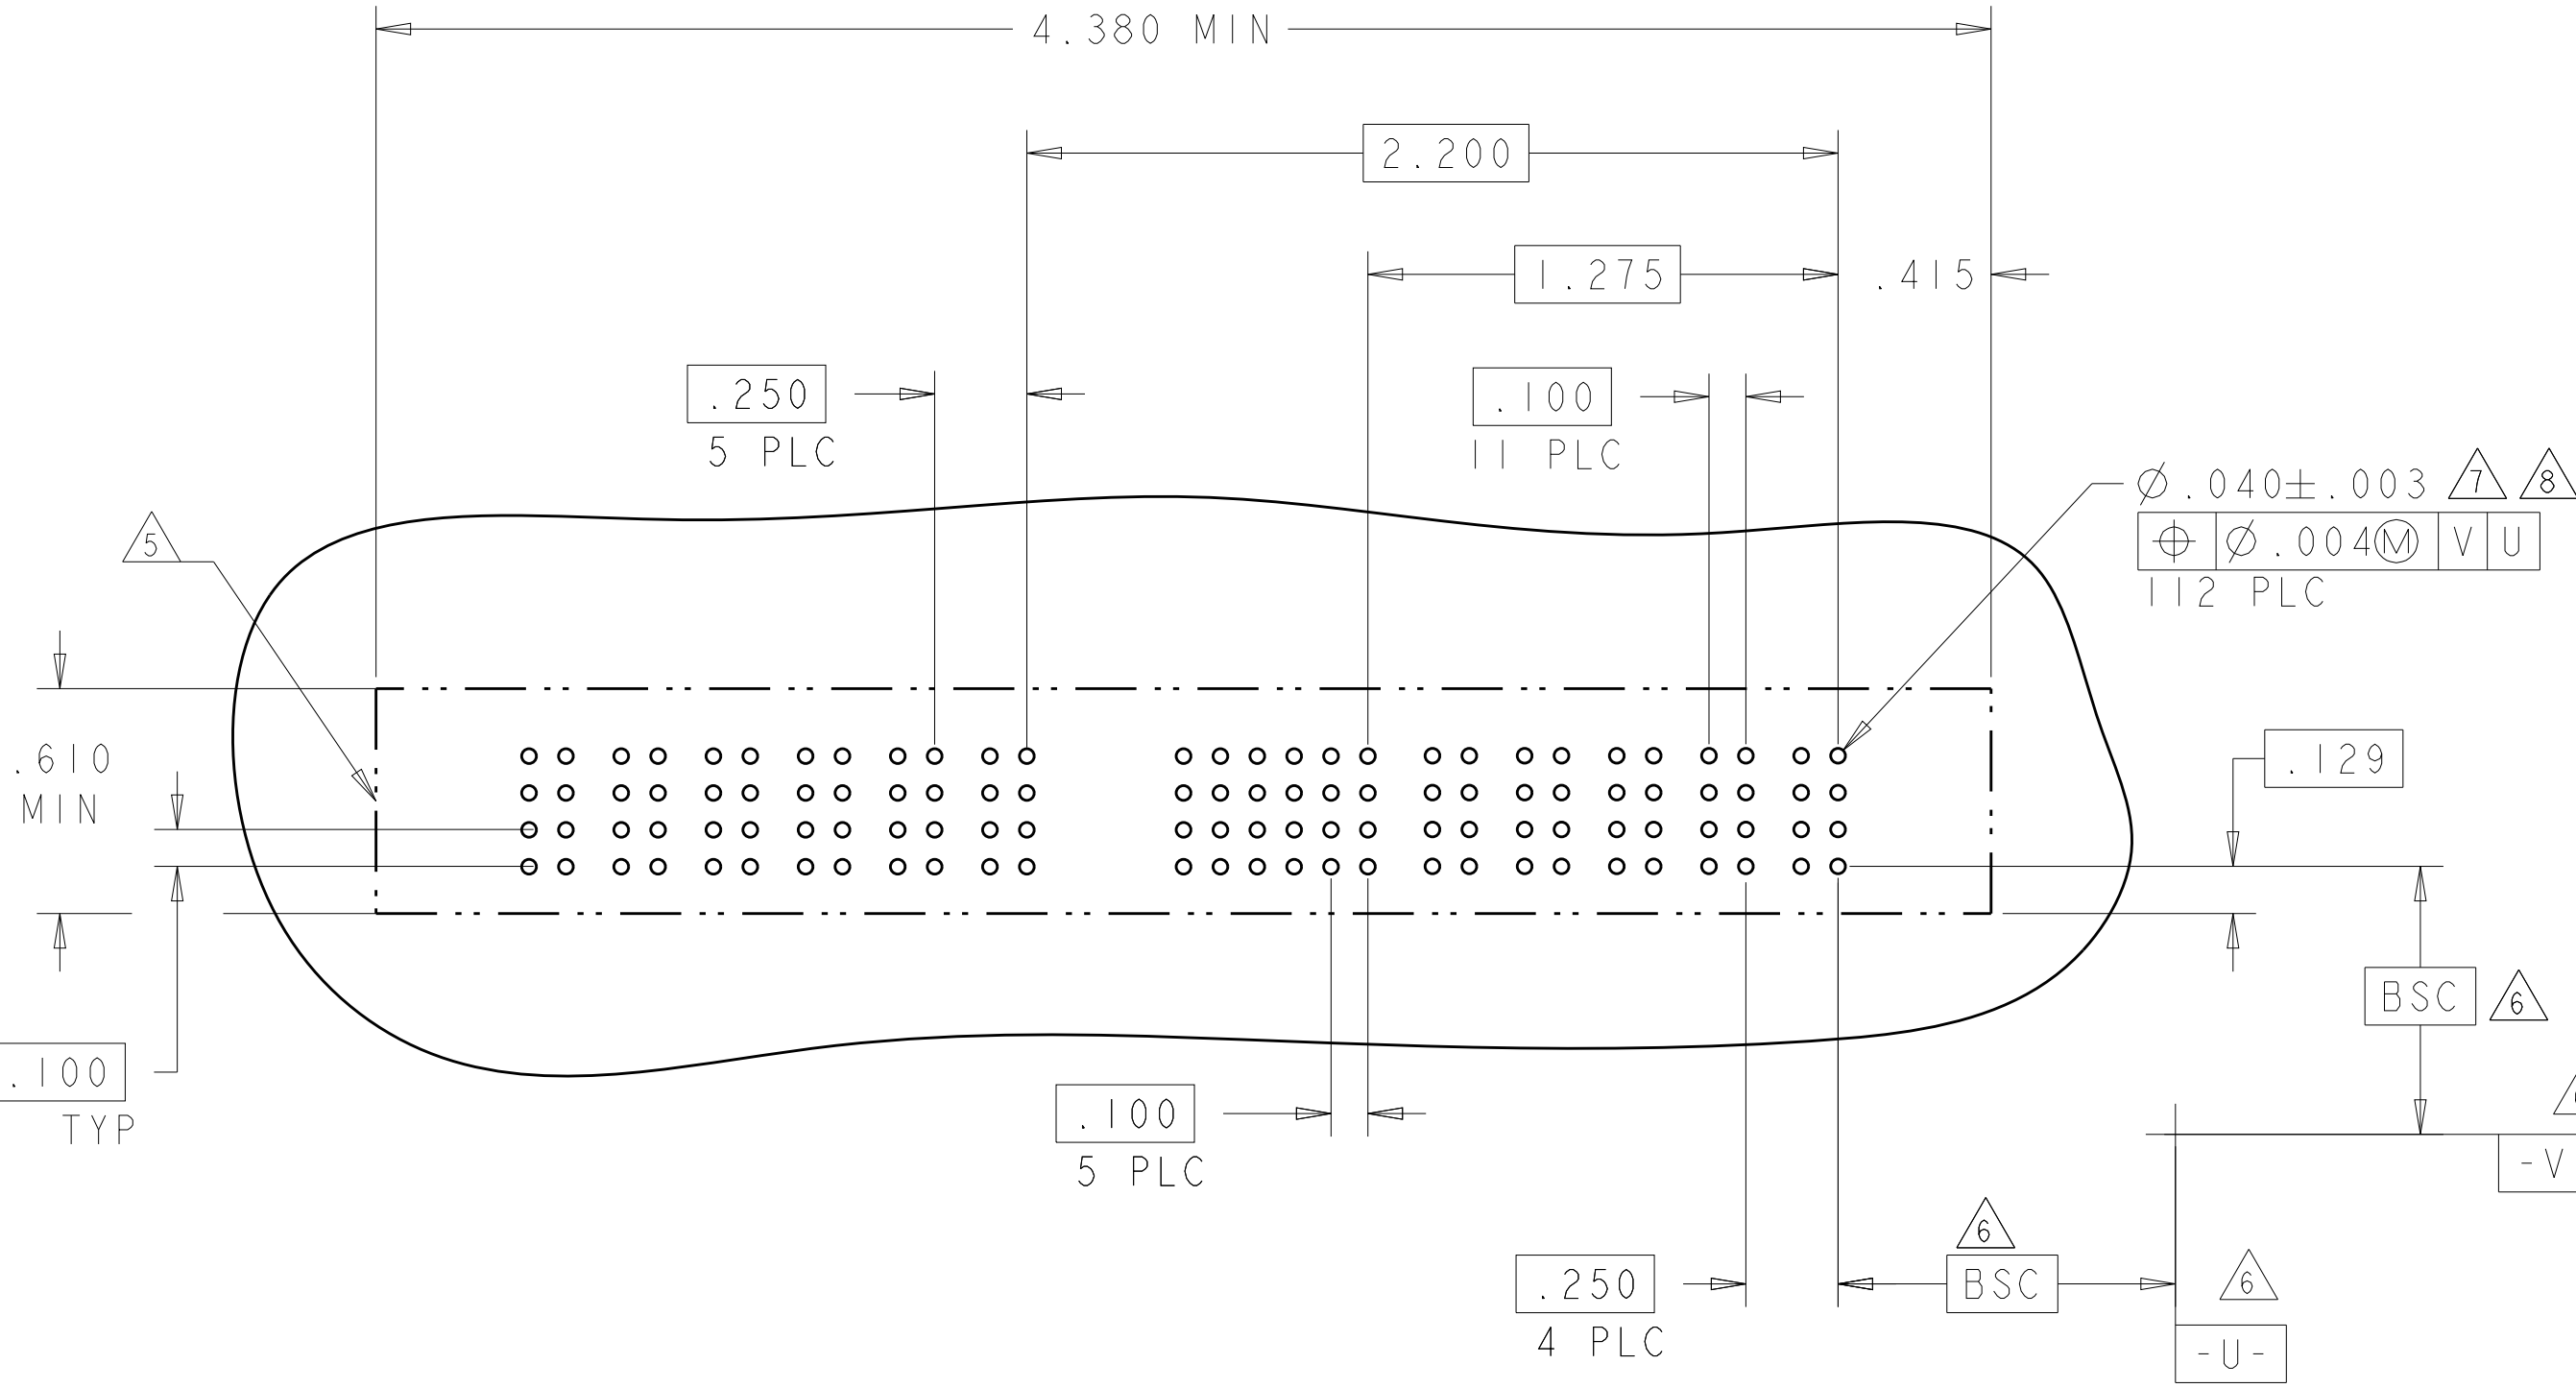
ITE Connectivity



LOC		DIST		REVISIONS				
ES	00	P	LTR	DESCRIPTION		DATE	DWN	APVD
		-		SEE SHEET 1		-	-	-

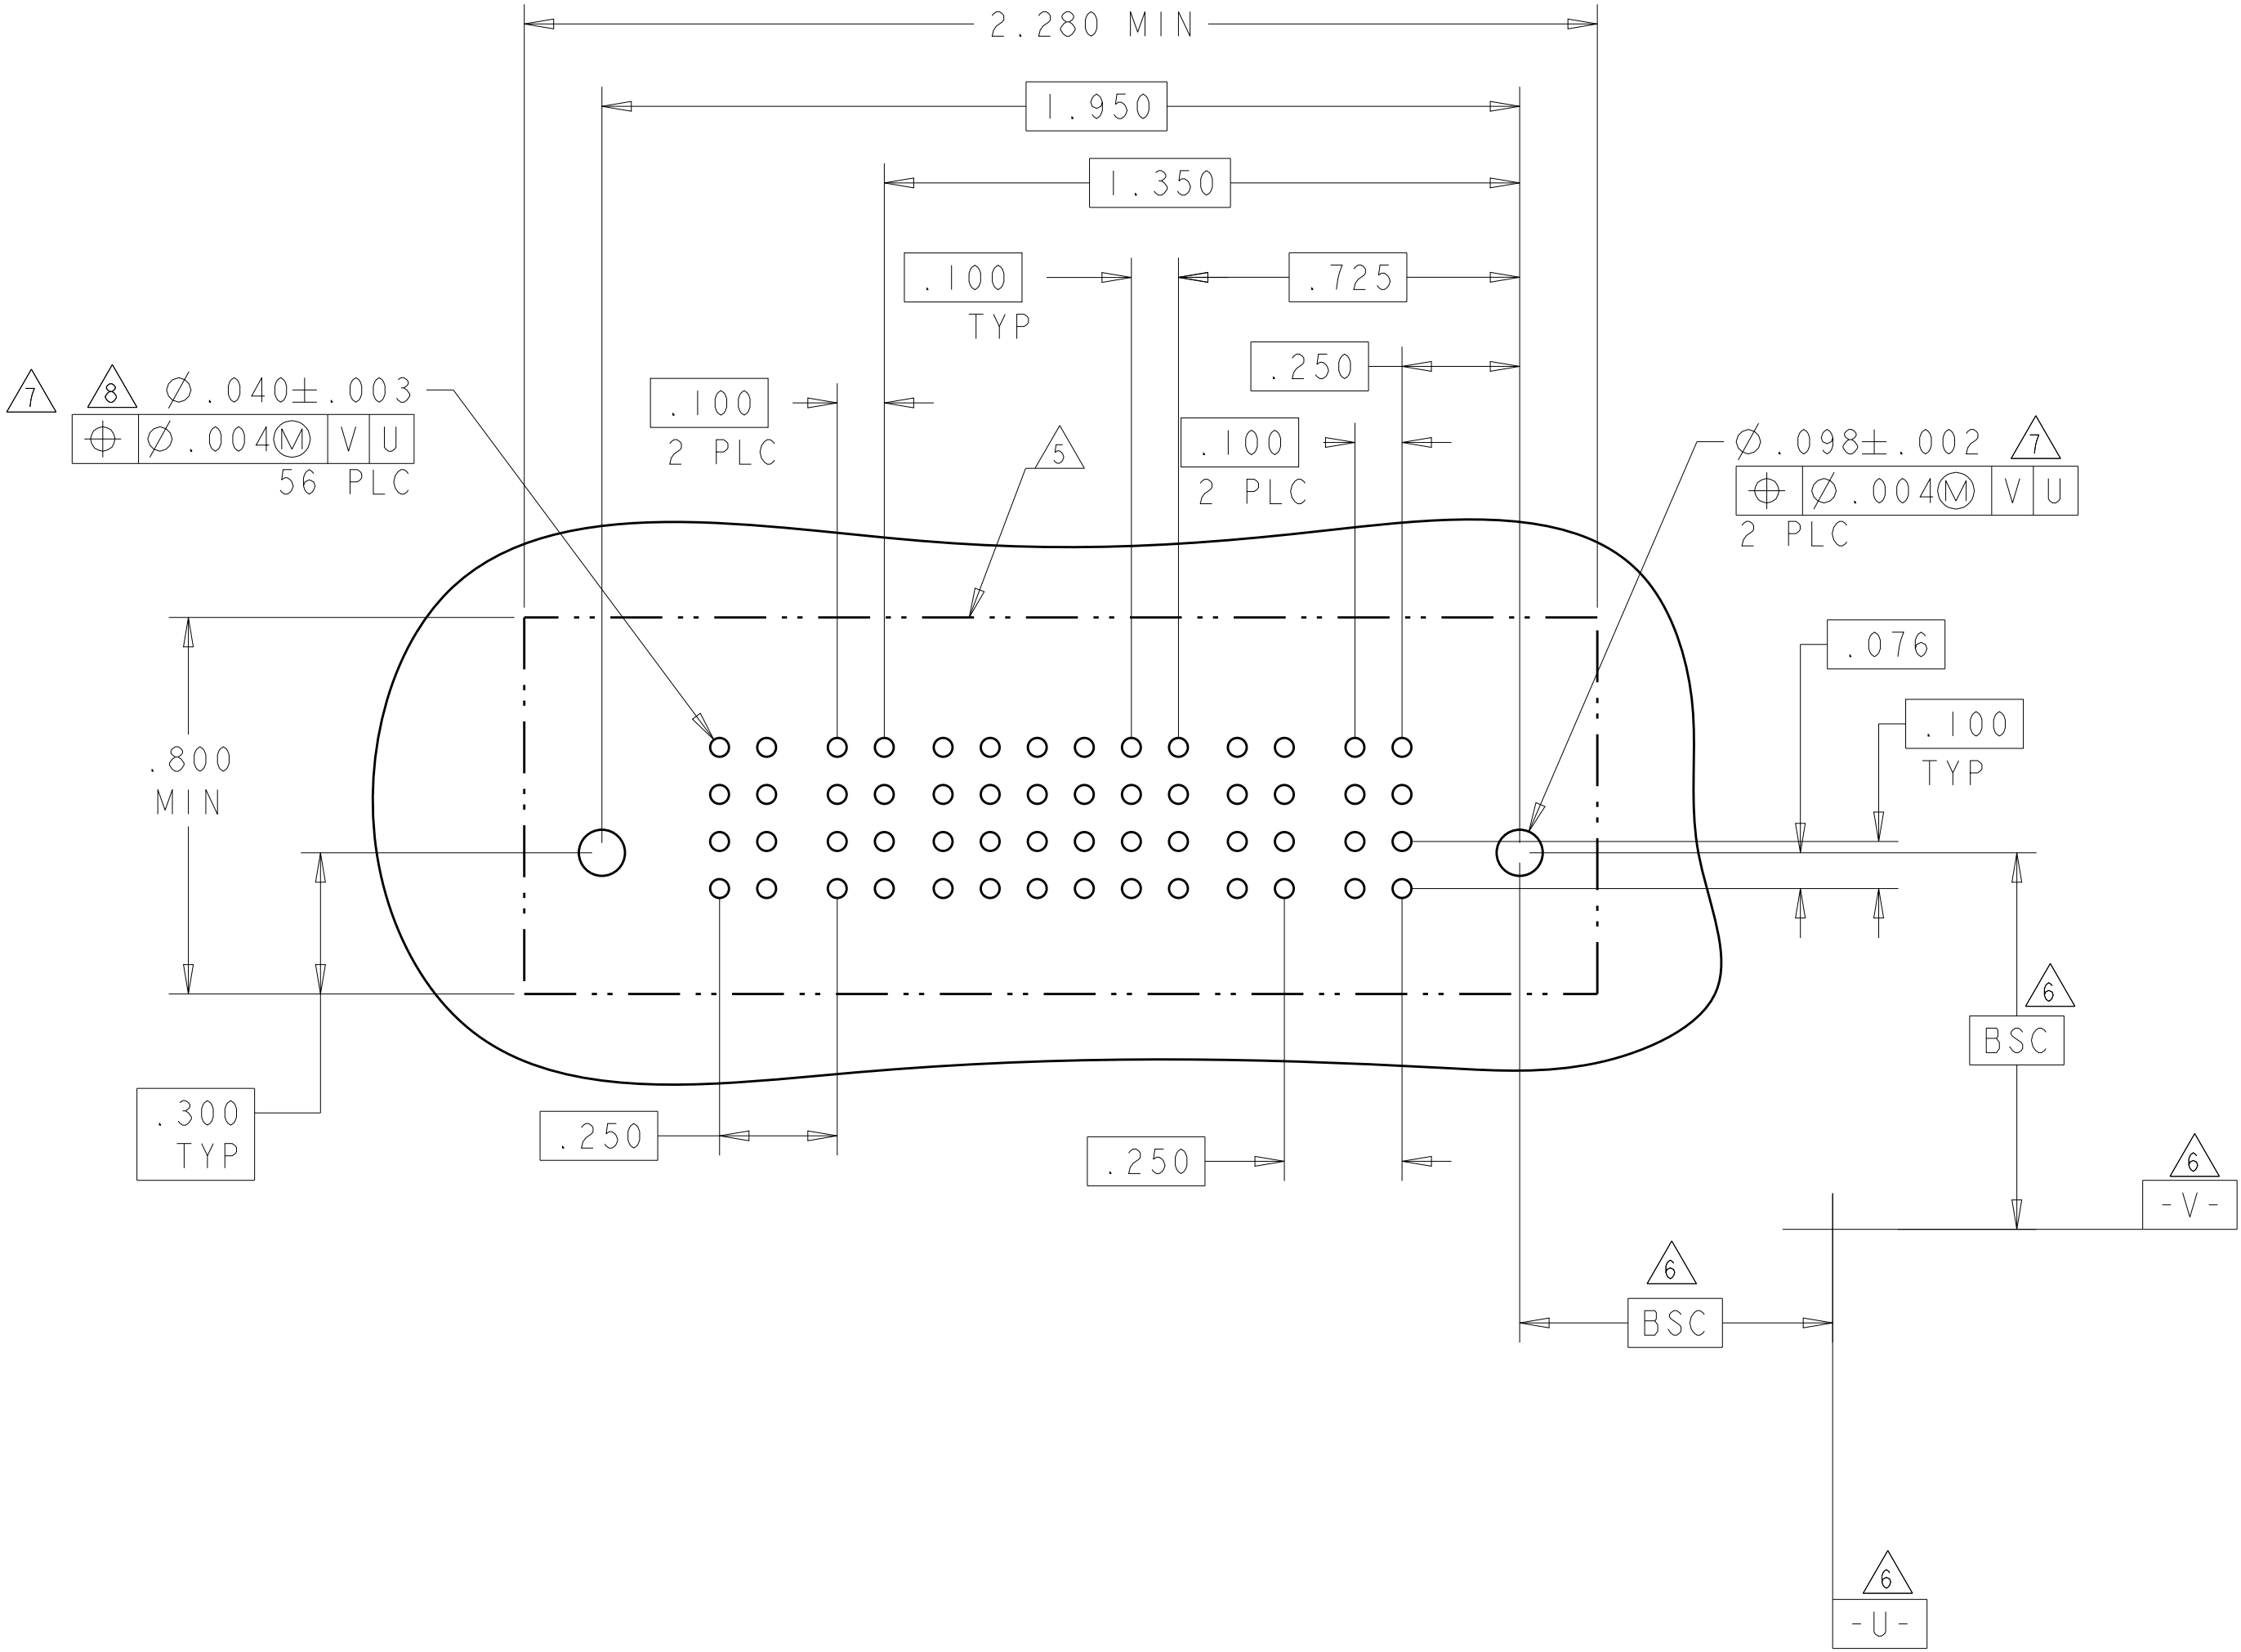
PART NUMBER	ROWS		POWER	SIGNAL							POWER	
			P2	6	5	4	3	2	1	PI		
6450540-1	D C B A		GP	AP	AP	AP	AP	AP	AP	AP	GP	
				AP	AP	AP	AP	AP	AP	AP		
				AP	AP	AP	AP	AP	AP	AP		
				AP	AP	AP	AP	AP	AP	AP		
IP + 24S + IP												



PART NUMBER	ROWS		POWER							SIGNAL						POWER						
			P11	P10	P9	P8	P7	P6		MI	6	5	4	3	2	1	P5	P4	P3	P2		P1
6450540-2	D C B A																					
																						
																						
																						
5P + 24S + 1M + 6P																						



PART NUMBER	ROWS		POWER		SIGNAL							POWER		
			P4	P3	6	5	4	3	2	1	P2	P1		
2-6450540-5	D C B A			AP	AP	AP	AP	AP	AP	AP				
				AP	AP	AP	AP	AP	AP	AP				AP
				AP	AP	AP	AP	AP	AP	AP				AP
				AP	AP	AP	AP	AP	AP	AP				AP
2P + 24S + 2P														



VS	STD POWER PRESSFIT CONTACT .115 LG
VP	MFBL POWER PRESSFIT CONTACT .115 LG
GS	STD POWER PRESSFIT CONTACT .135 LG
GP	MFBL POWER PRESSFIT CONTACT .135 LG
P	SIGNAL PRESSFIT CONTACT .115 LG
AP	SIGNAL PRESSFIT CONTACT .135 LG
CODE	TAIL LENGTH

CONTACT TABLE

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN R.GRZYBOWSKI 29APR05
CHK M.PERCHEKKE 29APR05
APVD M.PERCHEKKE

DIMENSIONS:
INCHES

0 PLC ±
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.002
ANGLES ±2°
FINISH

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

PRODUCT SPEC
108-1973
APPLICATION SPEC
114-13038
WEIGHT
CUSTOMER DRAWING

NAME
VERTICAL RECEPTACLE ASSEMBLY
WITH GUIDES
MULTI-BEAM XL

SIZE
A100779

CAGE CODE
C=6450540


DRAWING NO
3











RESTRICTED TO
K9

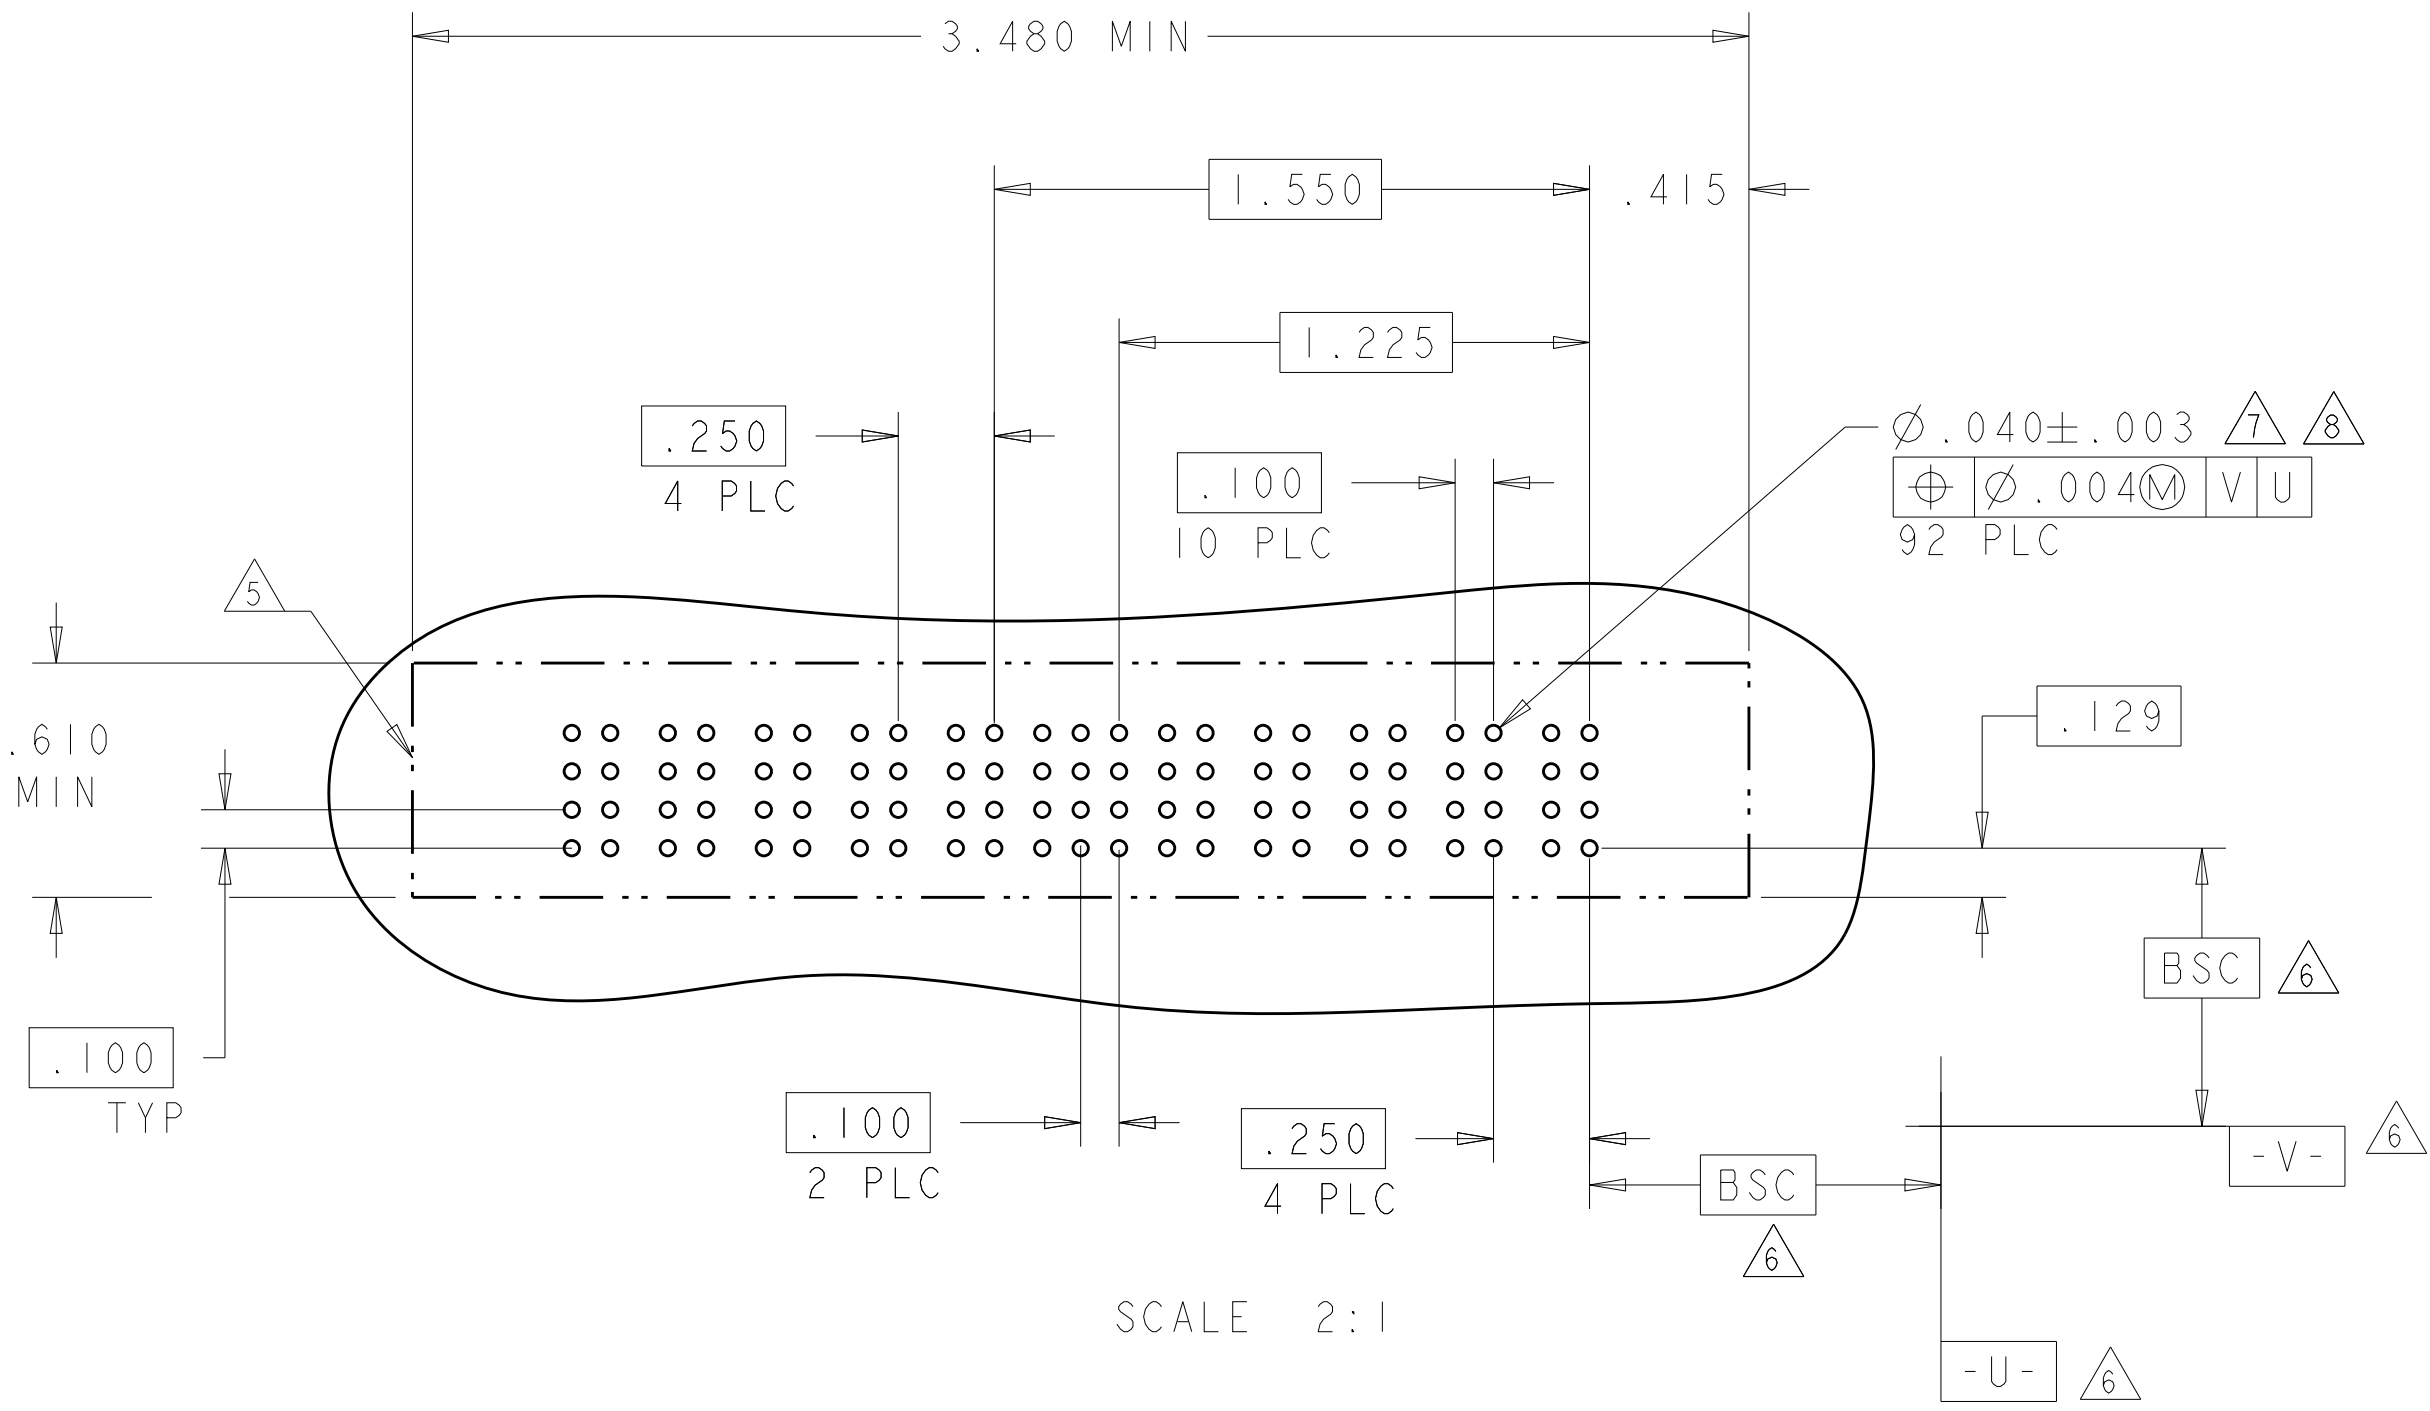
TE Connectivity

SCALE 2:1
SHEET 3 OF 19
REV K9

[illegible]

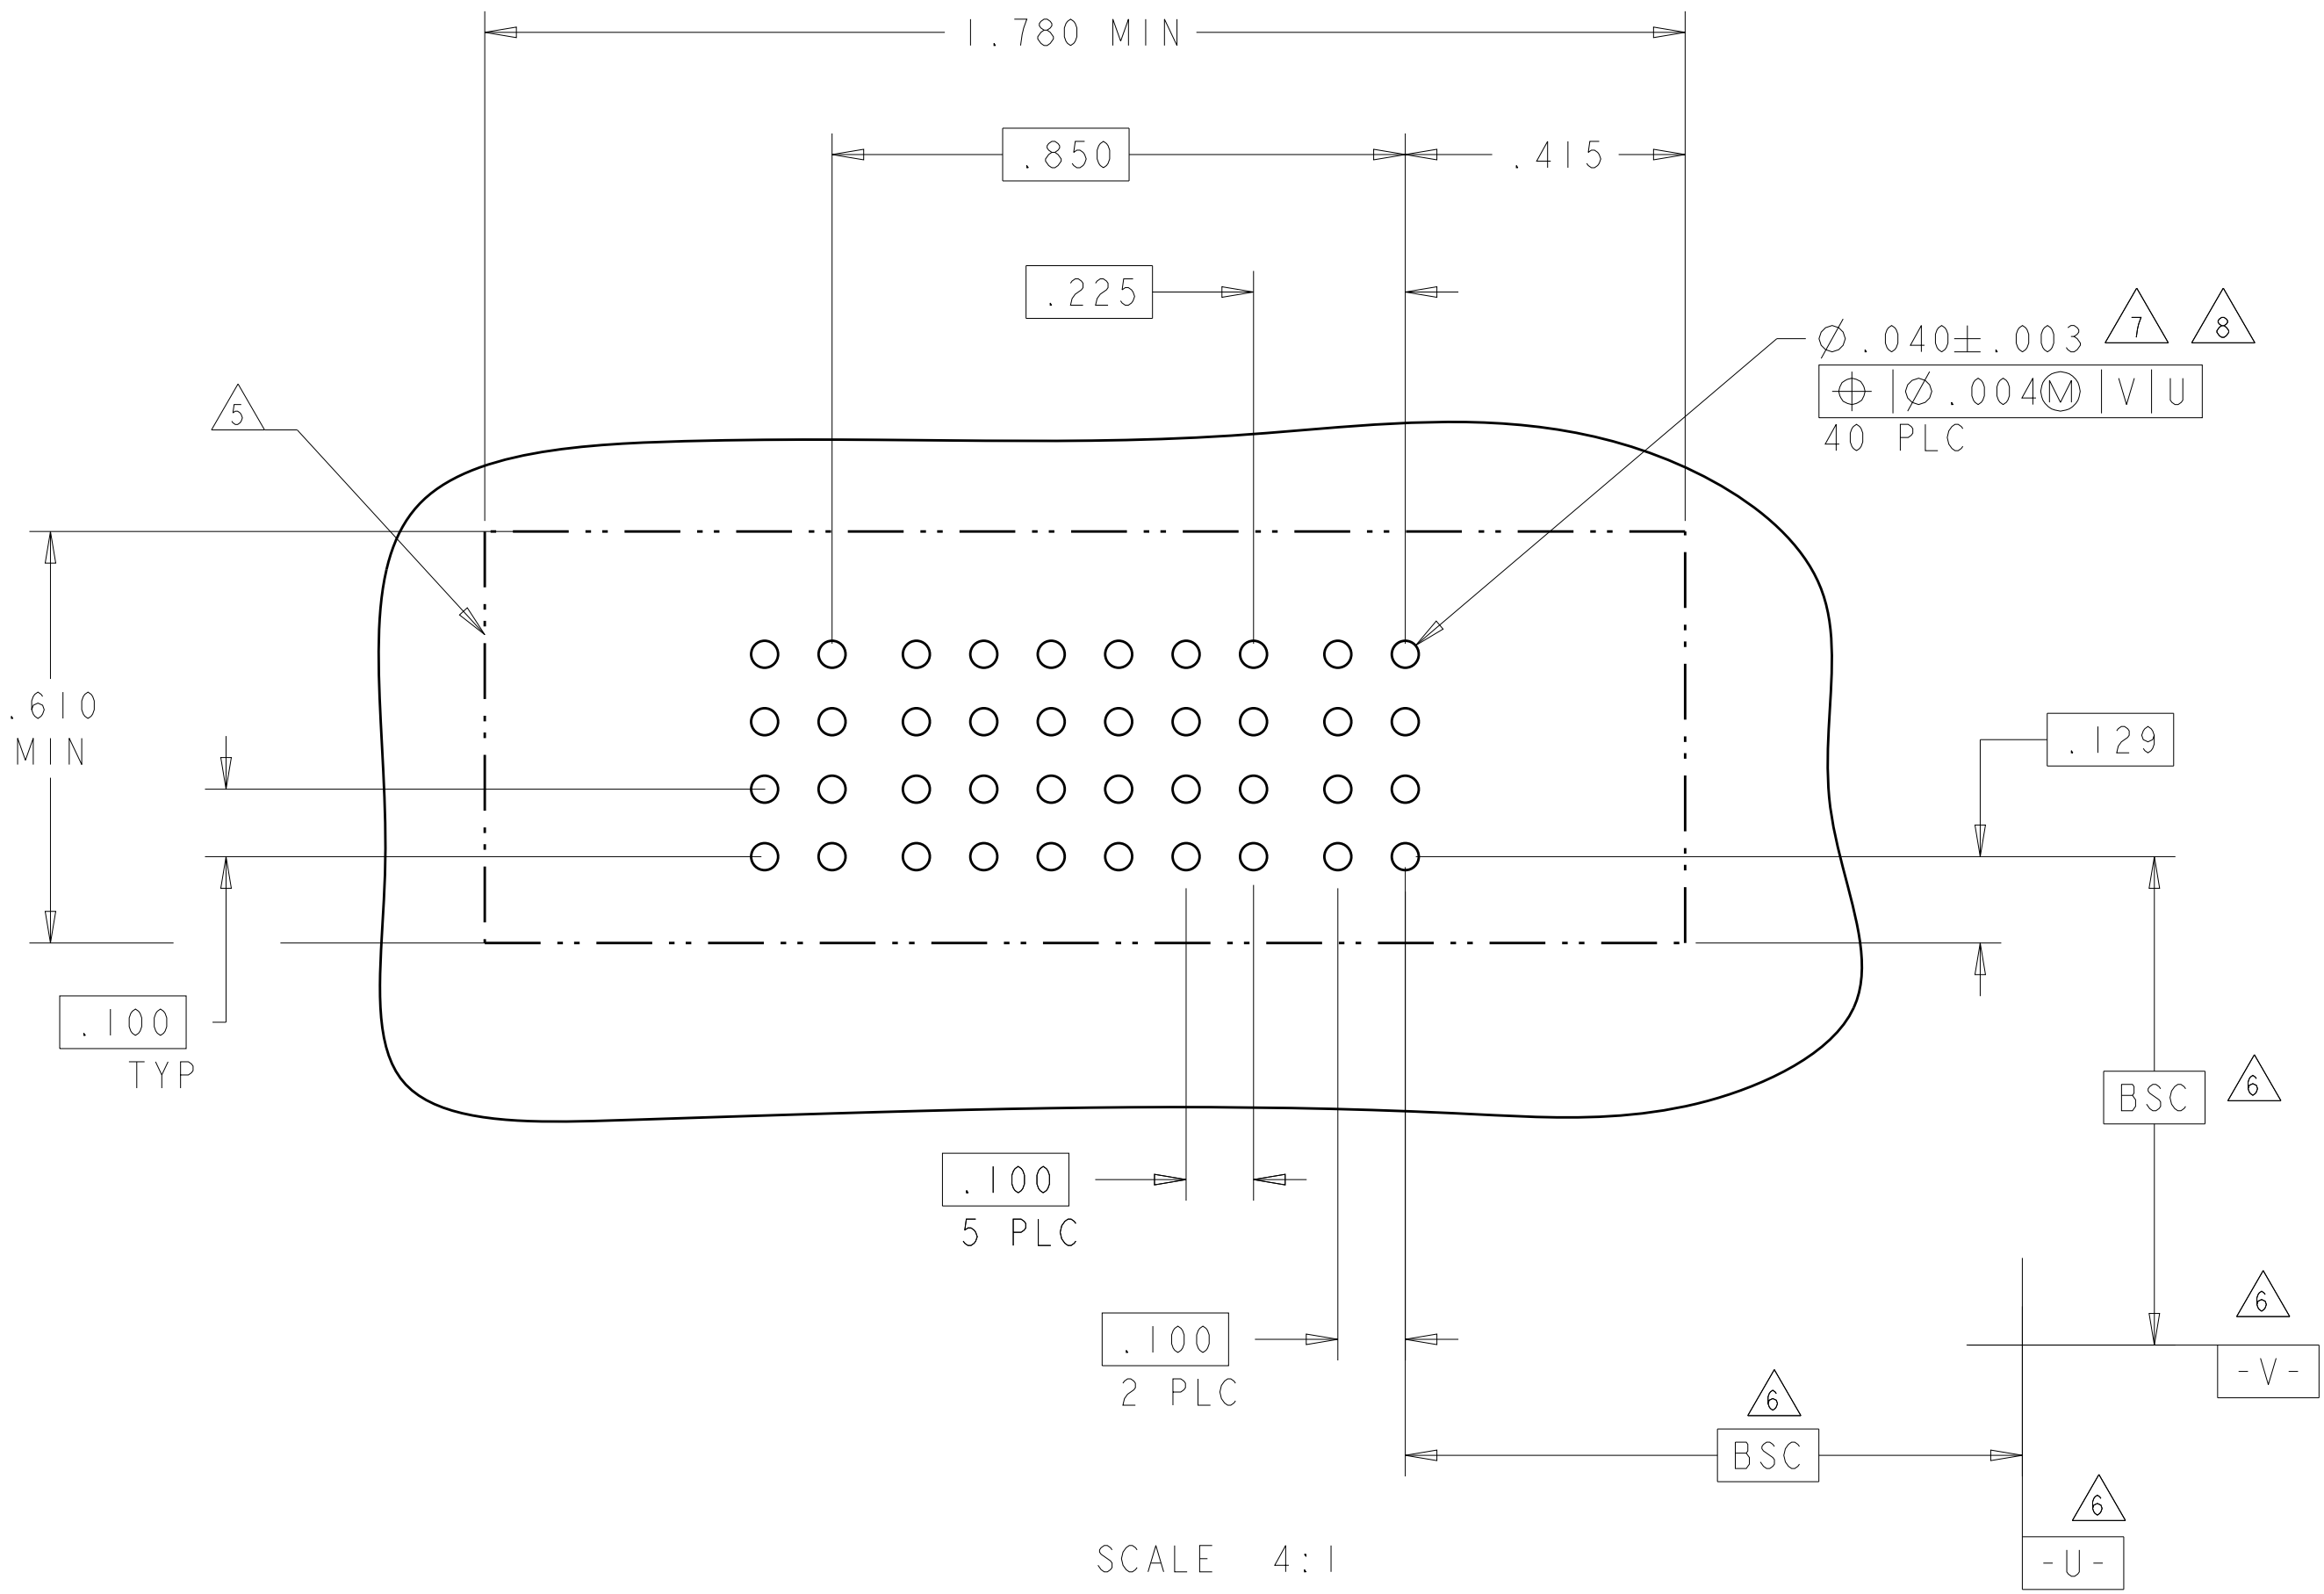
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI 29APR05		 TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 1 PLC ±. 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±°		CHN M. PERCHERKE 29APR05	
		APVD M. PERCHERKE PRODUCT SPEC 108-1973 APPLICATION SPEC 114-13038		NAME VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL	
MATERIAL		FINISH		SIZE A 100779	
WEIGHT		-		CASE CODE C-6450540	
CUSTOMER DRAWING		SCALE		DRAWING NO 2:1	
SHEET		4		OF 19	
REV		K		9	

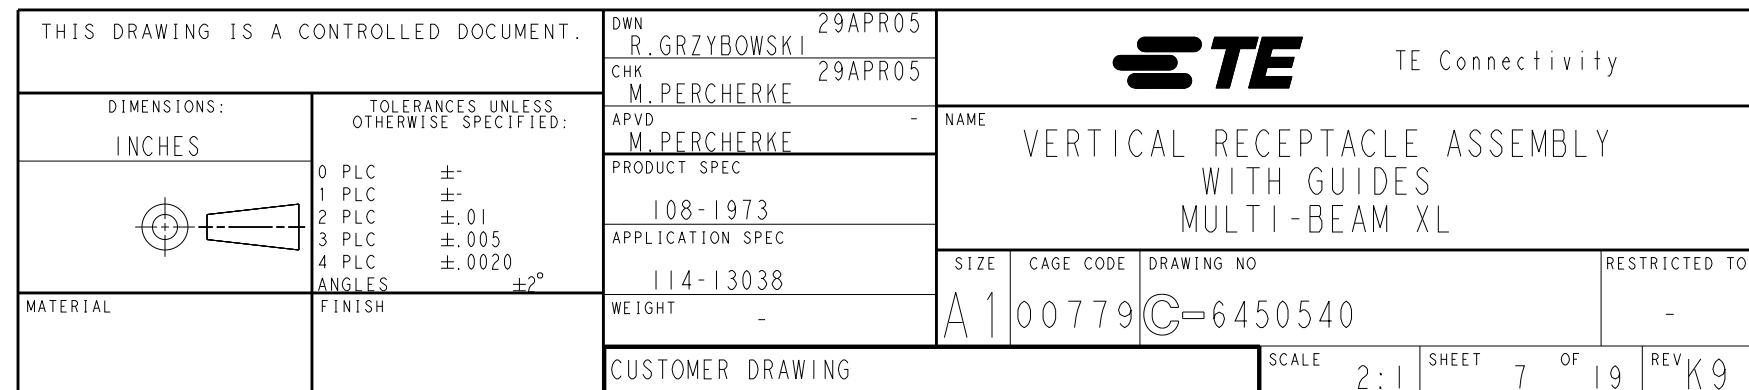
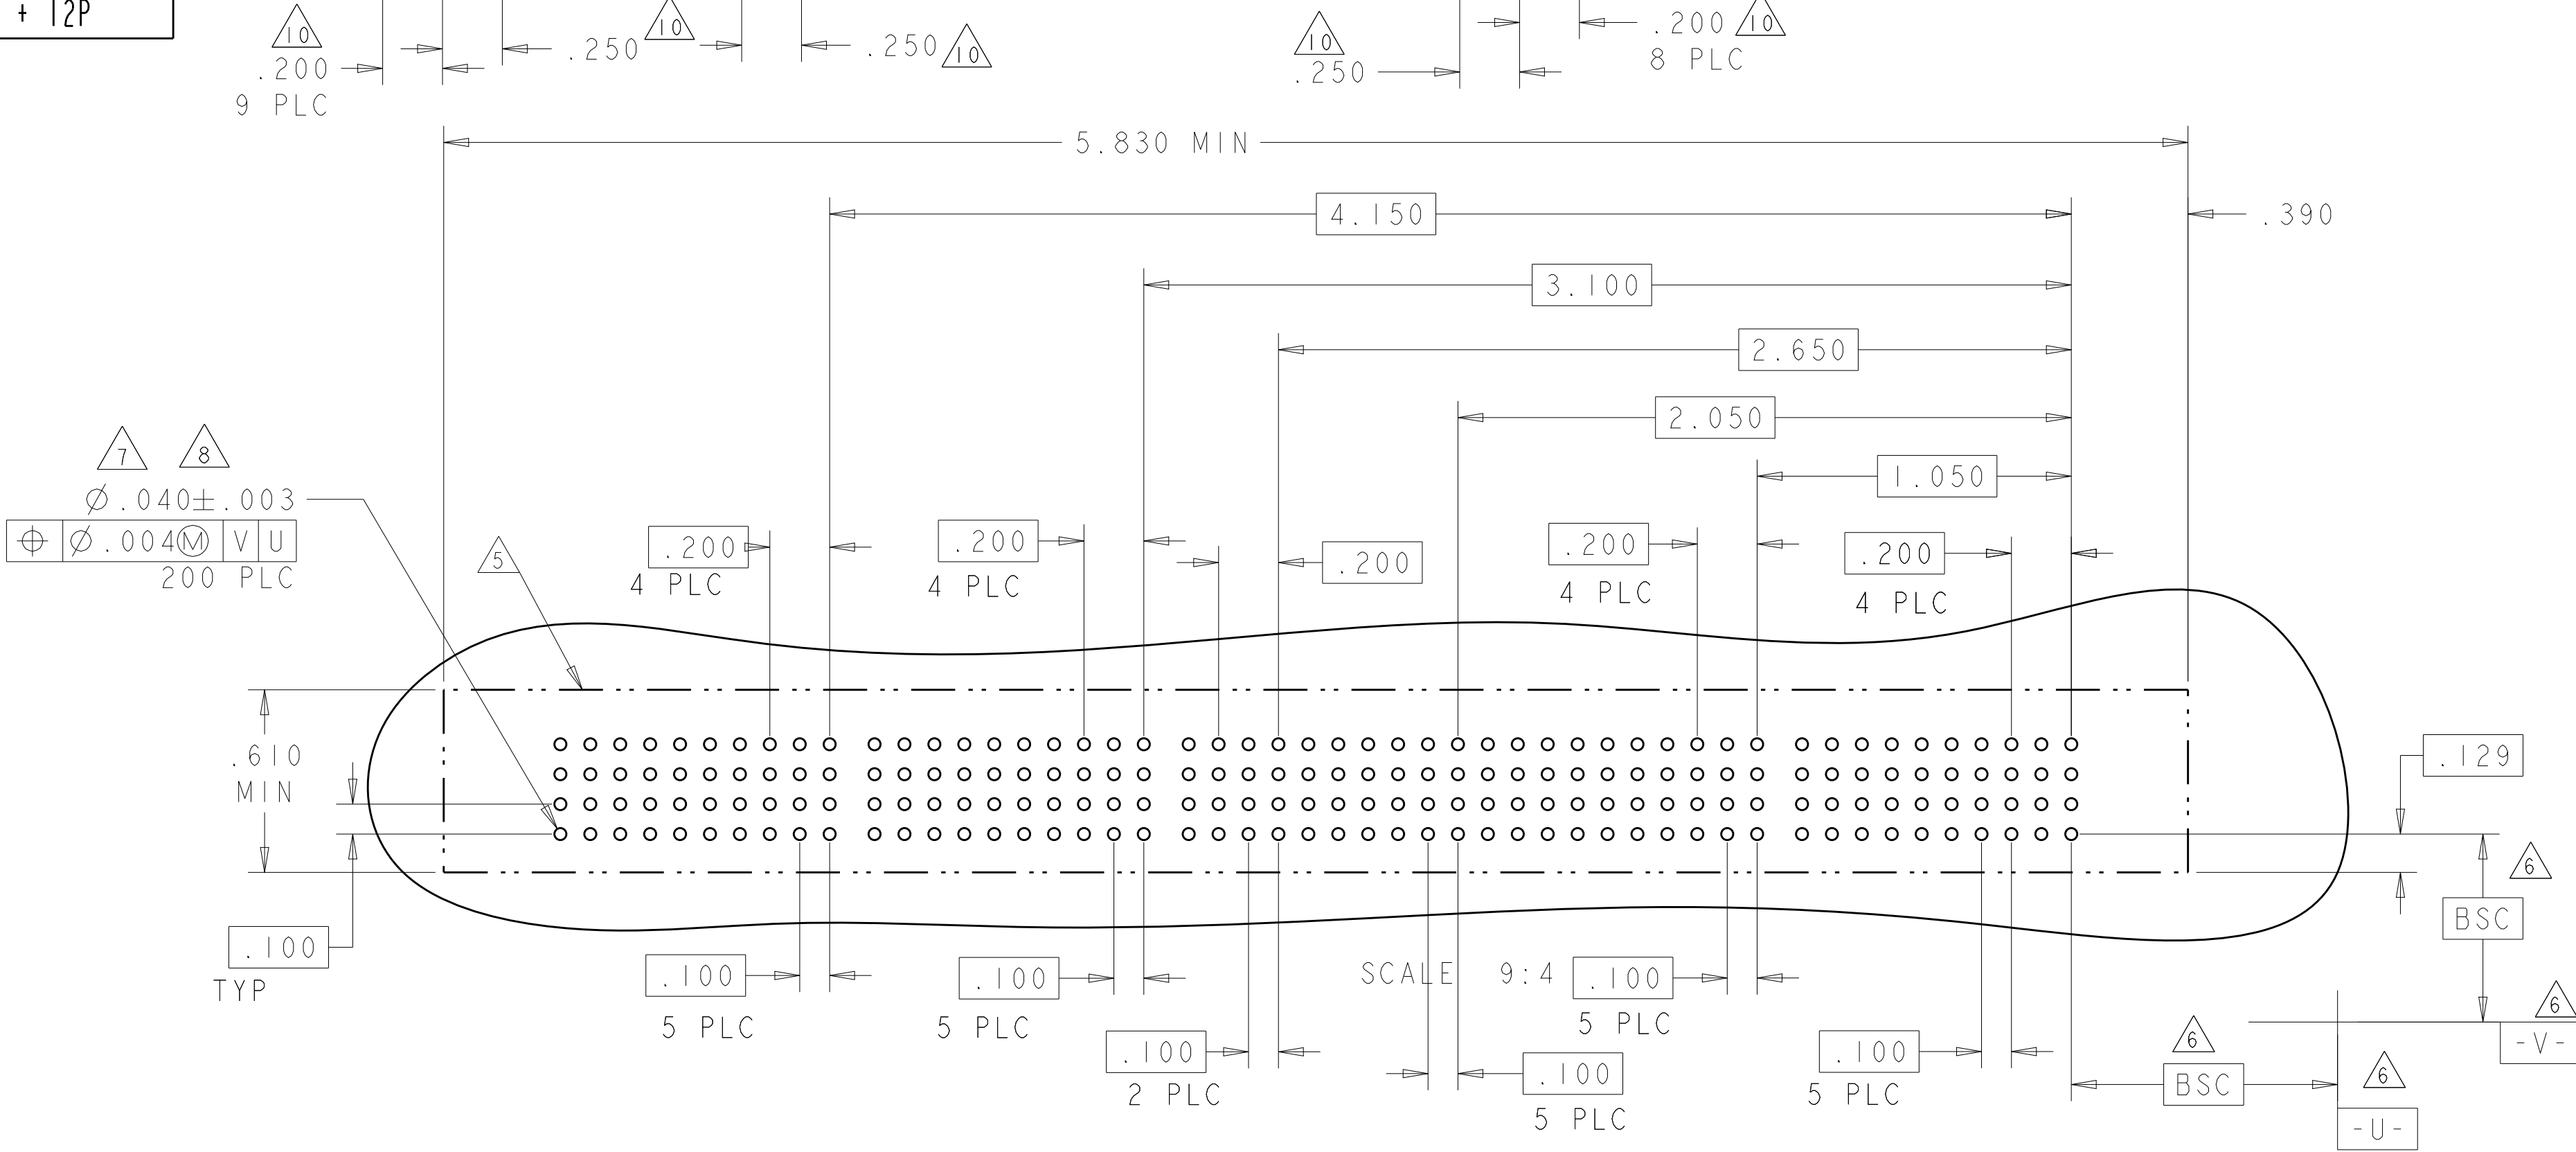
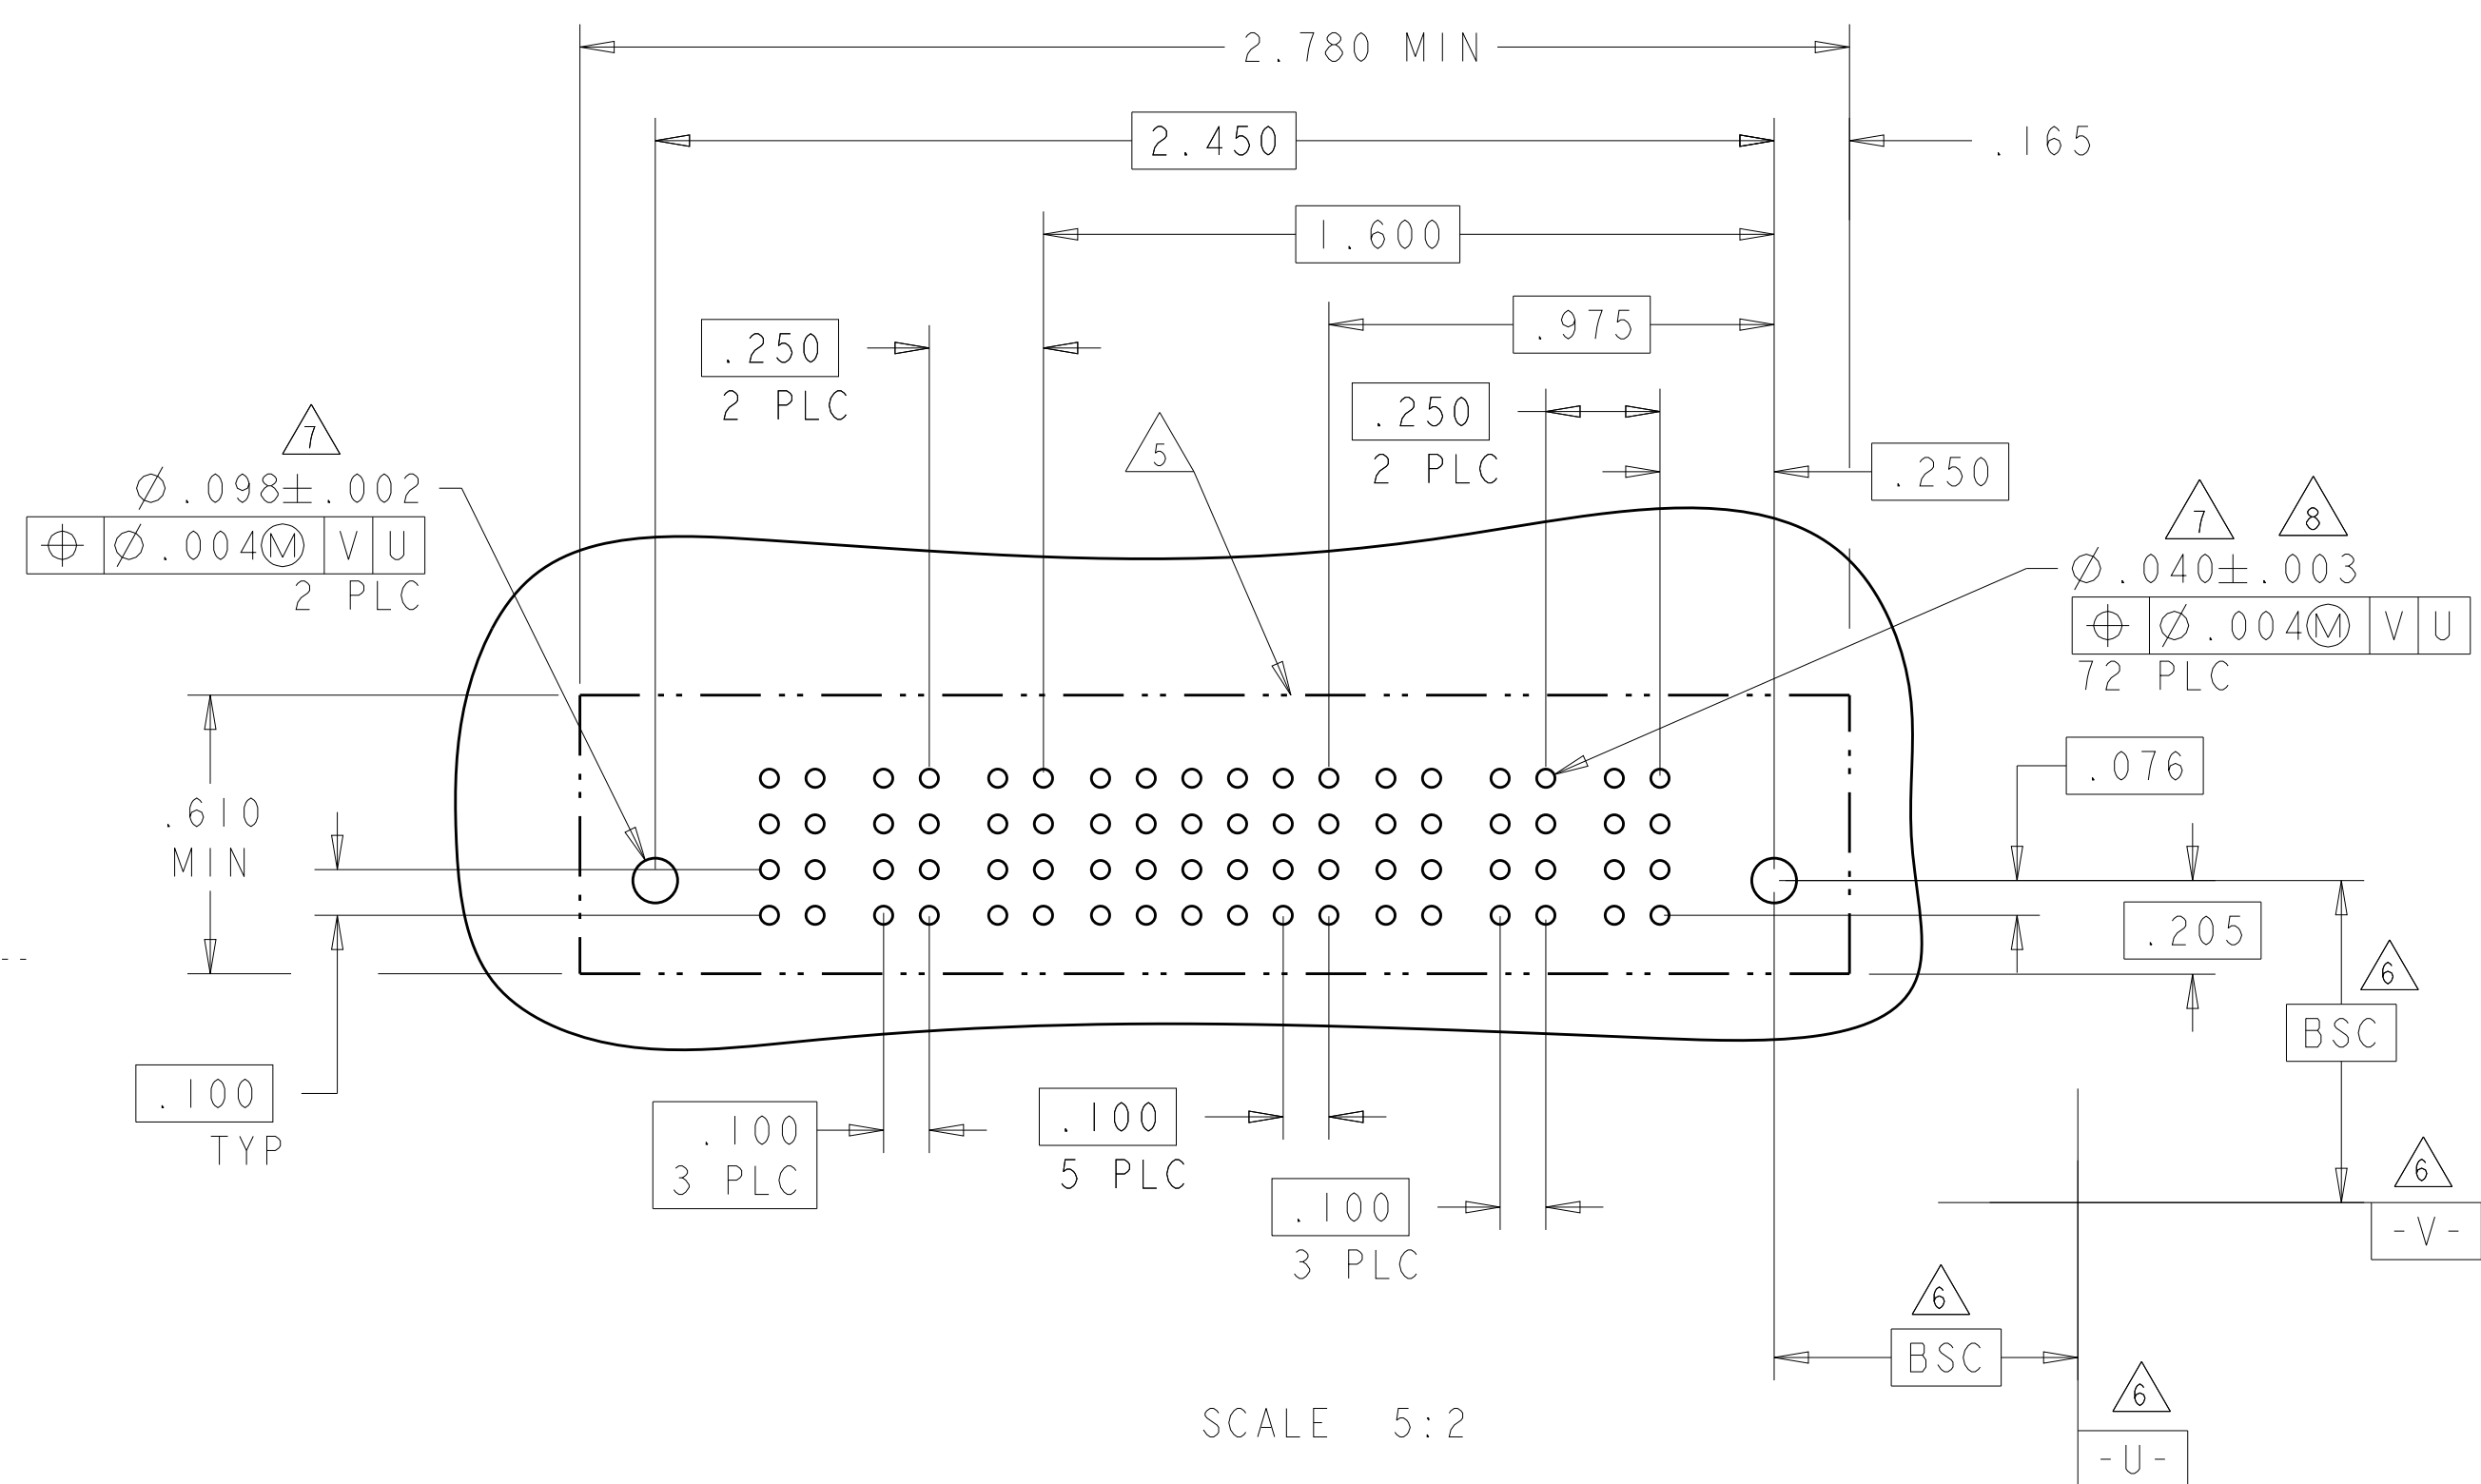
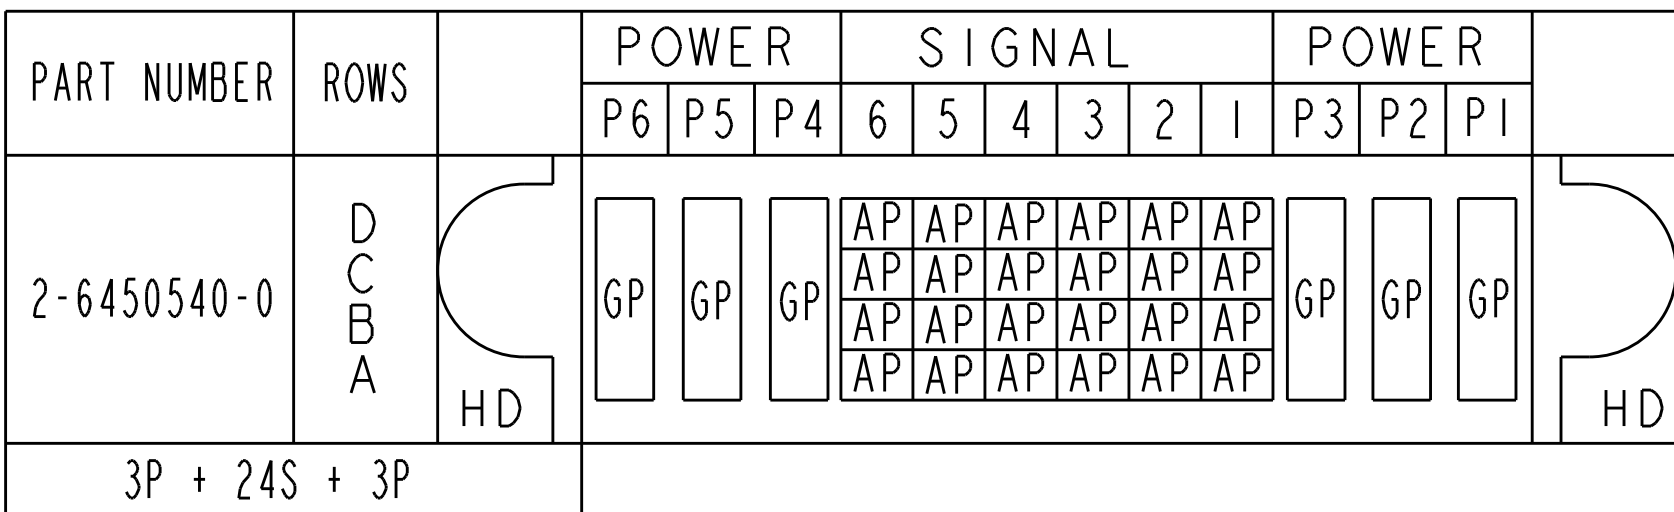
PART NUMBER	ROWS		POWER					SIGNAL			POWER					
			P10	P9	P8	P7	P6	3	2	1	P5	P4	P3	P2	P1	
6450540-5	D C B A															
5P + 12S + 5P																



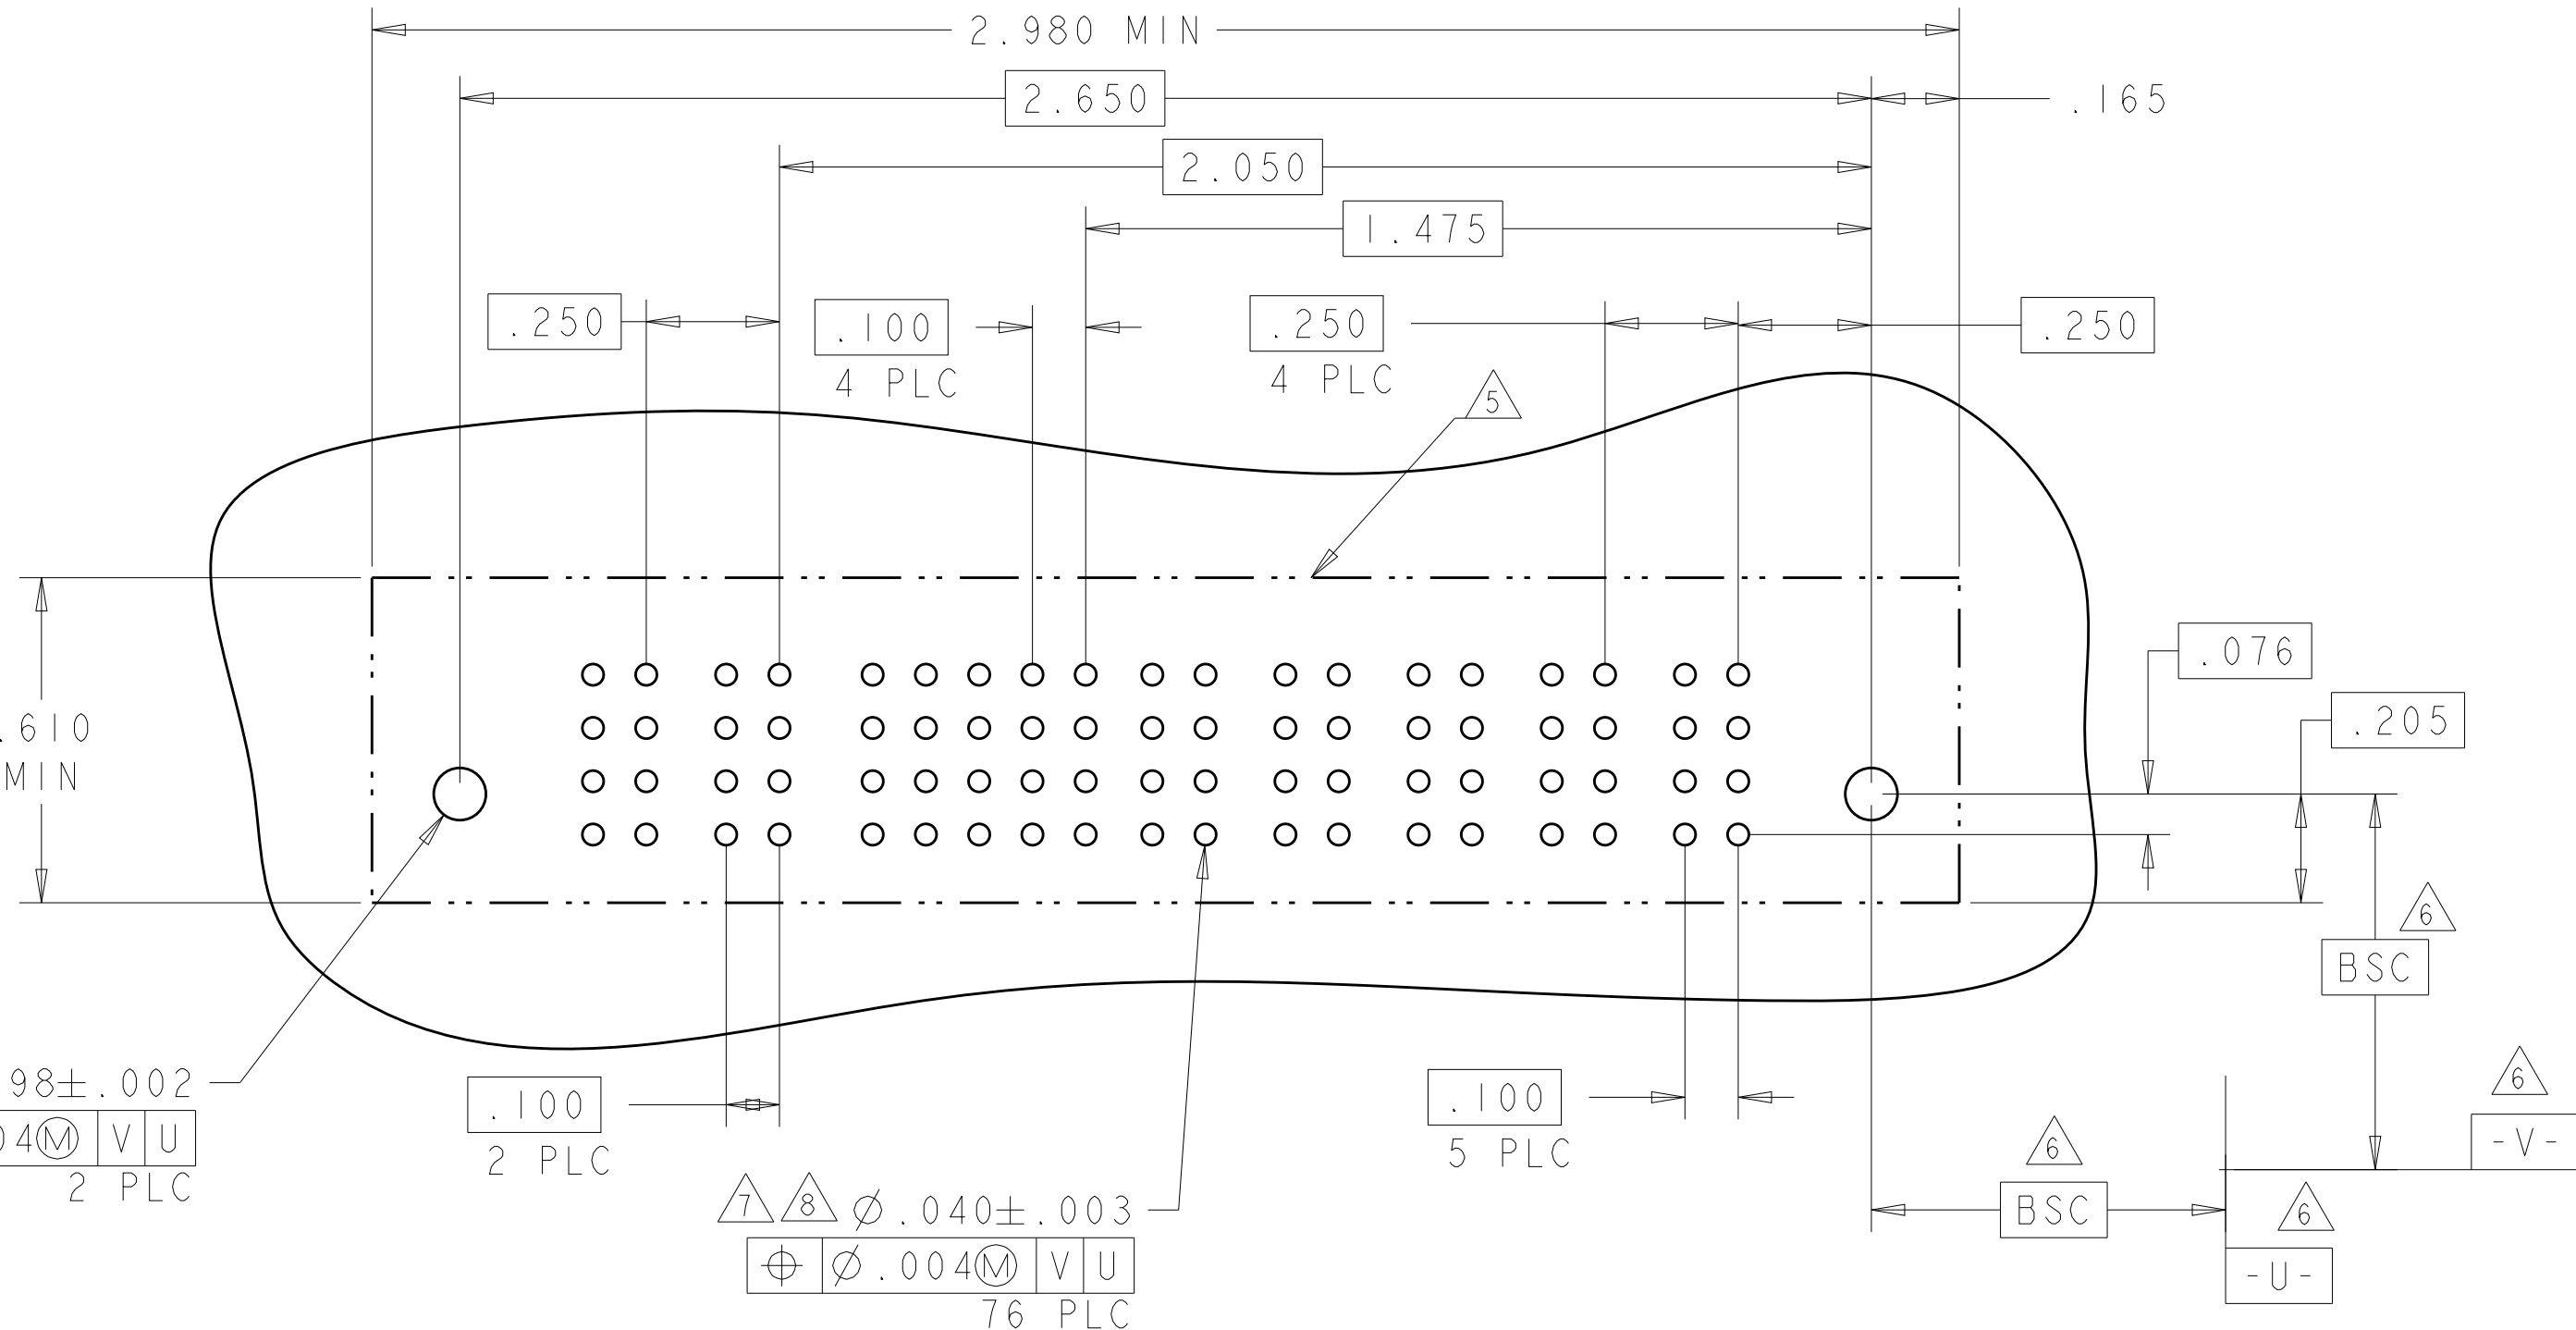
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI 29APR05		 TE Connectivity		
DIMENSIONS: INCHES		CHW M. PERCHERKE 29APR05				
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL		
	1 P/LC ±		APVD M. PERCHERKE -			
	1 P/LC ±		PRODUCT SPEC			
	2 P/LC ±.01		108-1973			
	3 P/LC ±.005		APPLICATION SPEC			
4 P/LC ±.0020		114-13038	SIZE	CAGE CODE	DRAWING NO.	RESTRICTED TO
ANGLES ±°		WEIGHT -	A	00779	©=6450540	-
MATERIAL	FINISH	CUSTOMER DRAWING	SCALE 2:1		SHEET 5 OF 19	REV K9

PART NUMBER	ROWS		POWER	SIGNAL							POWER	
			P2	6	5	4	3	2	1	P1		
6450540-7	D C B A		GP	AP	AP	AP	AP	AP	AP	AP	GP	
IP + 24S + IP												

4805 (3/11)



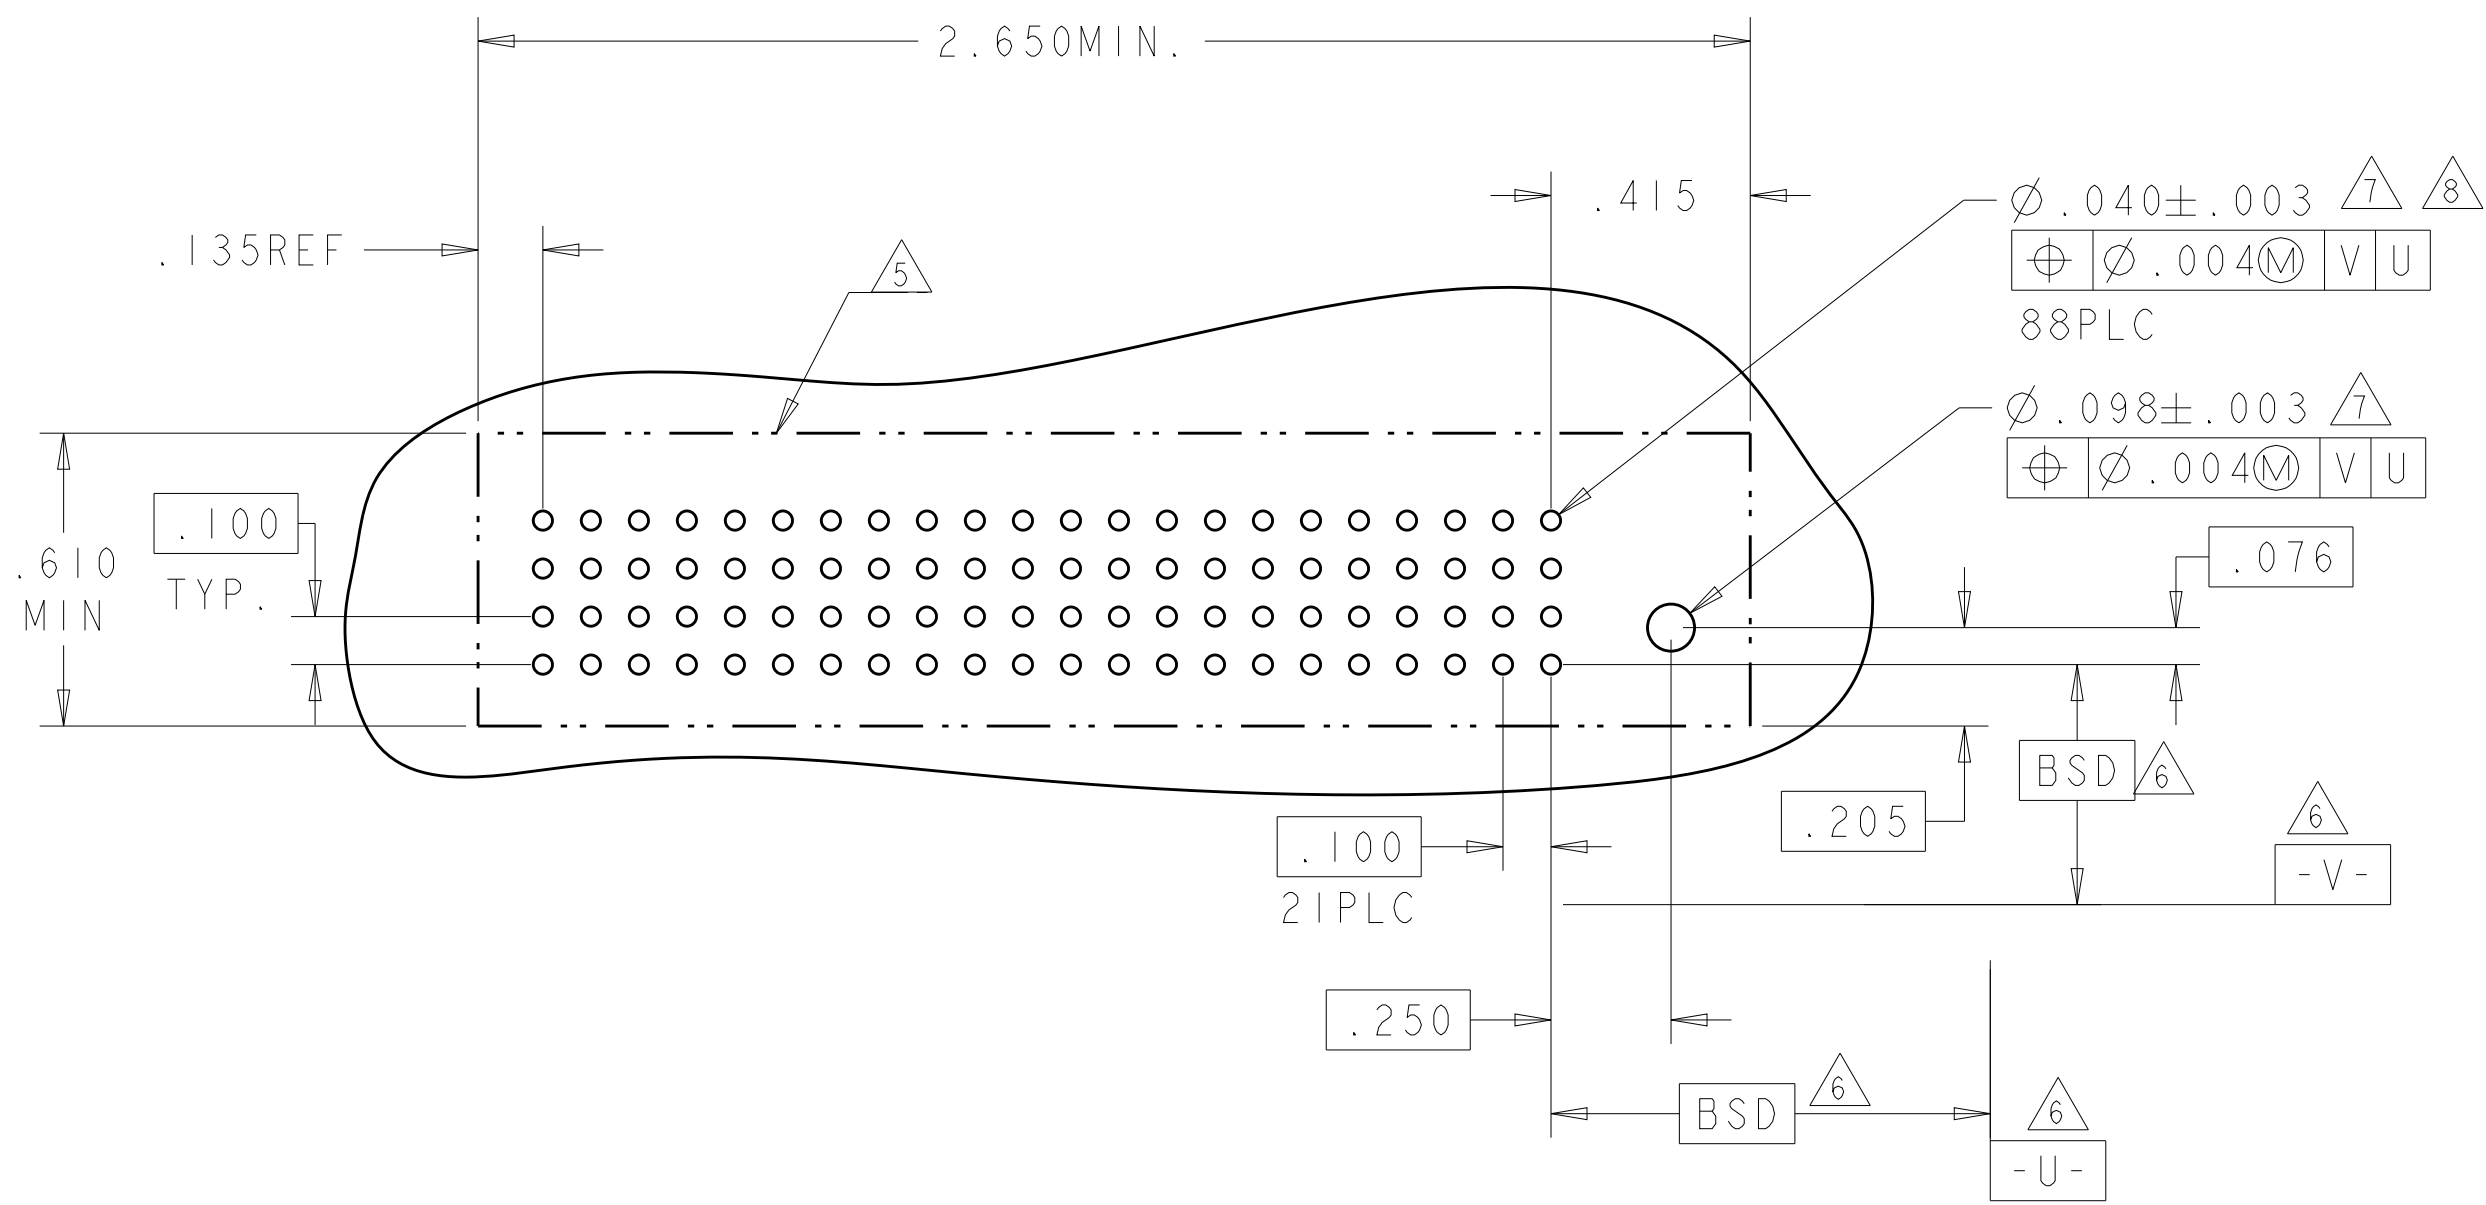
PART NUMBER	ROWS		POWER		SIGNAL					POWER						
			P7	P6	5	4	3	2	1	P5	P4	P3	P2	P1		
4-6450540-3	D C B A	 HD			AP	AP	AP	AP	AP	AP						 HD
5P + 20S + 2P																



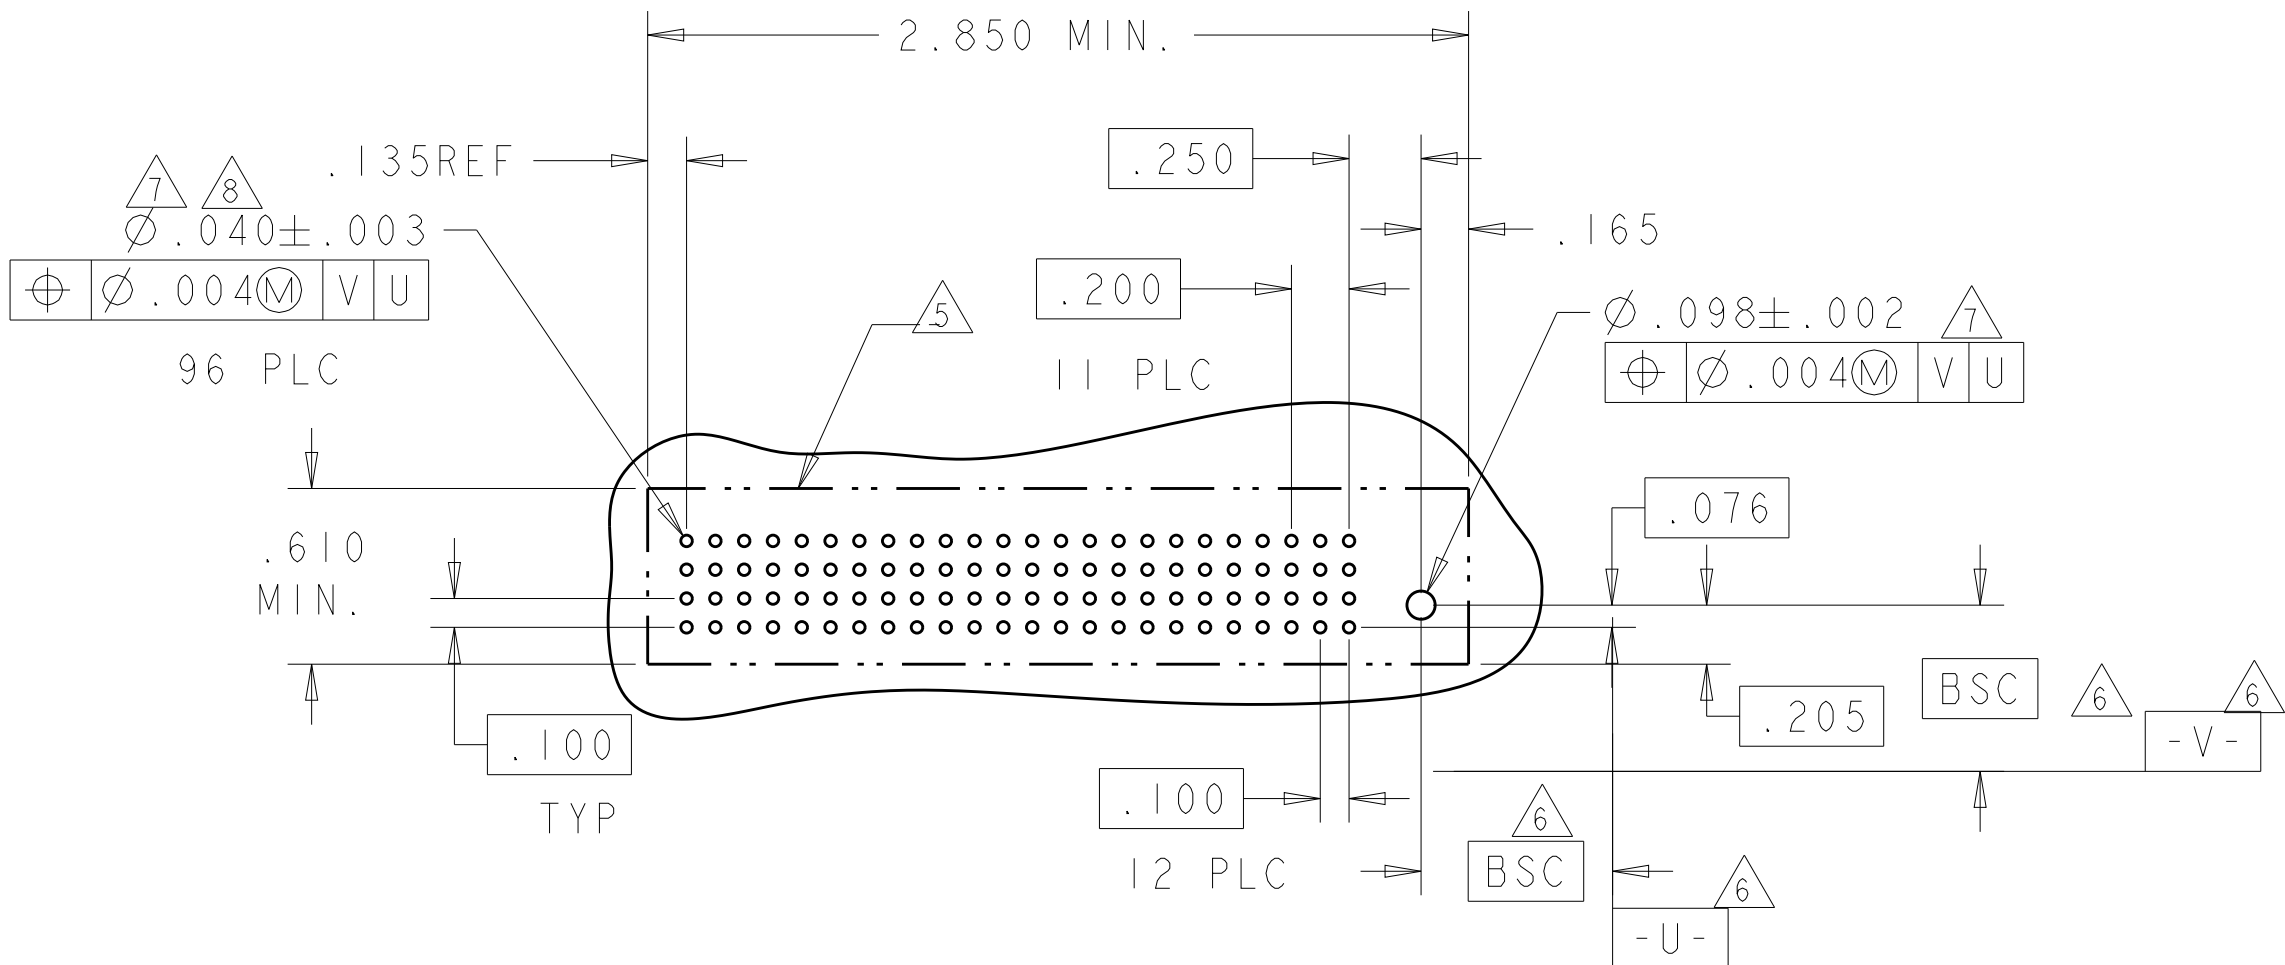
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI 29APR05 CHK M. PERCHERKE 29APR05		 TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 P/LC ±. 1 P/LC ±. 2 P/LC ±.01 3 P/LC ±.005 4 P/LC ±.0020 ANGLES ±°		NAME VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL	
		PRODUCT SPEC 108-1973 APPLICATION SPEC 114-13038		SIZE CAGE CODE DRAWING NO A 100779 © 6450540	
MATERIAL		FINISH		RESTRICTED TO	
		WEIGHT -		-	
CUSTOMER DRAWING				SCALE 2:1 SHEET 8 OF 19 REV K9	







[illegible][illegible]4805 (3/11)

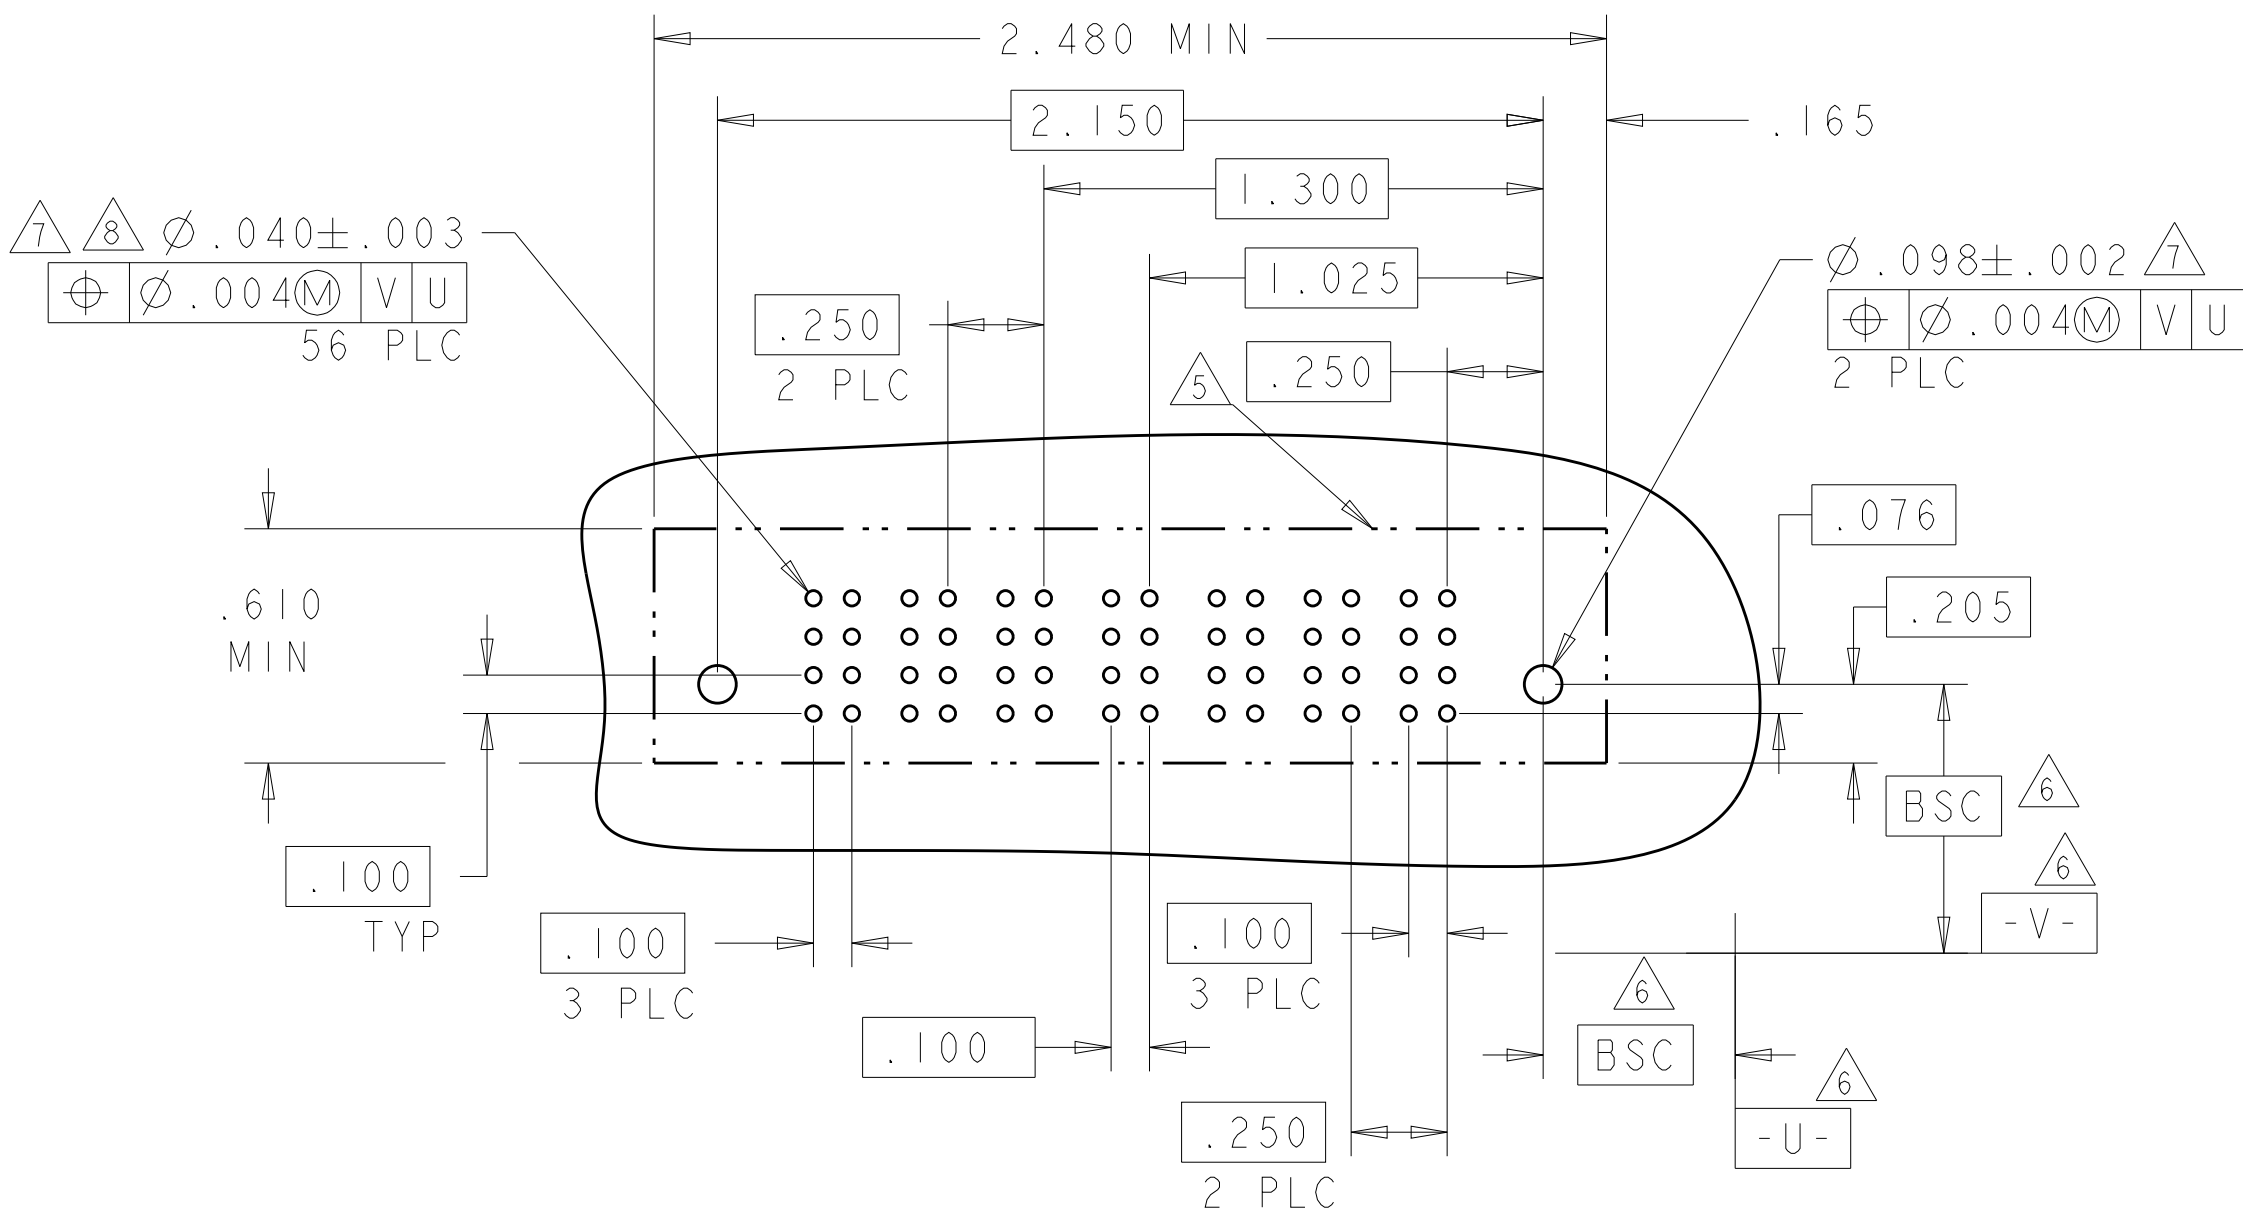
PART NUMBER	ROWS	POWER										
		P11	P10	P9	P8	P7	P6	P5	P3	P2	P1	
4-6450540-2	D C B A	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	
11HDP												

4805 (3/11)

PART NUMBER	ROWS	POWER											
		P12	P11	P10	P9	P8	P7	P6	P5	P3	P2		P1
4-6450540-5	DC CB A	GS	GS	GS	GS	GS	GS	GS	GS	GS	GS	GS	HD
12HDP													




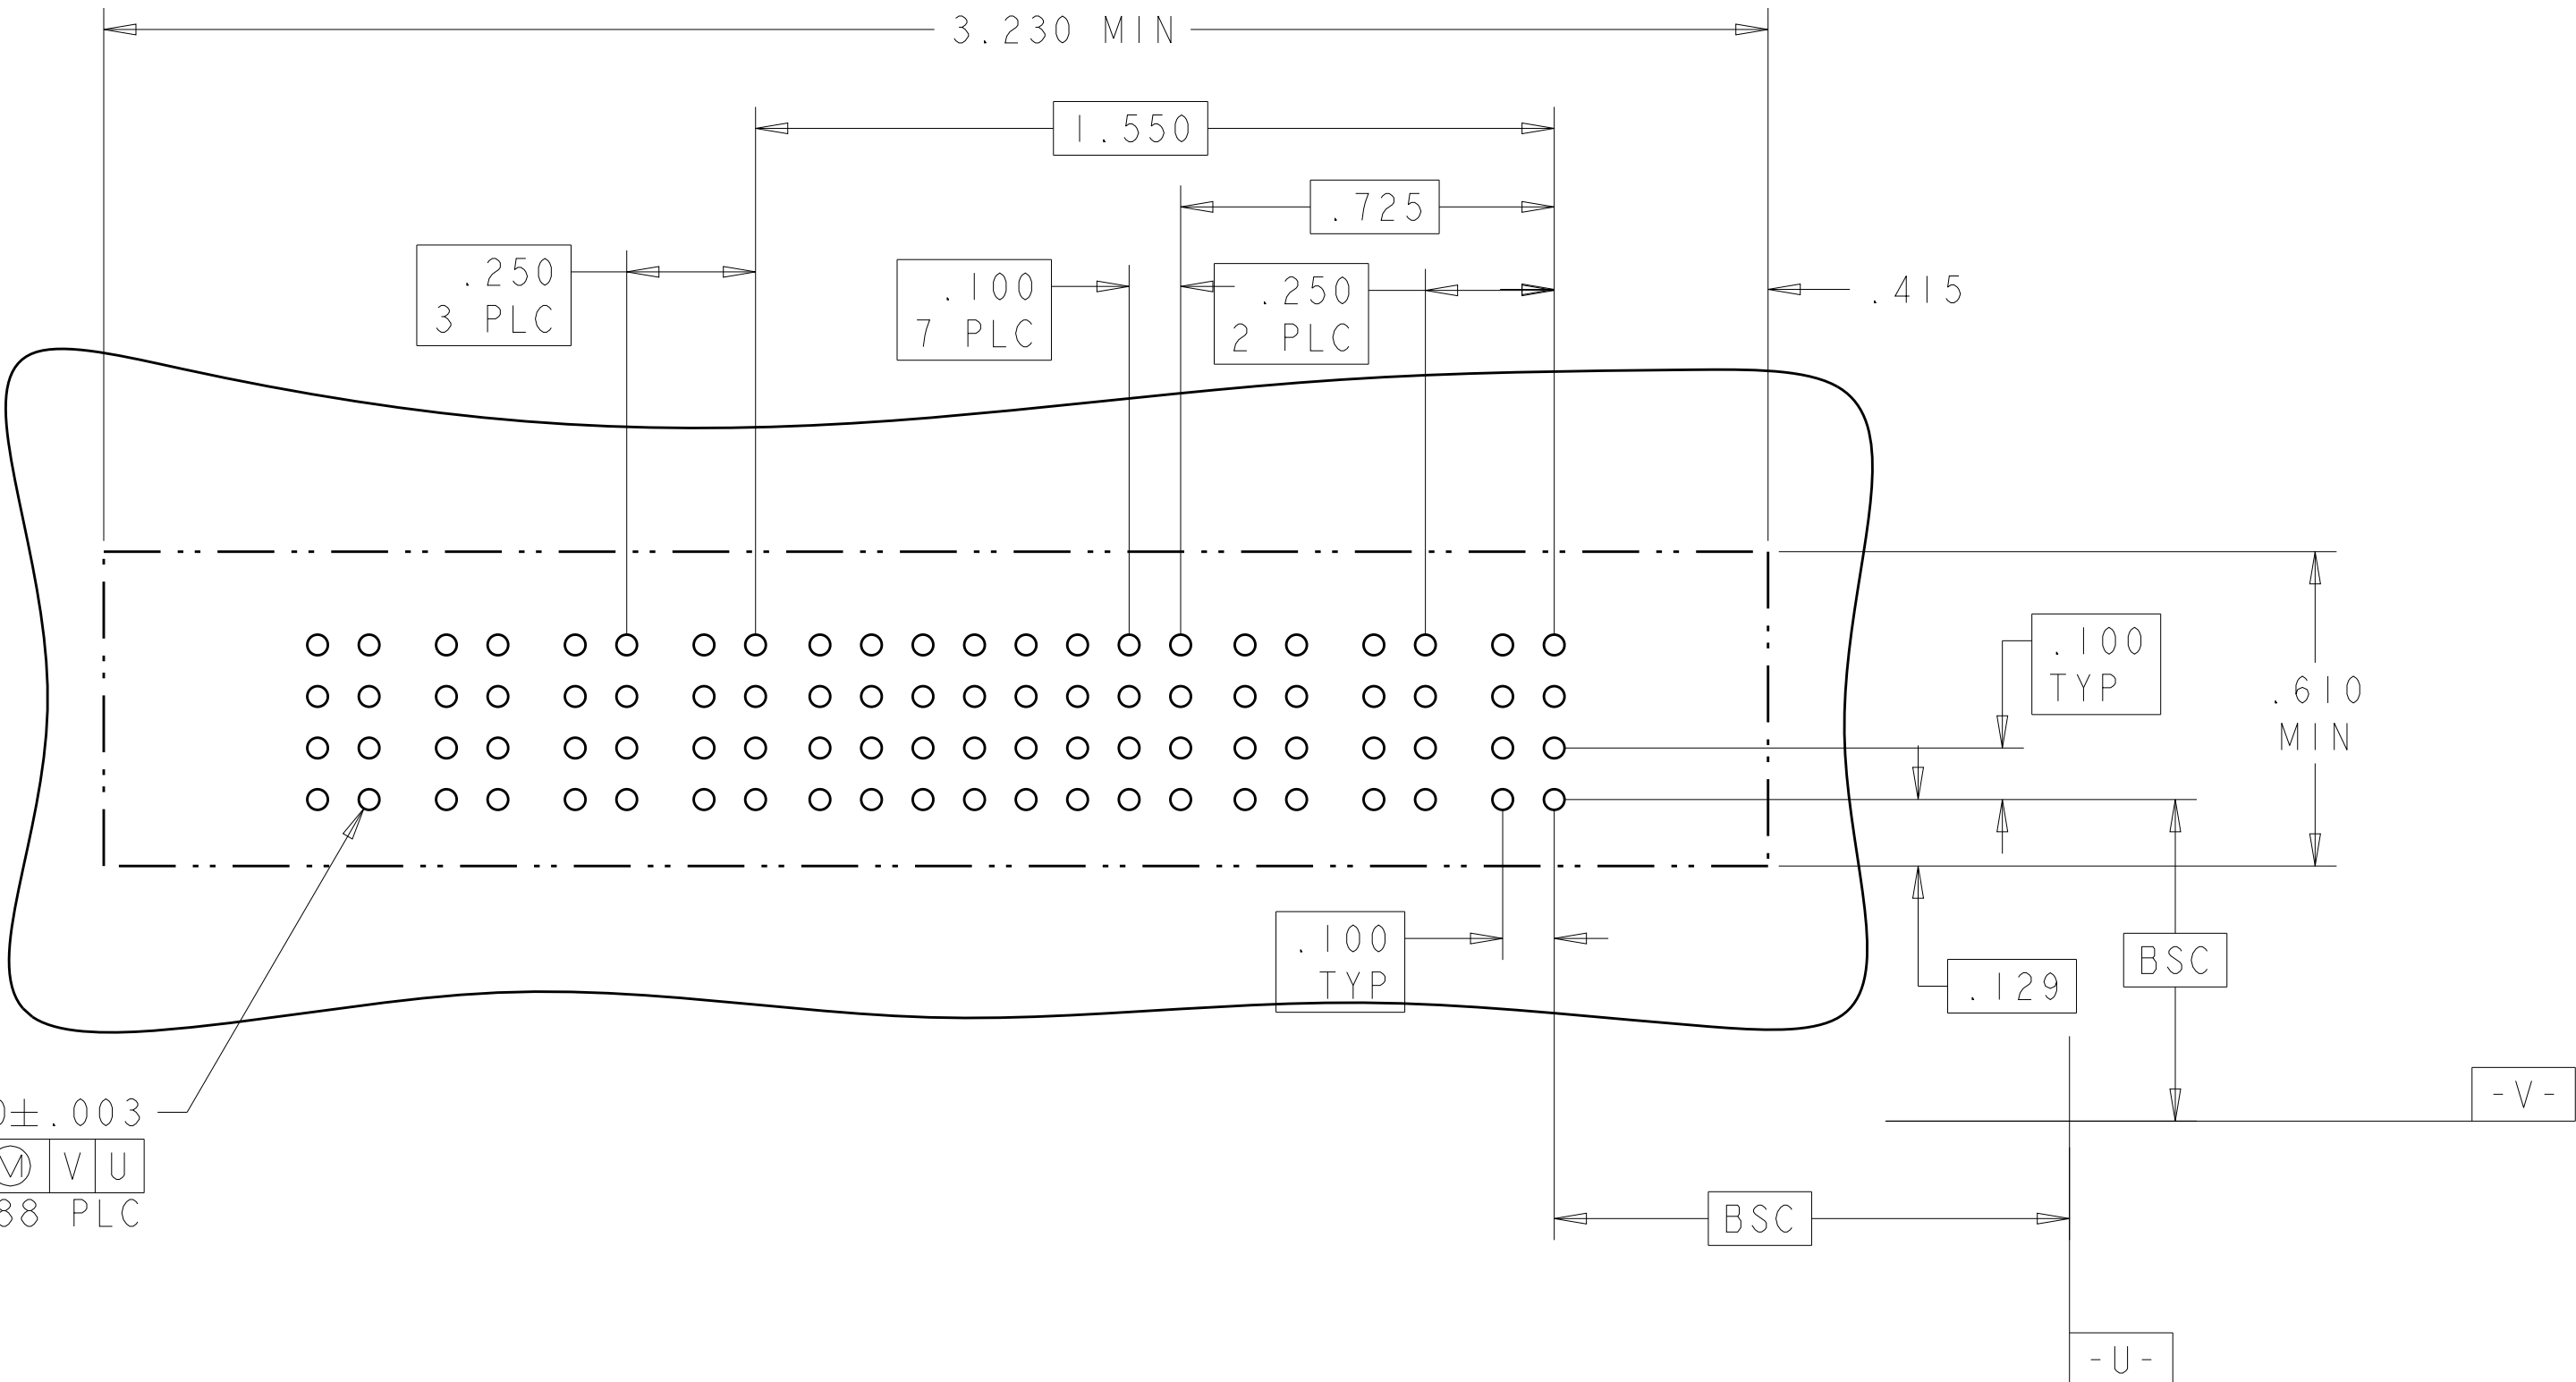
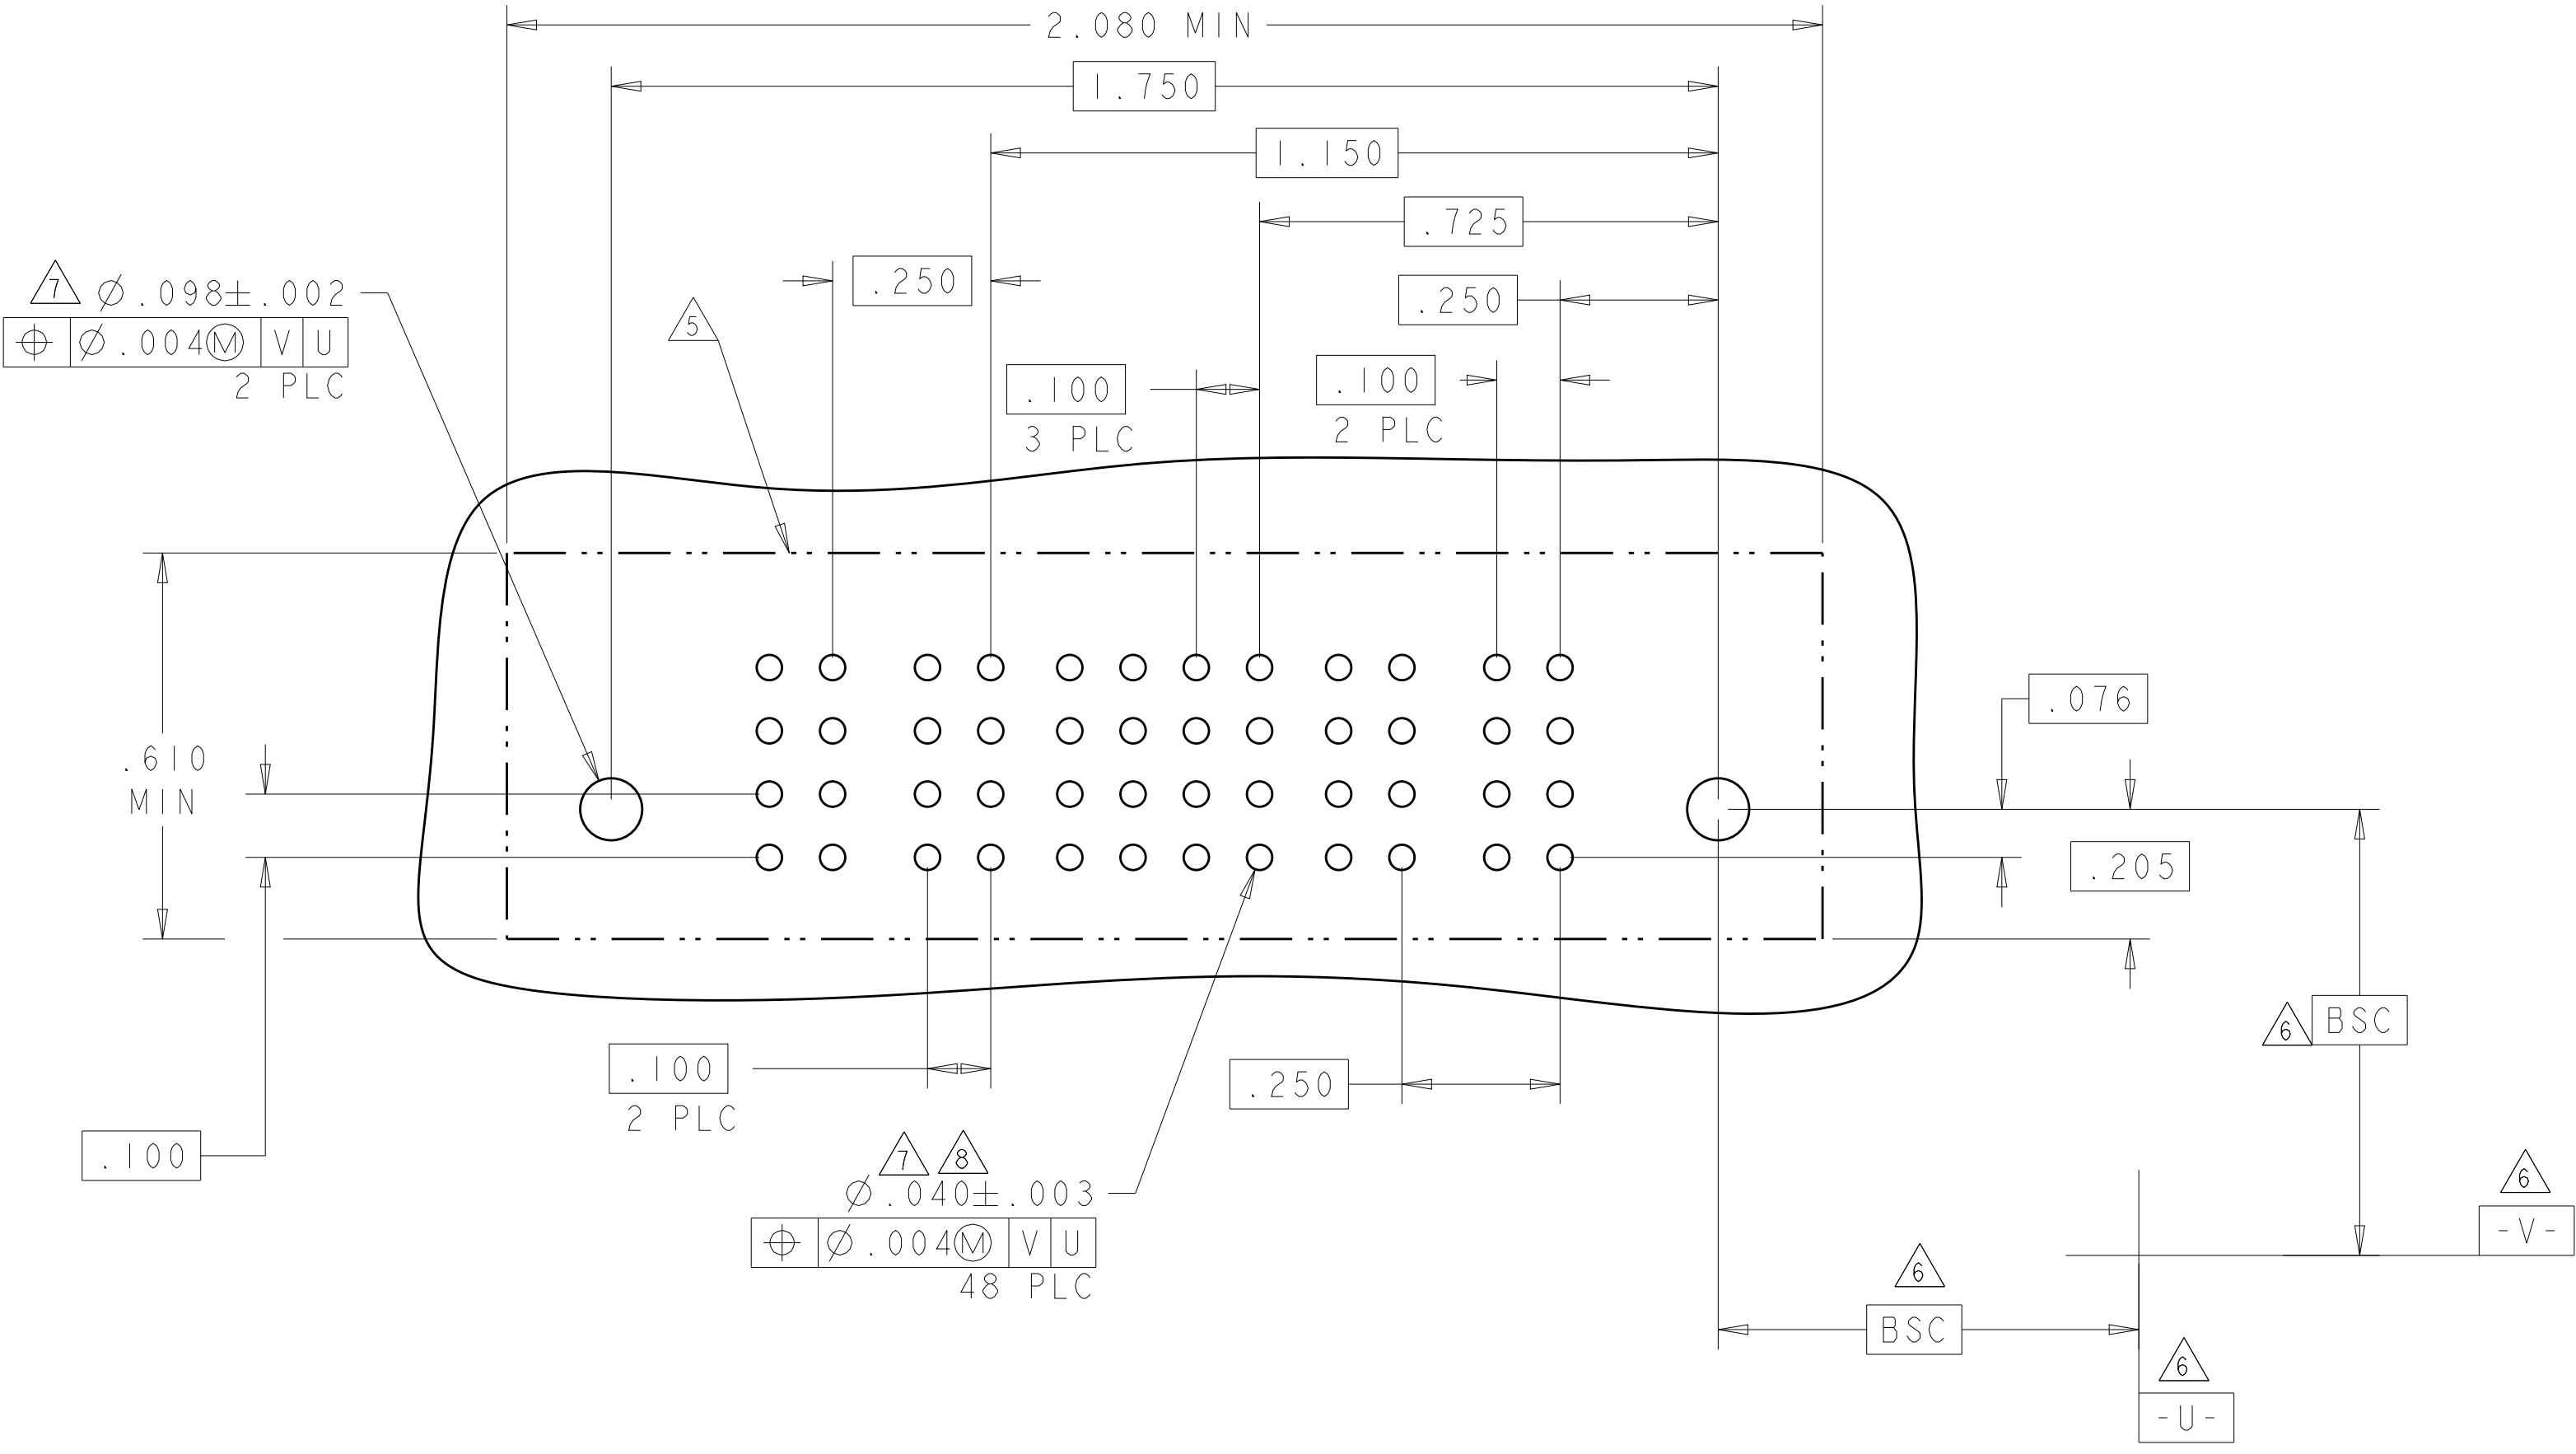
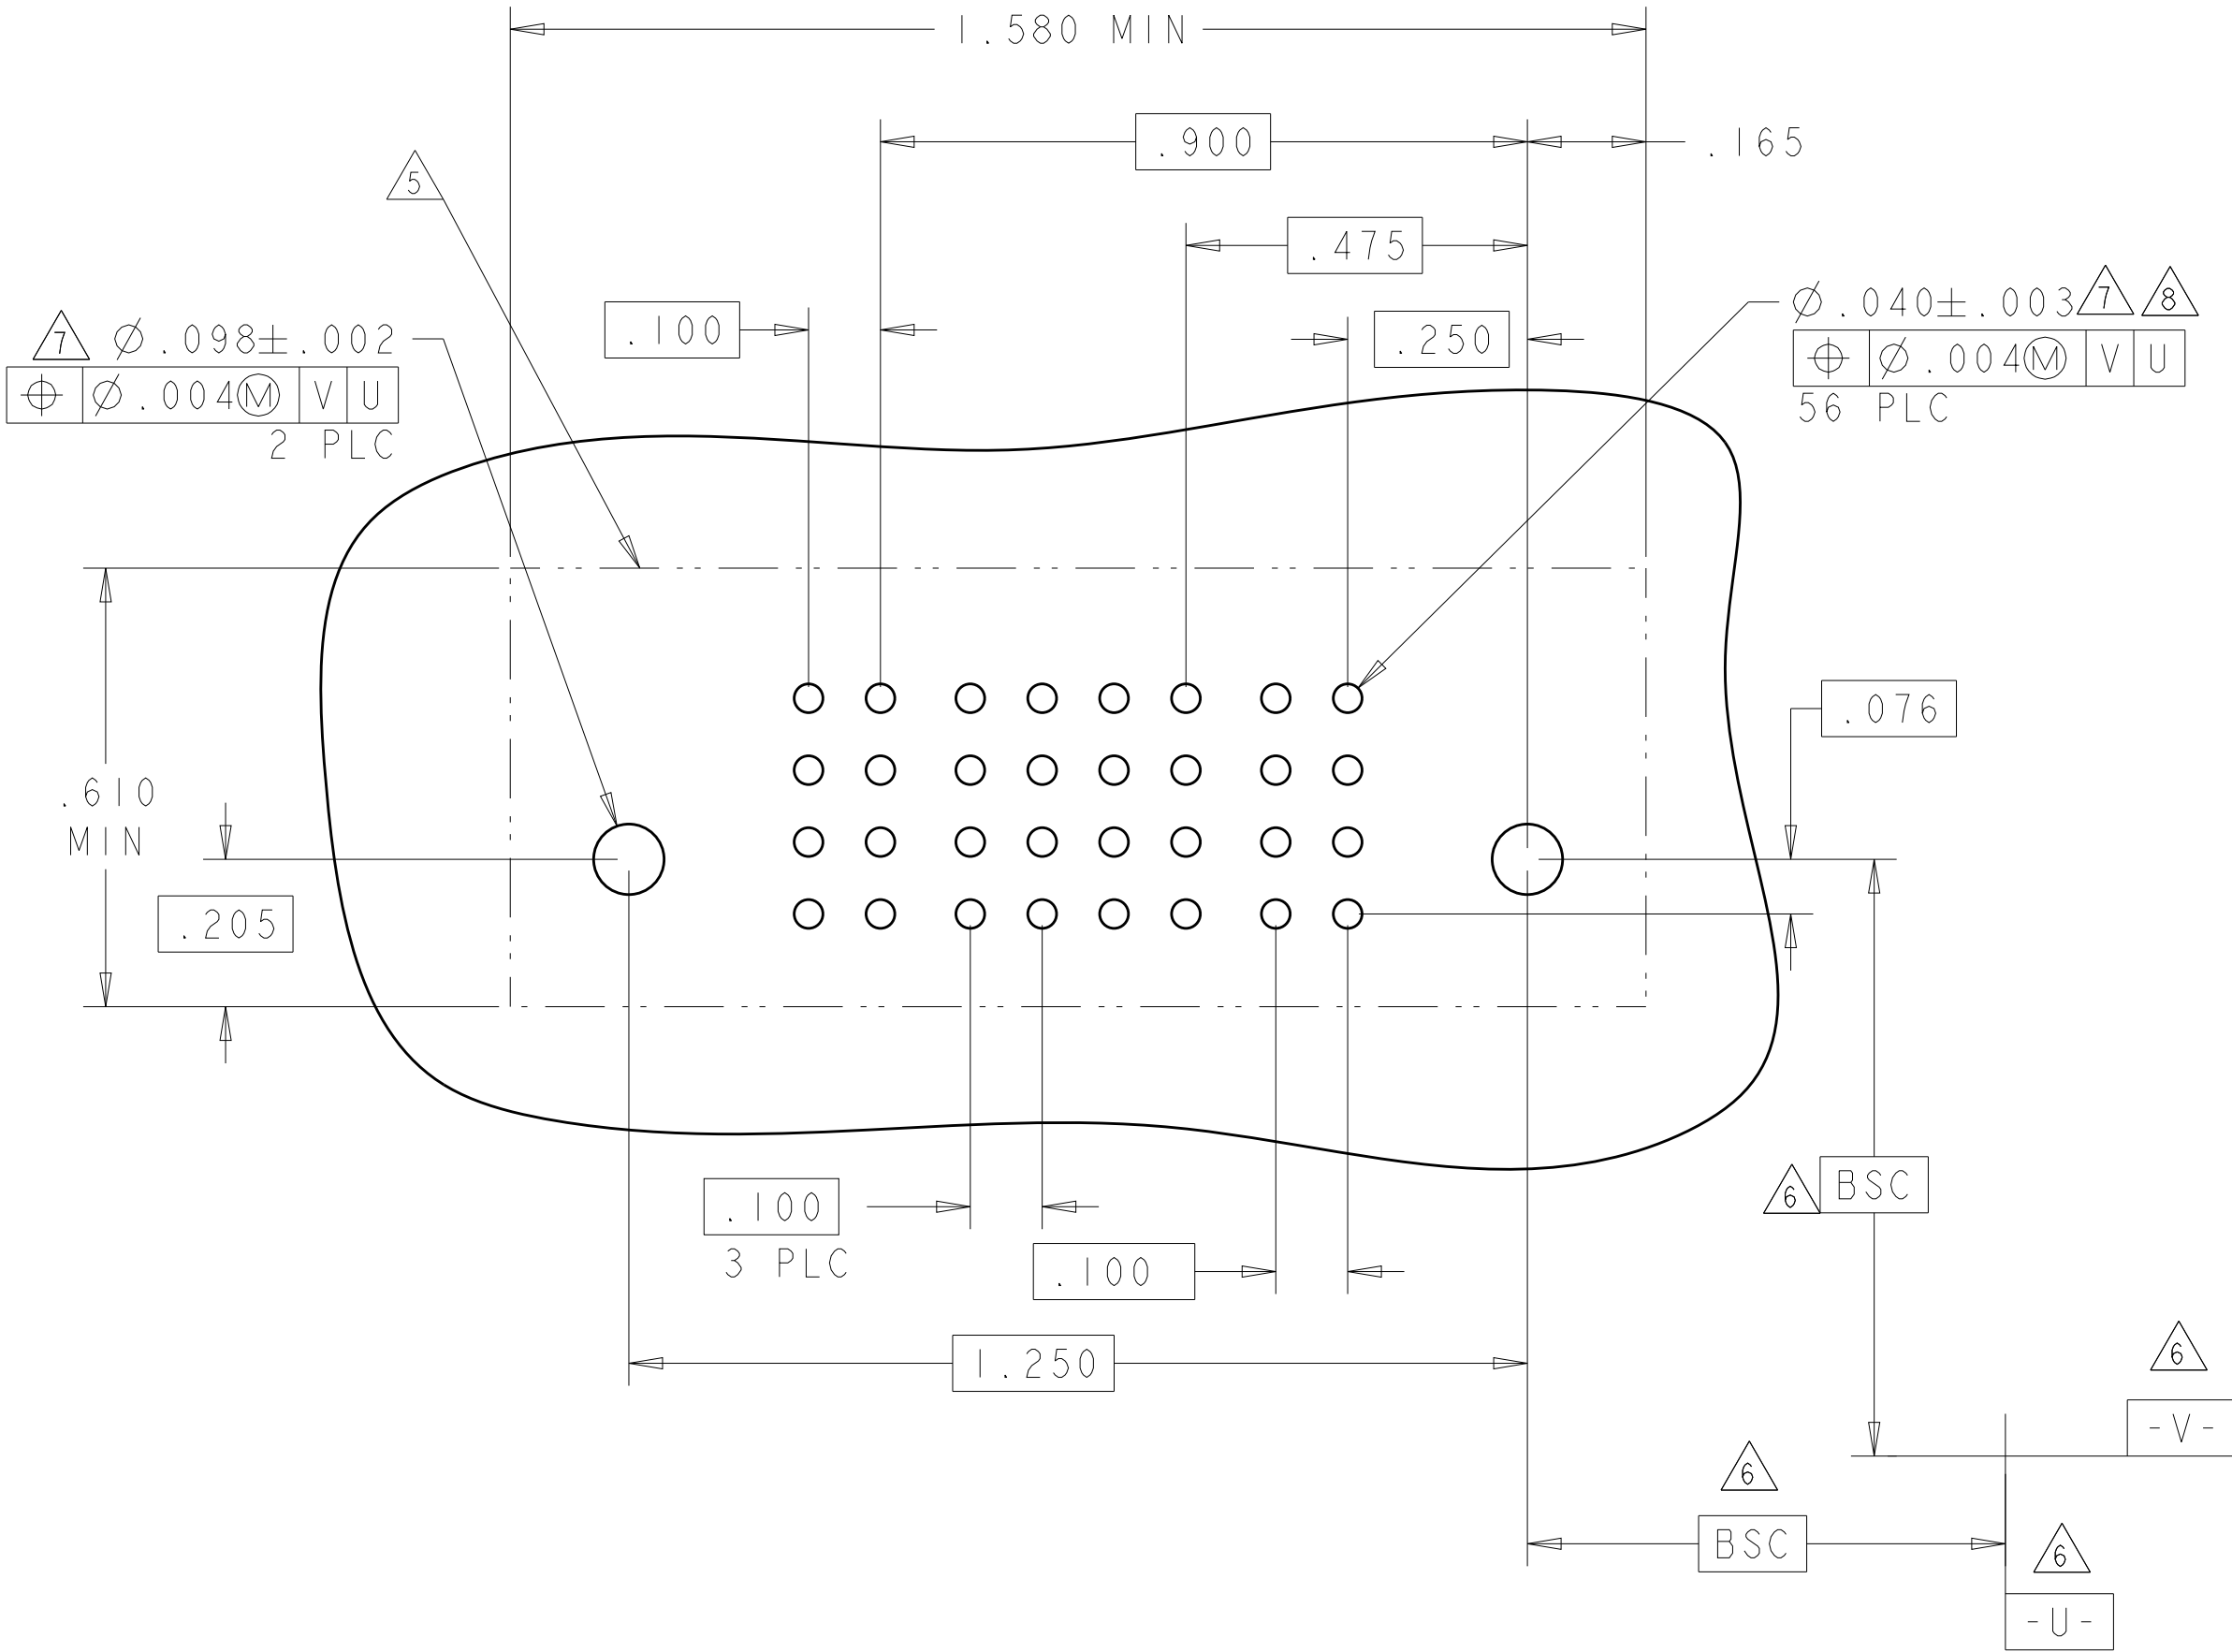
PART NUMBER	ROWS		POWER	SIGNAL		POWER	
			P2	2	1	P1	
4-6450540-6	D C B A						
IP + 8S + IP							

4805 (3/11)

LOC		DIST		REVISIONS				
P	LYR	DESCRIPTION			DATE	DWN	APVD	
-	-	SEE SHEET 1			-	-	-	

PART NUMBER	ROWS		POWER		SIGNAL				POWER		
			P2	4	3	2	1	P1			
4-6450540-8	D C B A		GS	AP	AP	AP	AP	GS			
				AP	AP	AP	AP				
				AP	AP	AP	AP				
				AP	AP	AP	AP				
IP + 16S + 1P											

PART NUMBER	ROWS		POWER		SIGNAL				POWER		
			P4	P3	4	3	2	1	P2	P1	
5-6450540-1	D C B A				AP	AP	AP	AP			
					AP	AP	AP	AP			
					AP	AP	AP	AP			
					AP	AP	AP	AP			
2P + 16S + 2P											



PART NUMBER	ROWS		POWER				SIGNAL								POWER				
			P7	P6	P5	P4	8	7	6	5	4	3	2	1	P3	P2	P1		
1-6450540-1	D C B A						P	P	P	P	P	P	P	P					
							P	P	P	P	P	P	P	P					
							P	P	P	P	P	P	P	P					
							P	P	P	P	P	P	P	P					
3P + 32S + 4P																			

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

MATERIAL

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.01
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°
FINISH

DWN: R. GRZYBOWSKI 29APR05
CHK: M. PERCHERKE 29APR05
APVD: M. PERCHERKE

PRODUCT SPEC: 108-1973
APPLICATION SPEC: 114-13038
WEIGHT: -

CUSTOMER DRAWING

NAME: VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL


SIZE: A1
CAGE CODE: 100779
DRAWING NO: C=6450540

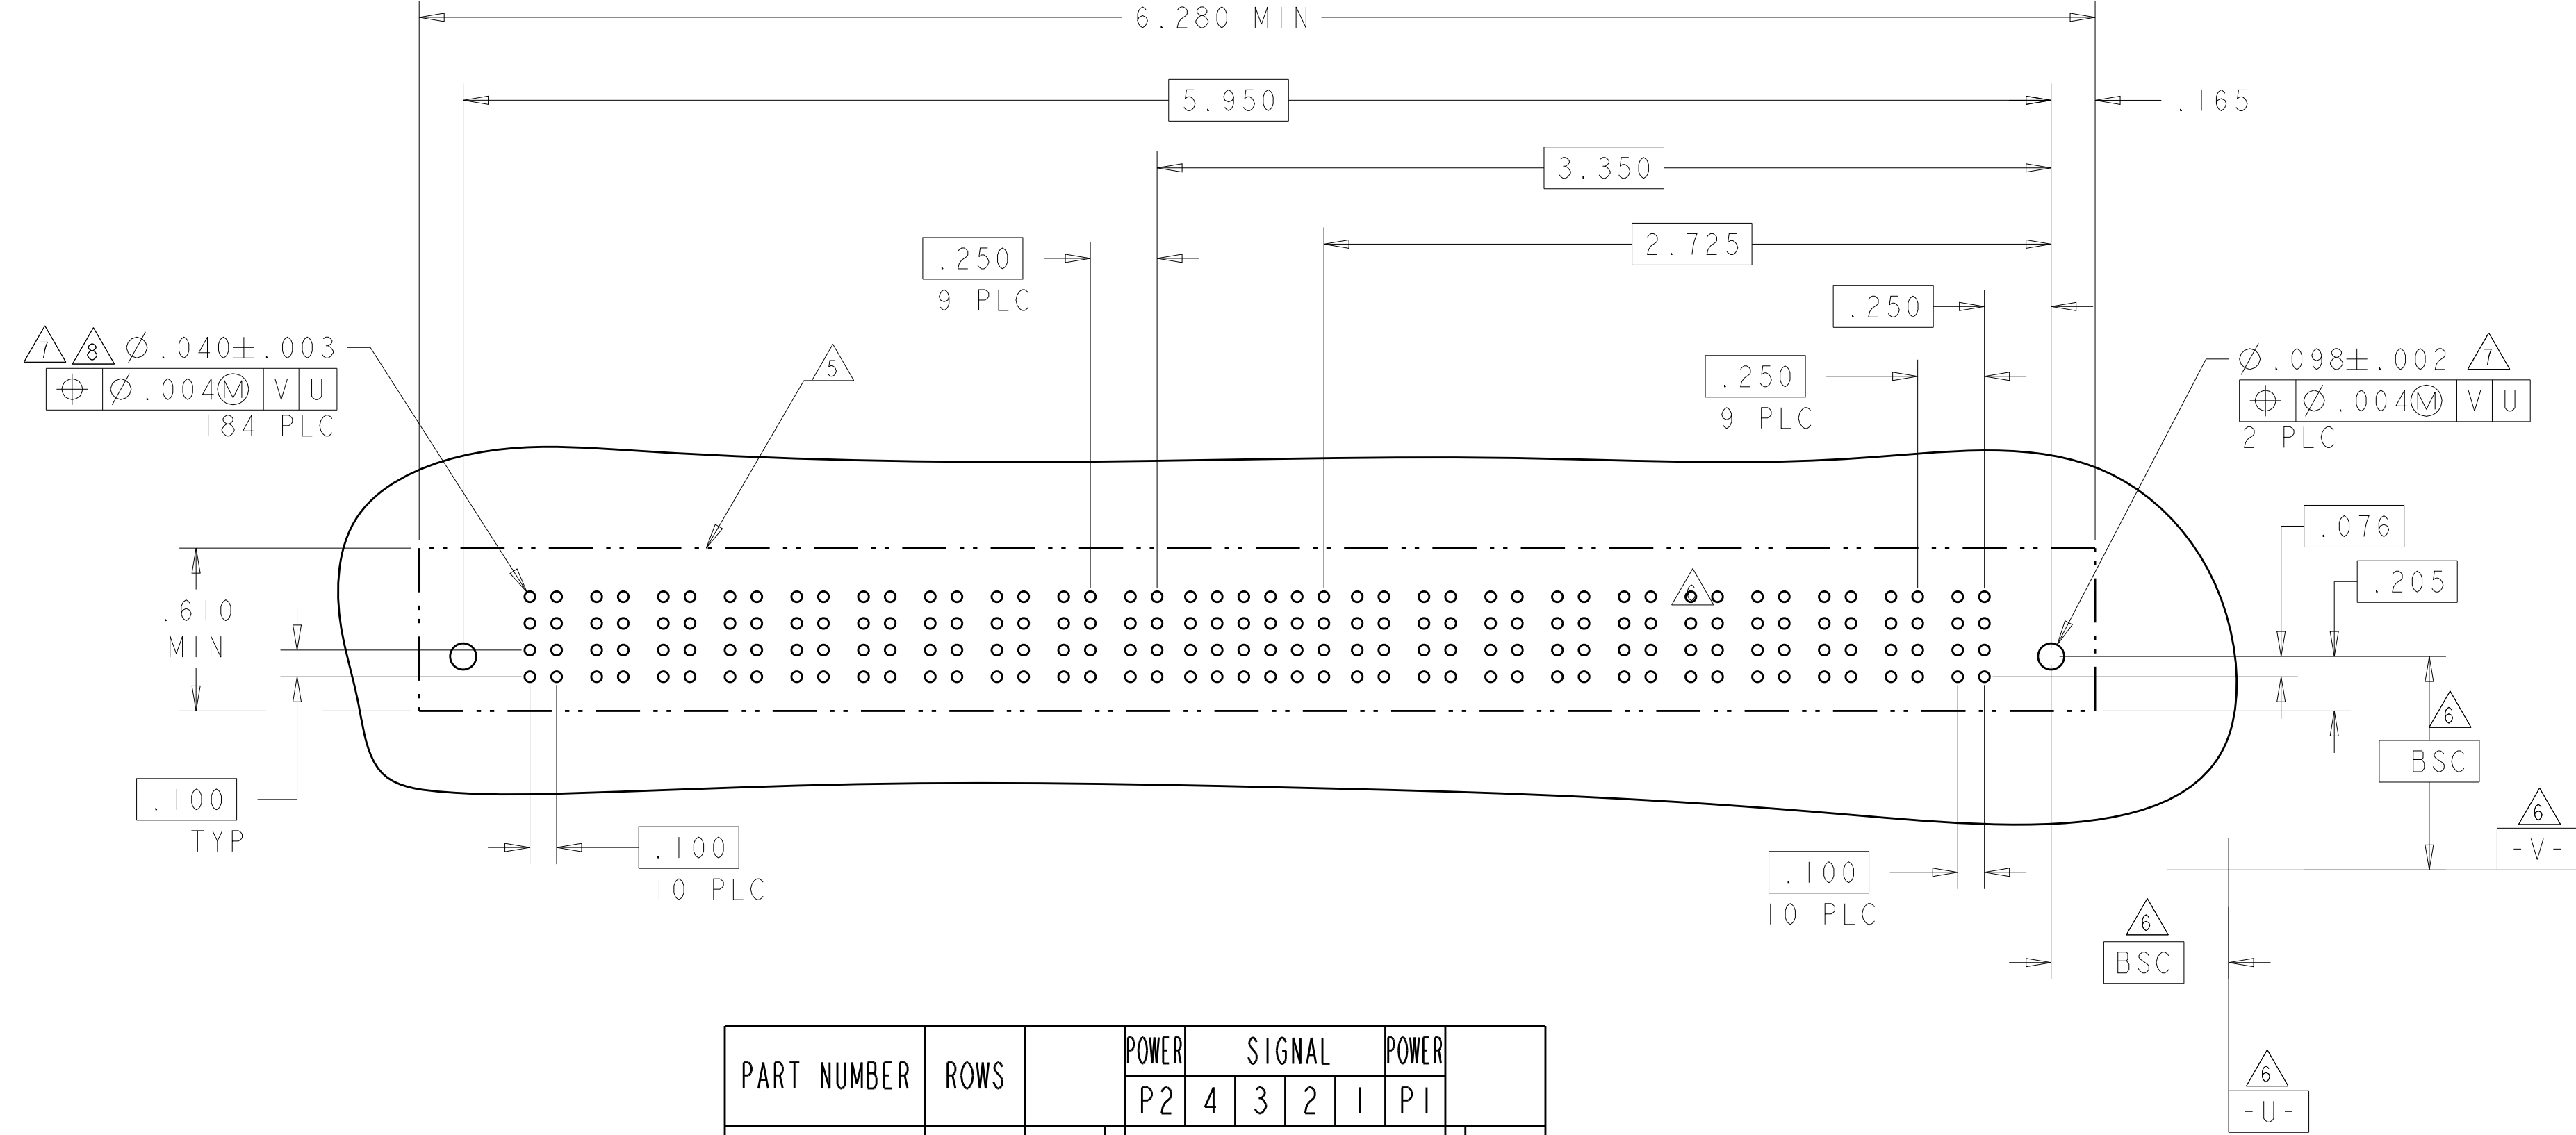
RESTRICTED TO: -


SCALE: 2:1
SHEET: 12 OF 19
REV: K9

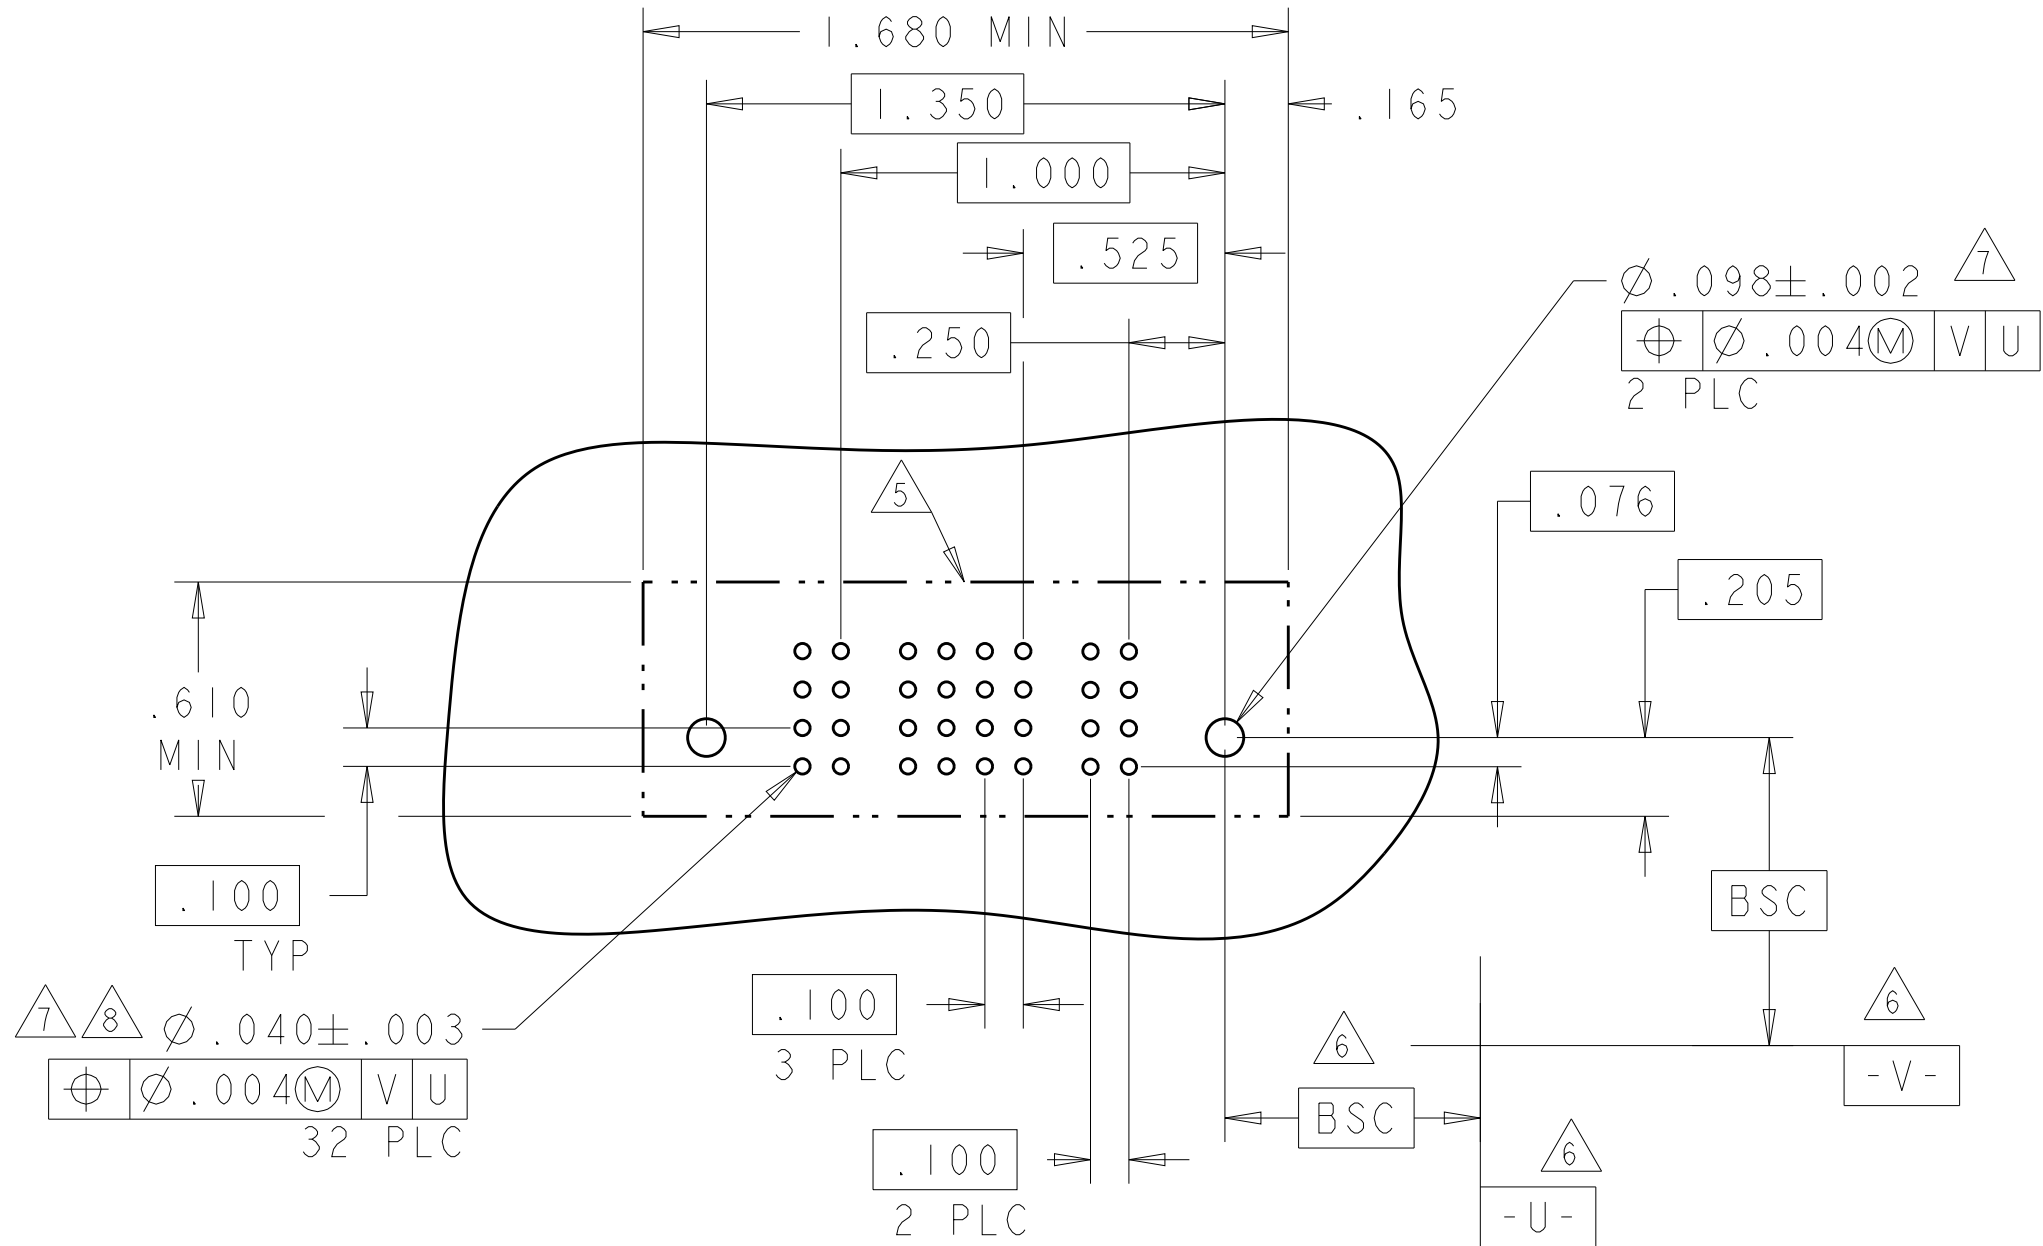
TE Connectivity


LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	SEE SHEET 1	-	-	-	

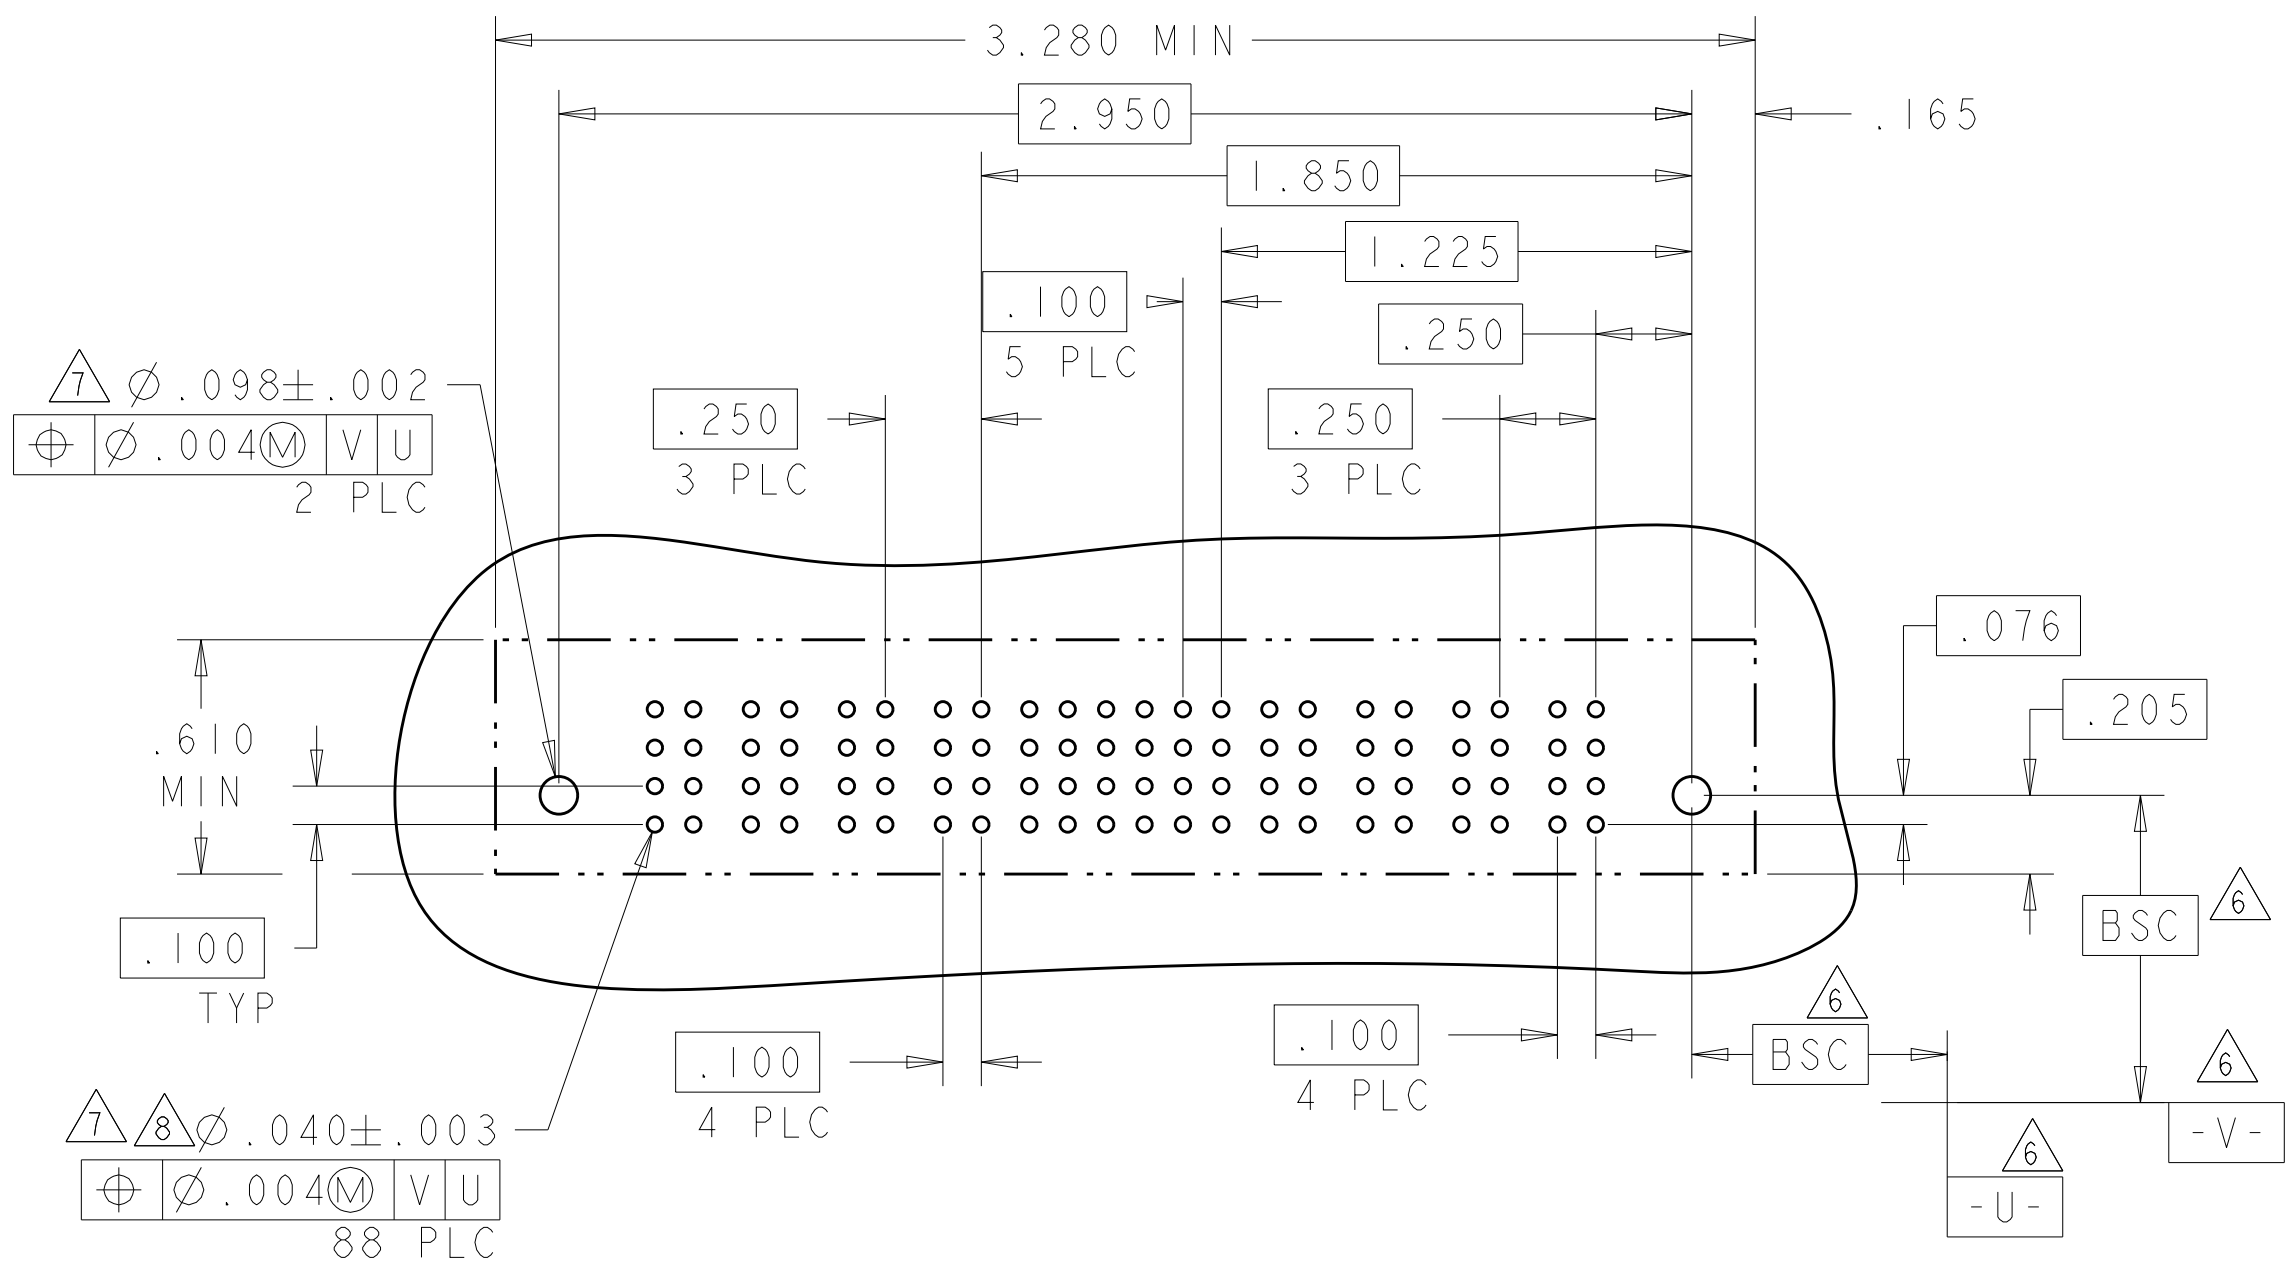
PART NUMBER	ROWS		POWER										SIGNAL						POWER										
			P20	P19	P18	P17	P16	P15	P14	P13	P12	P11	6	5	4	3	2	1	P10	P9	P8	P7	P6	P5	P4	P3	P2	P1	
5-6450540-0	D C B A																												
																													
																													
																													
10P + 24S + 10P																													



PART NUMBER	ROWS		POWER		SIGNAL				POWER		
			P2	4	3	2	1	P1			
5-6450540-2	D C B A		GS	AP	AP	AP	AP	AP	GS		
				AP	AP	AP	AP	AP			
				AP	AP	AP	AP	AP			
				AP	AP	AP	AP	AP			
1P + 16S + 1P											

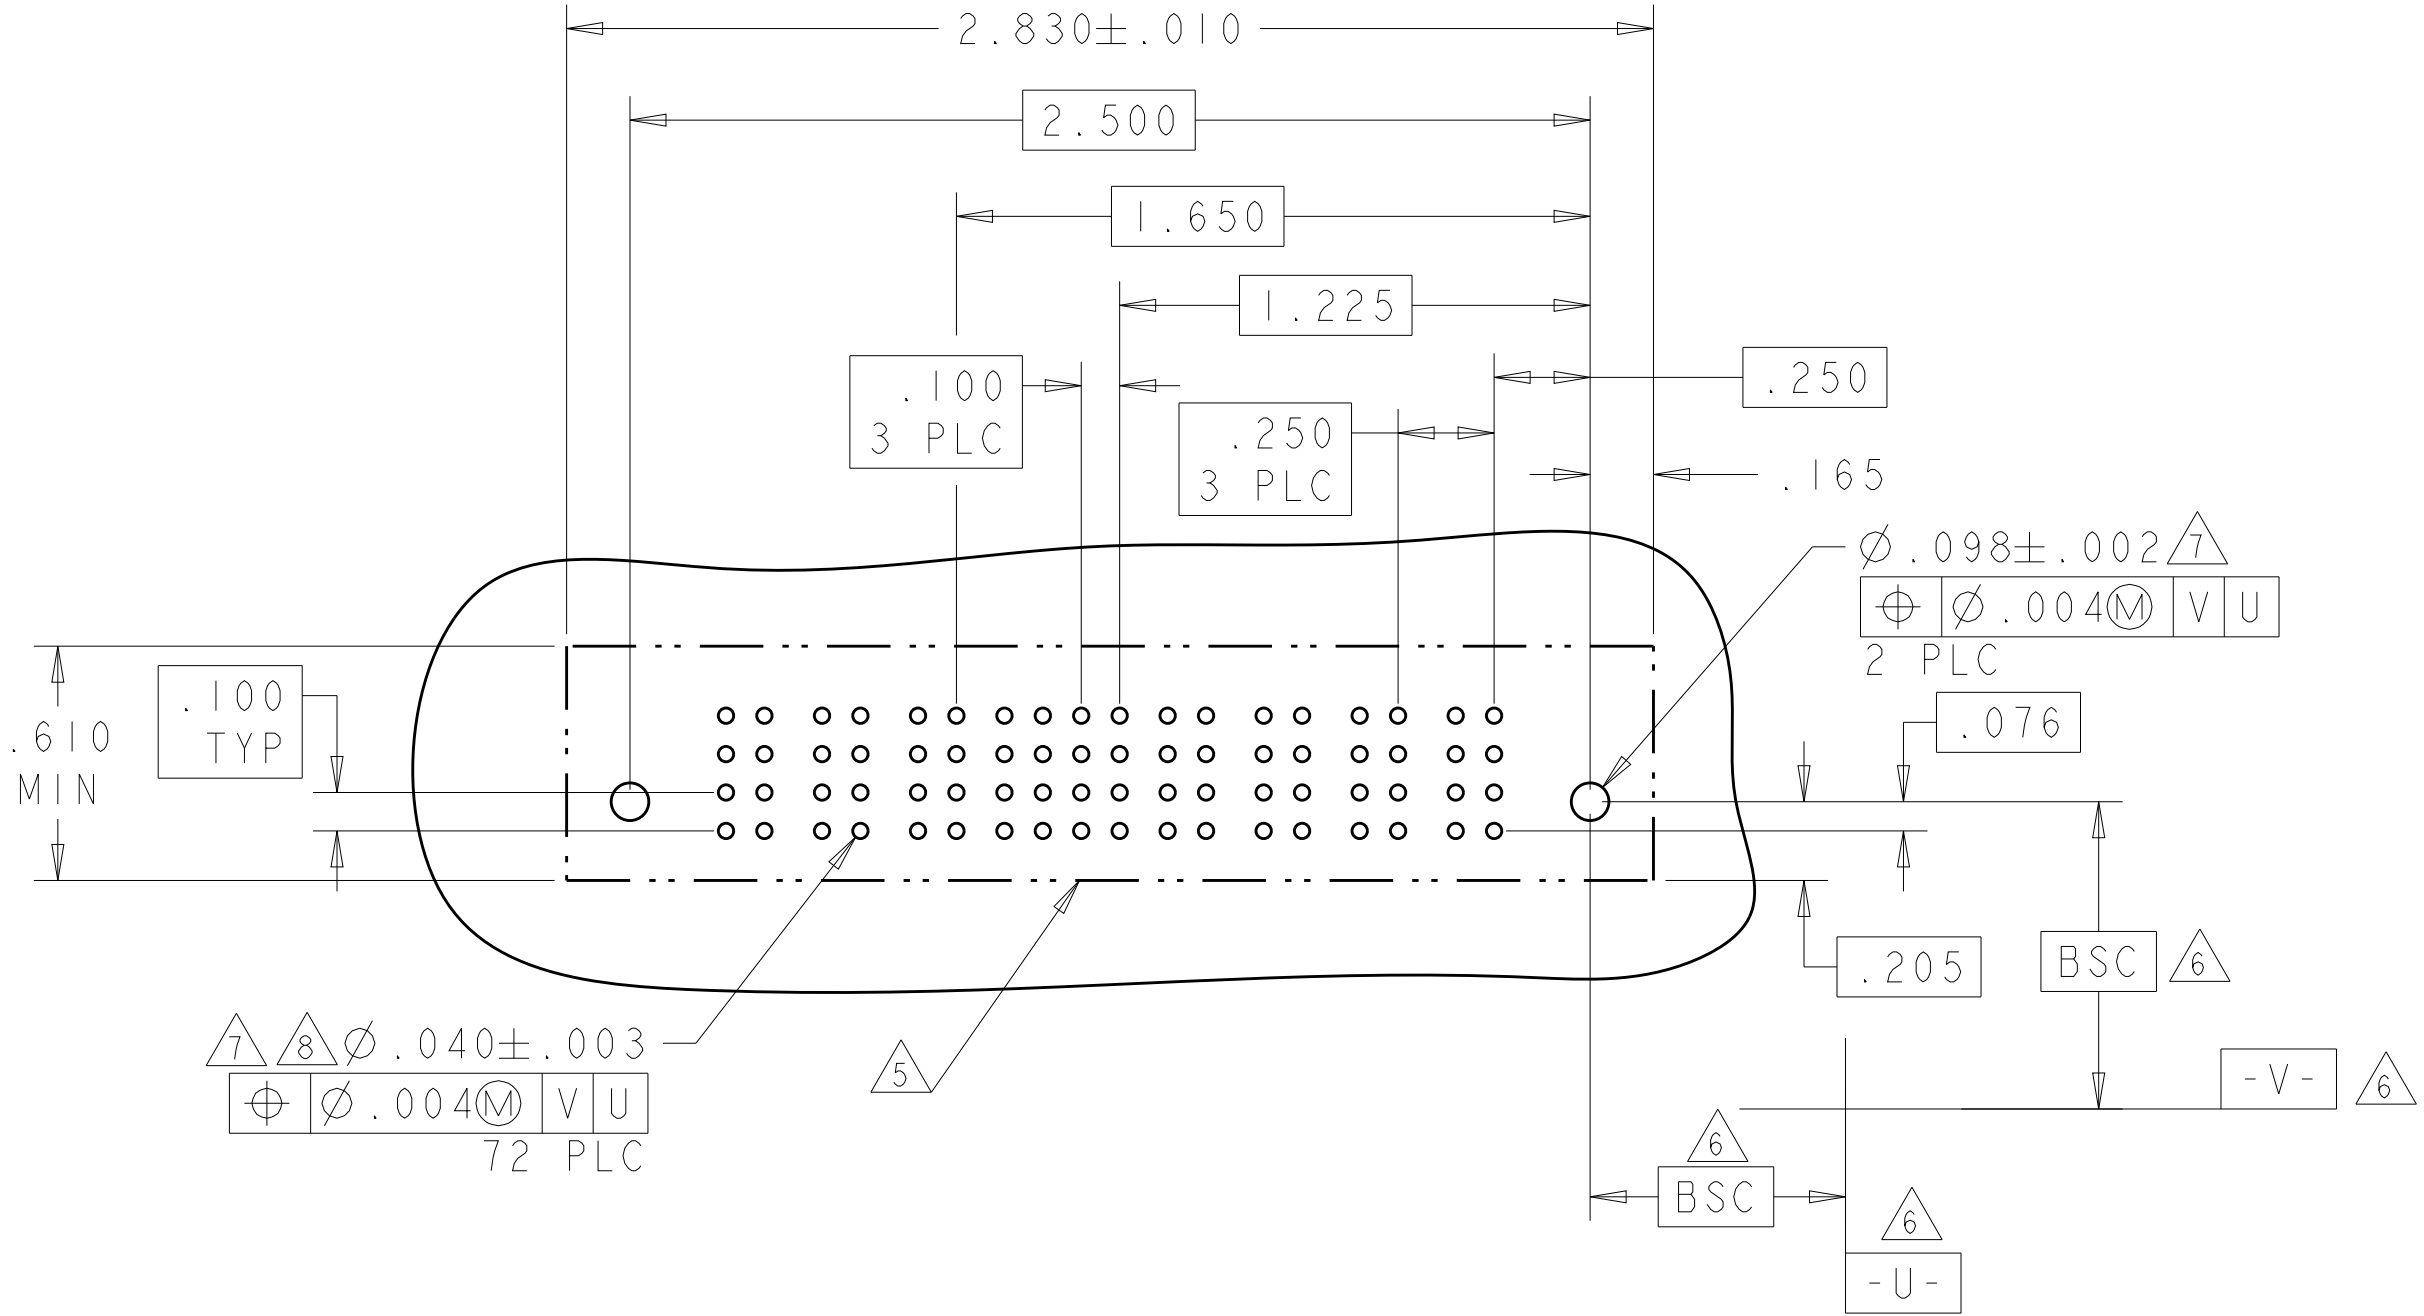


PART NUMBER	ROWS		POWER				SIGNAL						POWER					
			P8	P7	P6	P5	6	5	4	3	2	1	P4	P3	P2	P1		
5-6450540-3	D C B A						AP	AP	AP	AP	AP	AP						
							AP	AP	AP	AP	AP	AP						
							AP	AP	AP	AP	AP	AP						
							AP	AP	AP	AP	AP	AP						
4P + 24S + 4P																		

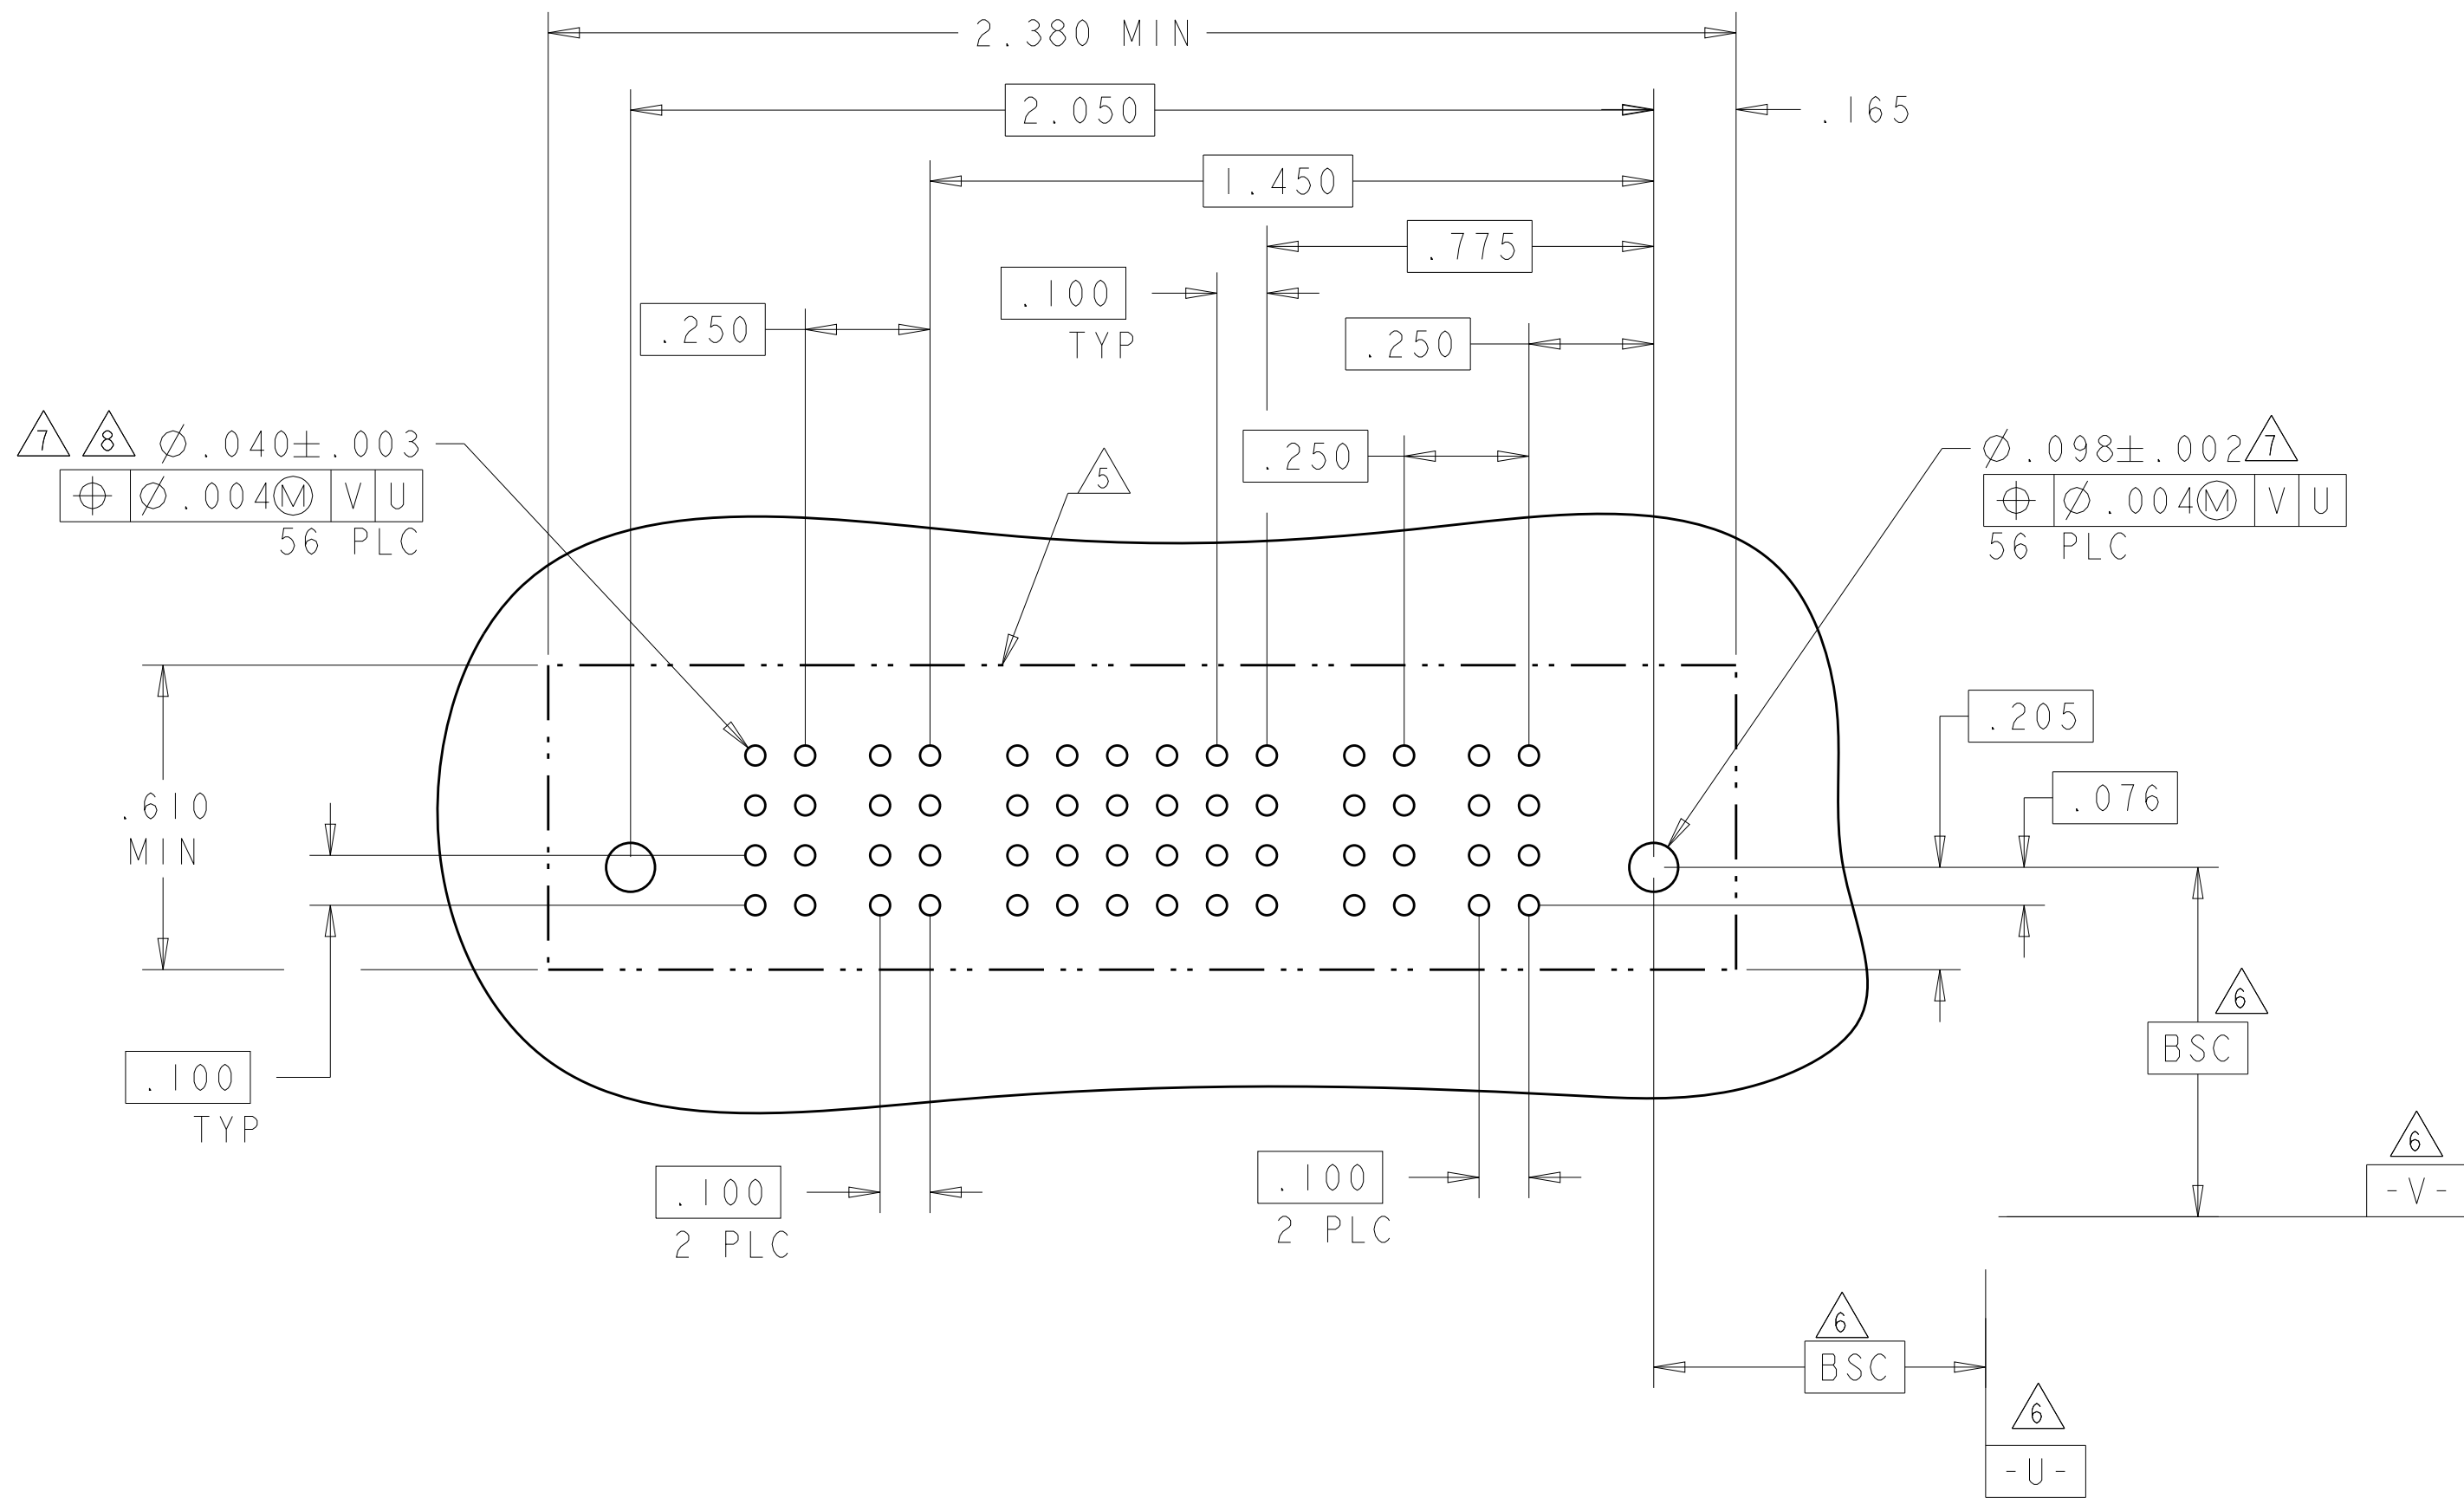
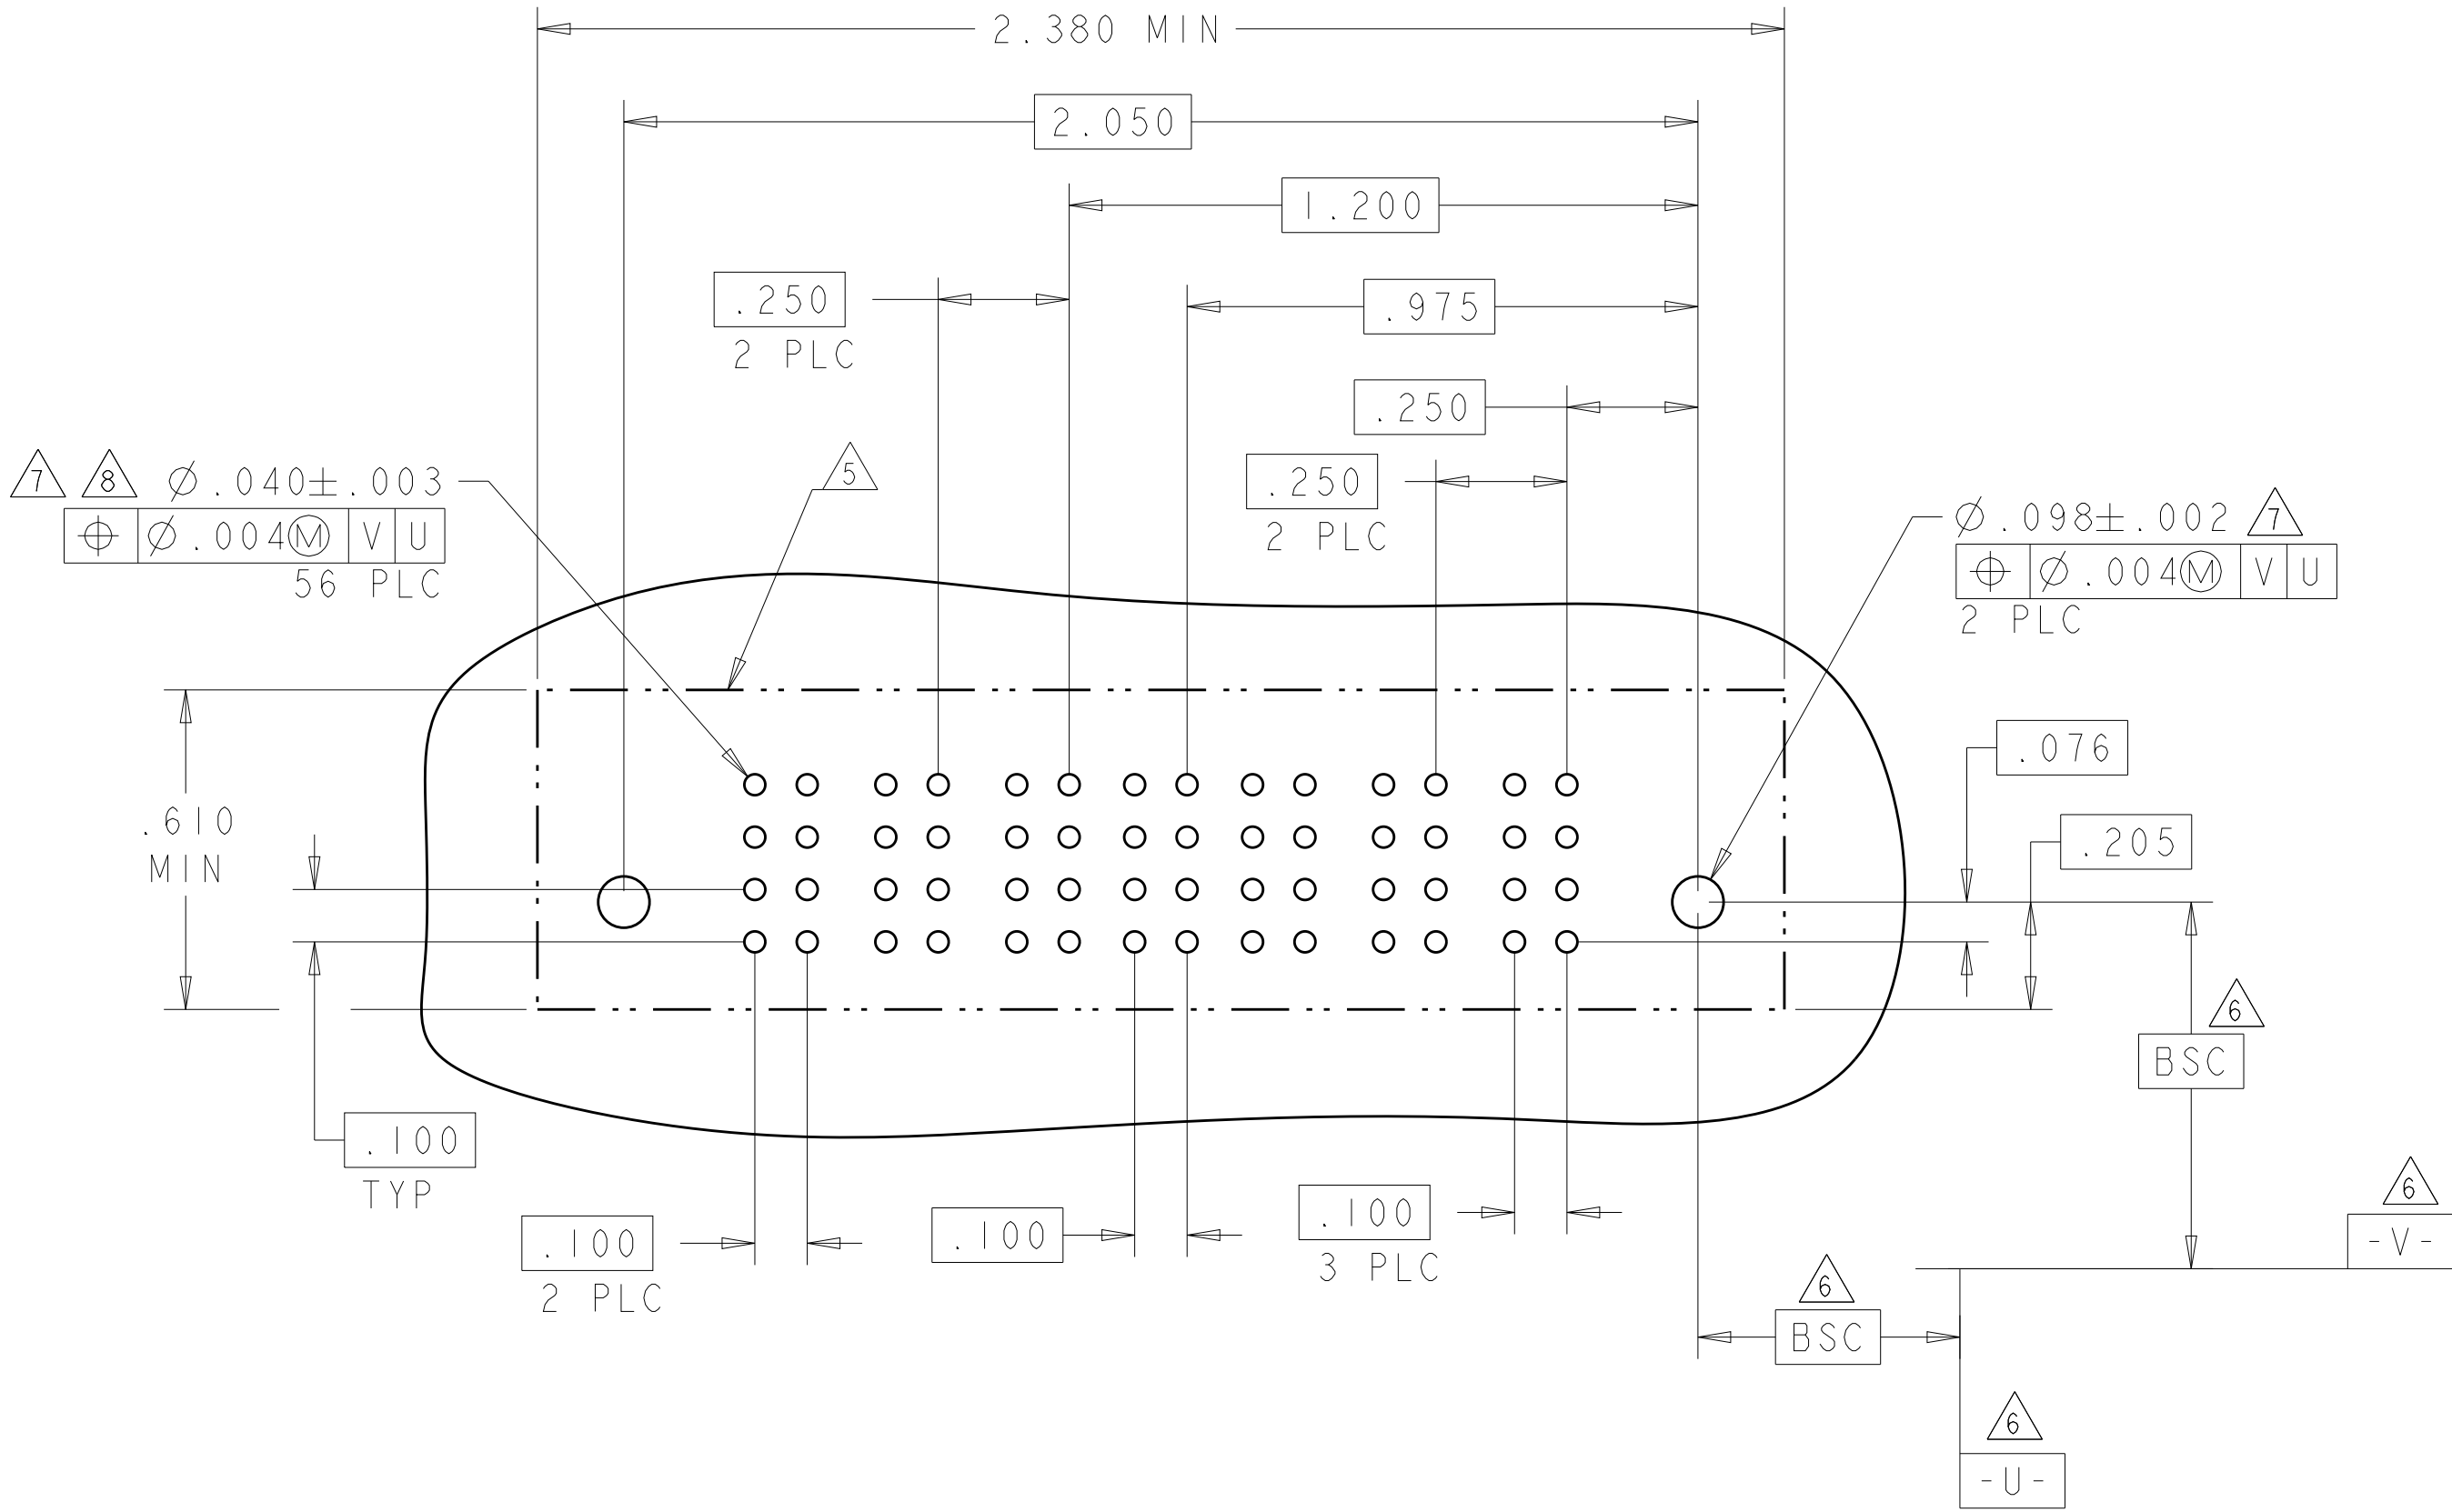


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI CHK M. PERCHERKE APVD M. PERCHERKE	29APR05 29APR05 -
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
		PRODUCT SPEC	
MATERIAL		APPLICATION SPEC	
		WEIGHT	
		CUSTOMER DRAWING	
		SCALE 2:1	
		SHEET 13 OF 19	
		REV K9	

PART NUMBER	ROWS		POWER			SIGNAL				POWER				
			P7	P6	P5	4	3	2	1	P4	P3	P2	P1	
5-6450540-4	D C B A				P	P	P	P	VS	VS	VS	VS		
					P	P	P	P						
					P	P	P	P						
					P	P	P	P						
4P + 16S + 3P														



PART NUMBER	ROWS		POWER			SIGNAL		POWER			
			P6	P5	P4	2	1	P3	P2	P1	
5-6450540-5	D C B A	 HD				AP	AP				 HD
						AP	AP				
						AP	AP				
						AP	AP				
						3P + 8S + 3P					



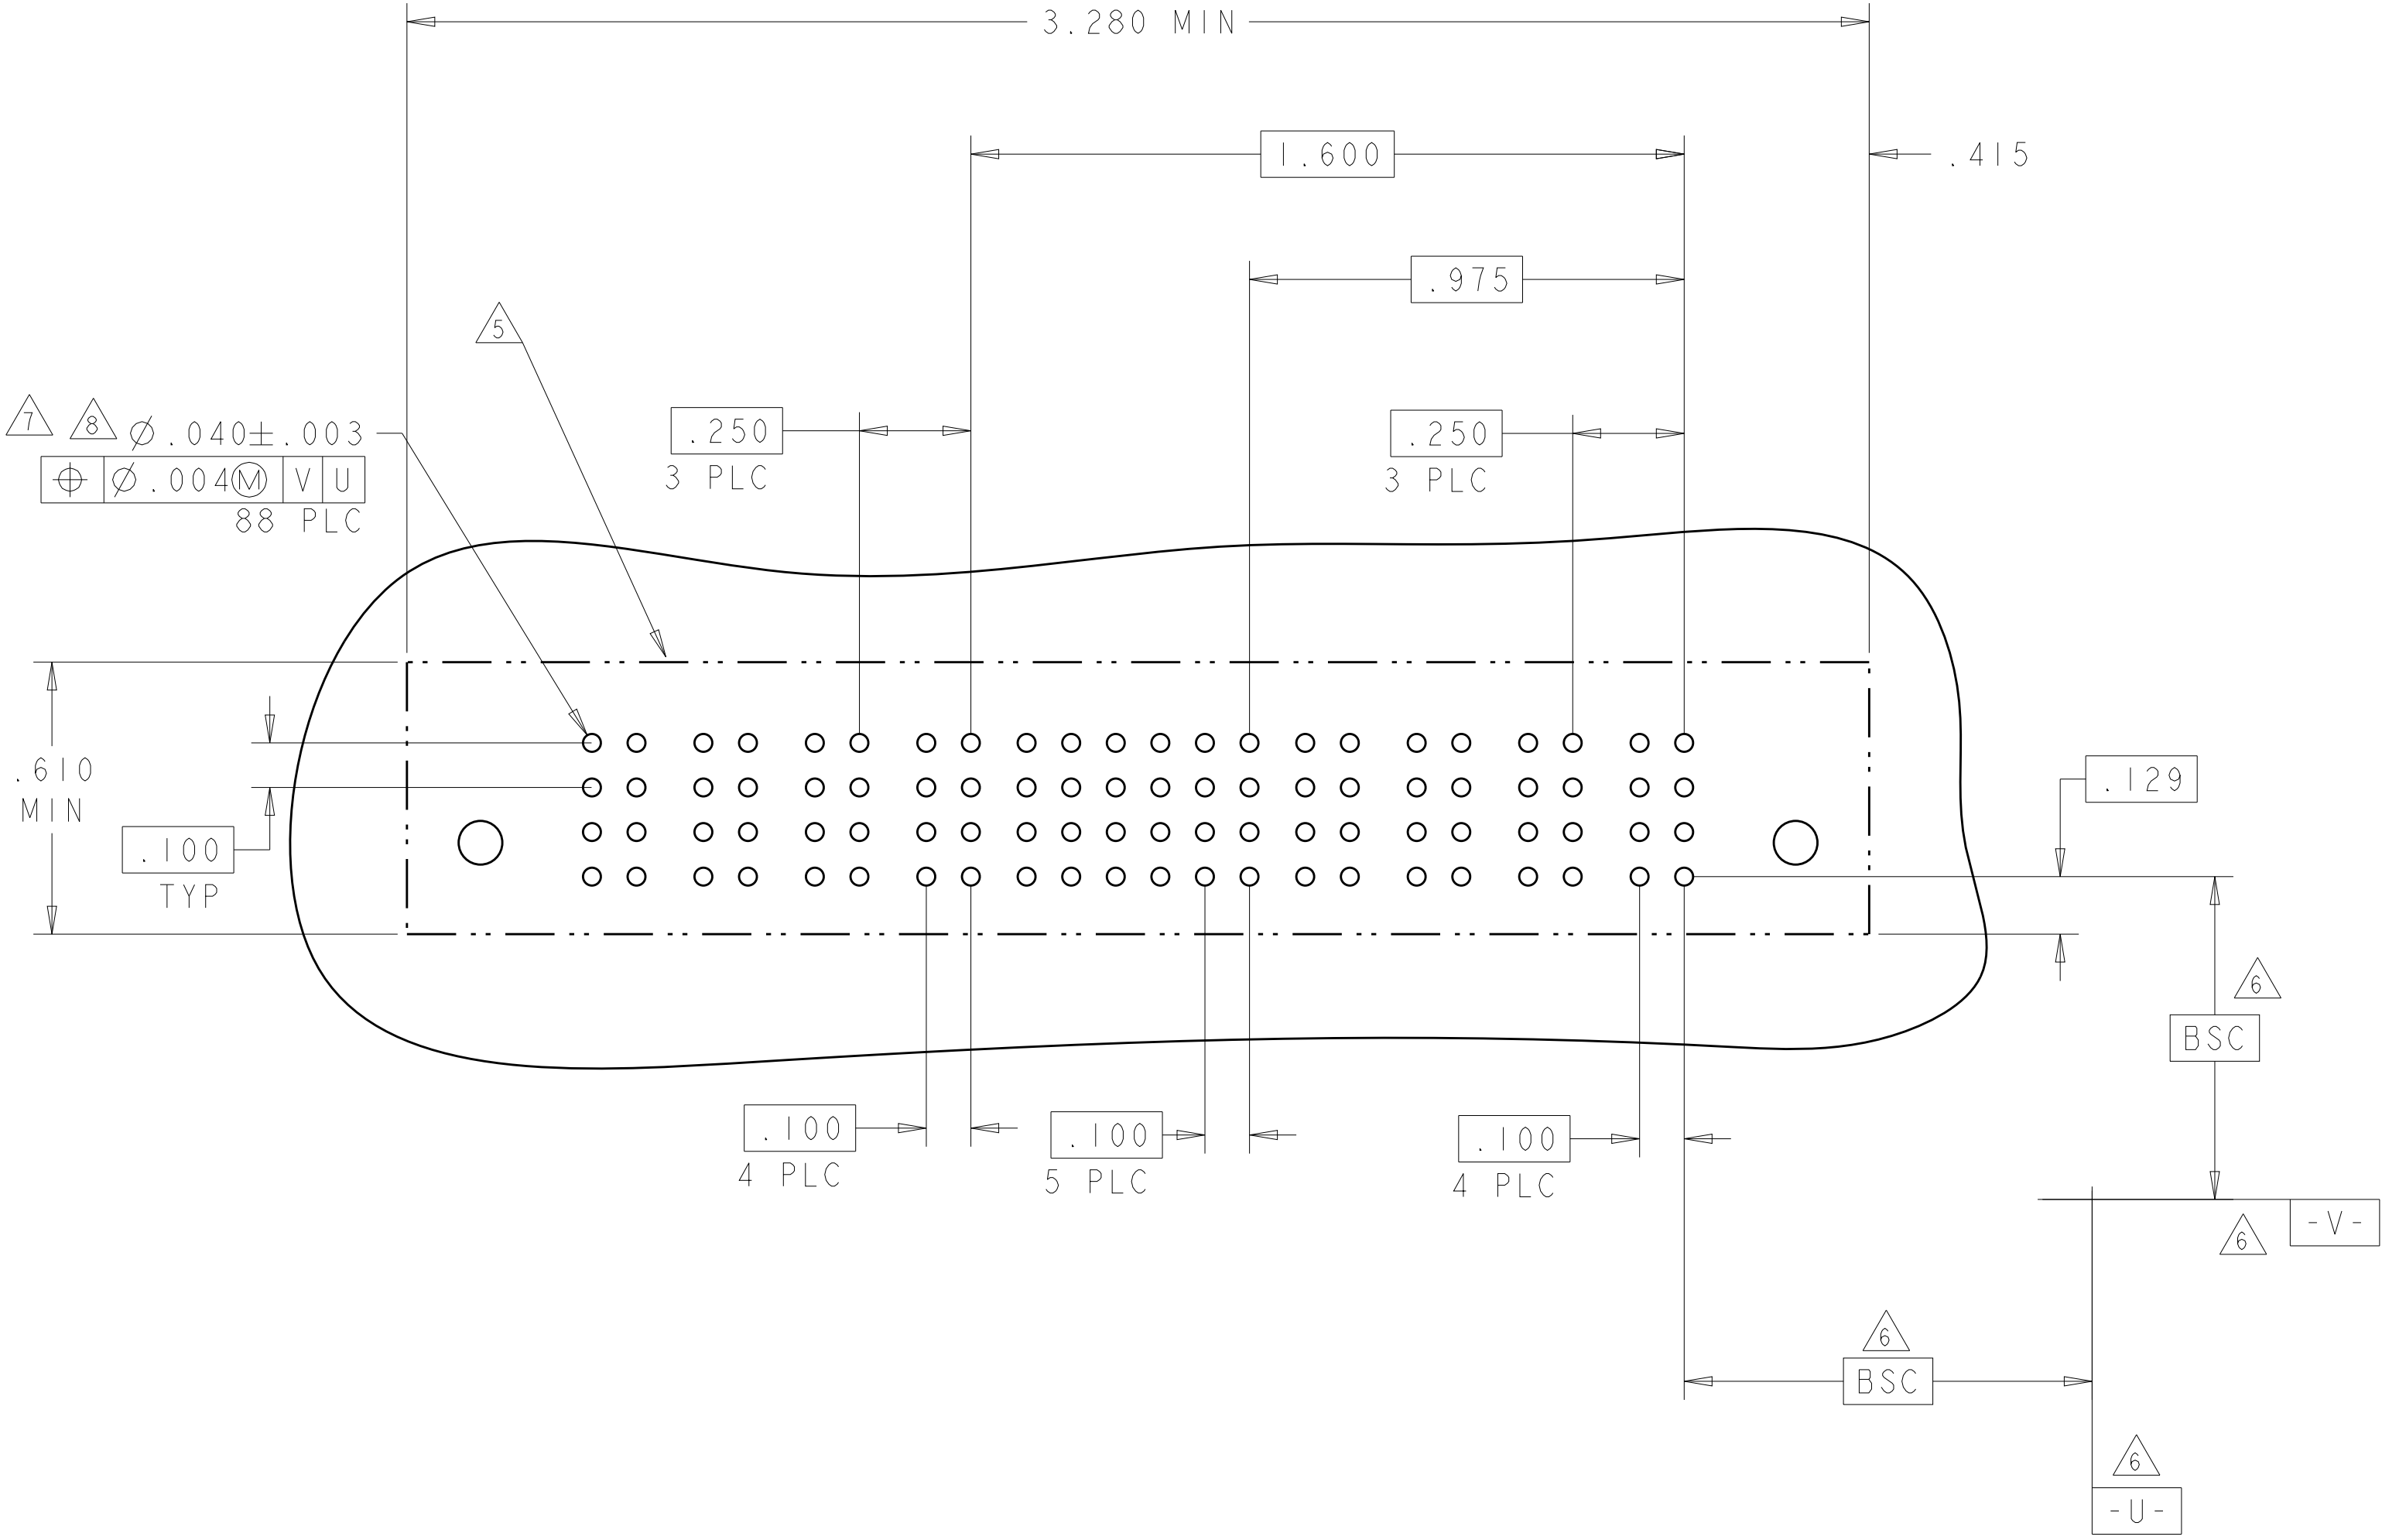
PART NUMBER	ROWS		POWER		SIGNAL						POWER				
			P4	P3	6	5	4	3	2	1	P2	P1			
5-6450540-9	D C B A					AP	AP	AP	AP	AP	AP	AP			
						AP	AP	AP	AP	AP	AP	AP			
						AP	AP	AP	AP	AP	AP	AP			
						AP	AP	AP	AP	AP	AP	AP			
2P + 24S + 2P															

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			-	SEE SHEET I	-	-	-

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI CHK M. PERCHERKE APVD M. PERCHERKE	29APR05 29APR05	NAME	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	
		0 PLC ±.01		108-1973	
		1 PLC ±.01		APPLICATION SPEC	
MATERIAL		FINISH		WEIGHT	
				114-13038	
				CUSTOMER DRAWING	
				SCALE 2:1	
				SHEET 14 OF 19	
				REV K9	

LOC		DIST		REVISIONS					
ES		00		P	LTR	DESCRIPTION			DATE
					-	SEE SHEET 1			-

PART NUMBER	ROWS		POWER				SIGNAL							POWER				
			P8	P7	P6	P5	6	5	4	3	2	1	P4	P3	P2	P1		
6-6450540-0	D C B A		GS	GS	GS	GS	AP	AP	AP	AP	AP	AP	GS	GS	GS	GS		
							AP	AP	AP	AP	AP	AP						
							AP	AP	AP	AP	AP	AP						
							AP	AP	AP	AP	AP	AP						
4P + 24S + 4P																		



THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
R.GRZYBOWSKI
CHK
M.PERCHERKE
APVD
M.PERCHERKE

29APR05
29APR05
-

DIMENSIONS:
INCHES

0 PLC ±"
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES #2°
FINISH

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

PRODUCT SPEC
108-1973
APPLICATION SPEC
114-13038
WEIGHT
-

MATERIAL

CUSTOMER DRAWING

SCALE 2:1

SHEET 15 OF 19

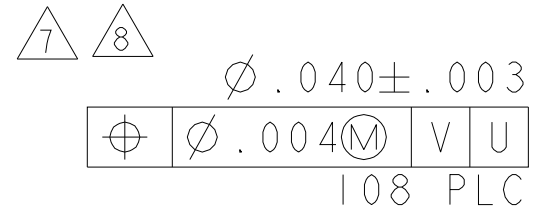
REV K9


TE Connectivity

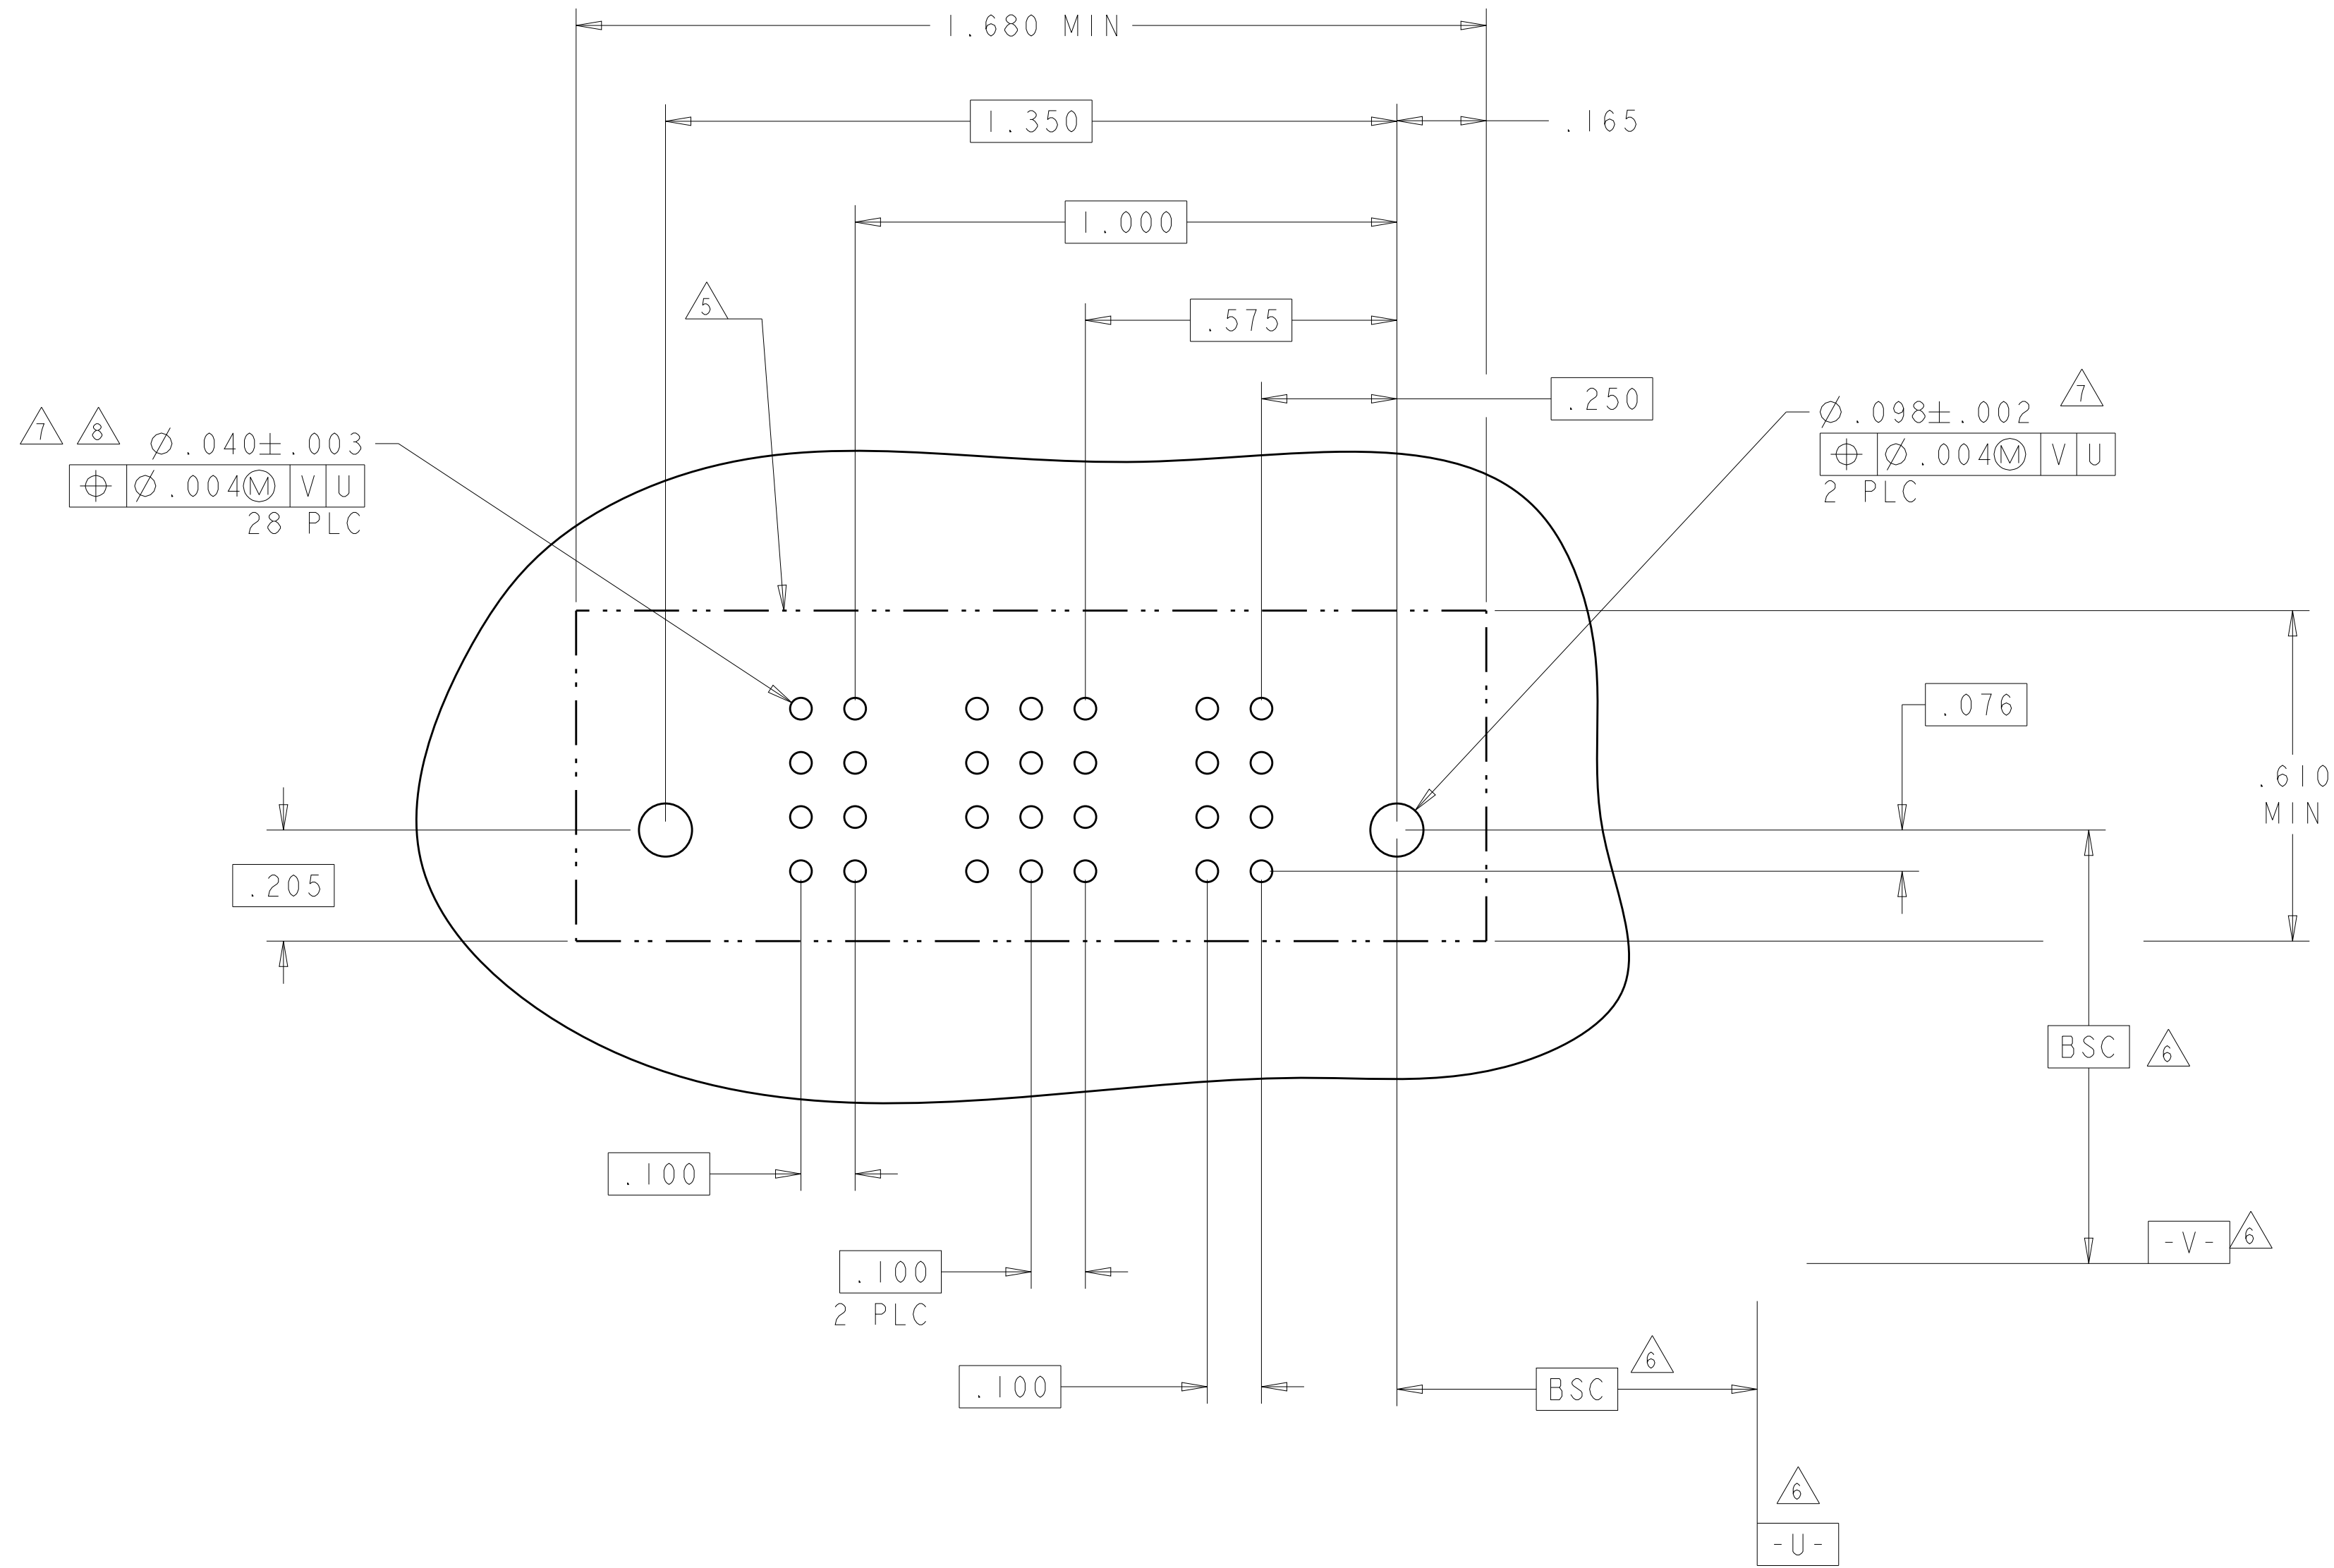
VERTICAL RECEPTACLE ASSEMBLY
WITH GUIDES
MULTI-BEAM XL

SIZE A1
CAGE CODE 00779
DRAWING NO. 6450540

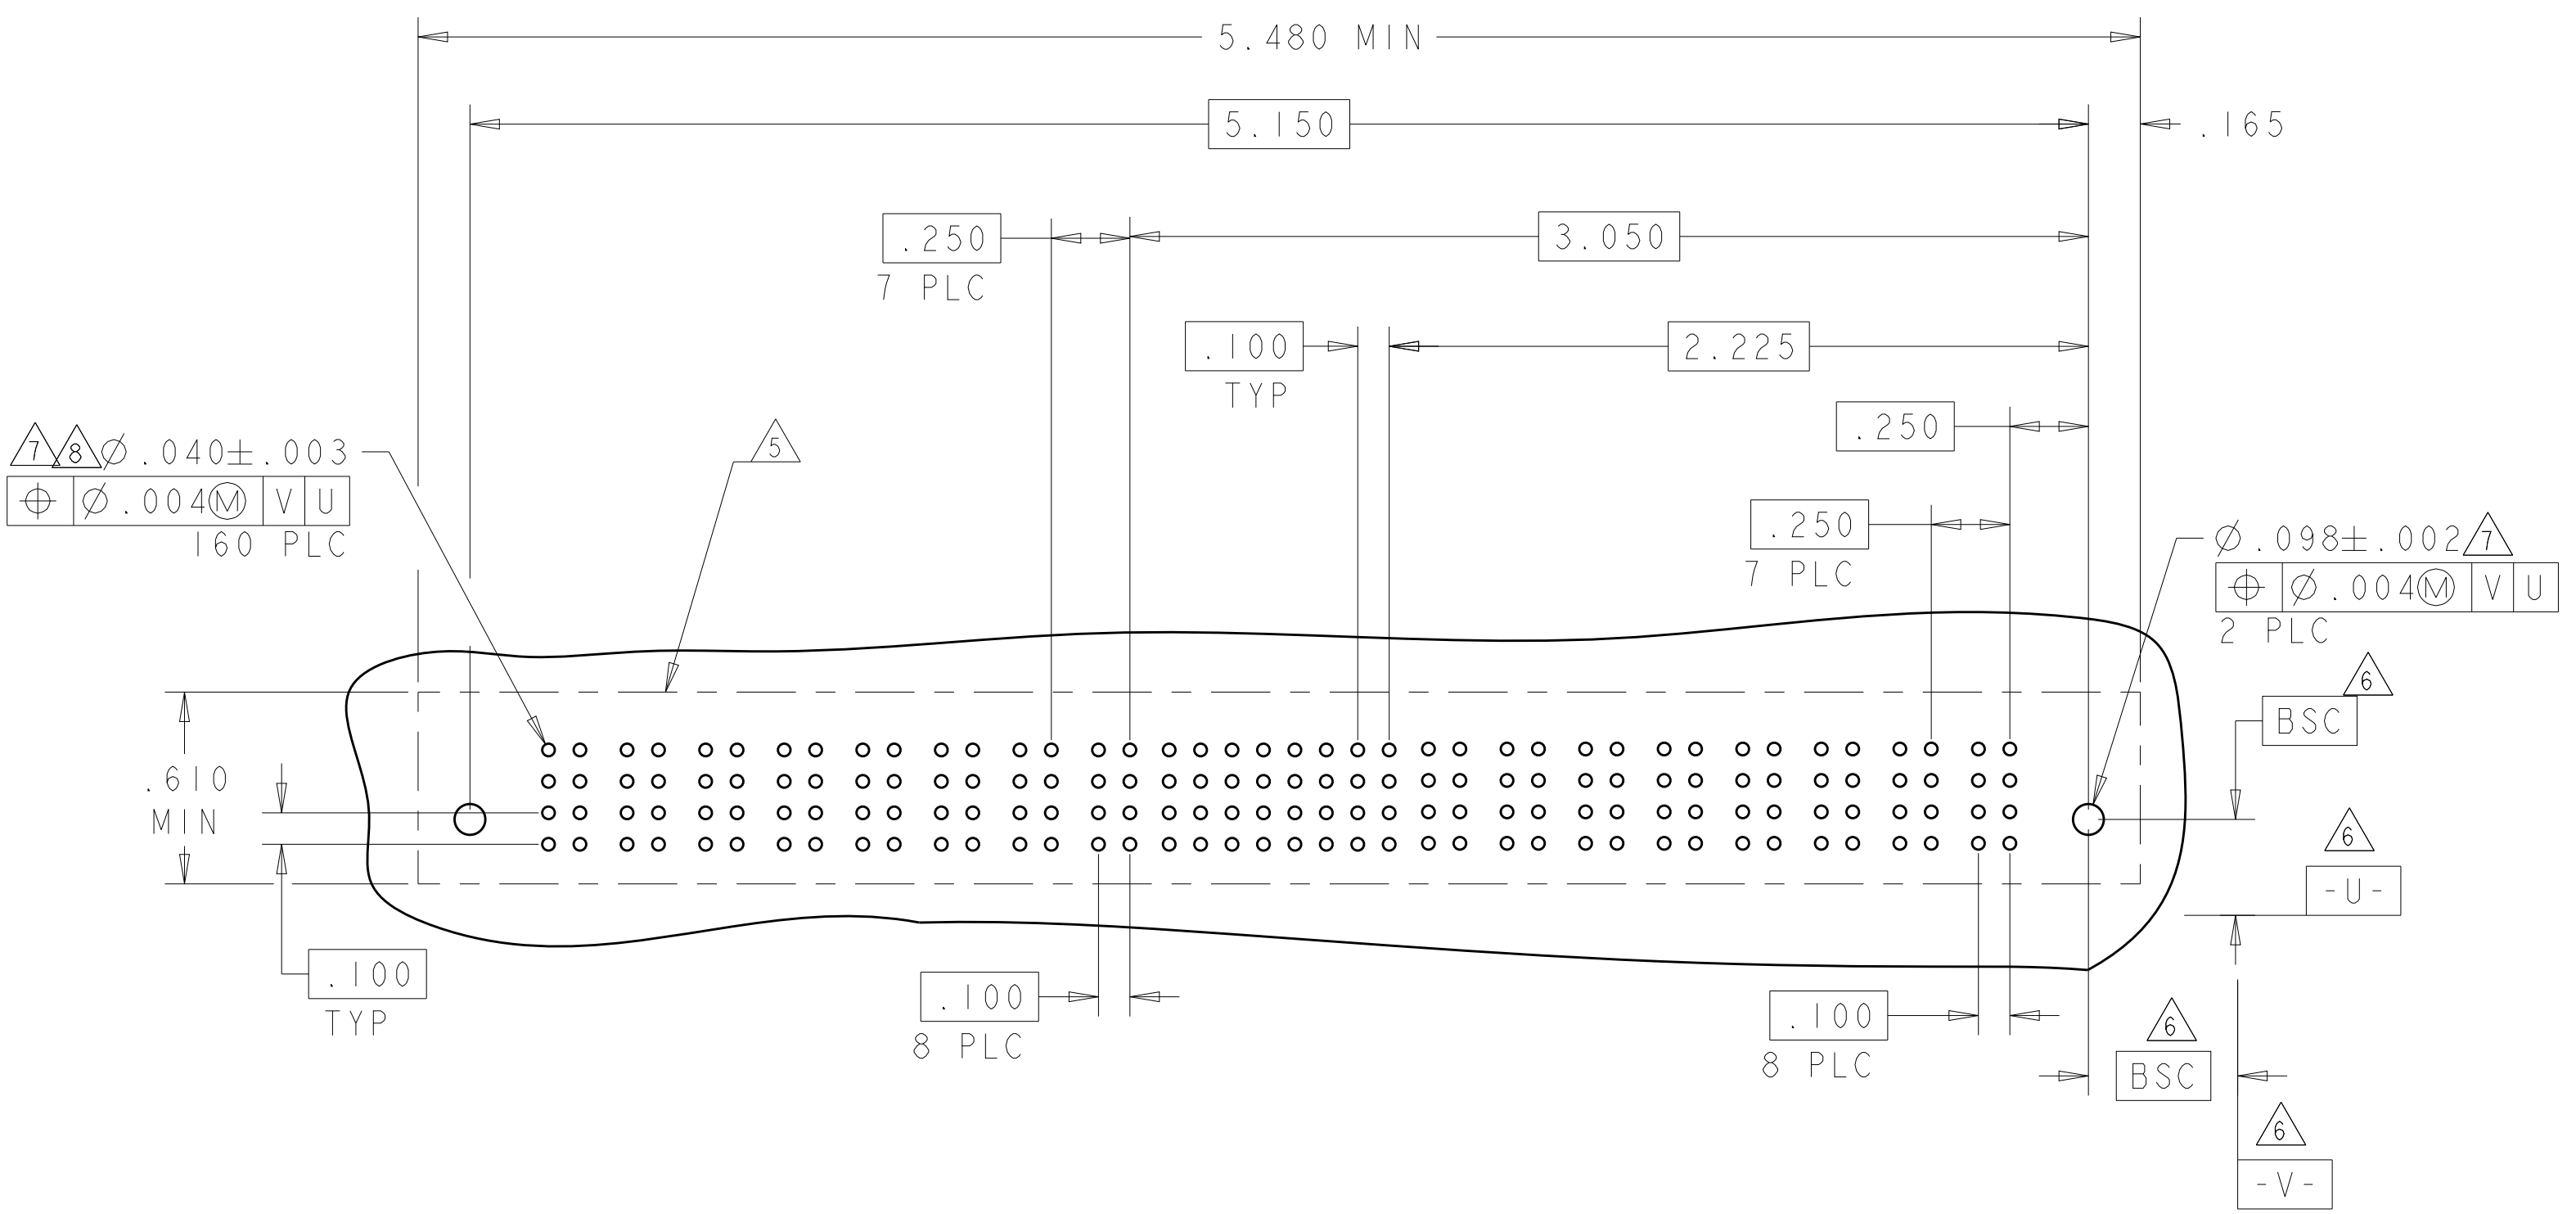
RESTRICTED TO
-


-NO SIGNAL CONTACTS4805 (3/11)

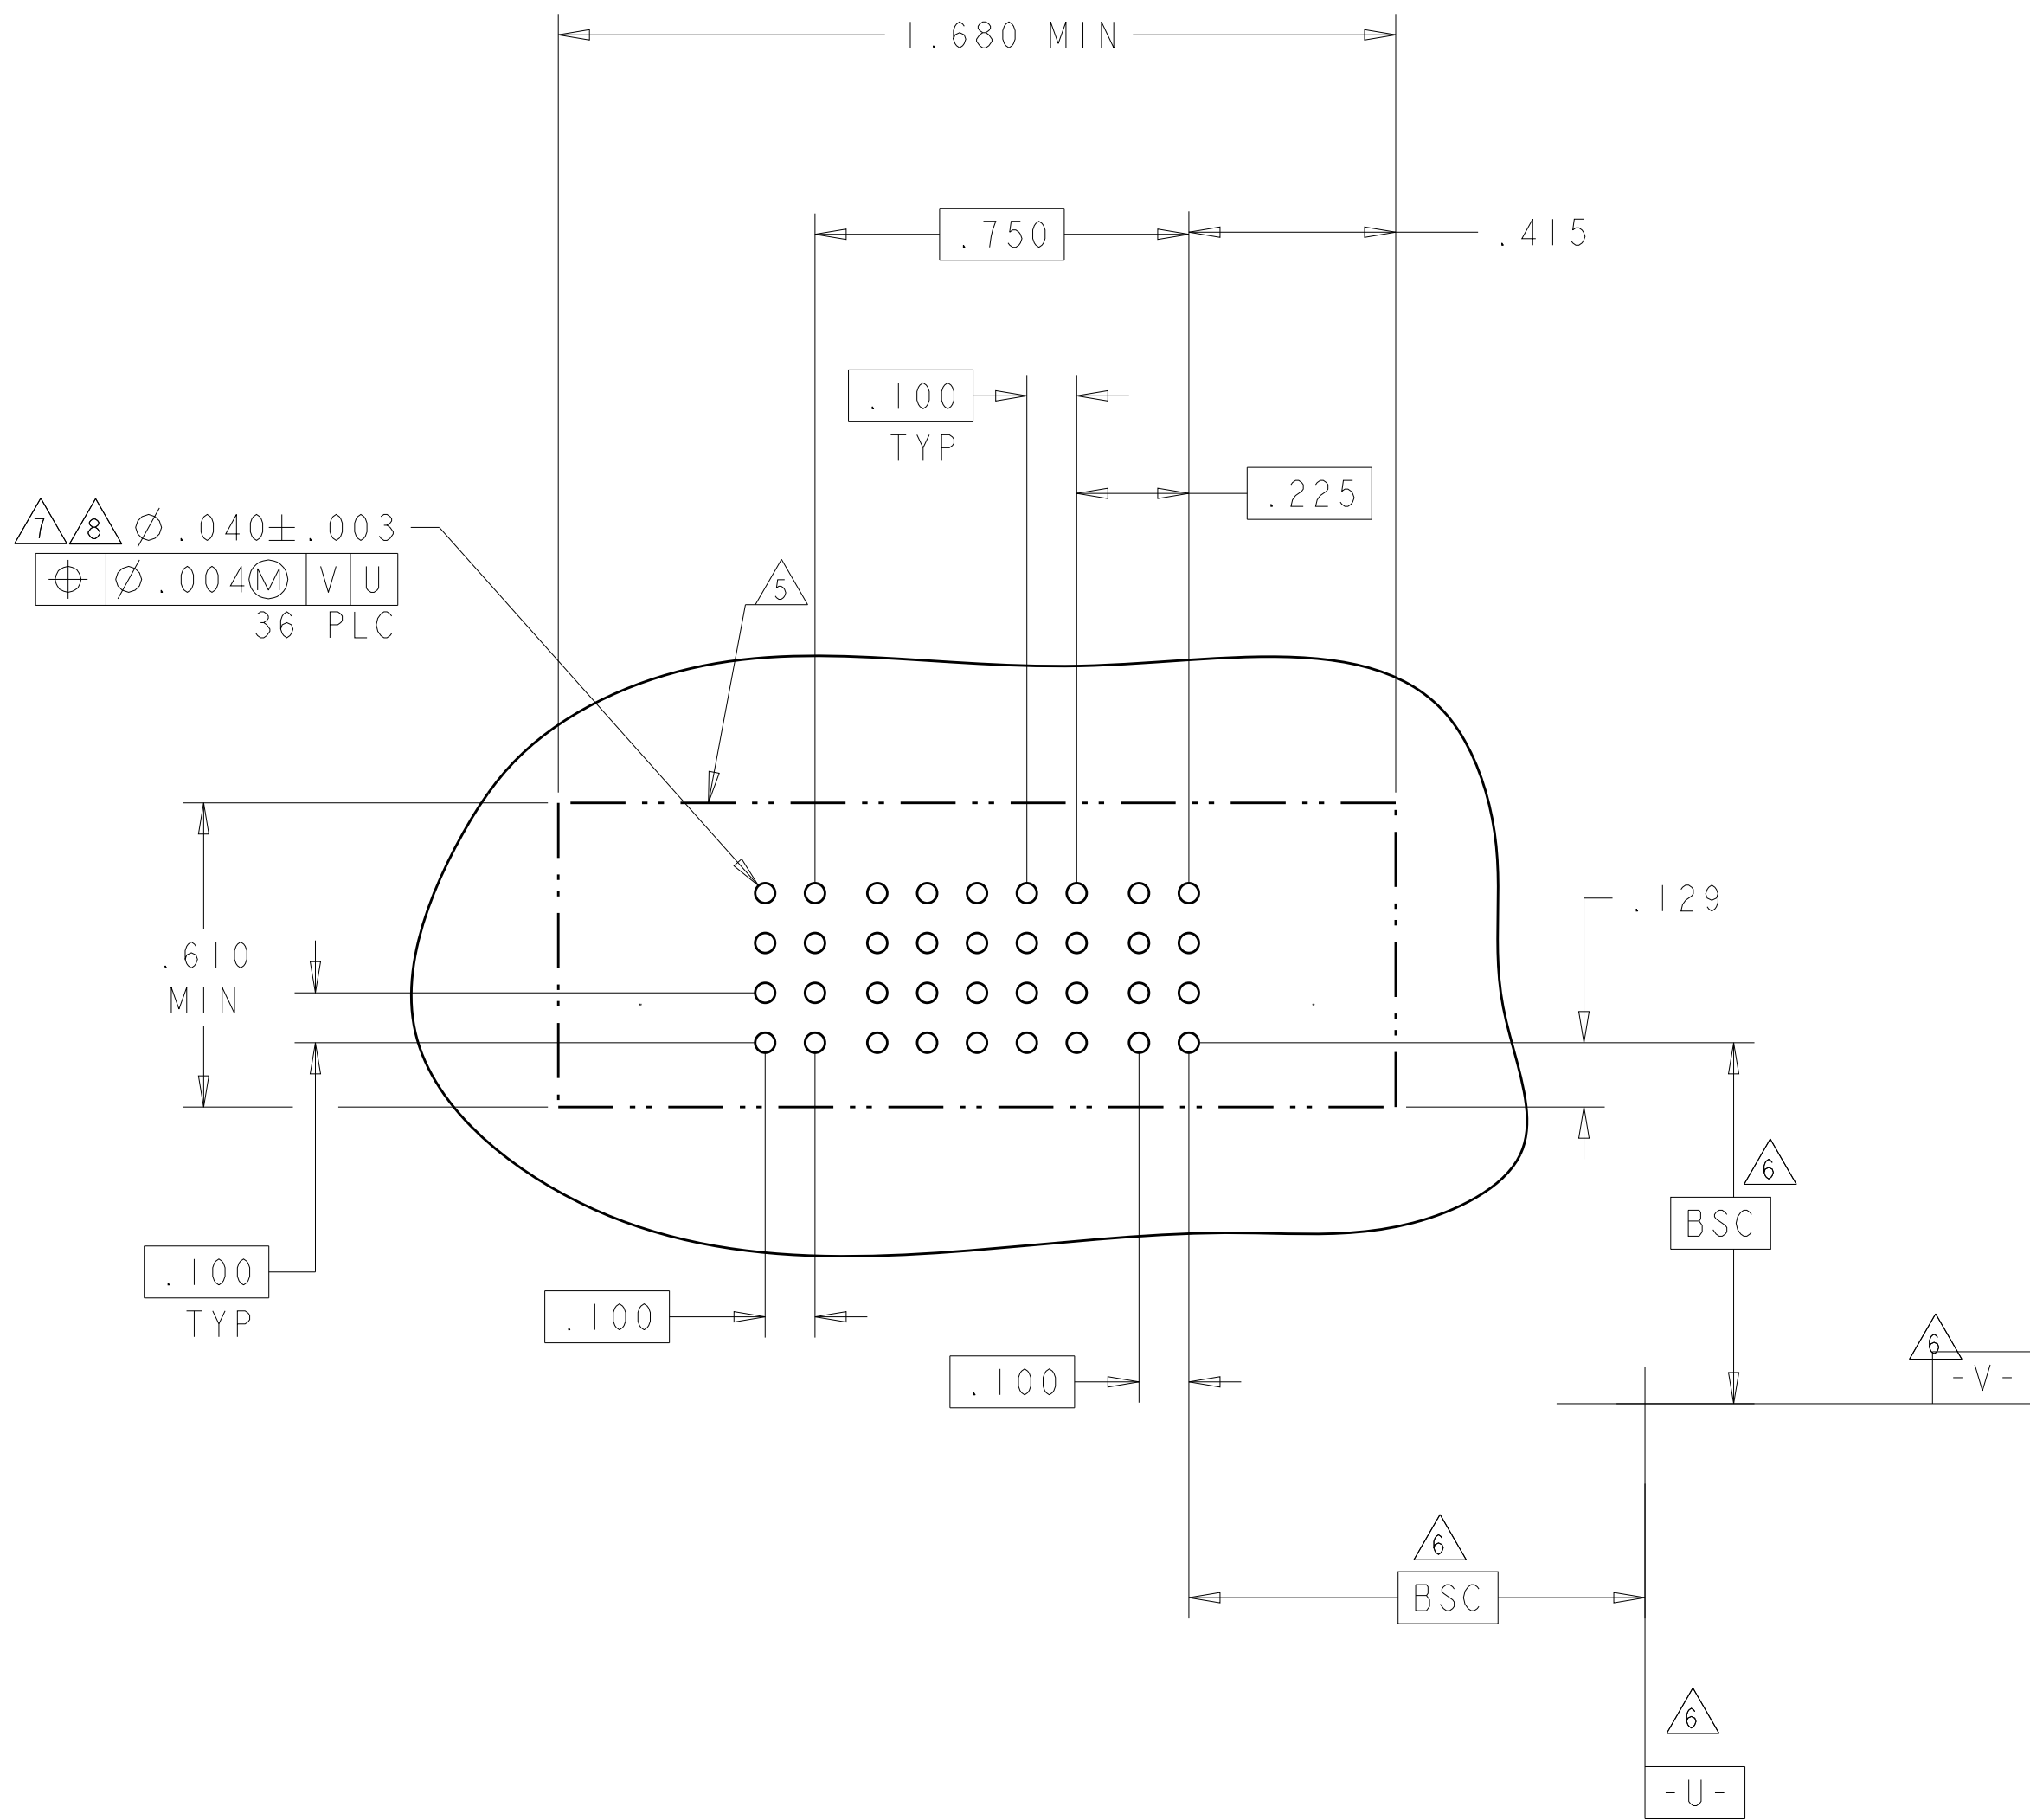
PART NUMBER	ROWS		POWER	SIGNAL						POWER																					
			P2	5	4	3	2	1	P1																						
6-6450540-2	D C B A	 	 <table data-bbox="804 470 1032 577"><tr><td></td><td>AP</td><td>AP</td><td>AP</td><td></td></tr><tr><td></td><td>AP</td><td>AP</td><td>AP</td><td></td></tr><tr><td></td><td>AP</td><td>AP</td><td>AP</td><td></td></tr><tr><td></td><td>AP</td><td>AP</td><td>AP</td><td></td></tr></table> 									AP	AP	AP			AP	AP	AP			AP	AP	AP			AP	AP	AP		 
	AP	AP	AP																												
	AP	AP	AP																												
	AP	AP	AP																												
	AP	AP	AP																												
IP + 20S + IP																															



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI 29APR05		 TE Connectivity	
DIMENSIONS:		CWH M. PERCHERKE 29APR05			
INCHES		APVD M. PERCHERKE -		NAME	
		PRODUCT SPEC		VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL	
0 PLC ±. 1 PLC ±. 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 <i>7</i> ANGLES		108-1973		SIZE	
FINISH		APPLICATION SPEC		CAGE CODE	
		114-13038		DRAWING NO	
MATERIAL		WEIGHT -		A100779 ©6450540	
		CUSTOMER DRAWING		RESTRICTED TO -	
		SCALE 2:1		SHEET 17 of 19 REV K9	

[illegible]4805 (3/11)

PART NUMBER	ROWS		POWER	S I G N A L						POWER																									
			P2	5	4	3	2	1	P1																										
6-6450540-6	D C B A			<table border="1"><tr><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td></tr><tr><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td></tr><tr><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td></tr><tr><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td></tr></table>						AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP		
AP	AP	AP	AP	AP	AP																														
AP	AP	AP	AP	AP	AP																														
AP	AP	AP	AP	AP	AP																														
AP	AP	AP	AP	AP	AP																														
IP + 20S + IP																																			

4805 (3/11)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9