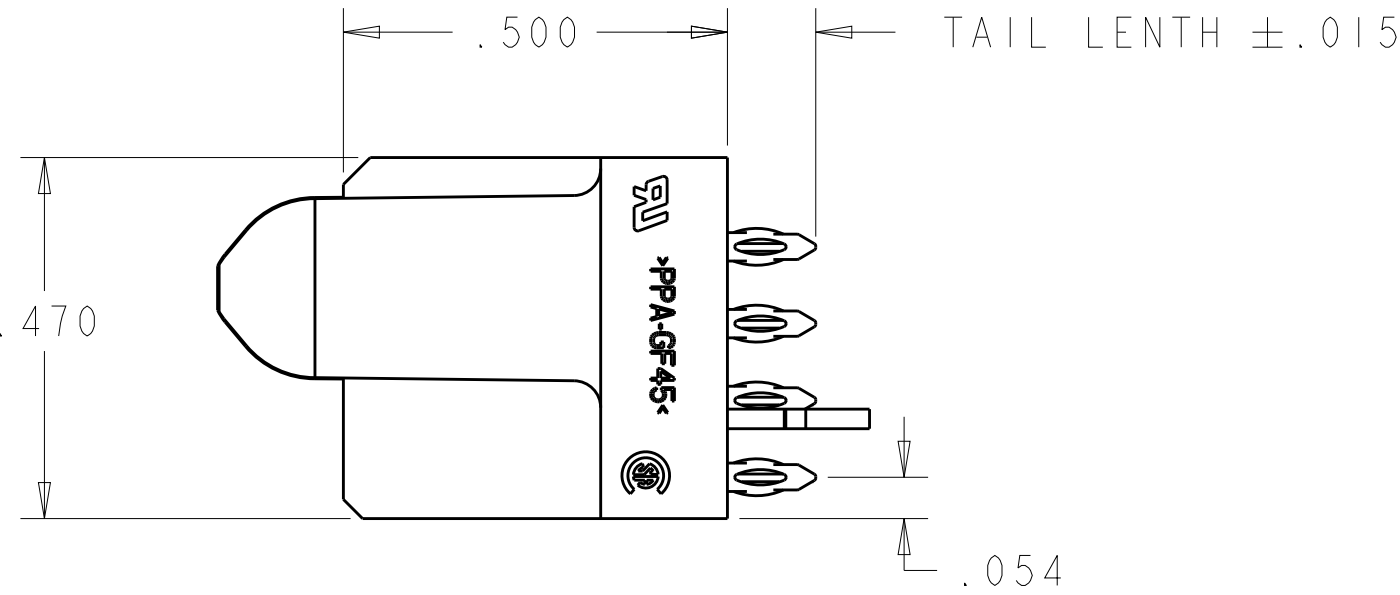
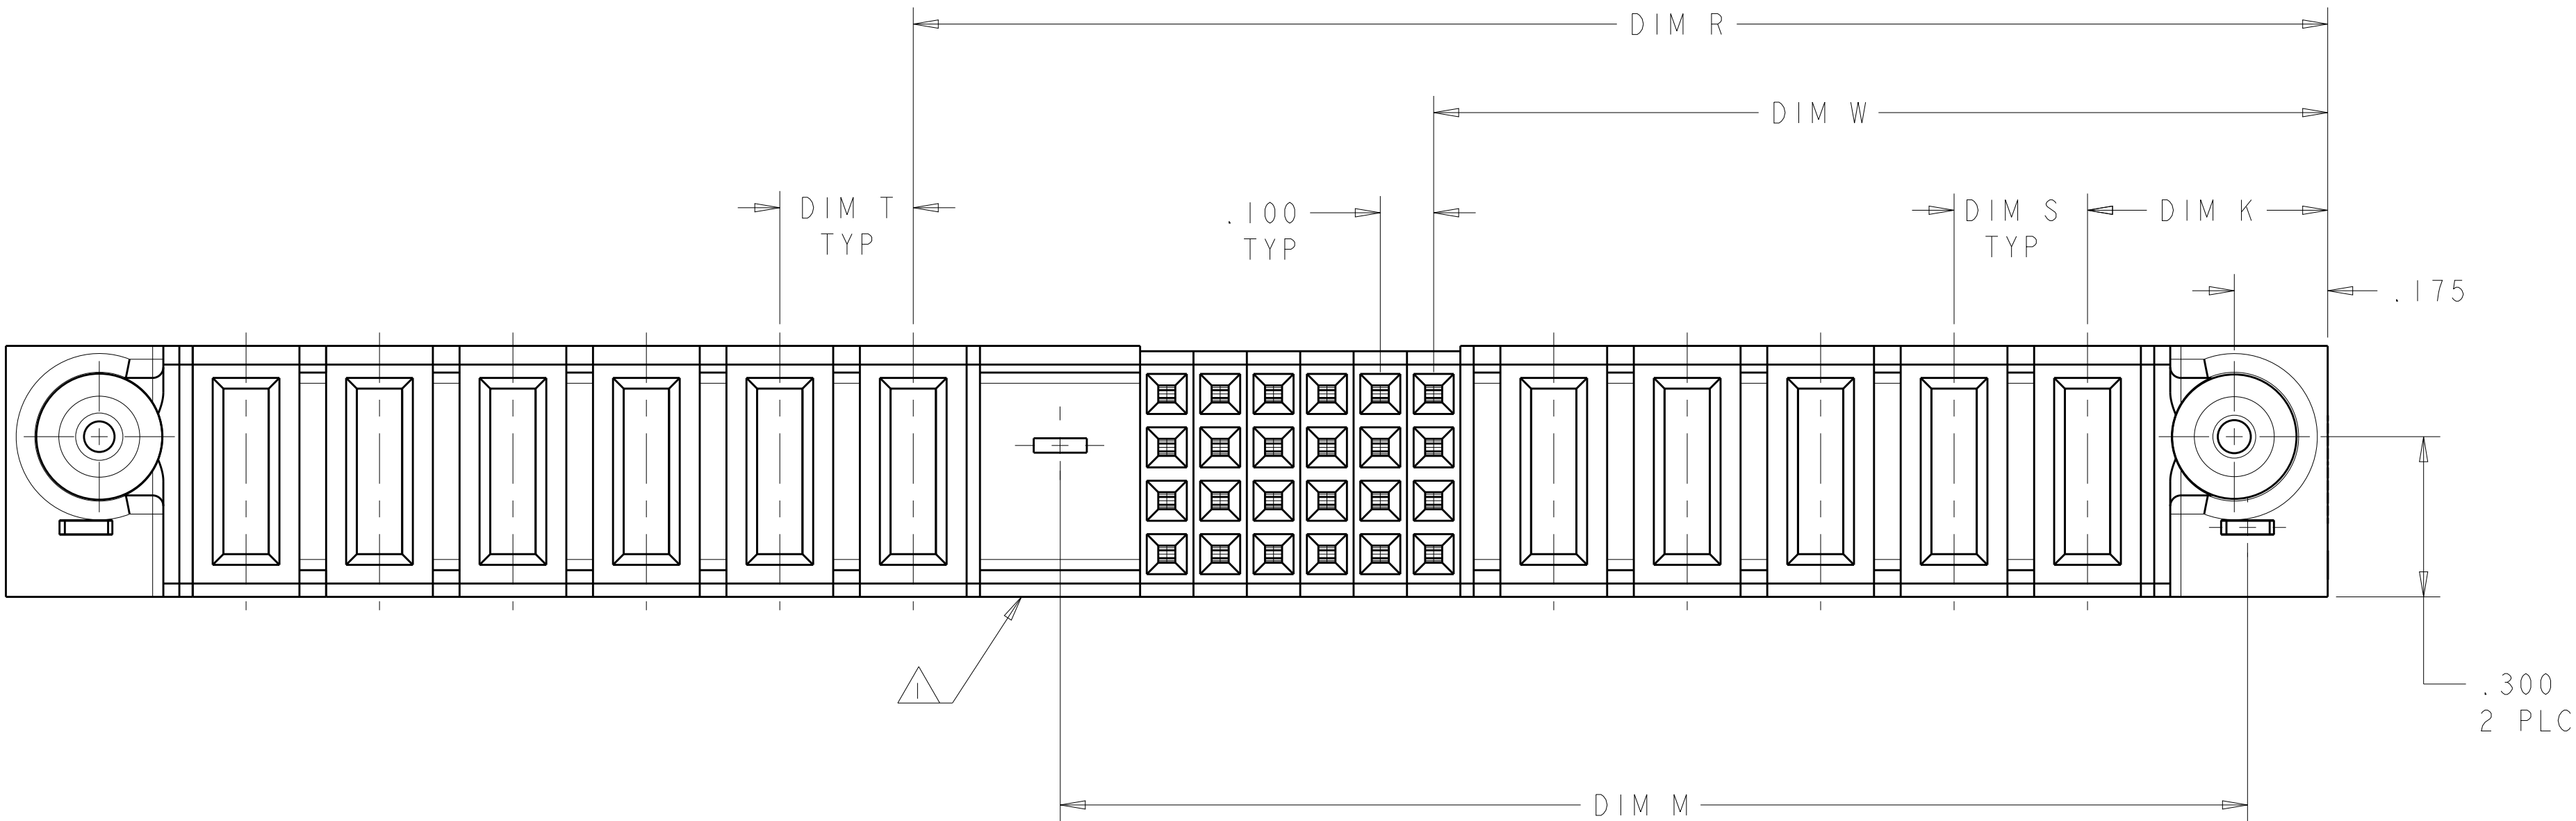
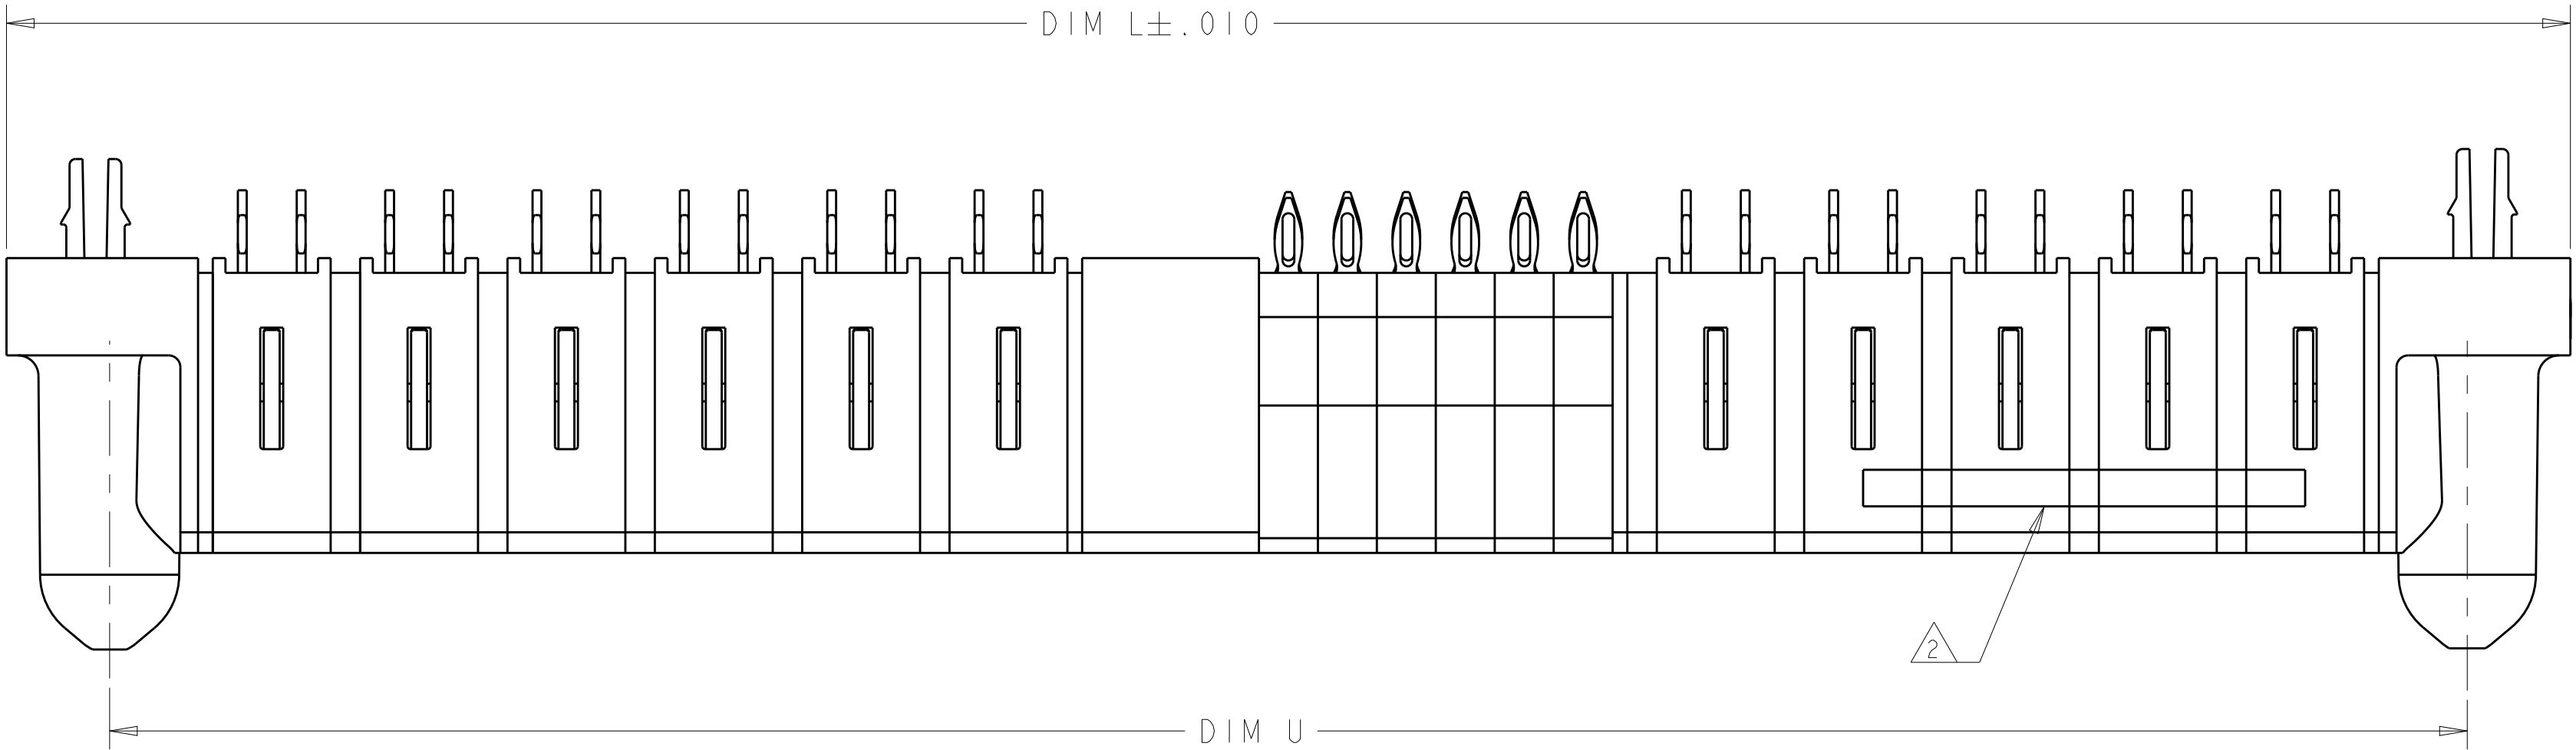
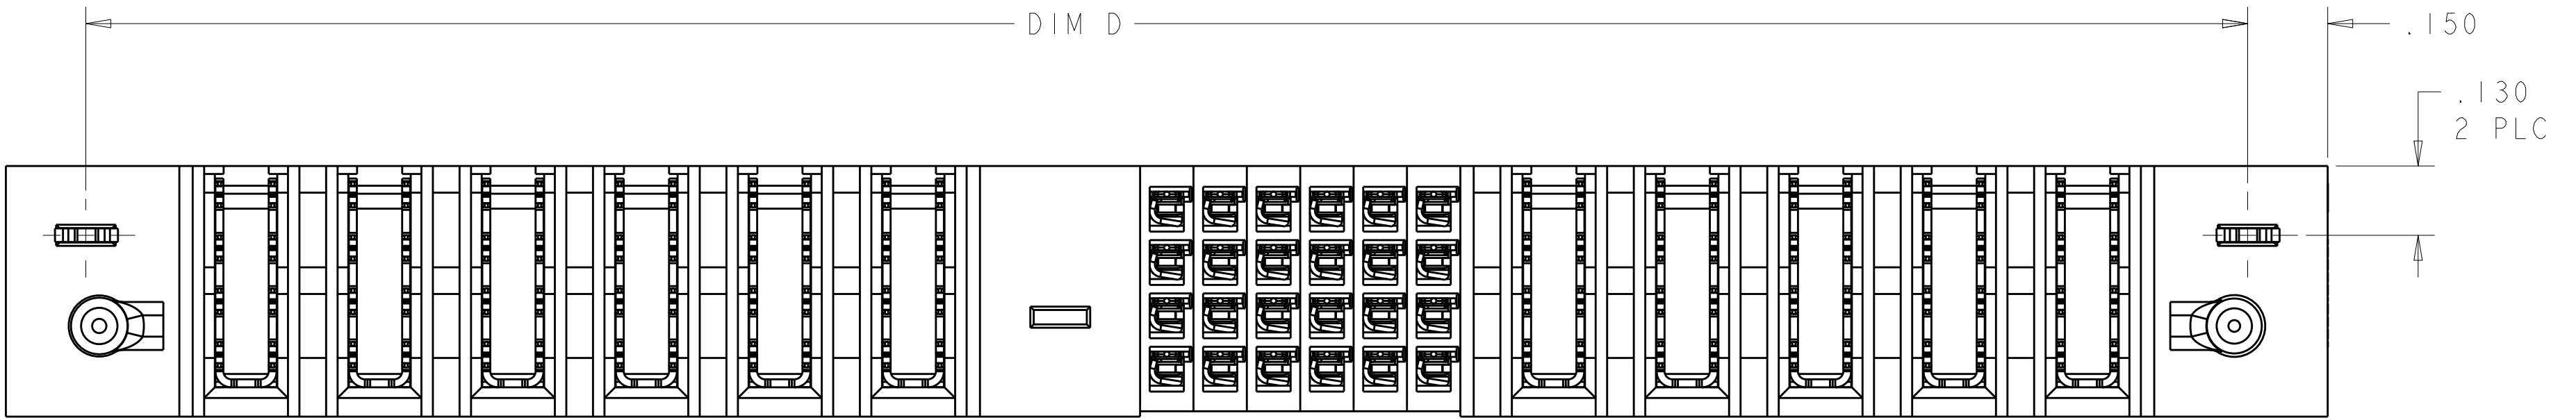


LOC		DIST		REVISIONS				
ES	00	P	LYR	DESCRIPTION	DATE	DWN	APVD	
		K9		REV PER ECR-12-018831	30OCT2012	AY	SZ	



- 1
- OPTIONAL CENTER MODULE, WITH Ø.150 THRU HOLE OR HOLD DOWN FEATURE
- 2
- "AMP", PART NUMBER AND DATE CODE TO BE MARKED IN AREA SHOWN
PARTS UNDER 2.00 LONG MAY BE MARKED ON BOTH SIDES
- 3
- MATERIAL: HOUSING - GLASS FILLED HIGH TEMP THERMO PLASTIC, UL94 V-O
SIGNAL CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
- 4
- CONTACT PLATING: NOBLE METAL PLATING ON CONTACT FUNCTIONAL AREA
OF POWER CONTACTS AND SIGNAL CONTACTS.
- 5
- MECHANICAL CONNECTOR KEEP OUT ZONE
- 6
- DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- 7
- PCB - ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES
- 8
- PCB - 0.0453 ±.0010 DRILLED HOLES PLATED WITH .0003 MIN Sn
OVER .001 TO .003 Cu PLATING TO ACHIEVE A .040 HOLE
- 9
- VARAIBLE DIMENSION SHOWN VIEW (SHEET 6)


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.GRZYBOWSKI 29APR05	TE Connectivity	VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL		
DIMENSIONS: INCHES		CHK M.PERCHERKE 29APR05				
	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD W.PERCHERKE	NAME	SIZE	CAGE CODE	DRAWING NO
		PRODUCT SPEC		A1	00779	6450540
	0 PLC ±.01 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±2° FINISH	APPLICATION SPEC				
		114-13038				
MATERIAL		WEIGHT				
3	4	CUSTOMER DRAWING	SCALE 2:1	SHEET 1	OF 19	REV K9

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

K9	1.350	1.300	-	-	1.200	.625	-	1.650	.450	1P + 20S + 1P	6-6450540-6
	2.550	2.500	.250	.250	1.650	1.375	-	2.85	.450	4P + 8S + 4P	6-6450540-5
	1.350	1.300	-	-	1.200	.625	-	1.650	.450	1P + 20S + 1P	6-6450540-2
	-	3.300	.200	.200	2.200	1.625	-	3.650	.450	6P + 20S + 6P	6-6450540-1
	2.950	2.900	.250	.250	2.050	1.375	-	3.250	.450	4P + 24S + 4P	6-6450540-0
	2.050	2.000	.250	.250	1.650	.925	-	2.350	.450	2P + 24S + 2P	5-6450540-9
	2.050	2.000	.250	.250	1.400	1.125	-	2.350	.450	3P + 8S + 3P	5-6450540-5
	2.500	2.450	.250	.250	1.850	1.375	-	2.800	.450	4P + 16S + 3P	5-6450540-4
	2.950	2.900	.250	.250	2.050	1.375	-	3.250	.450	4P + 24S + 4P	5-6450540-3
	1.350	1.300	-	-	1.200	.675	-	1.650	.450	1P + 16S + 1P	5-6450540-2
	1.750	1.700	.250	.250	1.350	.875	-	2.050	.450	2P + 16S + 2P	5-6450540-1
	5.950	5.900	.250	.250	3.550	2.8750	-	6.250	.450	10P + 24S + 10P	5-6450540-0
	5.150	5.100	.250	.250	3.250	2.375	-	5.450	.450	8P + 32S + 8P	4-6450540-9
	1.250	1.200	-	-	1.100	.625	-	1.550	.450	1P + 16S + 1P	4-6450540-8
	2.150	2.100	.250	.250	1.500	1.175	-	2.450	.450	3P + 8S + 3P	4-6450540-7
	1.150	1.100	-	-	1.000	.675	-	1.450	.450	1P + 8S + 1P	4-6450540-6
	-	-	-	.200	-	-	-	2.820	.450	12HDP	4-6450540-5
	-	-	.200	.200	2.600	1.625	-	3.970	.450	6HDP + 36S + 7HDP	4-6450540-4
	2.65	2.60	.250	.250	2.250	1.625	-	2.950	.450	5P + 20S + 2P	(E)4-6450540-3
	-	-	-	.200	-	-	-	2.620	.450	11HDP	(E)4-6450540-2
	-	-	.200	.200	2.600	1.625	-	3.770	.450	6P + 36S + 6P	4-6450540-1
	-	-	.200	.200	4.500	3.425	-	7.470	.450	15P + 40S + 15P	4-6450540-0
	-	-	.200	.200	-	-	-	7.470	-	15P + 40S + 15P	(D)3-6450540-9
	4.650	4.600	.250	.250	3.250	1.875	-	4.950	.450	6P + 52S + 6P	(D)2-6450540-7
	1.950	1.900	-	-	1.550	.875	-	2.250	.450	2P + 24S + 2P	(D)2-6450540-5
	2.450	2.400	.250	.250	1.800	1.125	-	2.750	.450	3P + 24S + 3P	(D)2-6450540-0
	-	1.575	-	-	1.425	.700	-	1.925	.475	1P + 24S + 1P	(E)1-6450540-8
	-	5.450			3.075	2.425	-	5.800	.425	10P + 24S + 12P	1-6450540-4
	3.250	3.200	.200	.200	2.125	1.575	-	3.550	.425	6P + 20S + 6P	1-6450540-2
	-	2.850	.250	.250	2.000	1.125	-	3.200	.450	3P + 32S + 4P	1-6450540-1
	1.950	1.900	.250	.250	1.550	.875	-	2.250	.450	2P + 24S + 2P	1-6450540-0
	-	1.400	.250	.250	1.300	.625	-	1.750	.450	1P + 24S + 1P	6450540-7
	-	2.400	.250	.250	2.050	1.375	-	2.750	.450	4P + 24S + 2P	6450540-6
	-	3.100	.250	.250	2.000	1.625	-	3.450	.450	5P + 12S + 5P	6450540-5
	-	3.400	.250	.250	2.050	1.375	-	3.750	.450	4P + 24S + 6P	6450540-4
	-	7.400	.250	.250	5.050	2.875	-	7.750	.450	10P + 84S + 10P	6450540-3
	-	4.000	.250	.250	2.650	1.675	2.225	4.350	.450	5P+24S+1M+6P	6450540-2
	-	1.575	-	-	1.425	.700	-	1.925	.475	1P + 24S + 1P	6450540-1
	D	U	T	S	R	W	M	L	K	DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.
TOLERANCES UNLESS OTHERWISE SPECIFIED:

DIMENSIONS:
INCHES



MATERIAL

0 PLC ±.1
1 PLC ±.01
2 PLC ±.005
3 PLC ±.005
4 PLC ±.0020
ANGLES ±.2°
FINISH

DWN
R. GRZYBOWSKI
CHK
M. PERCHERKE
APVD
M. PERCHERKE

29APR05
29APR05

PRODUCT SPEC
108-1973
APPLICATION SPEC
114-13038
WEIGHT
-

CUSTOMER DRAWING

NAME
VERTICAL RECEPTACLE ASSEMBLY
WITH GUIDES
MULTI-BEAM XL

SIZE
A1

CAGE CODE
100779

DRAWING NO
6450540

RESTRICTED TO
-

SCALE
2:1

SHEET
2

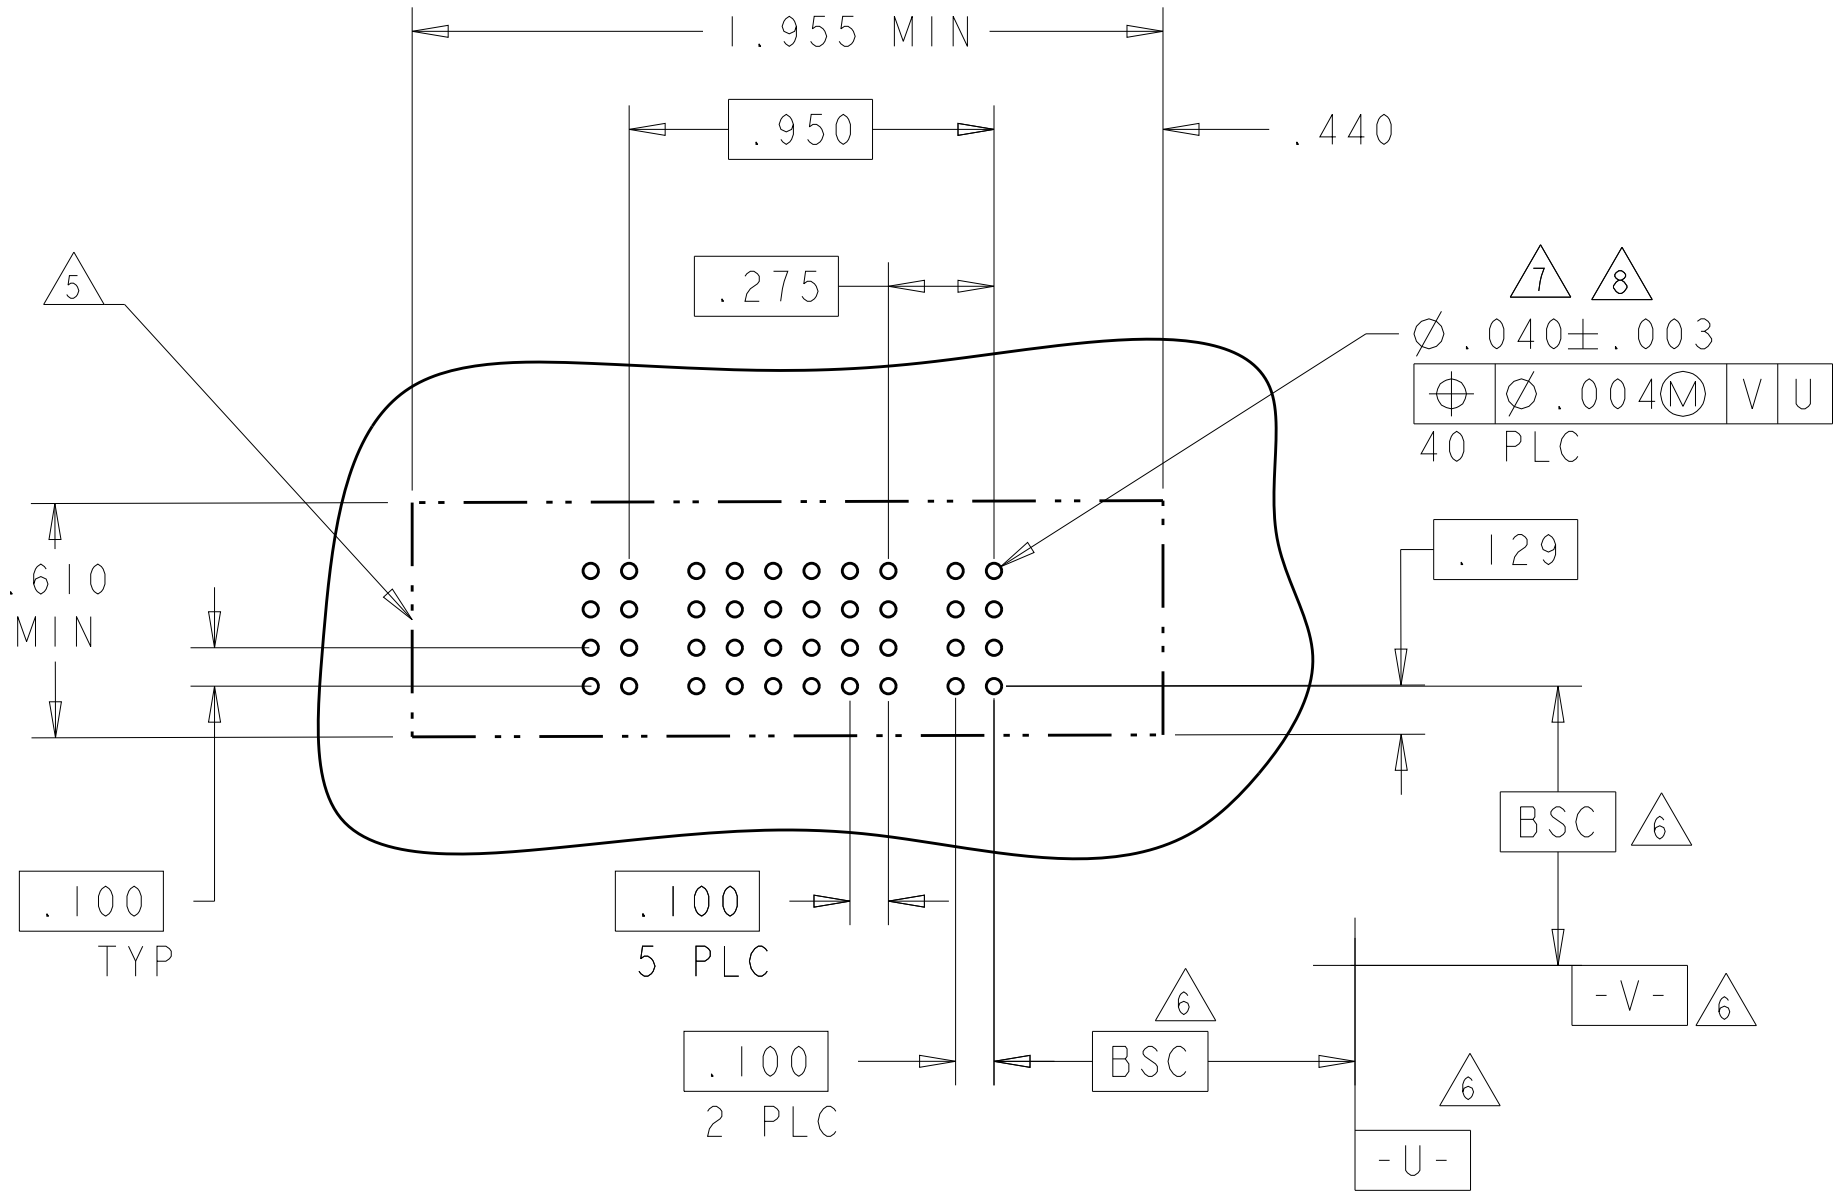
OF
19




REV
K9

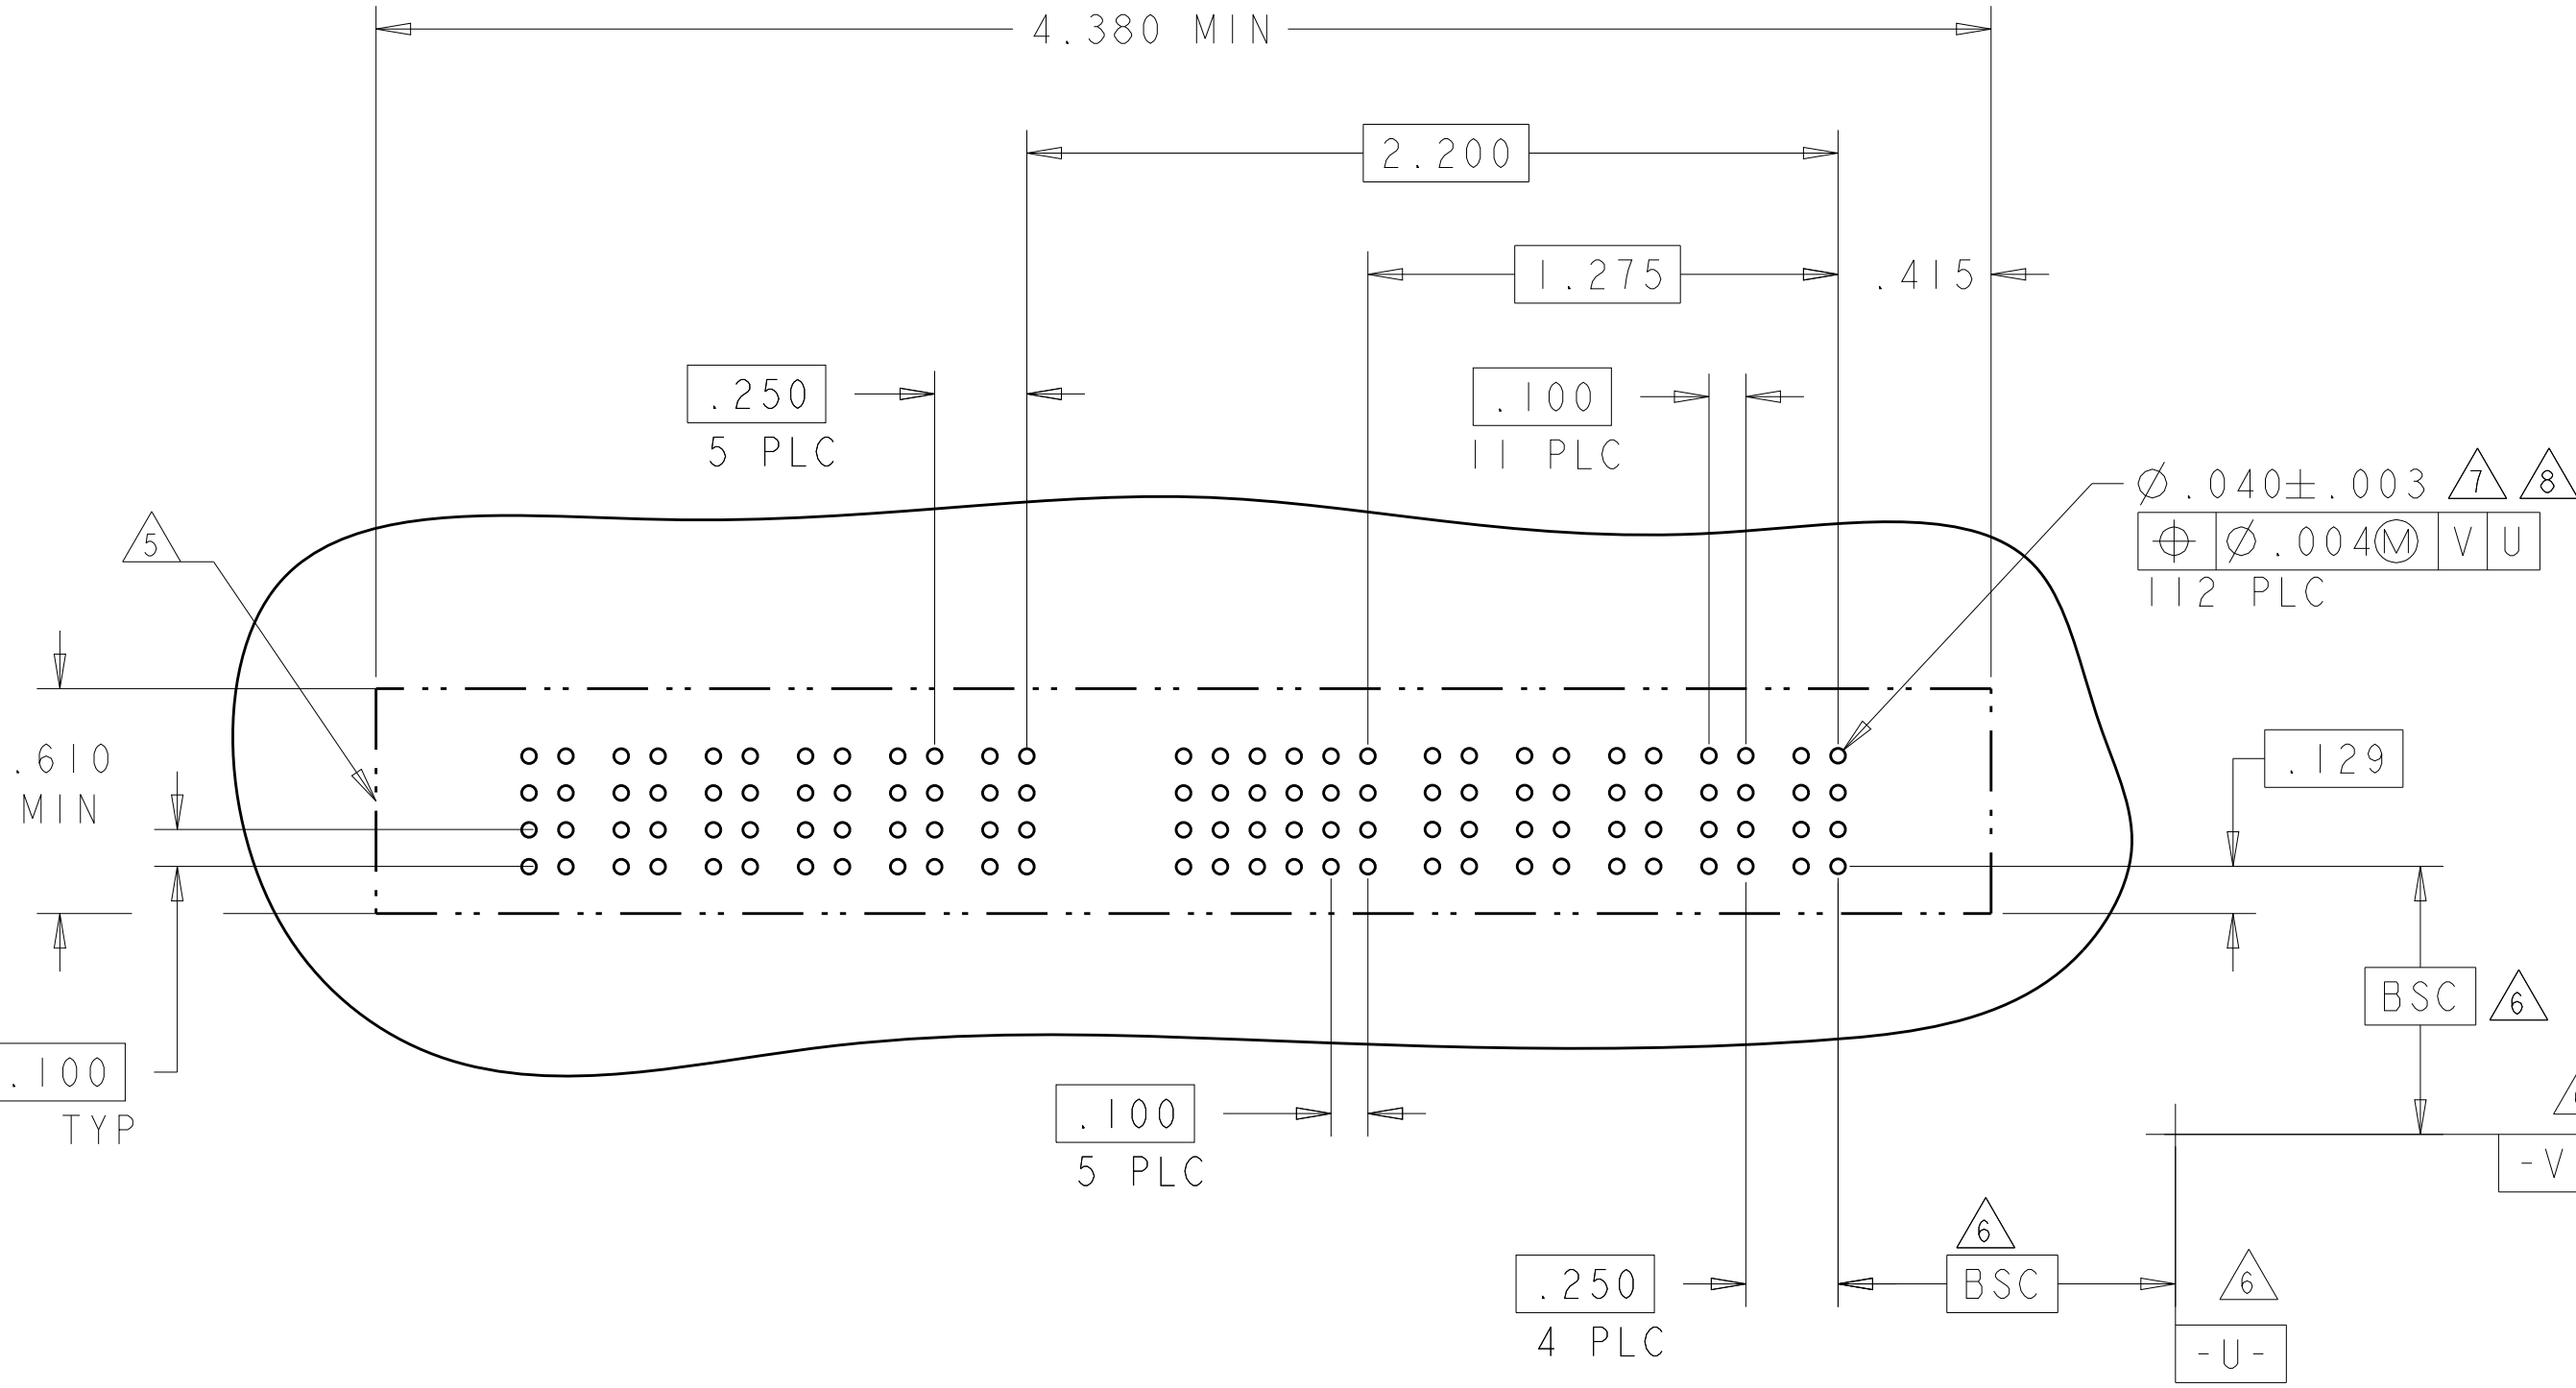
ITE Connectivity

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
ES	00	-		SEE SHEET 1	-	-	-

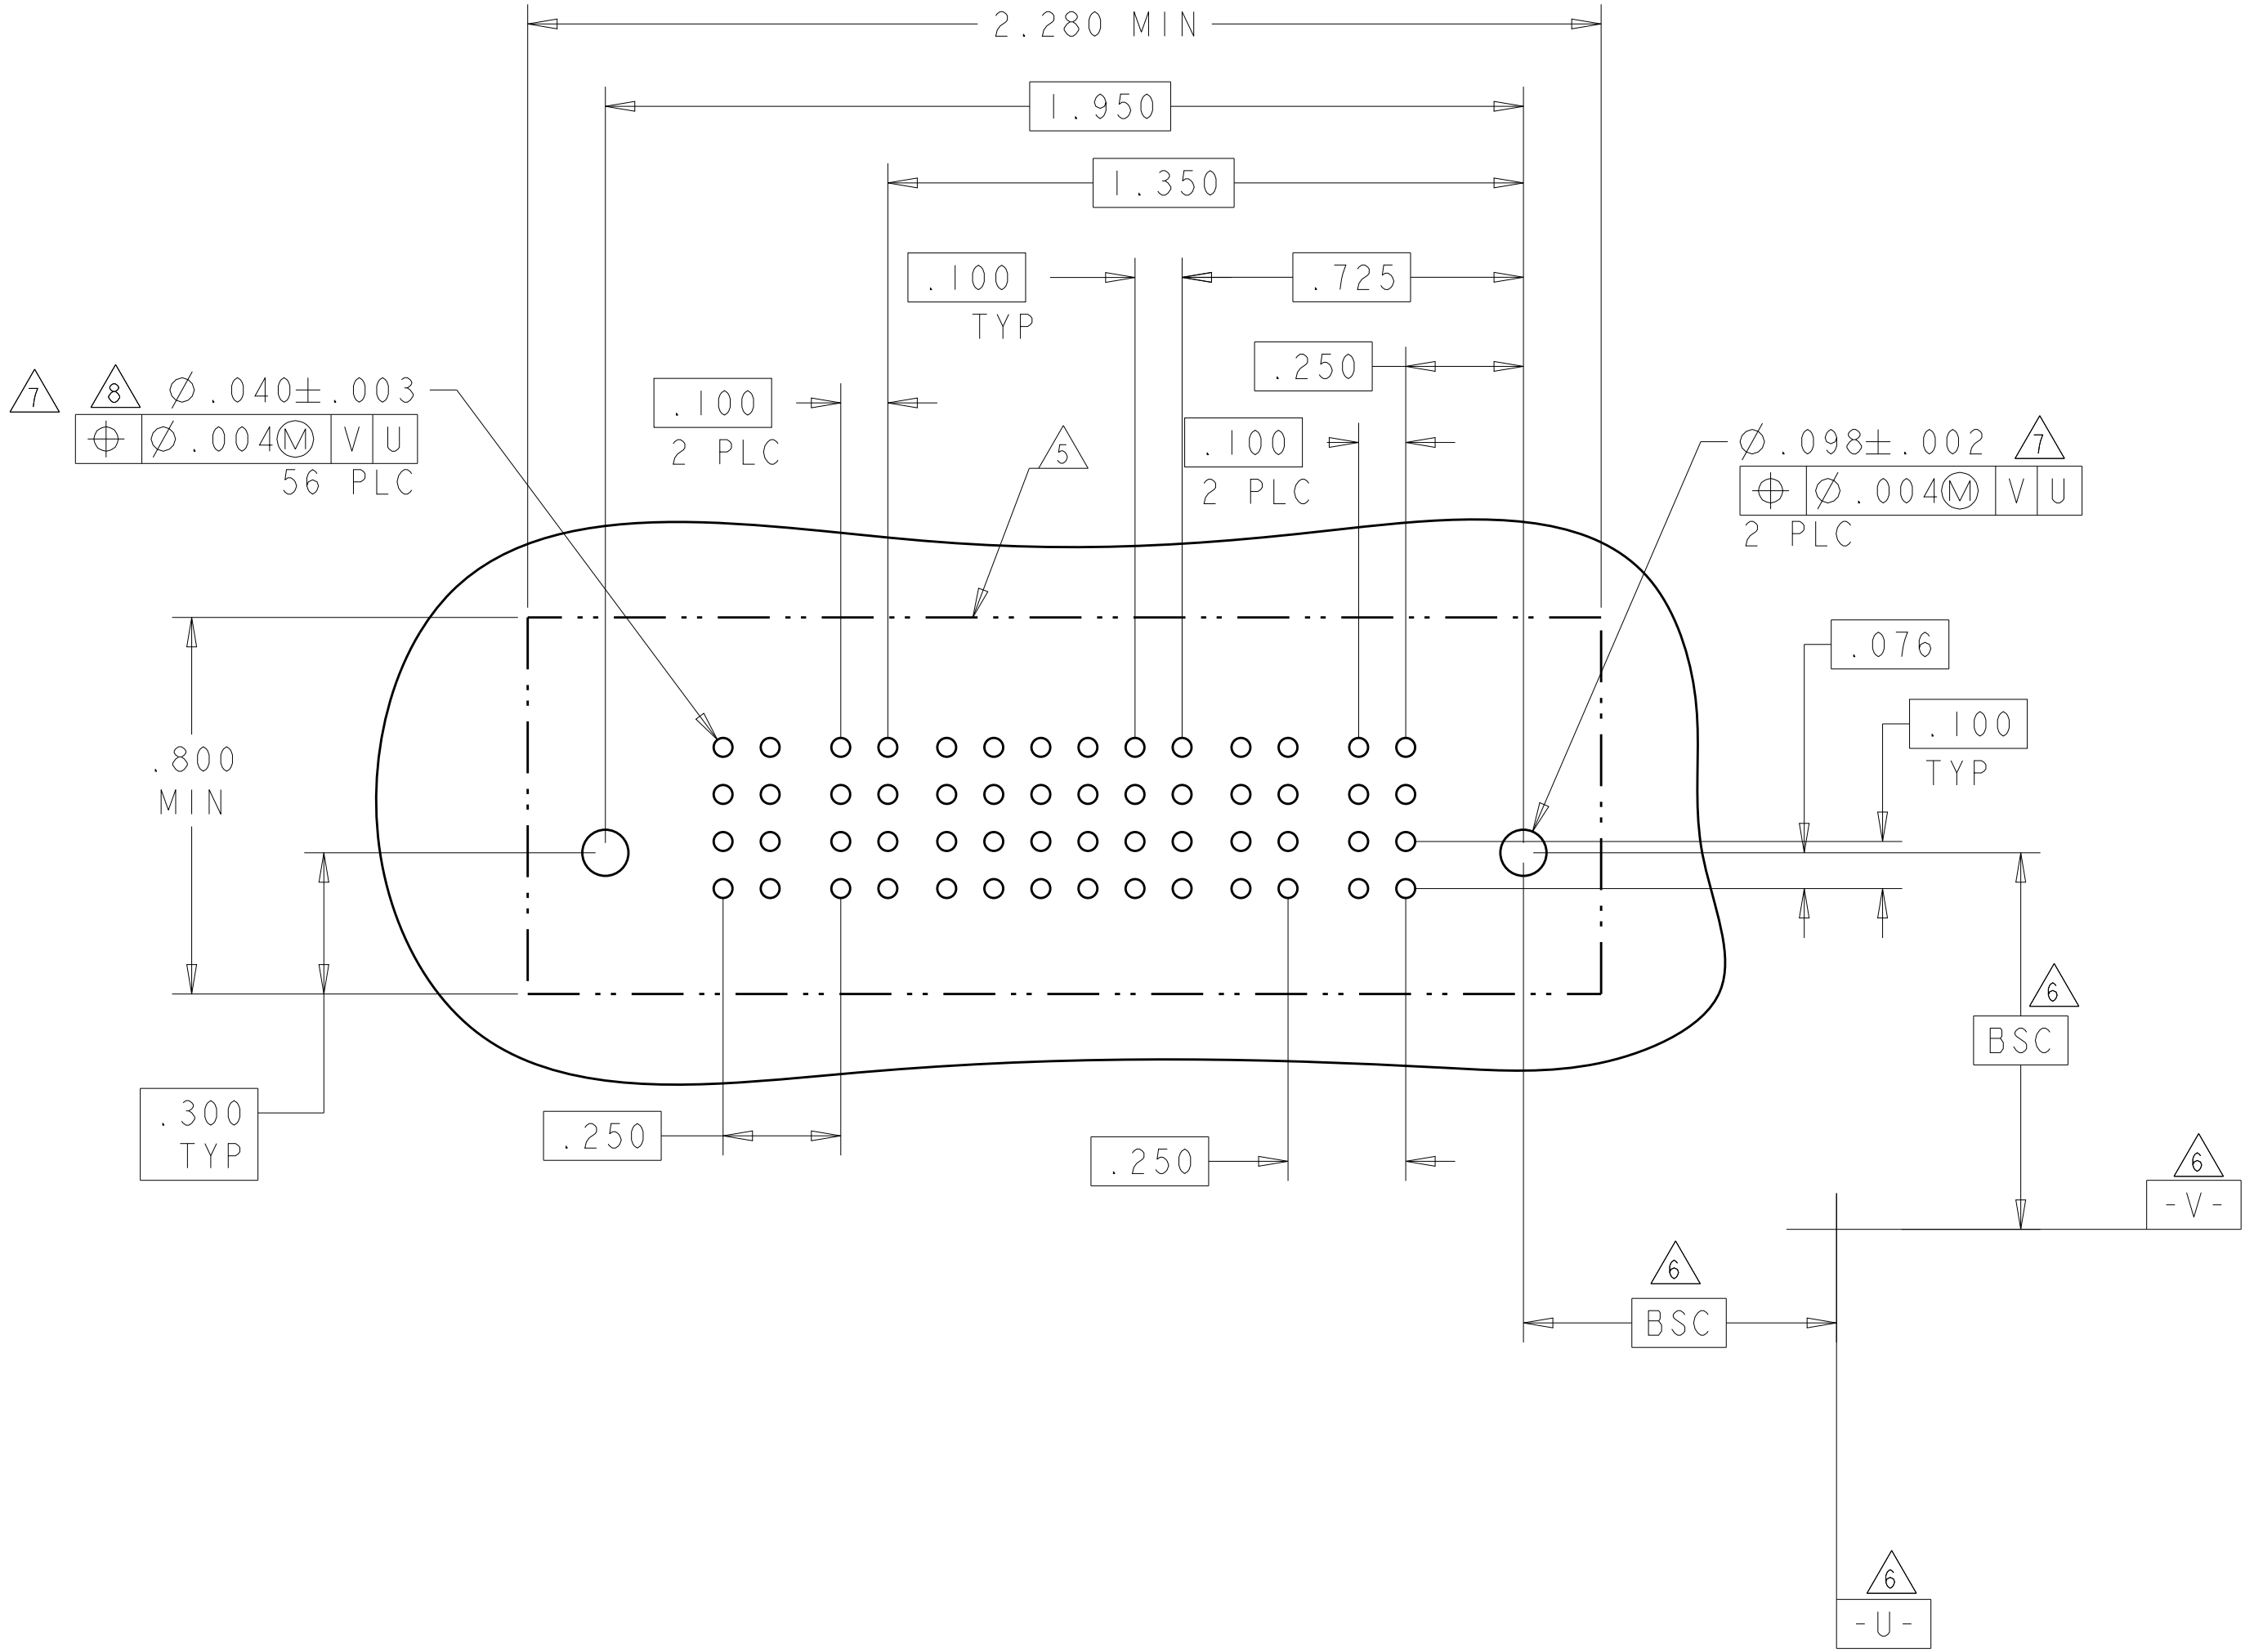
PART NUMBER	ROWS		POWER	SIGNAL							POWER	
			P2	6	5	4	3	2	1	PI		
6450540-1	D C B A		GP	AP	AP	AP	AP	AP	AP	AP	GP	
				AP	AP	AP	AP	AP	AP	AP		
				AP	AP	AP	AP	AP	AP	AP		
				AP	AP	AP	AP	AP	AP	AP		
IP + 24S + IP												



PART NUMBER	ROWS		POWER							SIGNAL						POWER						
			P11	P10	P9	P8	P7	P6		MI	6	5	4	3	2	1	P5	P4	P3	P2		P1
6450540-2	D C B A								AP	AP	AP	AP	AP	AP	AP							
									AP	AP	AP	AP	AP	AP	AP							AP
									AP	AP	AP	AP	AP	AP	AP							AP
									AP	AP	AP	AP	AP	AP	AP							AP
5P + 24S + 1M + 6P																						



PART NUMBER	ROWS		POWER		SIGNAL							POWER		
			P4	P3	6	5	4	3	2	1	P2	P1		
2-6450540-5	D C B A		GP	GP	AP	AP	AP	AP	AP	AP	GP	GP		
					AP	AP	AP	AP	AP	AP				
					AP	AP	AP	AP	AP	AP				
					AP	AP	AP	AP	AP	AP				
2P + 24S + 2P														



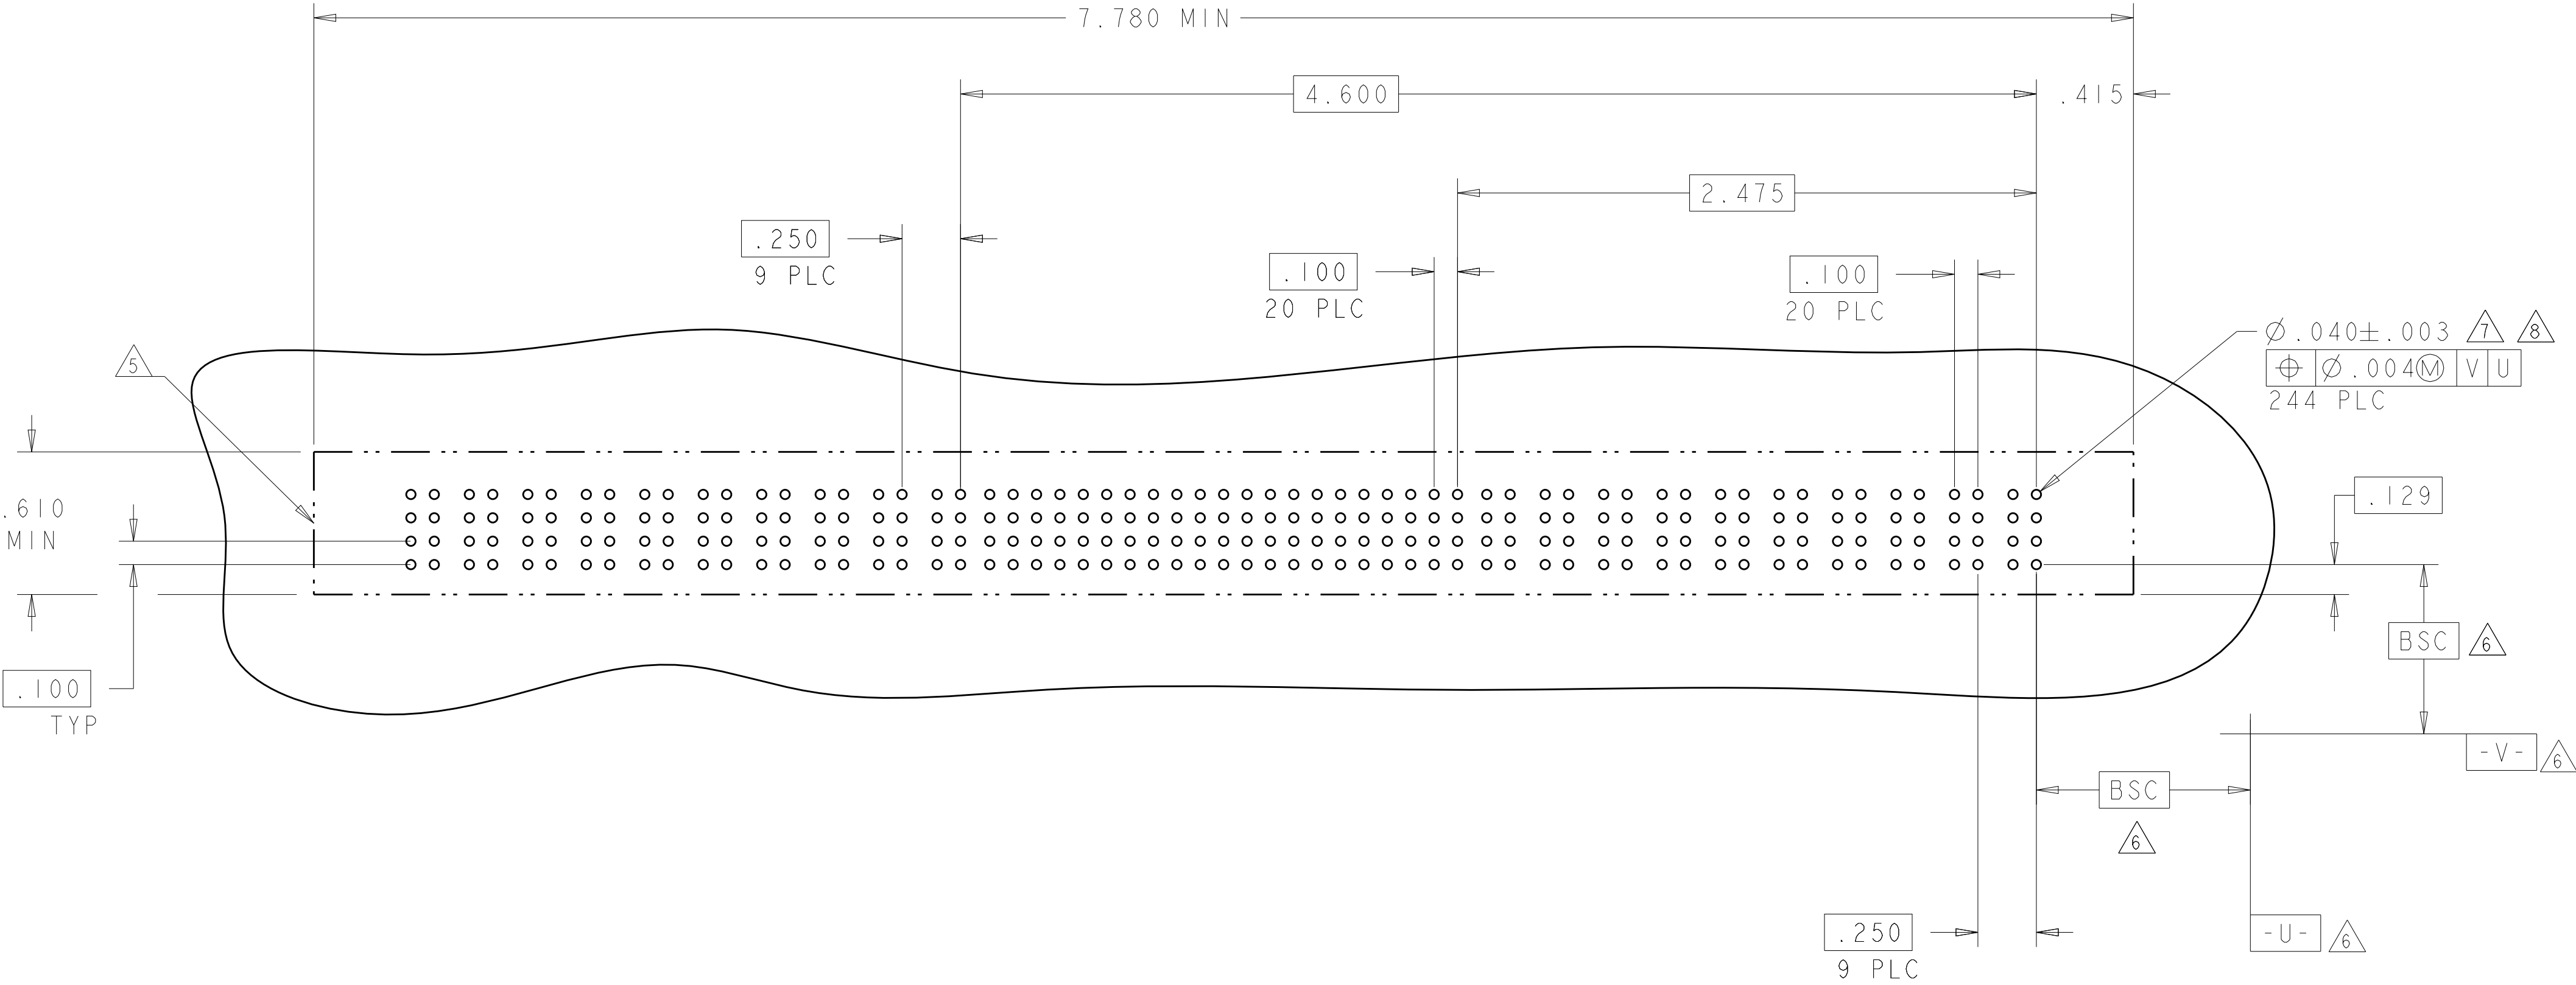
VS	STD POWER PRESSFIT CONTACT .115 LG
VP	MFBL POWER PRESSFIT CONTACT .115 LG
GS	STD POWER PRESSFIT CONTACT .135 LG
GP	MFBL POWER PRESSFIT CONTACT .135 LG
P	SIGNAL PRESSFIT CONTACT .115 LG
AP	SIGNAL PRESSFIT CONTACT .135 LG
CODE	TAIL LENGTH

CONTACT TABLE

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI 29APR05	NAME	
DIMENSIONS:		CHK M. PERCHERKE 29APR05	VERTICAL RECEPTACLE ASSEMBLY	
INCHES		APVD M. PERCHERKE	WITH GUIDES	
		PRODUCT SPEC	MULTI-BEAM XL	
		108-1973		
		APPLICATION SPEC		
		114-13038		
		WEIGHT		
		CUSTOMER DRAWING		









LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

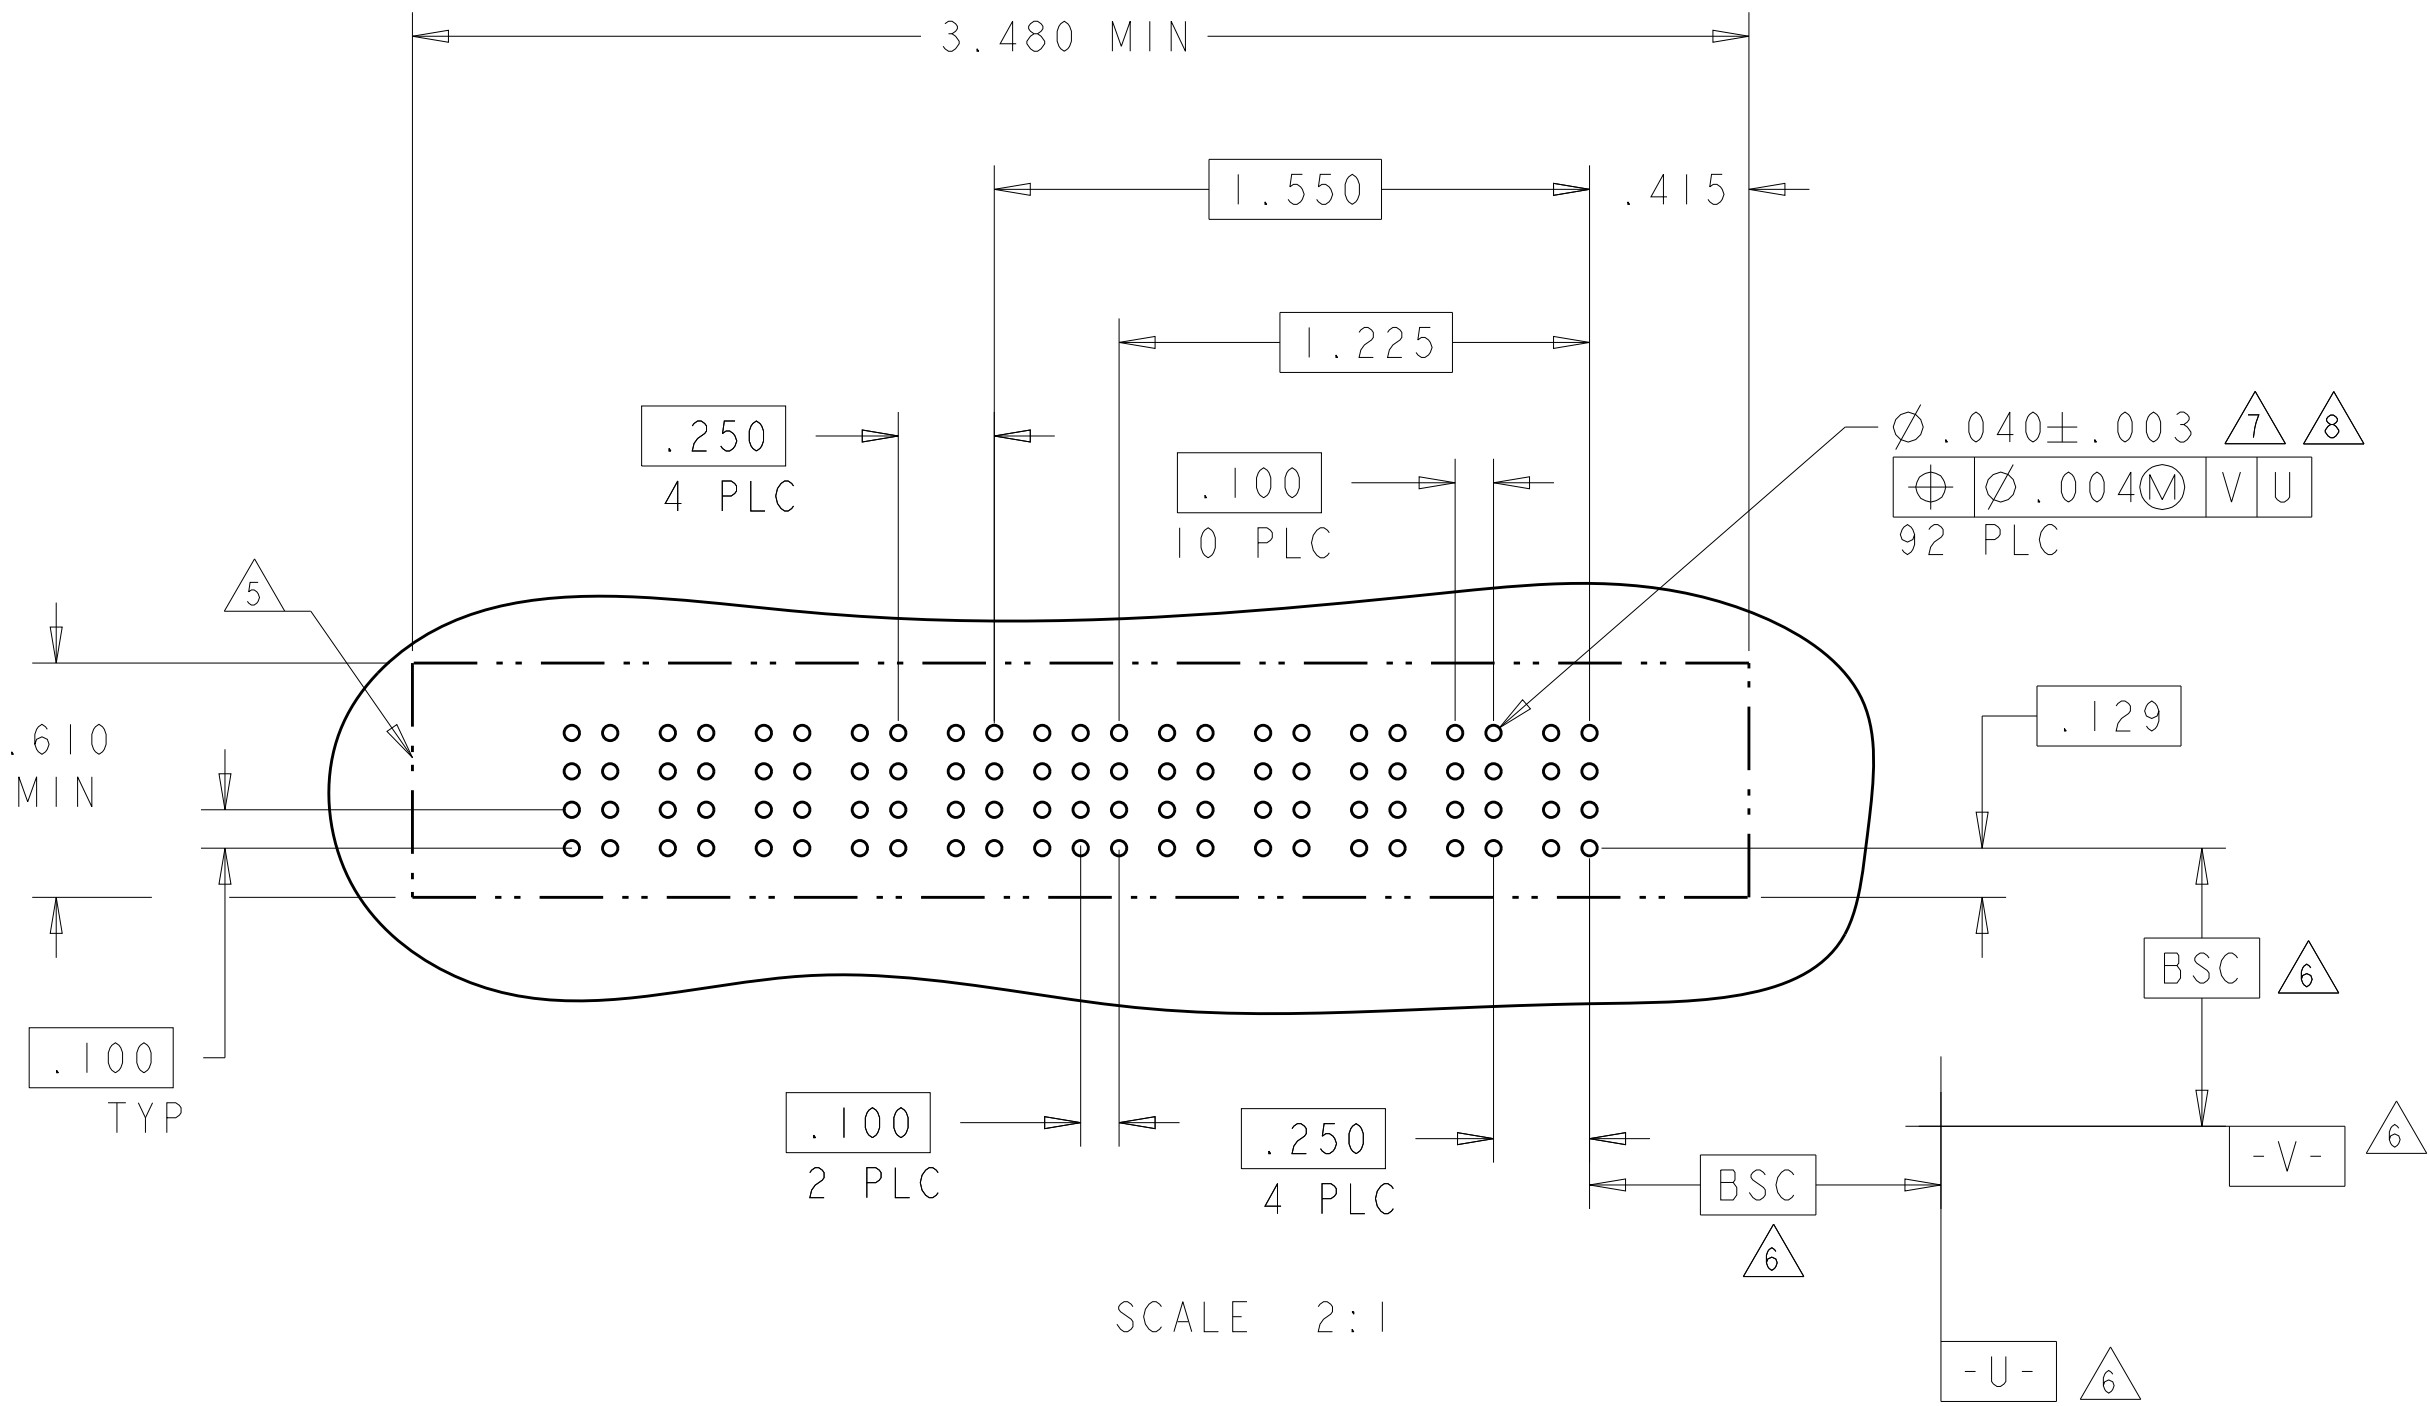
PART NUMBER	ROWS		POWER										SIGNAL																				POWER																				
			P20	P19	P18	P17	P16	P15	P14	P13	P12	P11	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	P10	P9	P8	P7	P6	P5	P4	P3	P2		P1									
6450540-3	D C B A																																																				
																																																					
																																																					
																																																					
10P + 84S + 10P																																																					




HP	MFBL POWER PRESSFIT CONTACT .165 LG
BP	SIGNAL PRESSFIT CONTACT .165 LG
GP	MFBL POWER PRESSFIT CONTACT .135 LG
AP	SIGNAL PRESSFIT CONTACT .135 LG
CODE	TAIL LENGTH
CONTACT TABLE	

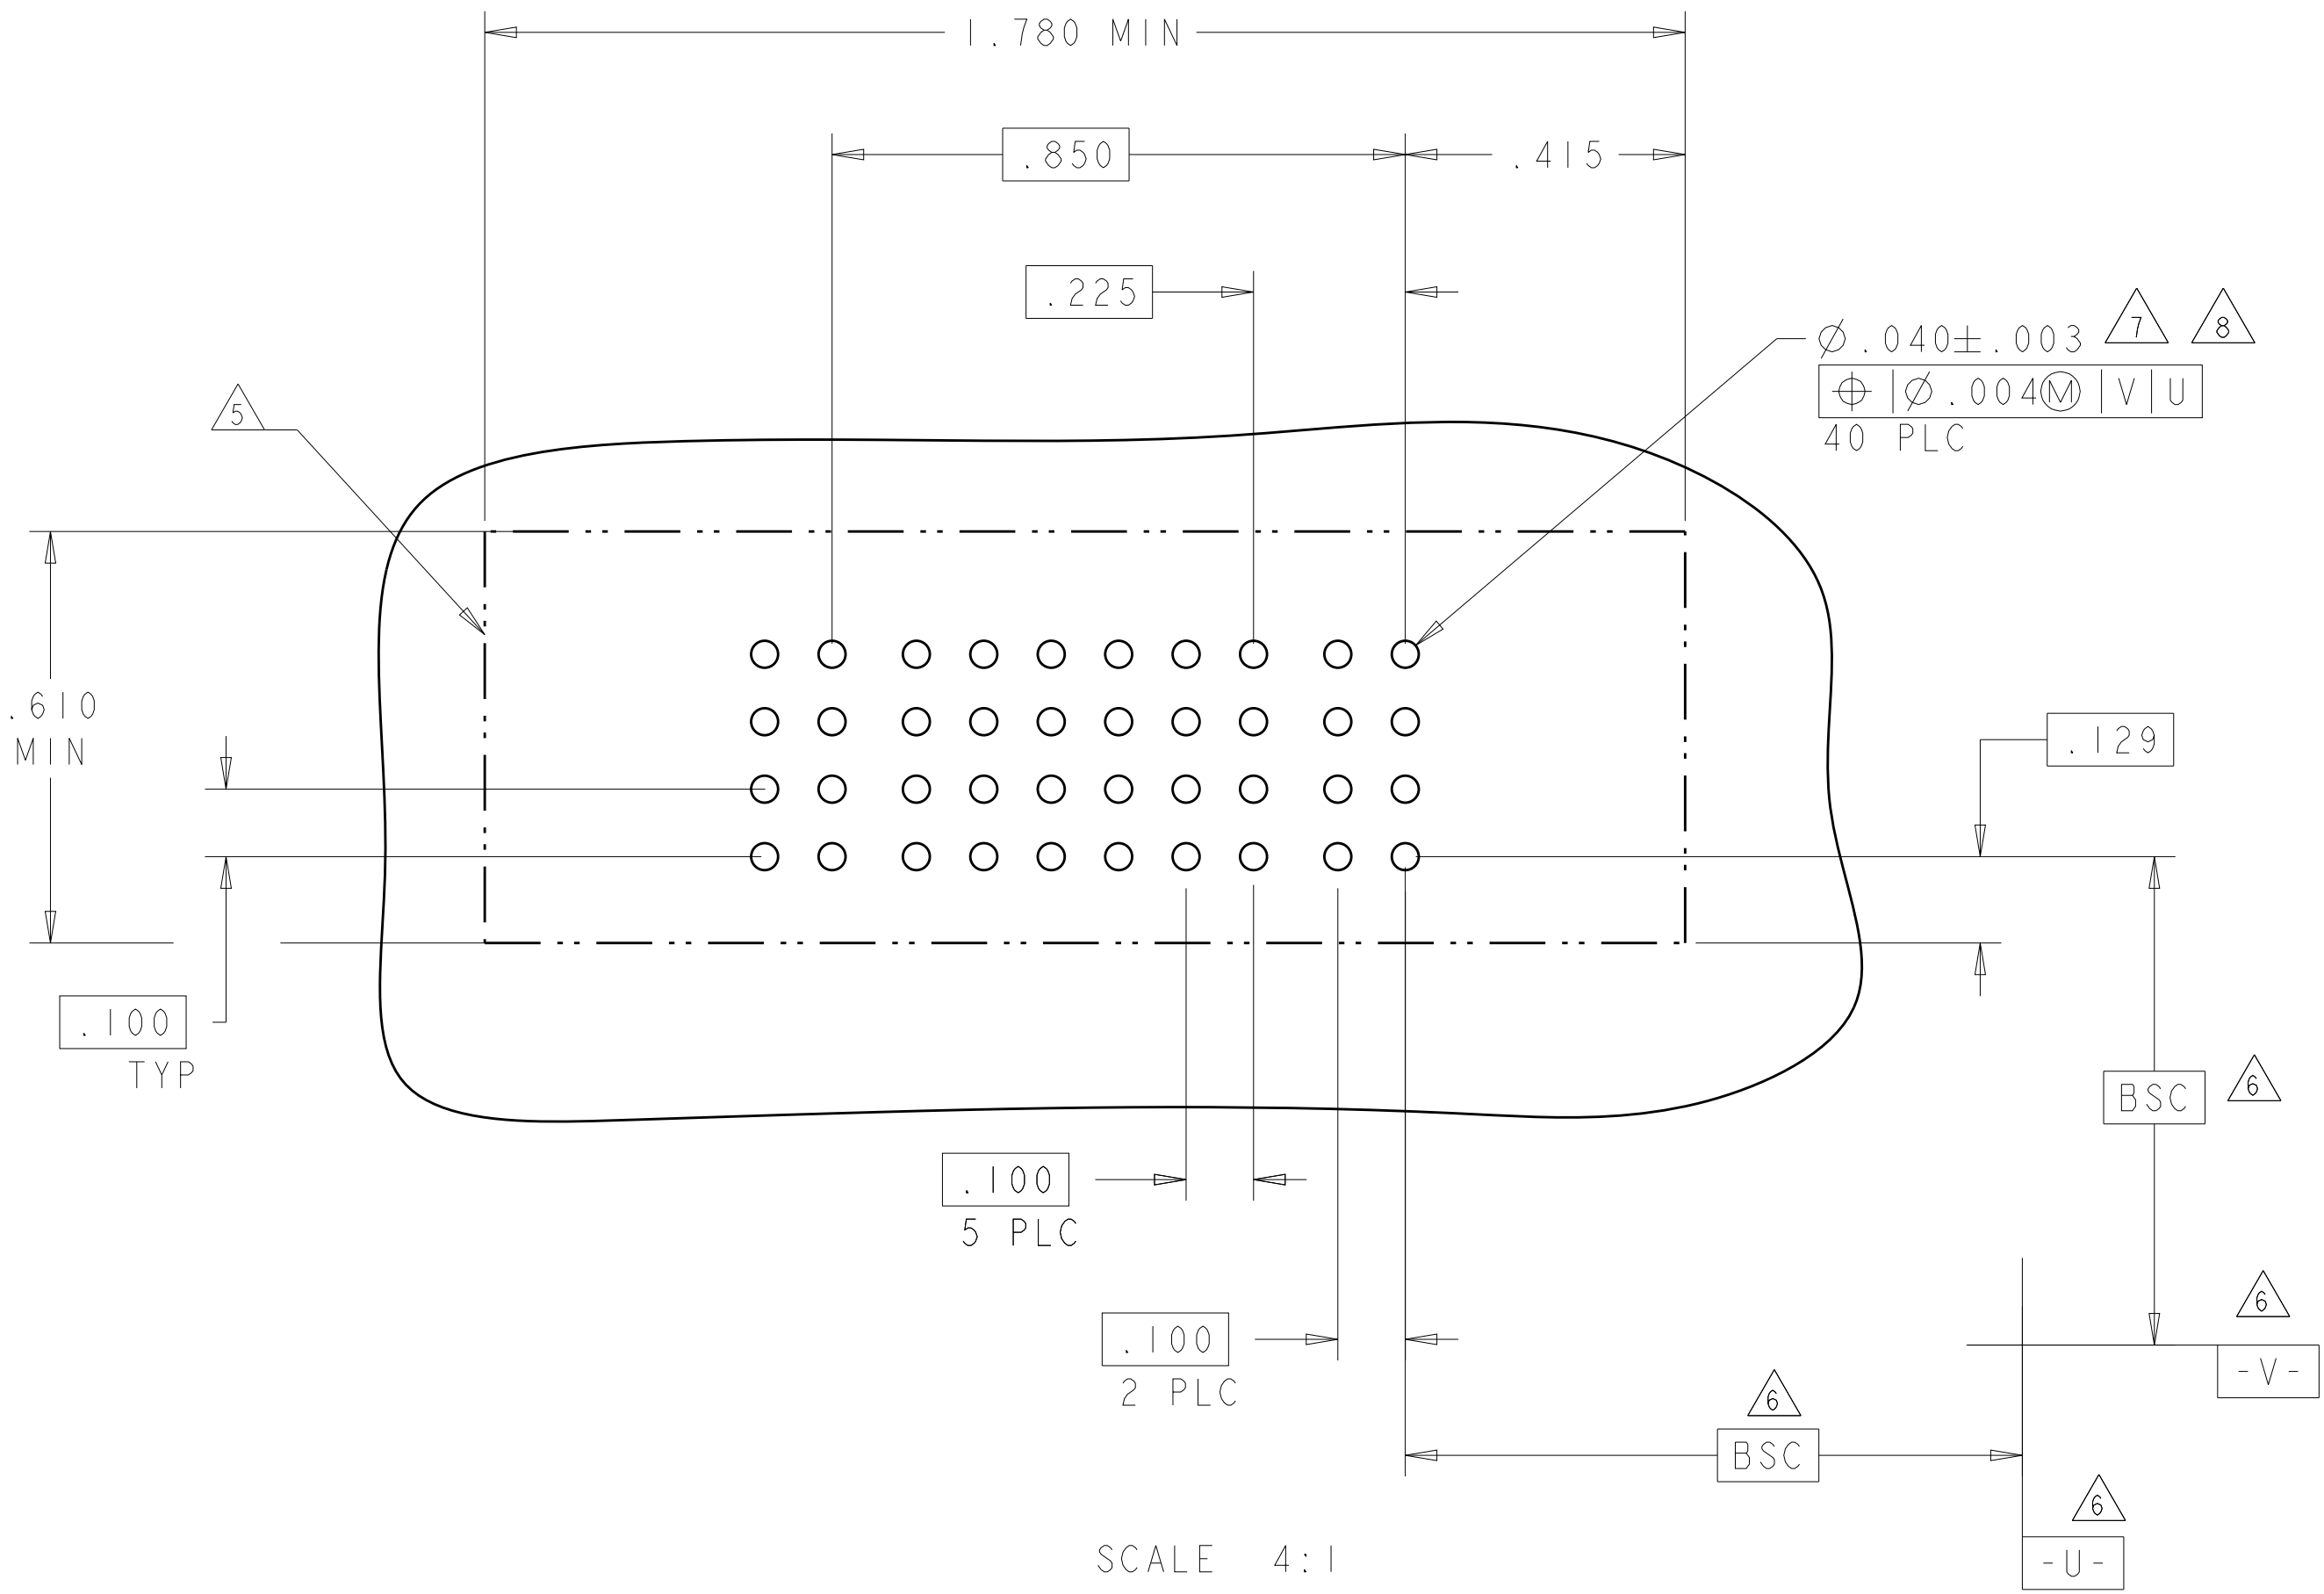
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI 29APR05	TE Connectivity	
DIMENSIONS: INCHES		CHK M. PERCHERKE 29APR05	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M. PERCHERKE	PRODUCT SPEC	
0 PLC ±.01		PRODUCT SPEC	108-1973	
1 PLC ±.01		APPLICATION SPEC	114-13038	
2 PLC ±.005		WEIGHT	-	
3 PLC ±.002		CUSTOMER DRAWING	SCALE 2:1 SHEET 4 OF 19 REV K9	
4 PLC ±.002				
ANGLES #2°				
FINISH				

PART NUMBER	ROWS		POWER					SIGNAL			POWER					
			P10	P9	P8	P7	P6	3	2	1	P5	P4	P3	P2	P1	
6450540-5	D C B A															
5P + 12S + 5P																



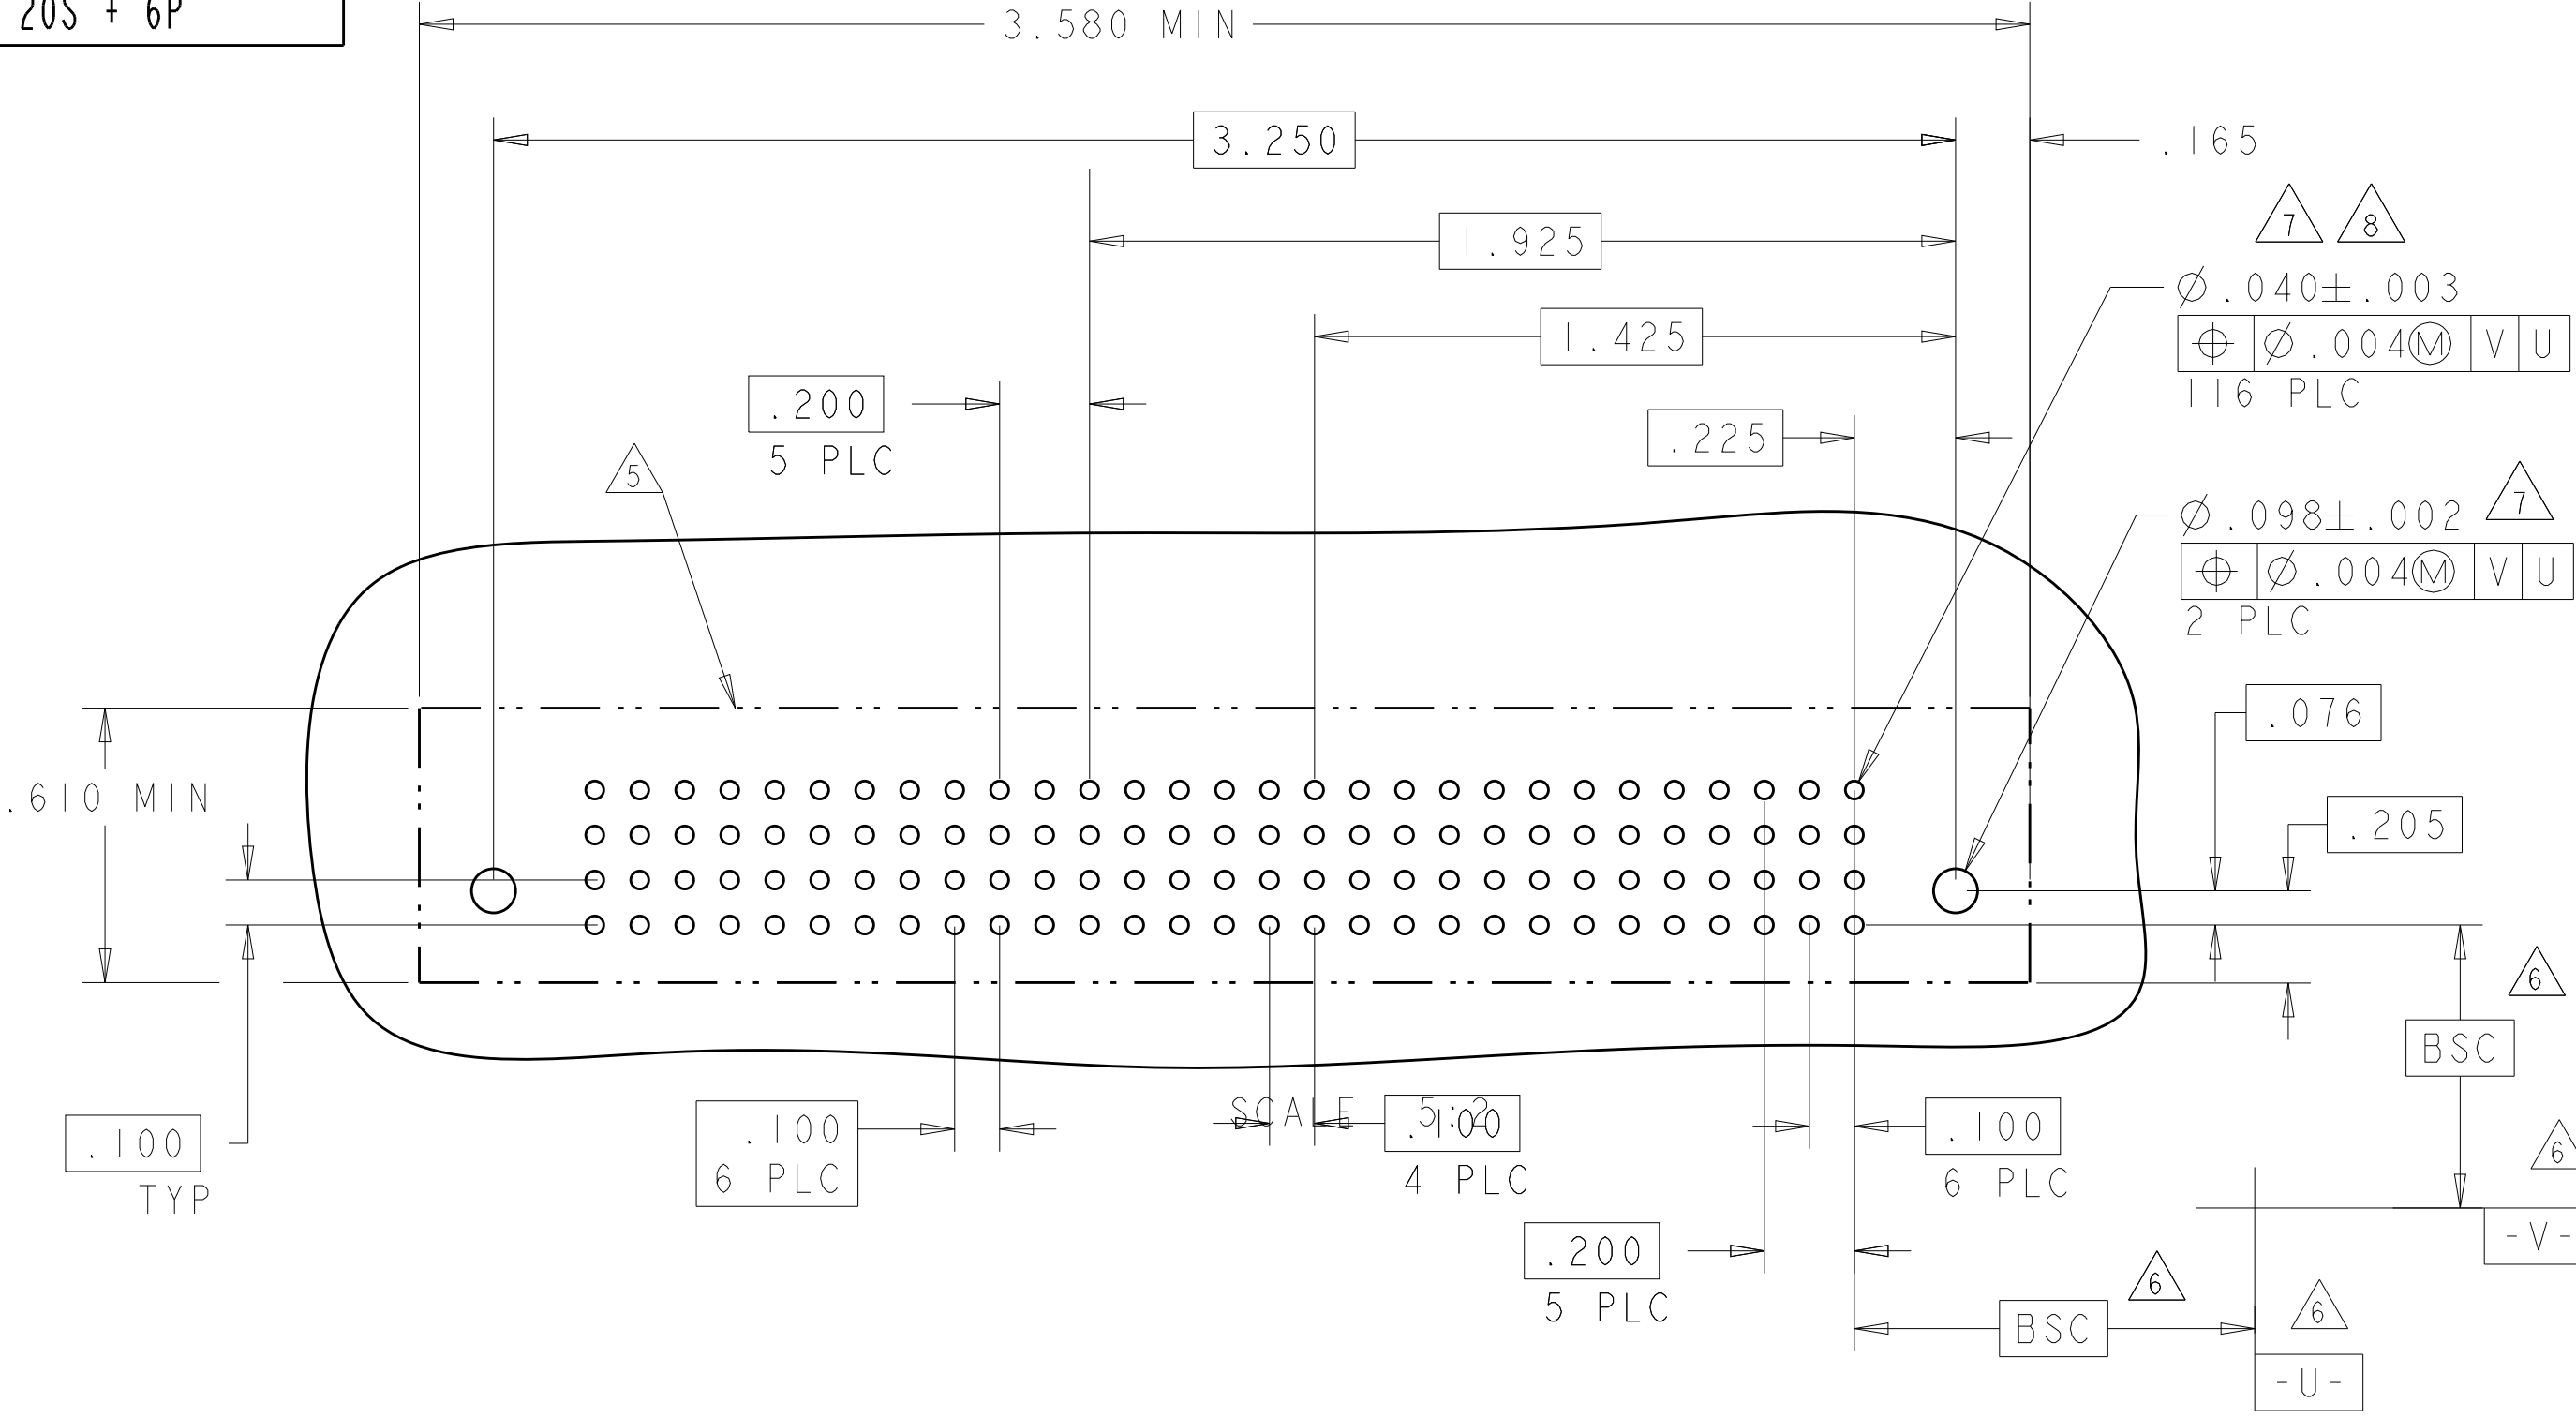
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI 29APR05		 TE Connectivity	
DIMENSIONS:		CHW M. PERCHERKE 29APR05			
INCHES		APVD M. PERCHERKE -		NAME	
		PRODUCT SPEC		VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL	
		108-1973			
		APPLICATION SPEC			
		114-13038			
MATERIAL	FINISH	WEIGHT	-	SIZE	CAGE CODE
				A	00779
CUSTOMER DRAWING				SCALE	2:1
				SHEET	5 of 19
				REV	K9

PART NUMBER	ROWS		POWER	SIGNAL							POWER																						
			P2	6	5	4	3	2	1	P1																							
6450540-7	D C B A		GP <table><tr><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td></tr><tr><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td></tr><tr><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td></tr><tr><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td></tr></table> GP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP		
AP	AP	AP	AP	AP	AP	AP																											
AP	AP	AP	AP	AP	AP	AP																											
AP	AP	AP	AP	AP	AP	AP																											
AP	AP	AP	AP	AP	AP	AP																											
IP + 24S + IP																																	

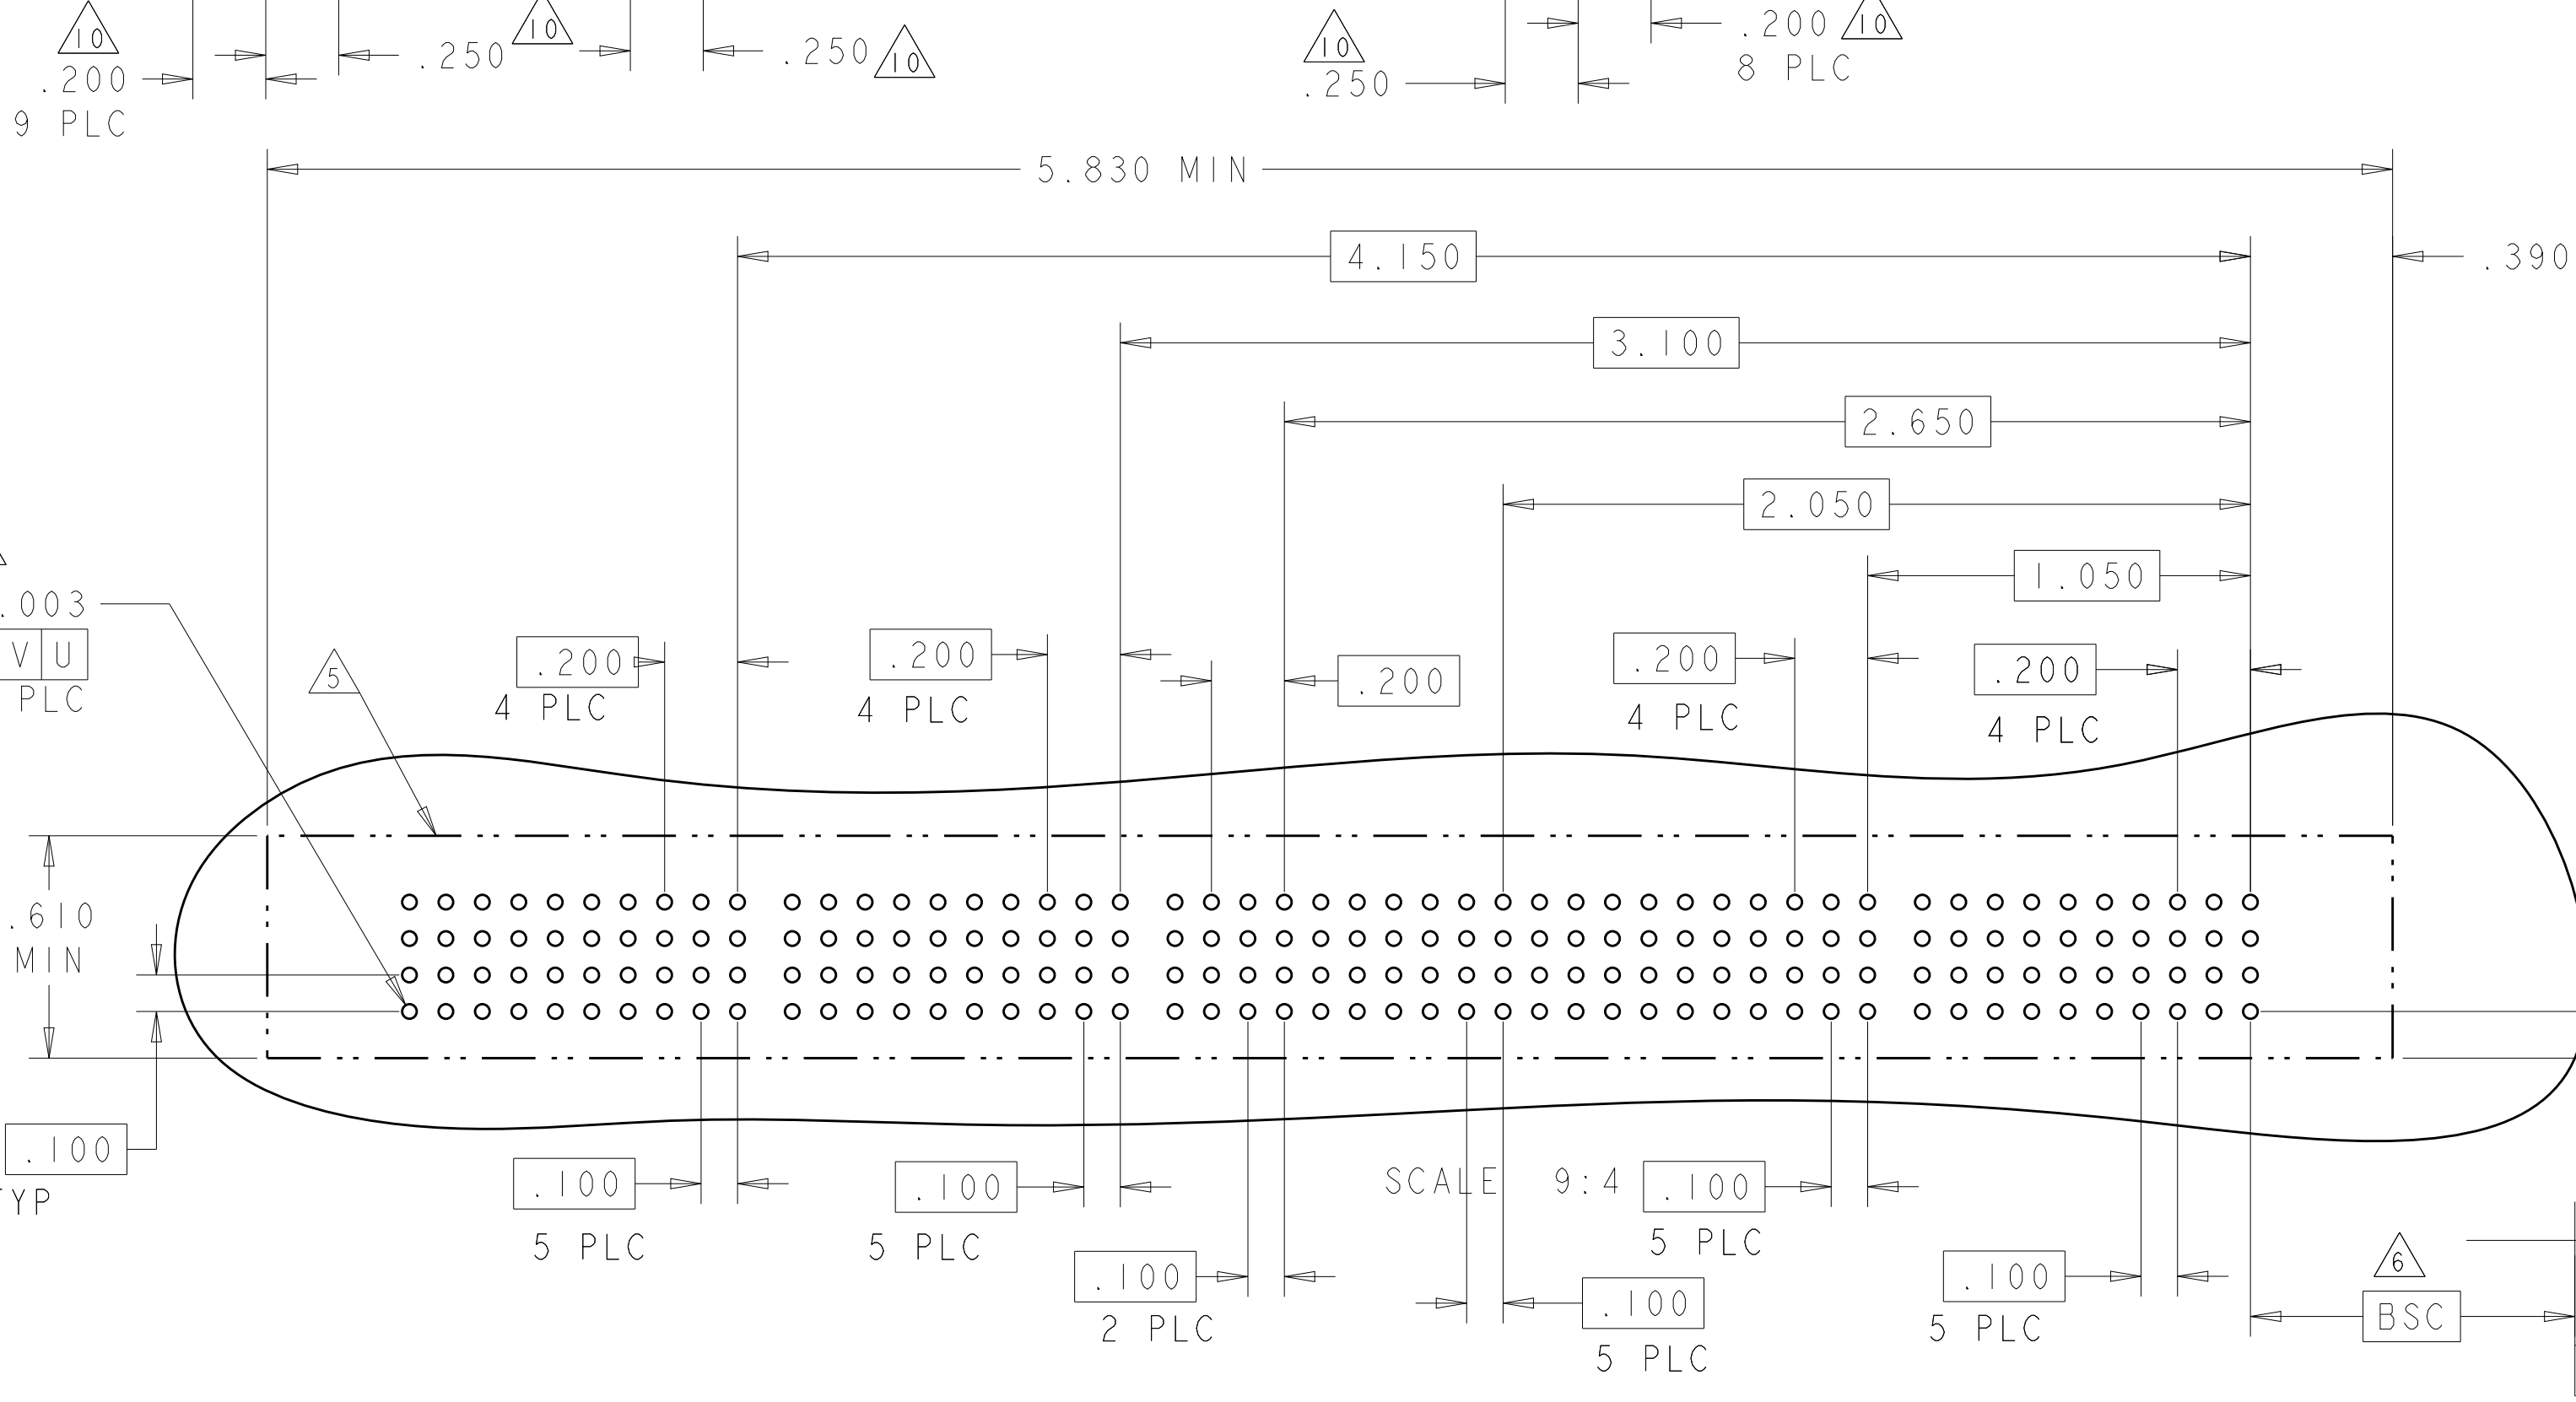
4805 (3/11)


LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

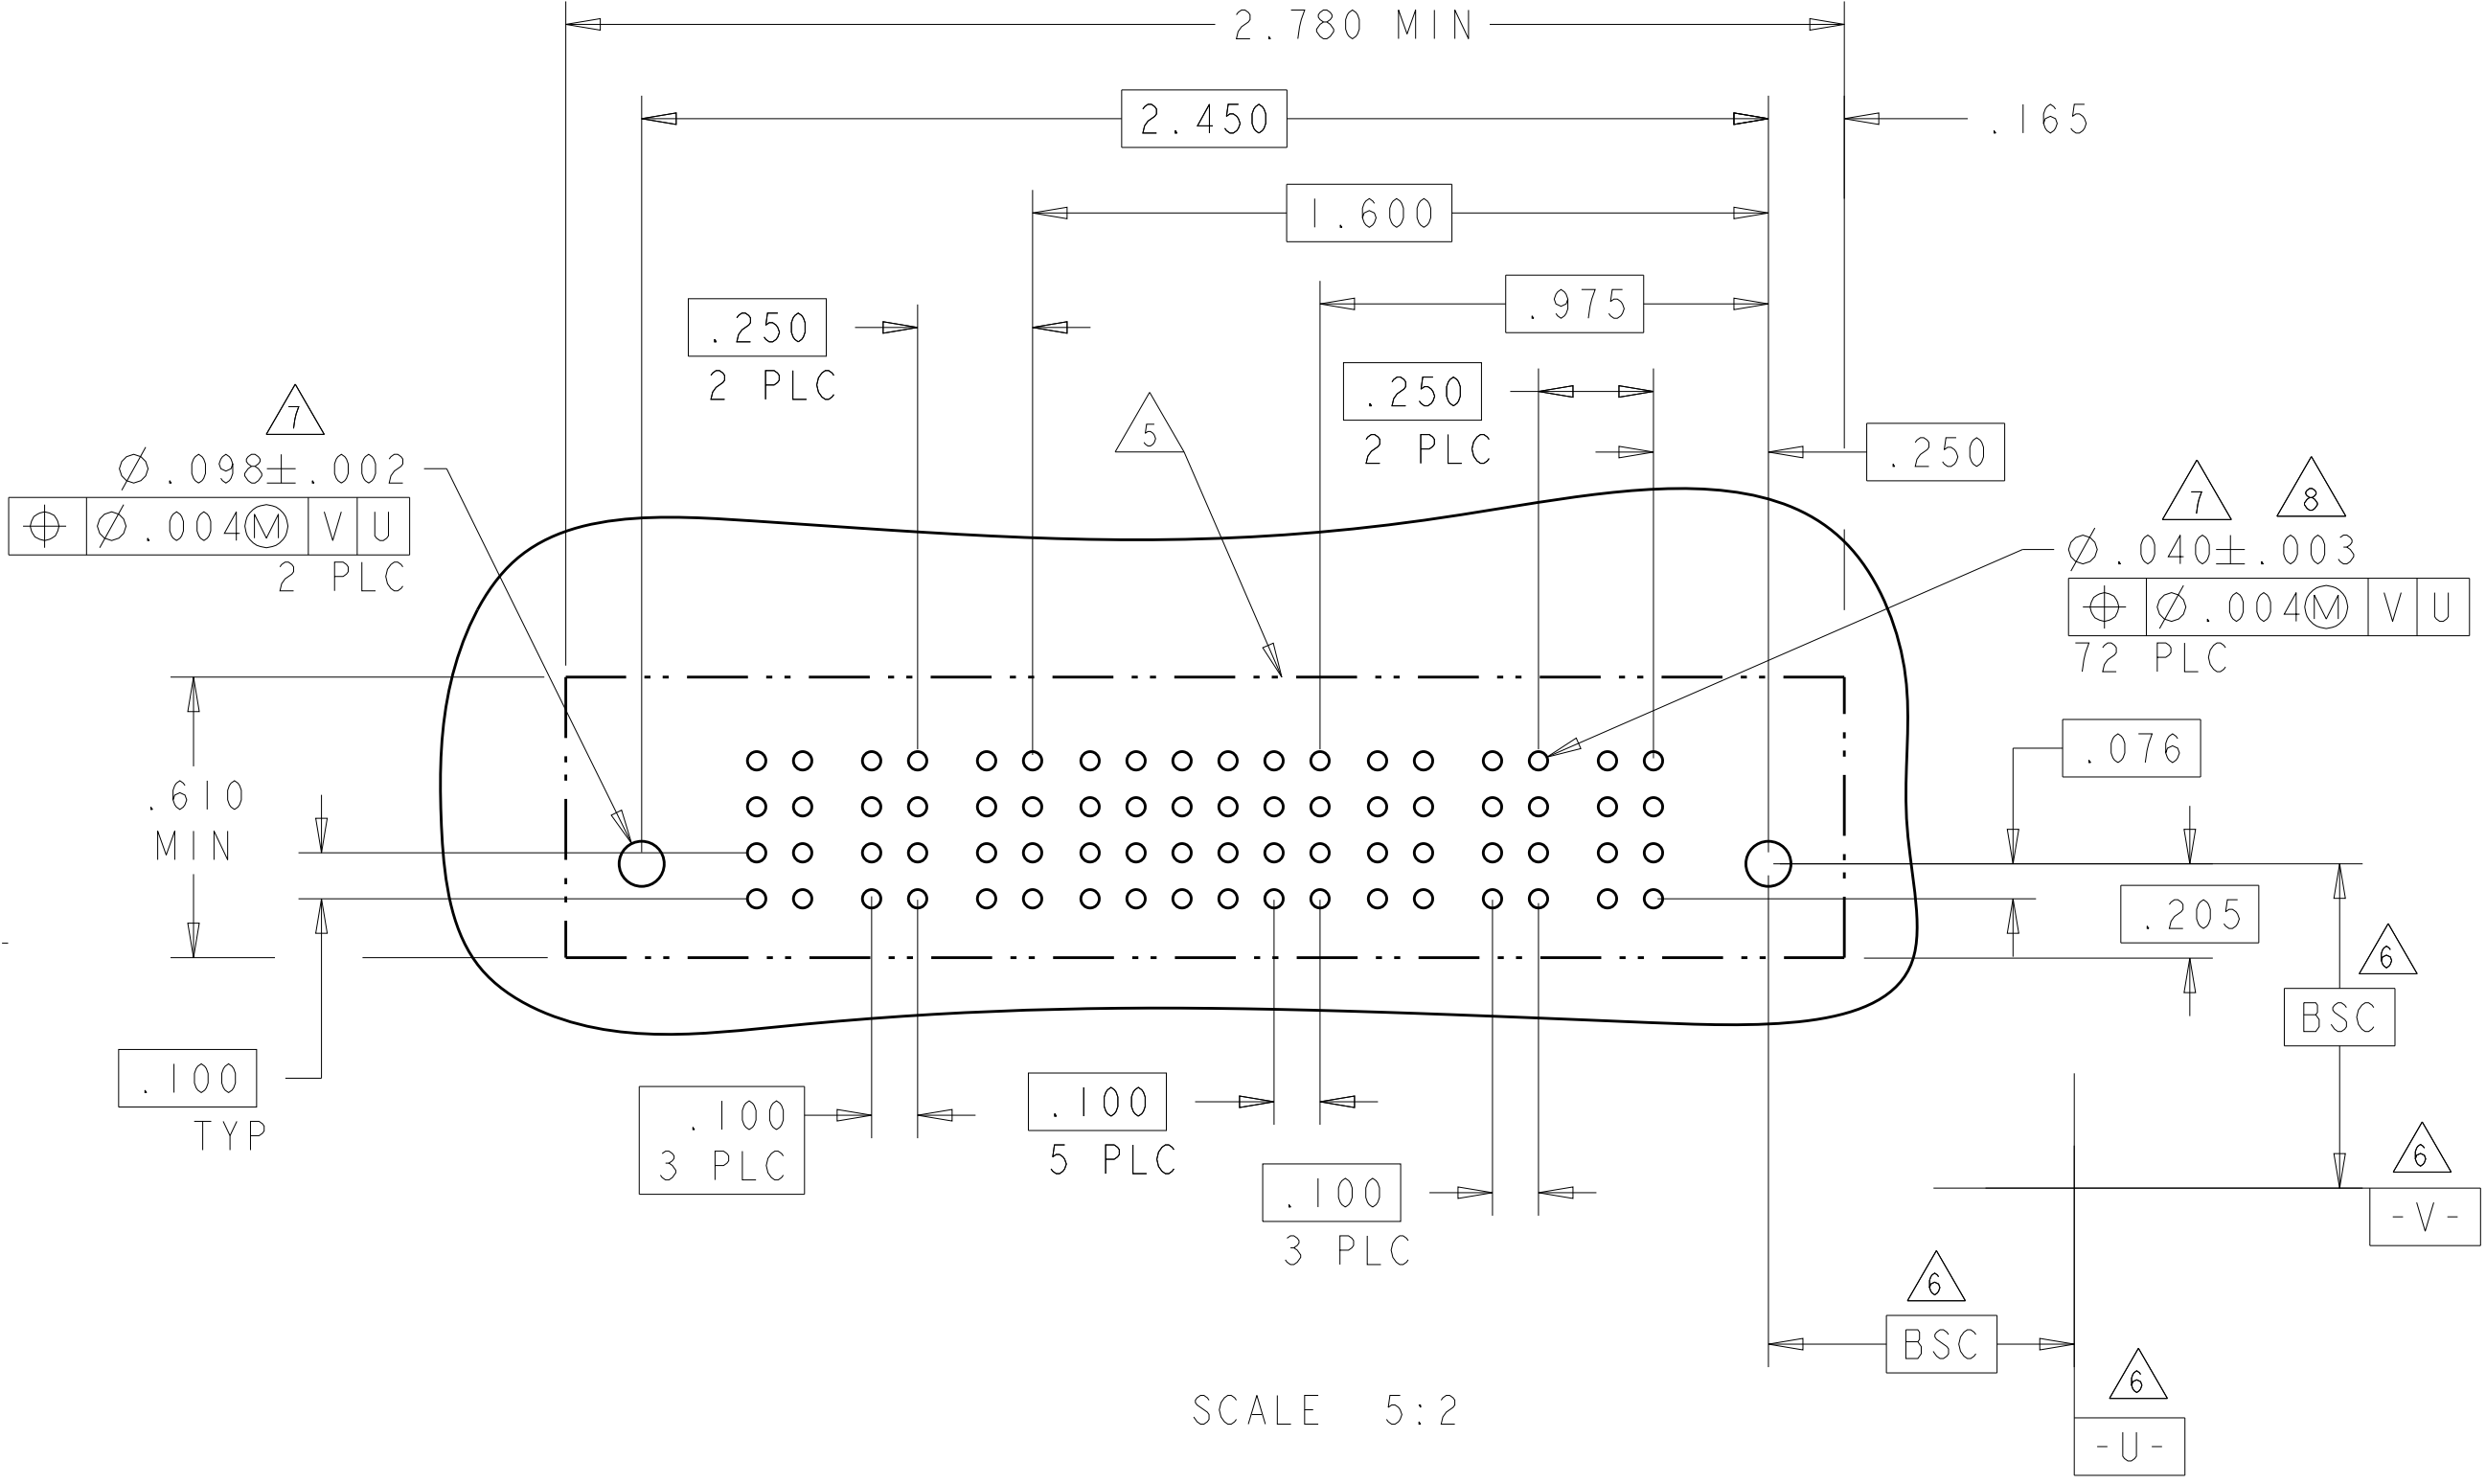
PART NUMBER	ROWS		POWER						SIGNAL					POWER						
			PI2	PI1	PI0	P9	P8	P7	5	4	3	2	1	P6	P5	P4	P3	P2	P1	
1-6450540-2	D C B A	HD	GP GP GP GP GP GP	AP AP AP AP AP AP	AP AP AP AP AP AP	AP AP AP AP AP AP	AP AP AP AP AP AP	GP GP GP GP GP GP	GP GP GP GP GP GP	GP GP GP GP GP GP	GP GP GP GP GP GP	GP GP GP GP GP GP	GP GP GP GP GP GP	GP GP GP GP GP GP	GP GP GP GP GP GP	GP GP GP GP GP GP	GP GP GP GP GP GP			



PART NUMBER	ROWS		POWER											SIGNAL						POWER																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
			P22	P21	P20	P19	P18	P17	P16	P15	P14	P13	P12	P11	6	5	4	3	2	1	P10	P9	P8	P7	P6	P5	P4	P3	P2		P1																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
1-6450540-4	D C B A		GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP



PART NUMBER	ROWS		POWER			SIGNAL						POWER																																																																																																																																																																																											
			P6	P5	P4	6	5	4	3	2	1	P3	P2	P1																																																																																																																																																																																									
2-6450540-0	D C B A																																																																																																																																																																																																						



THIS DRAWING IS A CONTROLLED DOCUMENT.

OWN R. GRZYBOWSKI 29APR05
CHK M. PERCHERKE 29APR05
APVD M. PERCHERKE

PRODUCT SPEC
108-1973
APPLICATION SPEC
114-13038
WEIGHT
CUSTOMER DRAWING

DIMENSIONS:
INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.002
ANGLES ±2°
FINISH

MATERIAL

NAME
VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL

SIZE
A1

CAGE CODE
00779

DRAWING NO
6450540

RESTRICTED TO
K9

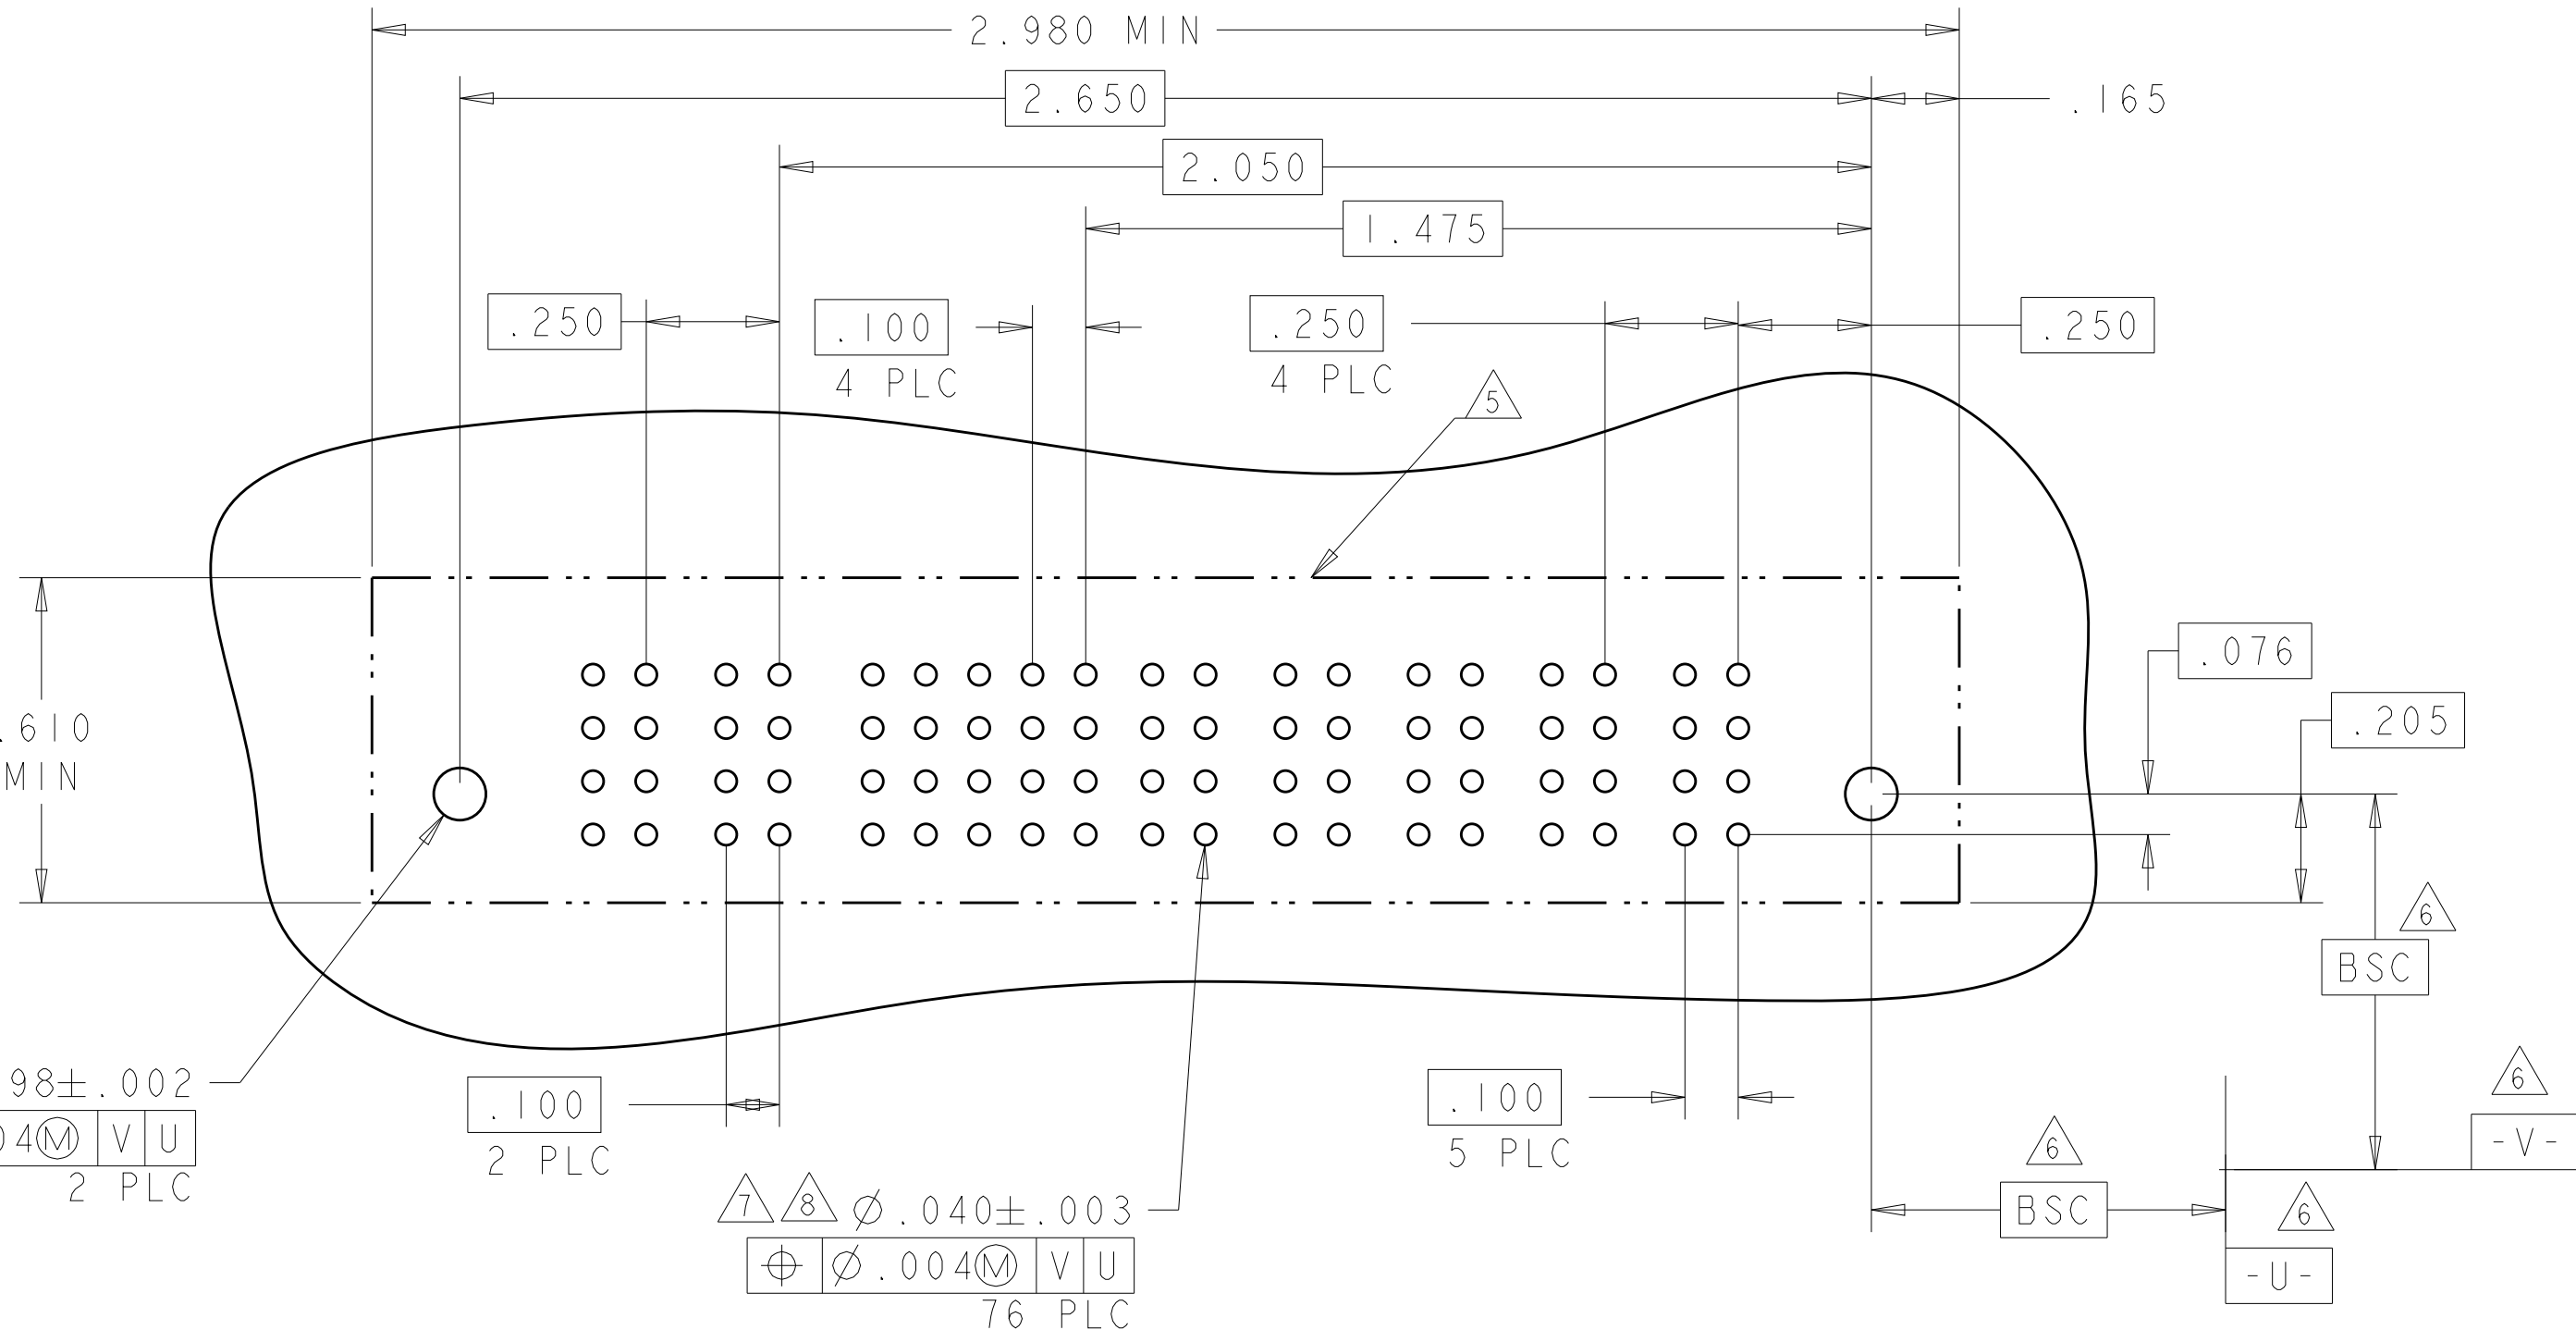
TE Connectivity

SCALE 2:1

SHEET 7 OF 19

REV K9

PART NUMBER	ROWS		POWER		SIGNAL					POWER						
			P7	P6	5	4	3	2	1	P5	P4	P3	P2	P1		
4-6450540-3	D C B A	 HD			AP	AP	AP	AP	AP	AP						 HD
5P + 20S + 2P																



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWA R. GRZYBOWSKI 29APR05		 TE Connectivity	
		CHP M. PERCHERKE 29APR05			
DIMENSIONS: INCHES		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC ±		VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL	
		2 PLC ± 0.1			
		4 PLC ± 0.05			
		4 PLC ± 0.020			
ANGLES FINISH		APPROX. M. PERCHERKE 29APR05		PRODUCT SPEC	
		108-1973			
		APPLICATION SPEC		SIZE	
		114-13038		CASE CODE	
		WEIGHT		DRAWING NO	
		-		A1 00779	
MATERIAL		CUSTOMER DRAWING		RESTRICTED TO	
				-	
				SCALE 2:1	
				SHEET 8 OF 19	
				REV K9	

Technical drawing of a mechanical part, likely a piston, showing dimensions and tolerances. The part is cylindrical with a central bore and a series of holes along its length. Dimensions include overall length (7.500 MIN), bore diameter (Ø.098 ± .003), and various hole diameters and positions. Surface finish symbols (4, 5) and material specifications (29PLC, 280PLC) are also indicated.

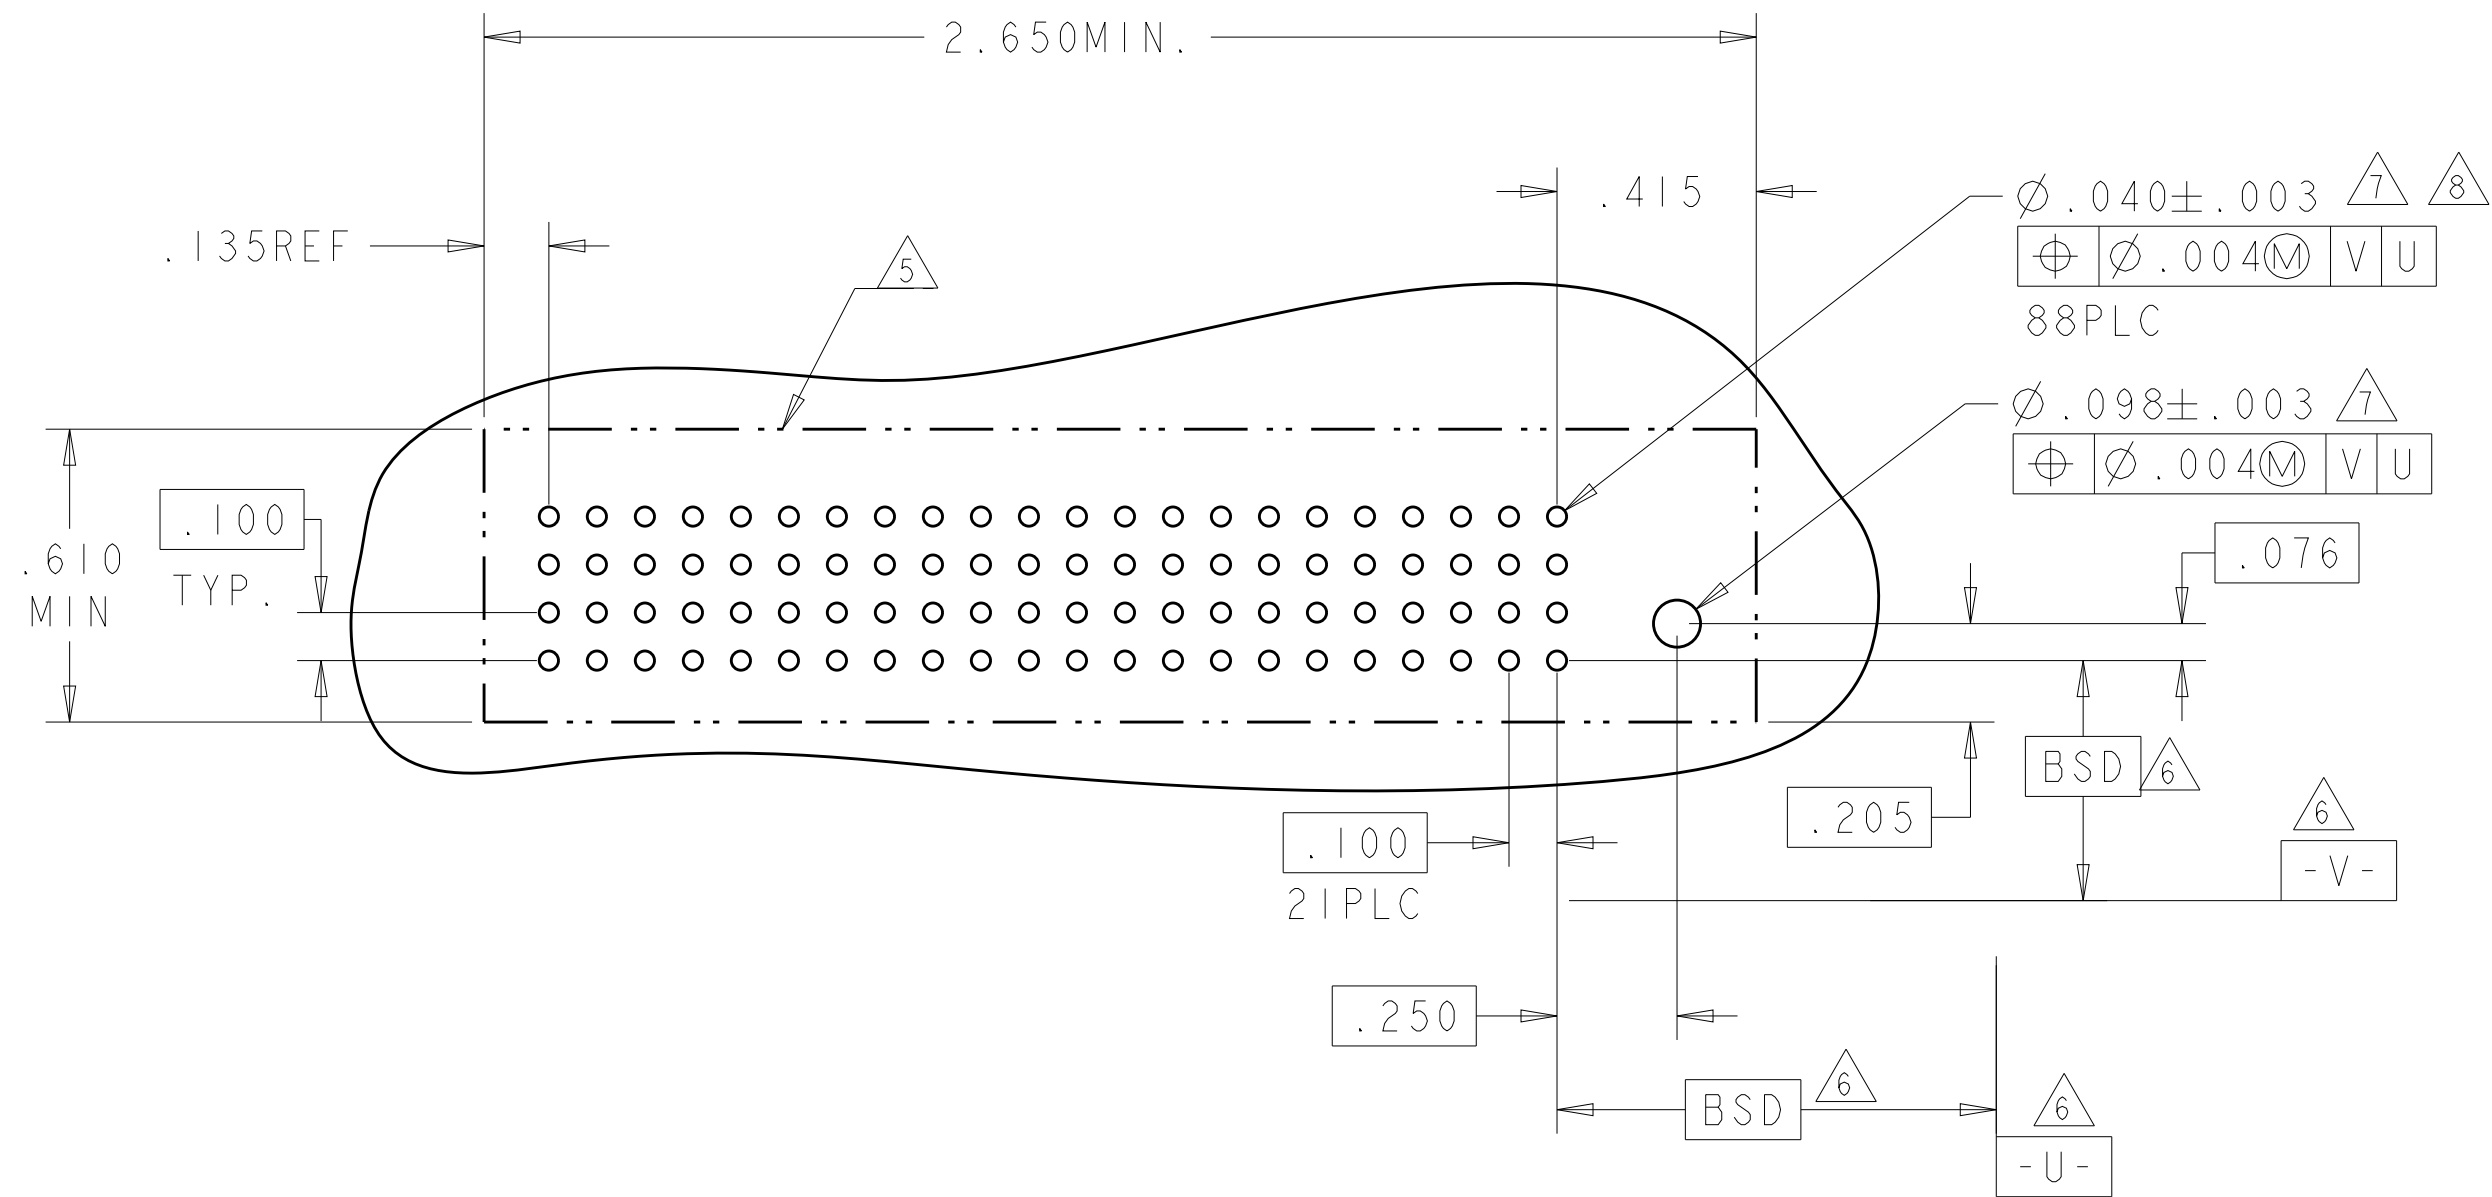
Key dimensions and features:

- Overall length: 7.500 MIN
- Bore diameter: Ø.098 ± .003
- Surface finish: 4 (top surface), 5 (bottom surface)
- Material: 29PLC (main body), 280PLC (right end)
- Hole diameters: Ø.004 (multiple), Ø.040 ± .003 (right end)
- Hole positions: .100 TYP., .077, .205, .250, .100, .100, .100
- Other features: .610 MIN. (left end), .135 REF (right end), BSD (bottom surface detail), -V- (vent), -U- (union)

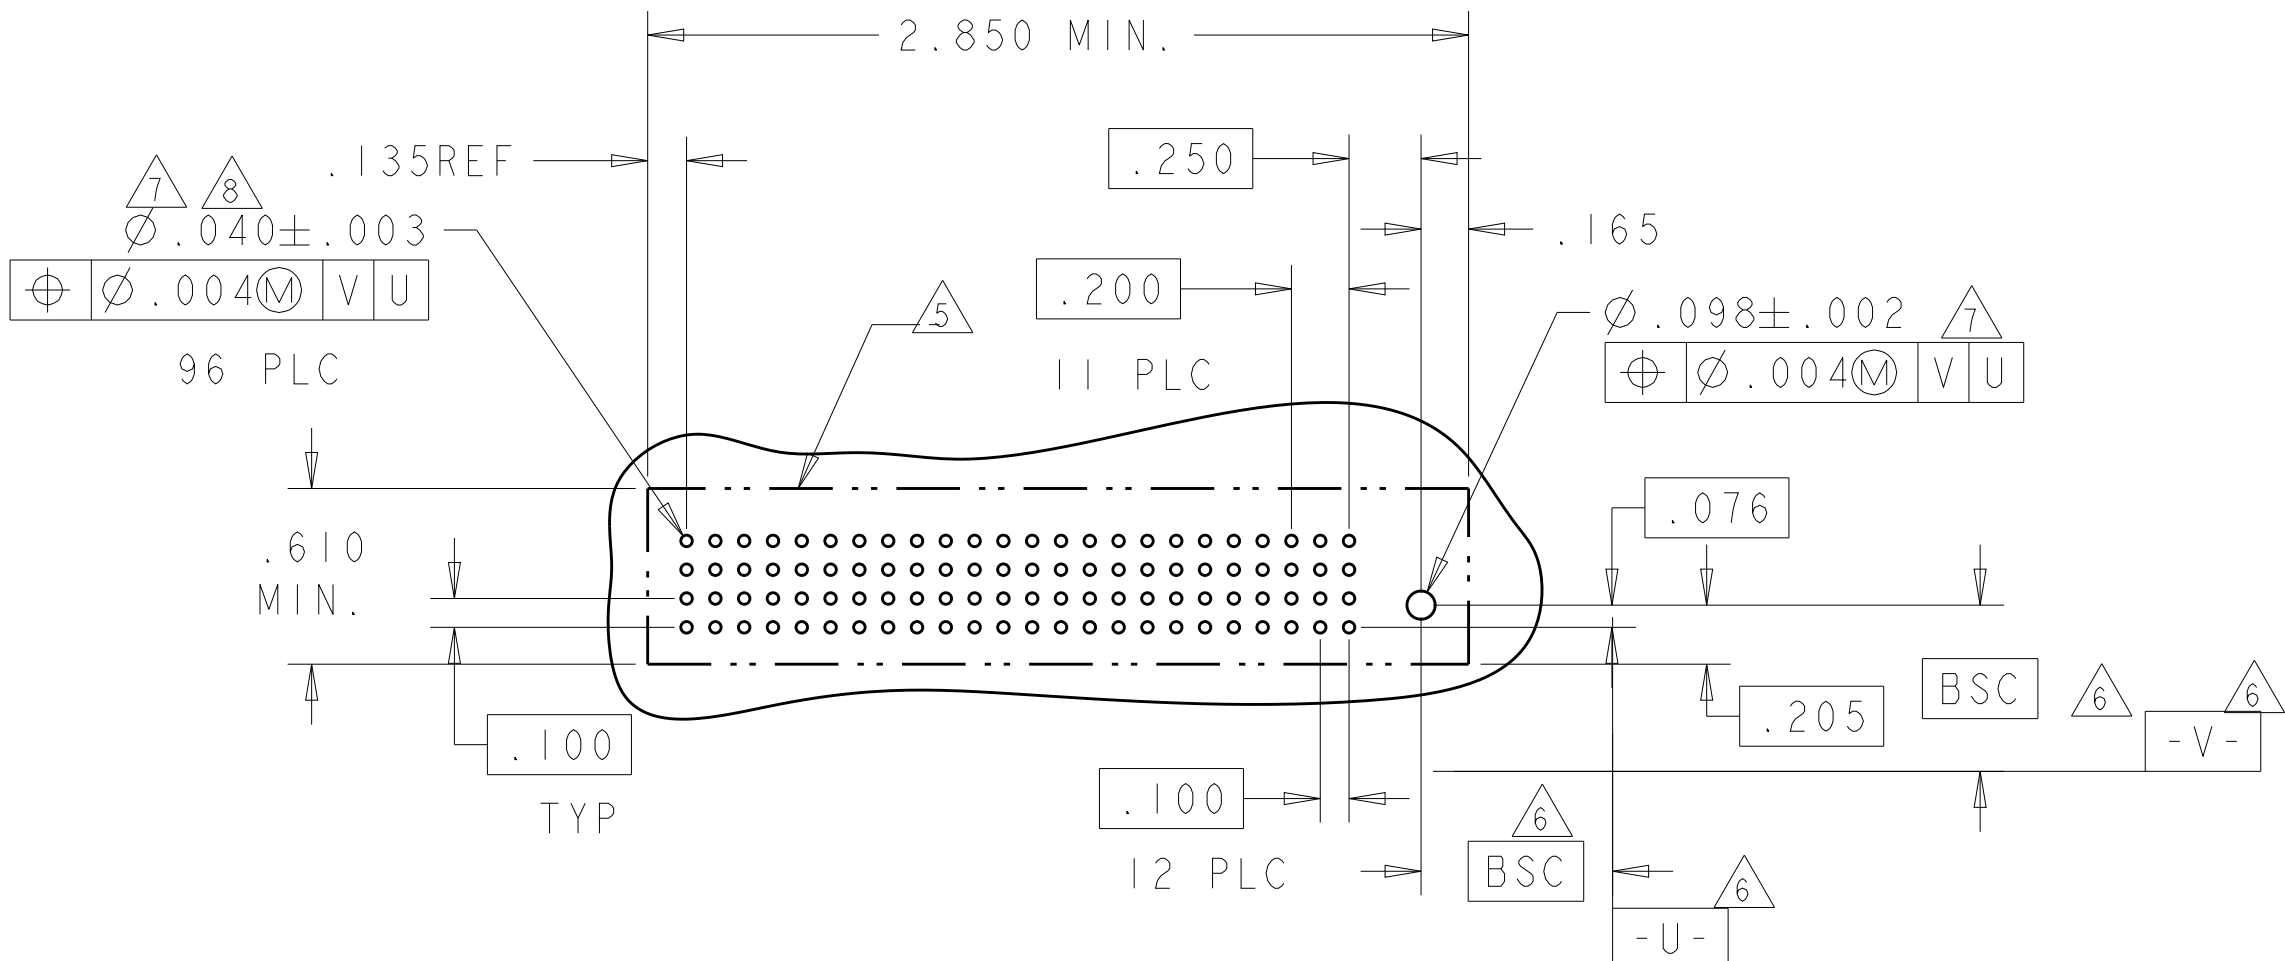
Technical drawing of a mechanical part, likely a nozzle or probe, showing dimensions and tolerances. The part is cylindrical with a central bore. Key dimensions include a total length of 7.500 MIN., a central bore diameter of $\varnothing .040 \pm .003$, and a central bore length of 4.050. The drawing also shows a 0.077 diameter feature, a 0.250 diameter feature, and a 0.100 diameter feature. Surface finish symbols (A, B, C, D, E, F, G, H, I, J, K, L, M, N, O, P, Q, R, S, T, U, V, W, X, Y, Z) are used to specify surface requirements. The drawing is labeled with '280PLC', '29PLC', and '9PLC'.

4805 (3/11)

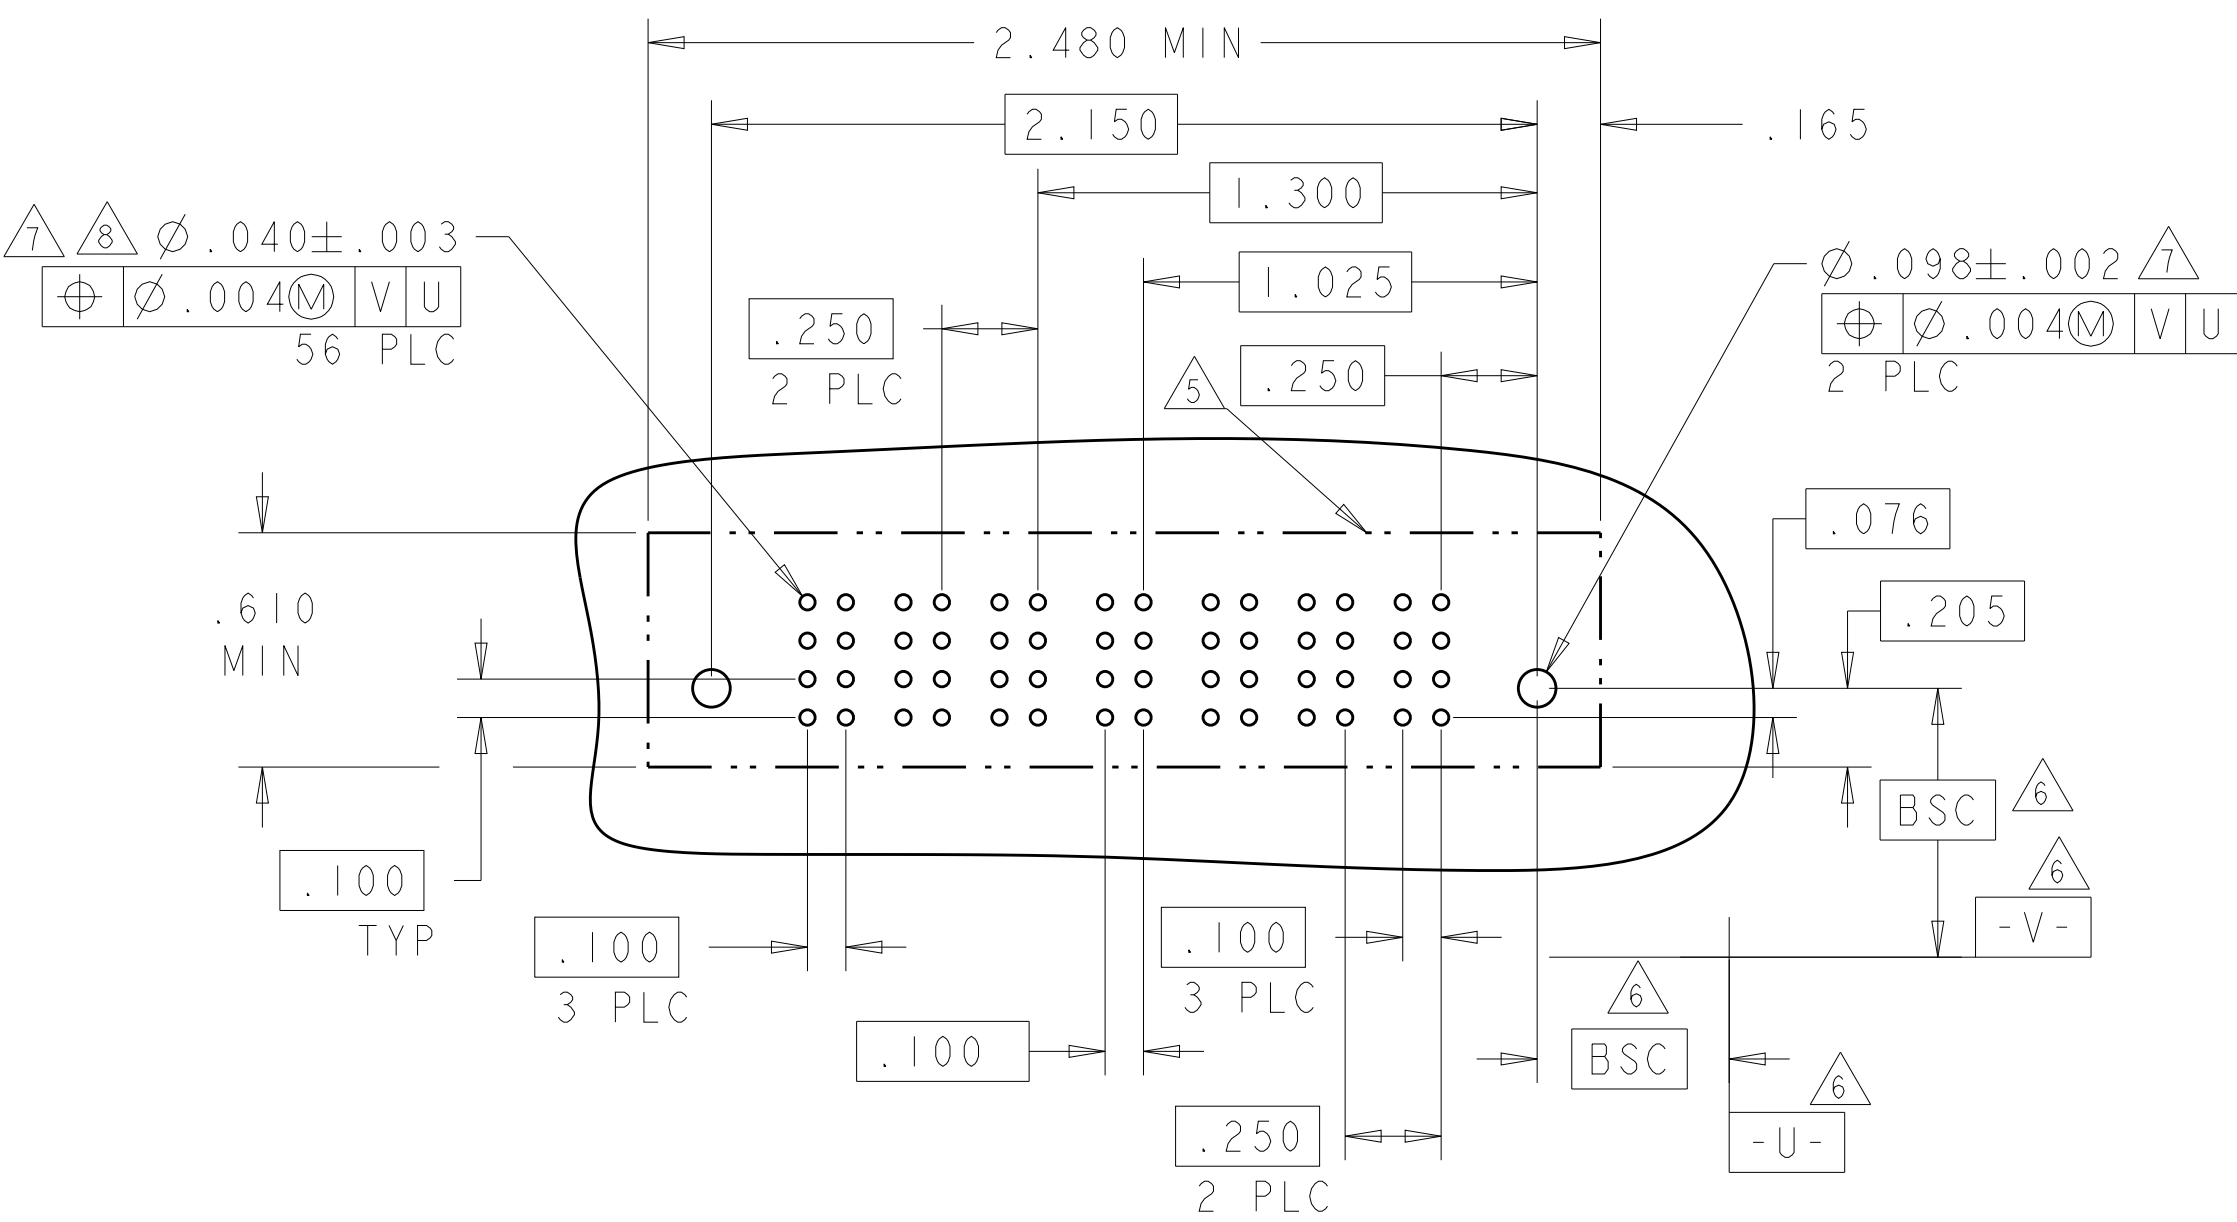
PART NUMBER	ROWS	POWER									
		P11	P10	P9	P8	P7	P6	P5	P3	P2	P1
4-6450540-2	D C B A	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP
I I HDP											

4805 (3/11)


PART NUMBER	ROWS	POWER											
		P12	P11	P10	P9	P8	P7	P6	P5	P3	P2		P1
4-6450540-5	DC CB A	GS	GS	GS	GS	GS	GS	GS	GS	GS	GS	GS	HD
12HDP													



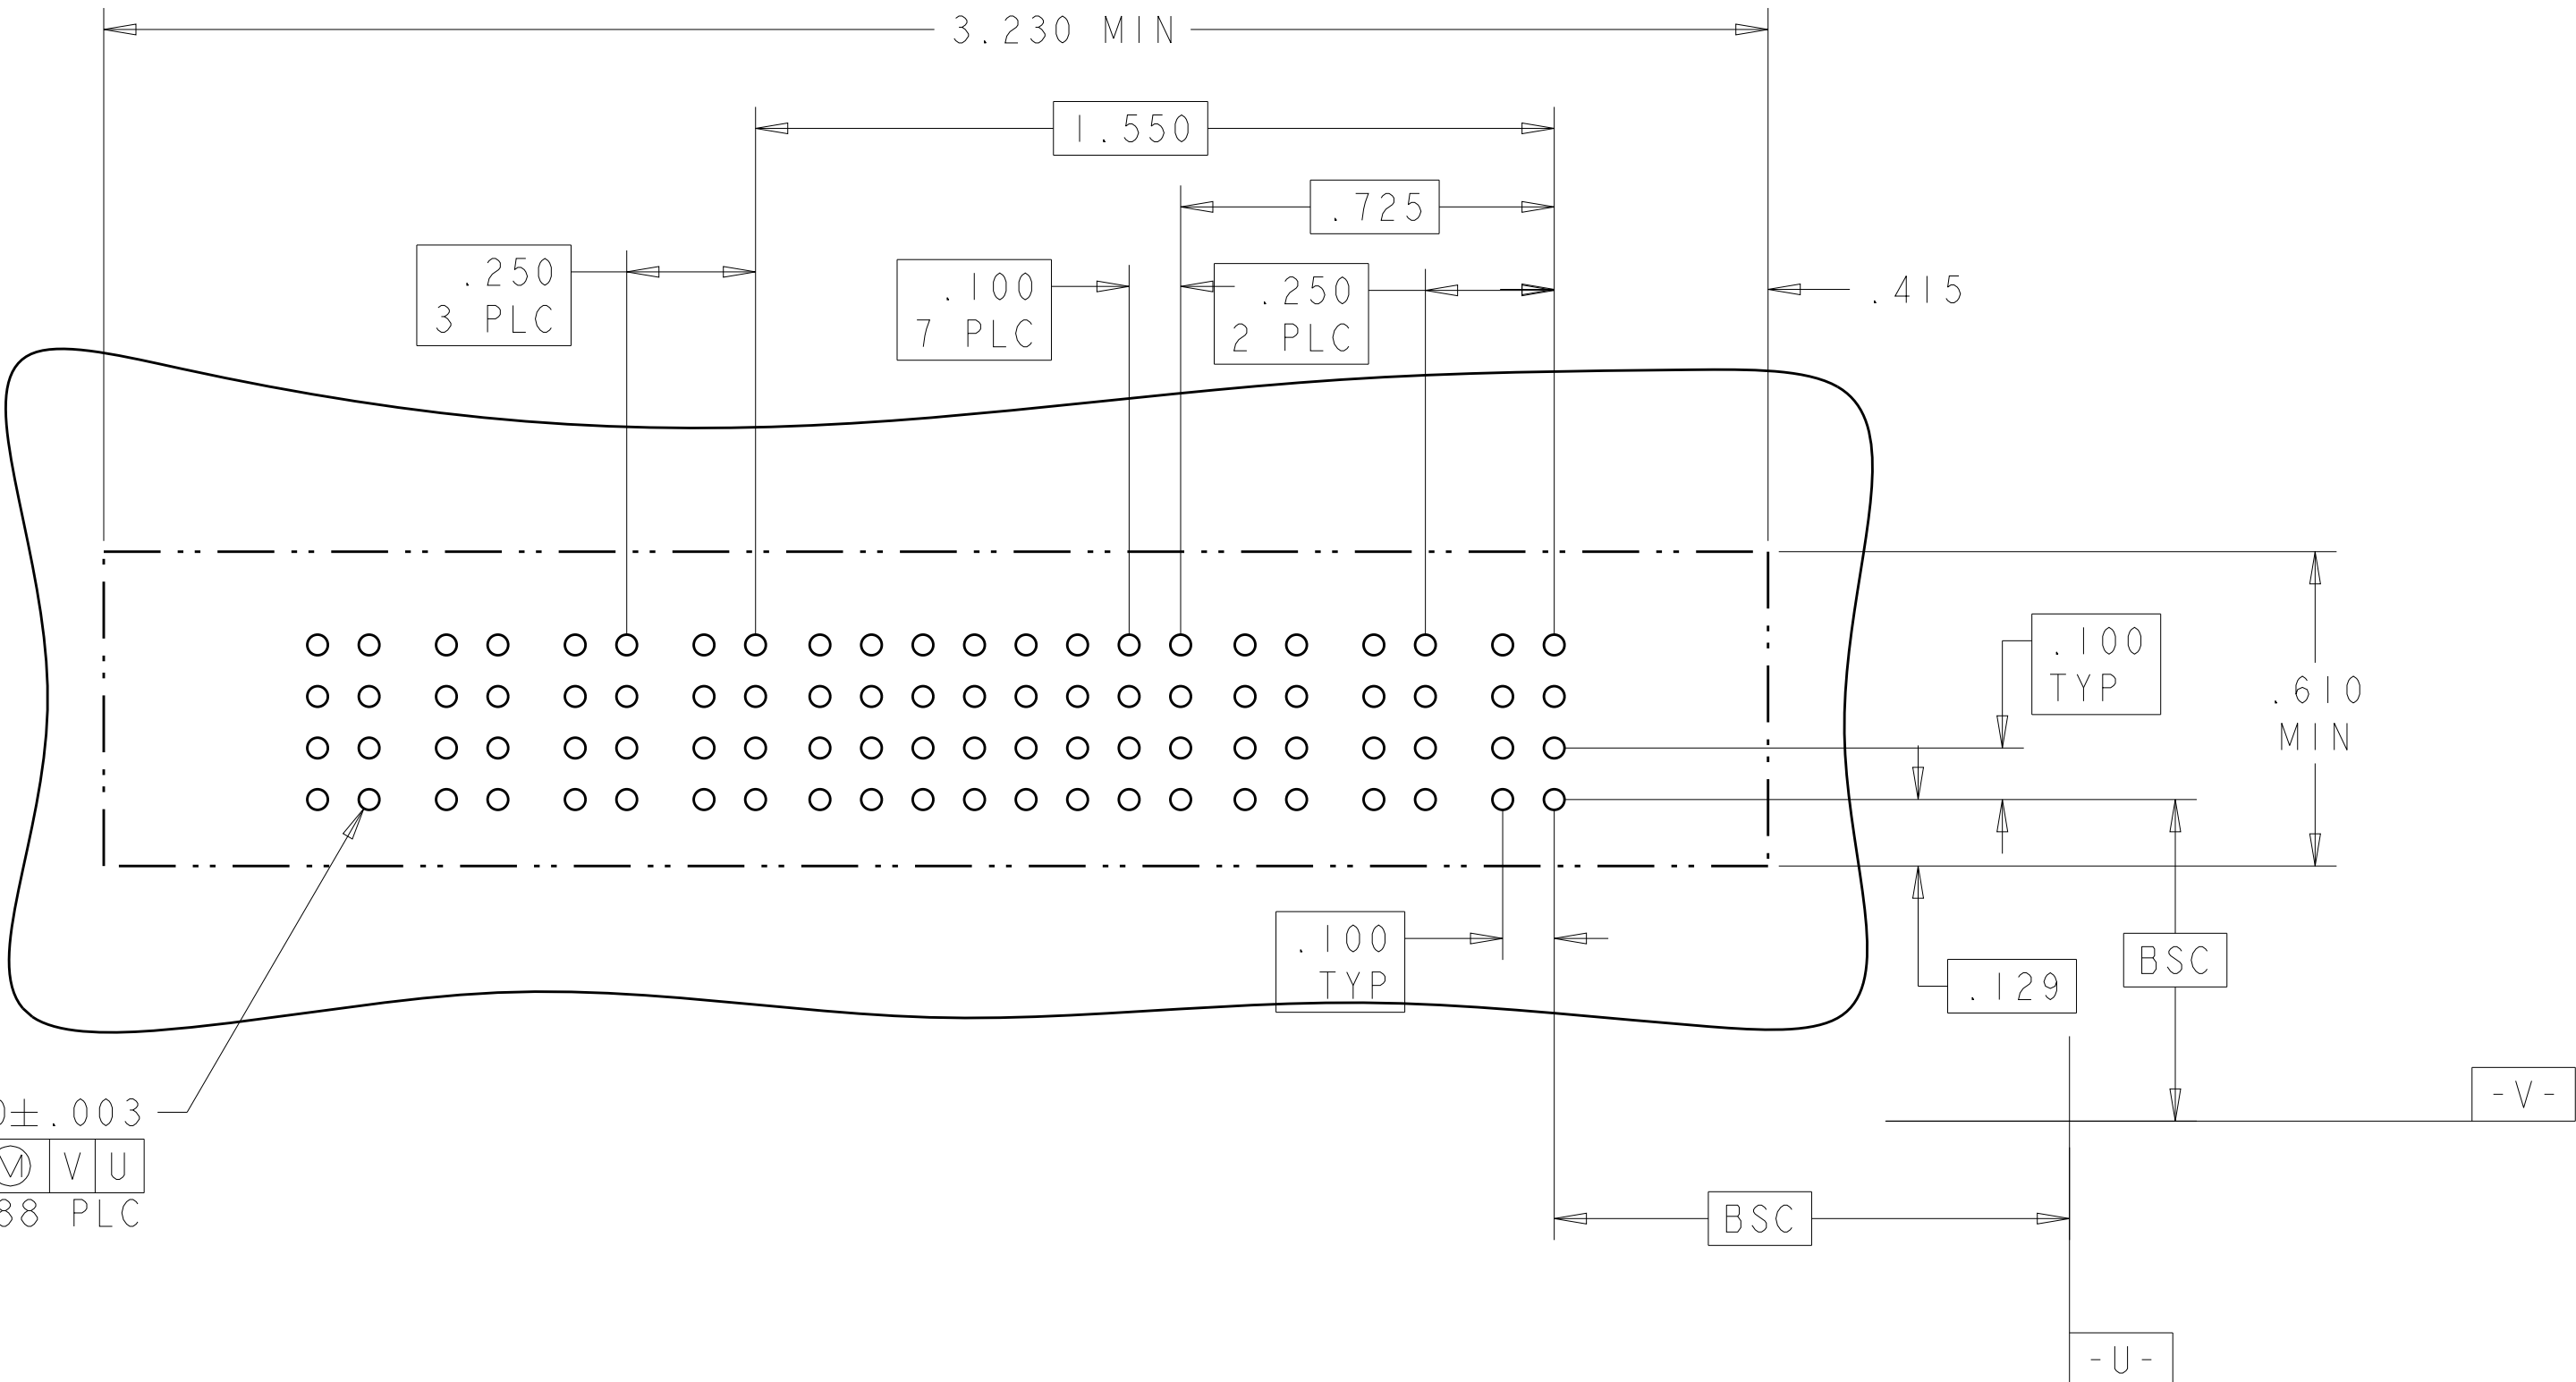
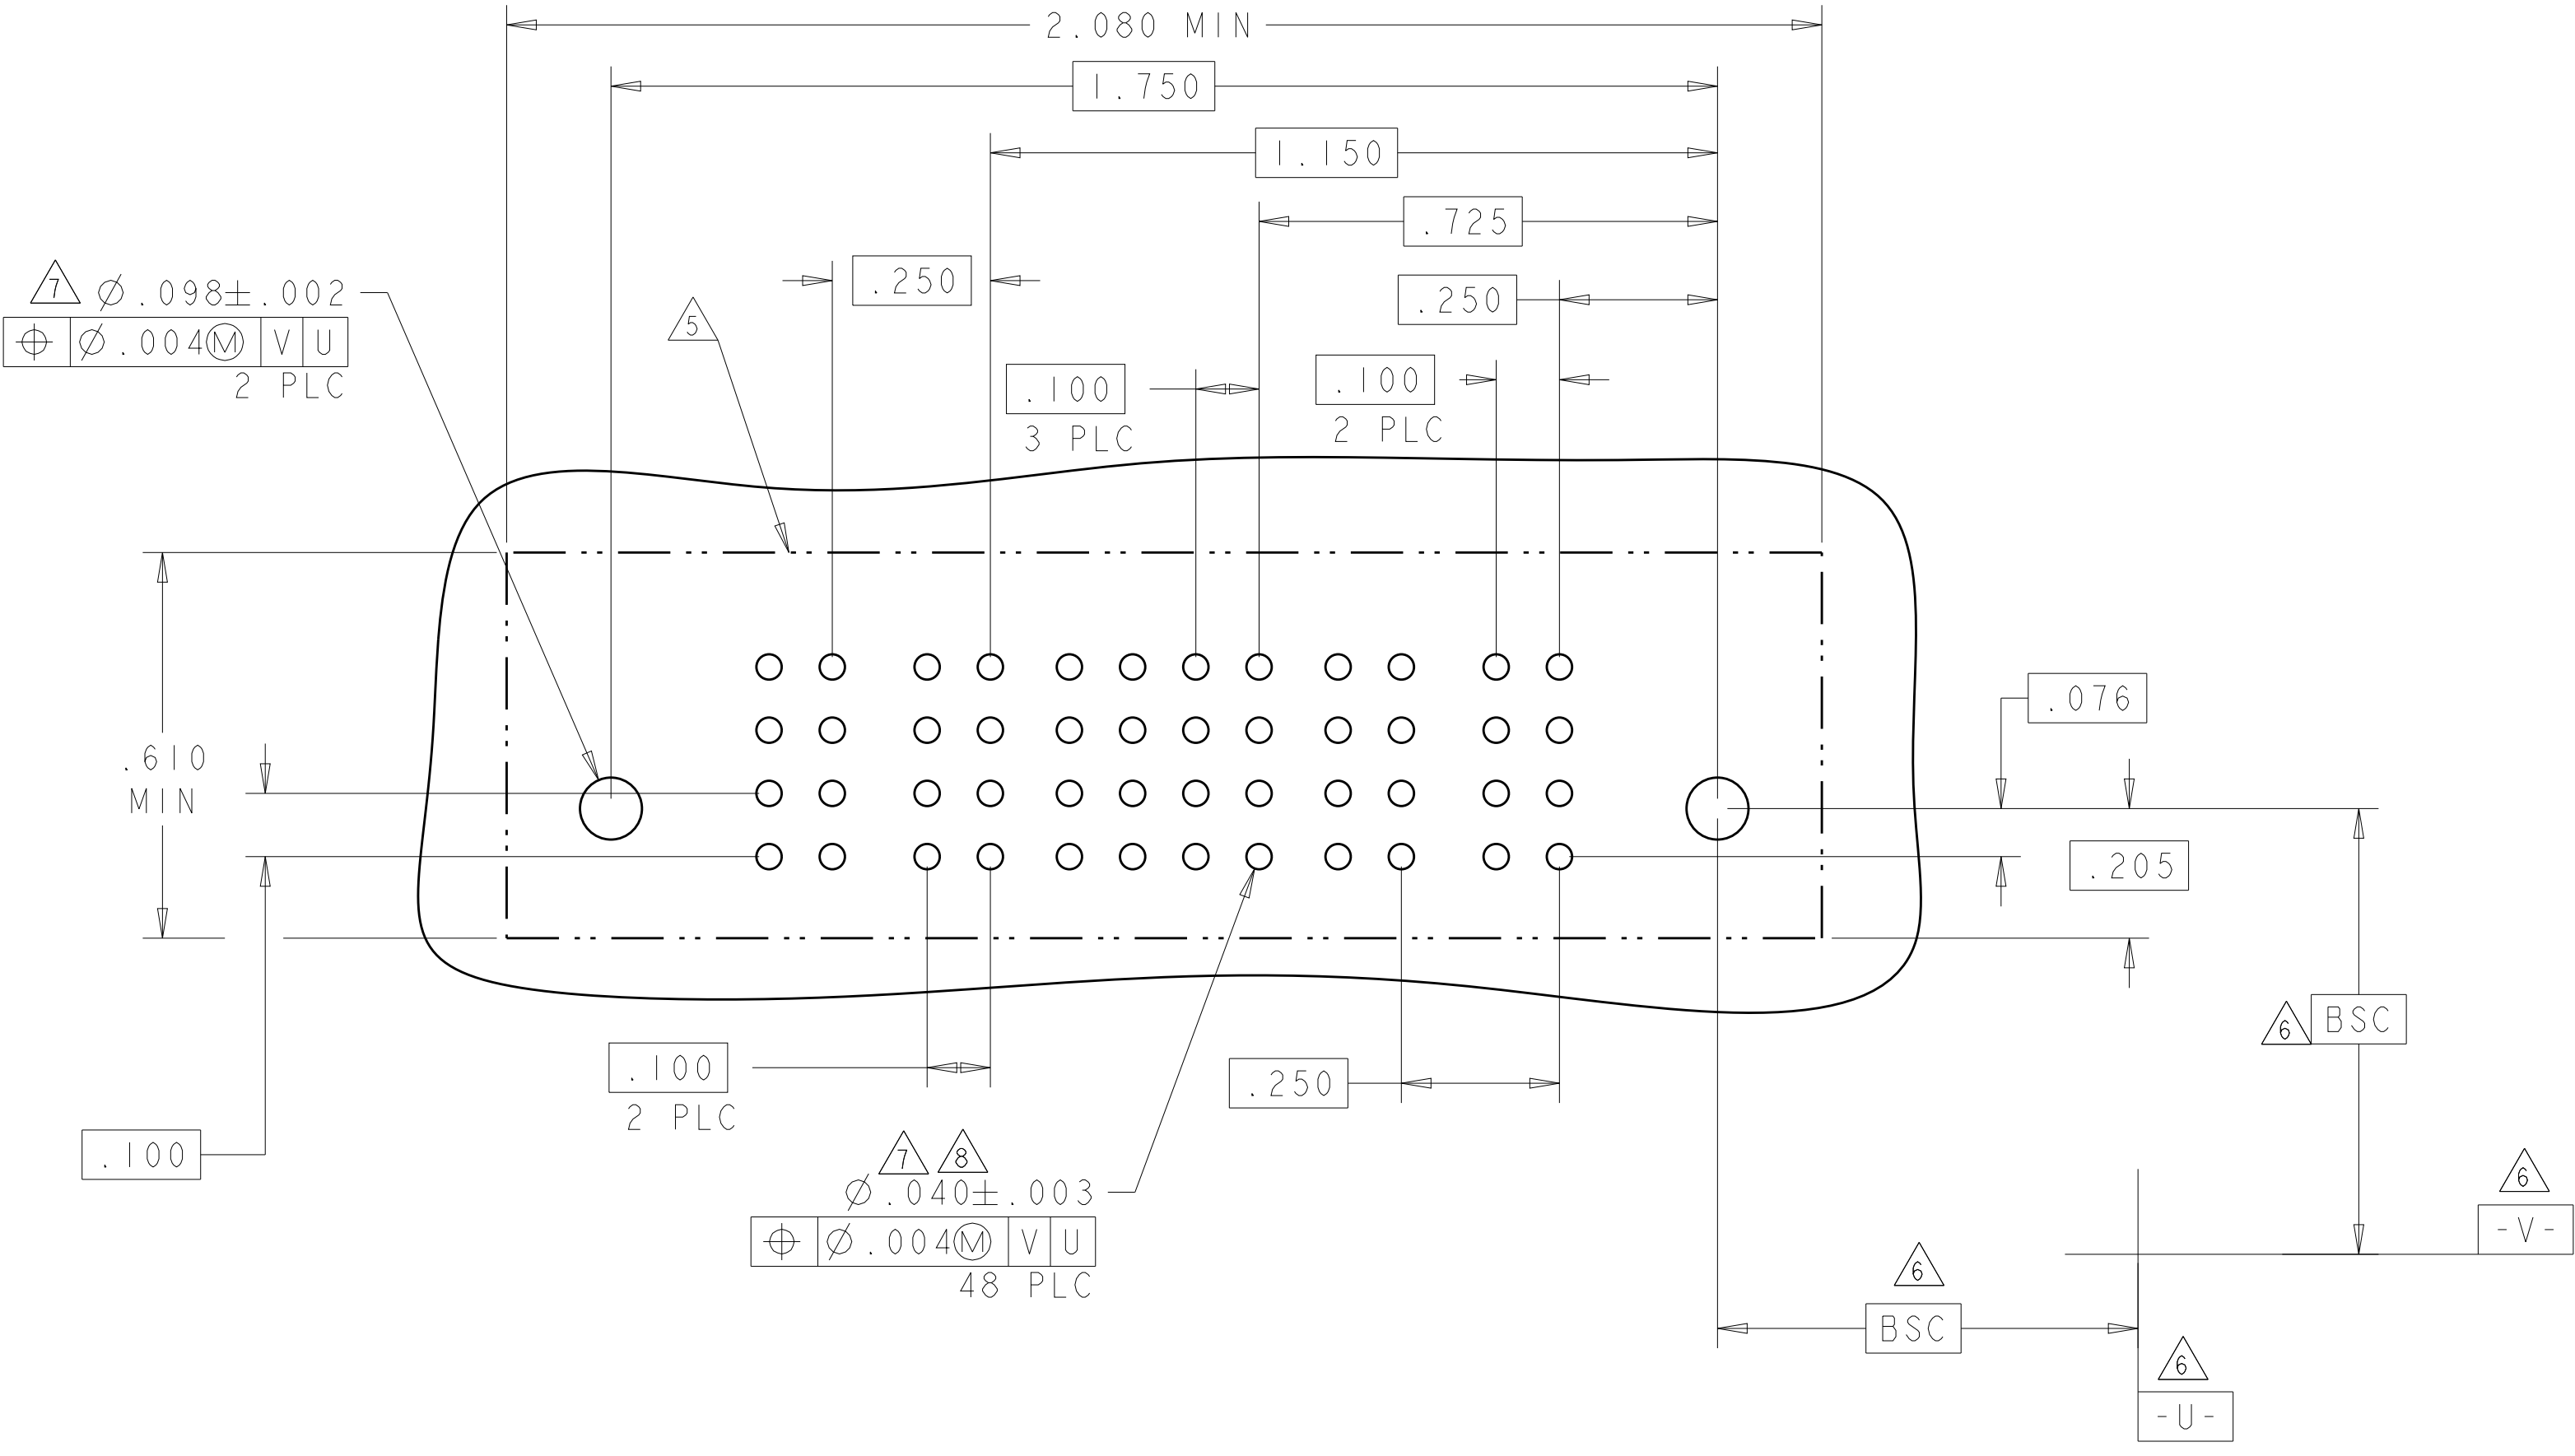
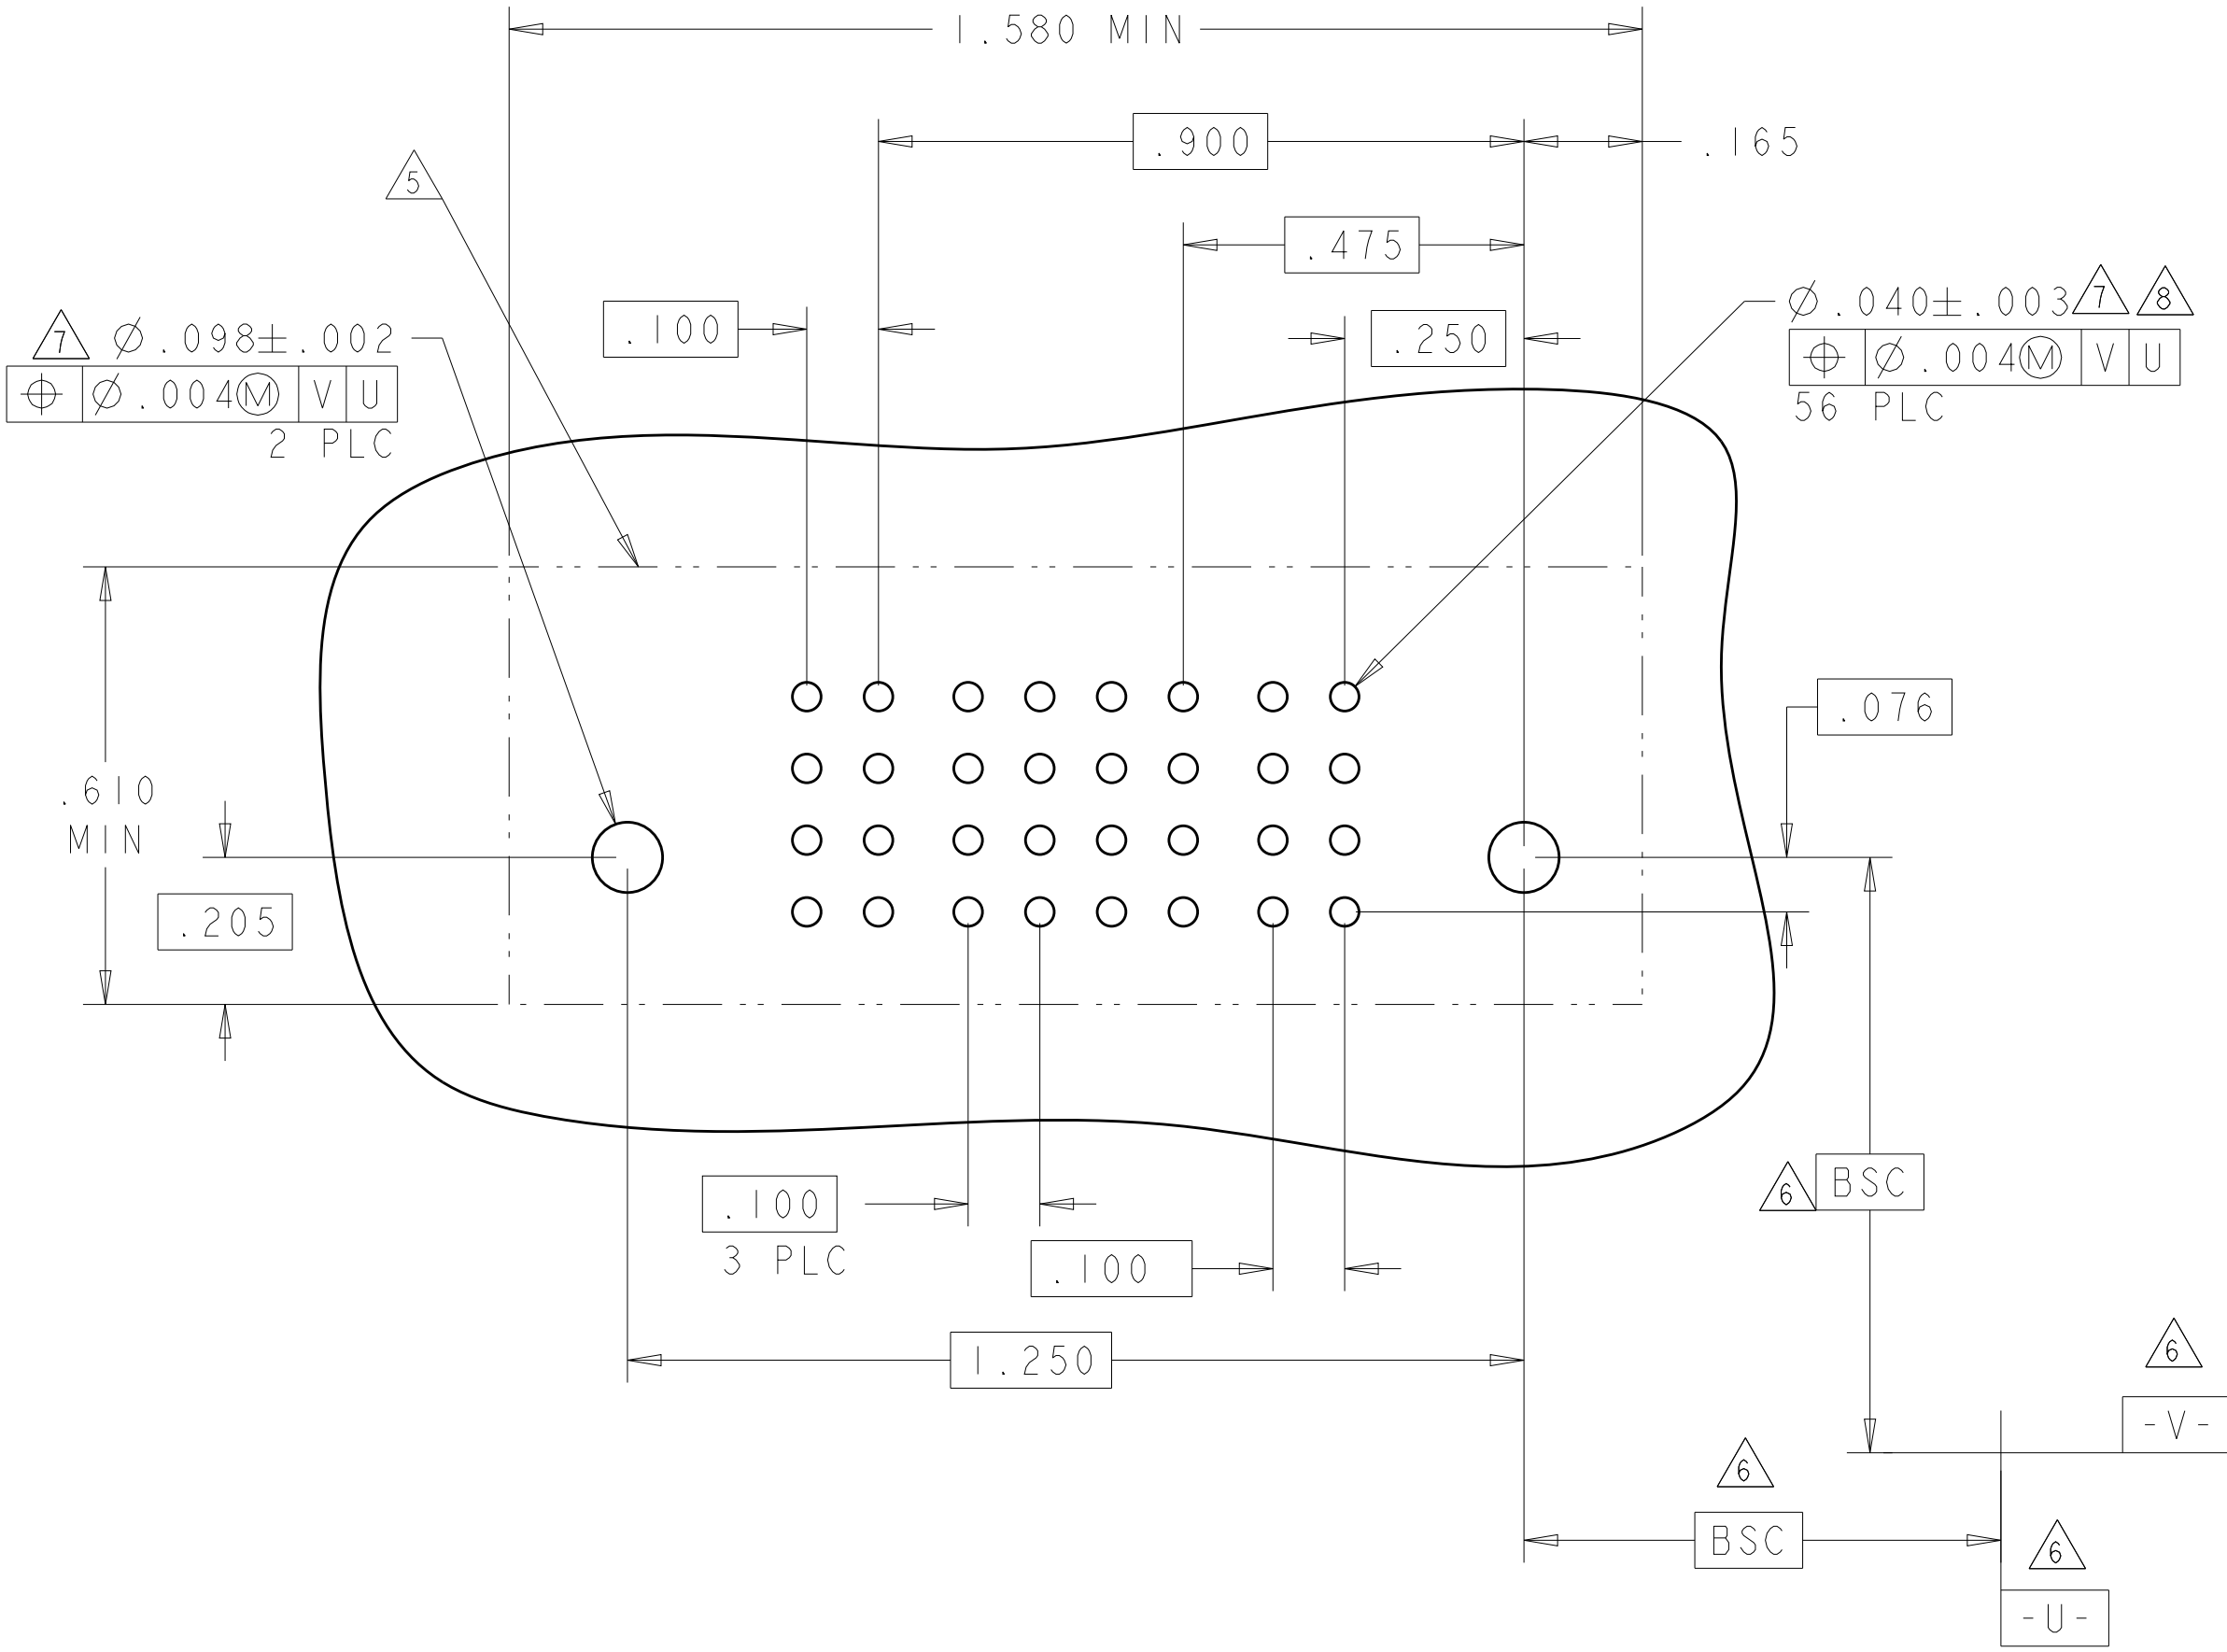
PART NUMBER	ROWS		POWER			SIGNAL		POWER			
			P6	P5	P4	2	1	P3	P2	P1	
4-6450540-7	D C B A										
											
3P + 8S + 3P											

4805 (3/11)

LOC		DIST		REVISIONS				
P	LYR	DESCRIPTION			DATE	OWN	APVD	
-	-	SEE SHEET 1			-	-	-	

PART NUMBER	ROWS		POWER		SIGNAL				POWER		
			P2	4	3	2	1	P1			
4-6450540-8	D C B A		GS	AP	AP	AP	AP	GS			
				AP	AP	AP	AP				
				AP	AP	AP	AP				
				AP	AP	AP	AP				
				IP + 16S + 1P							

PART NUMBER	ROWS		POWER		SIGNAL				POWER		
			P4	P3	4	3	2	1	P2	P1	
5-6450540-1	D C B A				AP	AP	AP	AP			
					AP	AP	AP	AP			
					AP	AP	AP	AP			
					AP	AP	AP	AP			
2P + 16S + 2P											



PART NUMBER	ROWS		POWER				SIGNAL								POWER			
			P7	P6	P5	P4	8	7	6	5	4	3	2	1	P3	P2	P1	
1-6450540-1	D C B A						P	P	P	P	P	P	P	P				
							P	P	P	P	P	P	P	P				
							P	P	P	P	P	P	P	P				
							P	P	P	P	P	P	P	P				
3P + 32S + 4P																		

THIS DRAWING IS A CONTROLLED DOCUMENT.




OWN: R. GRZYBOWSKI 29APR05
CHK: M. PERCHERKE 29APR05
APVD: M. PERCHERKE

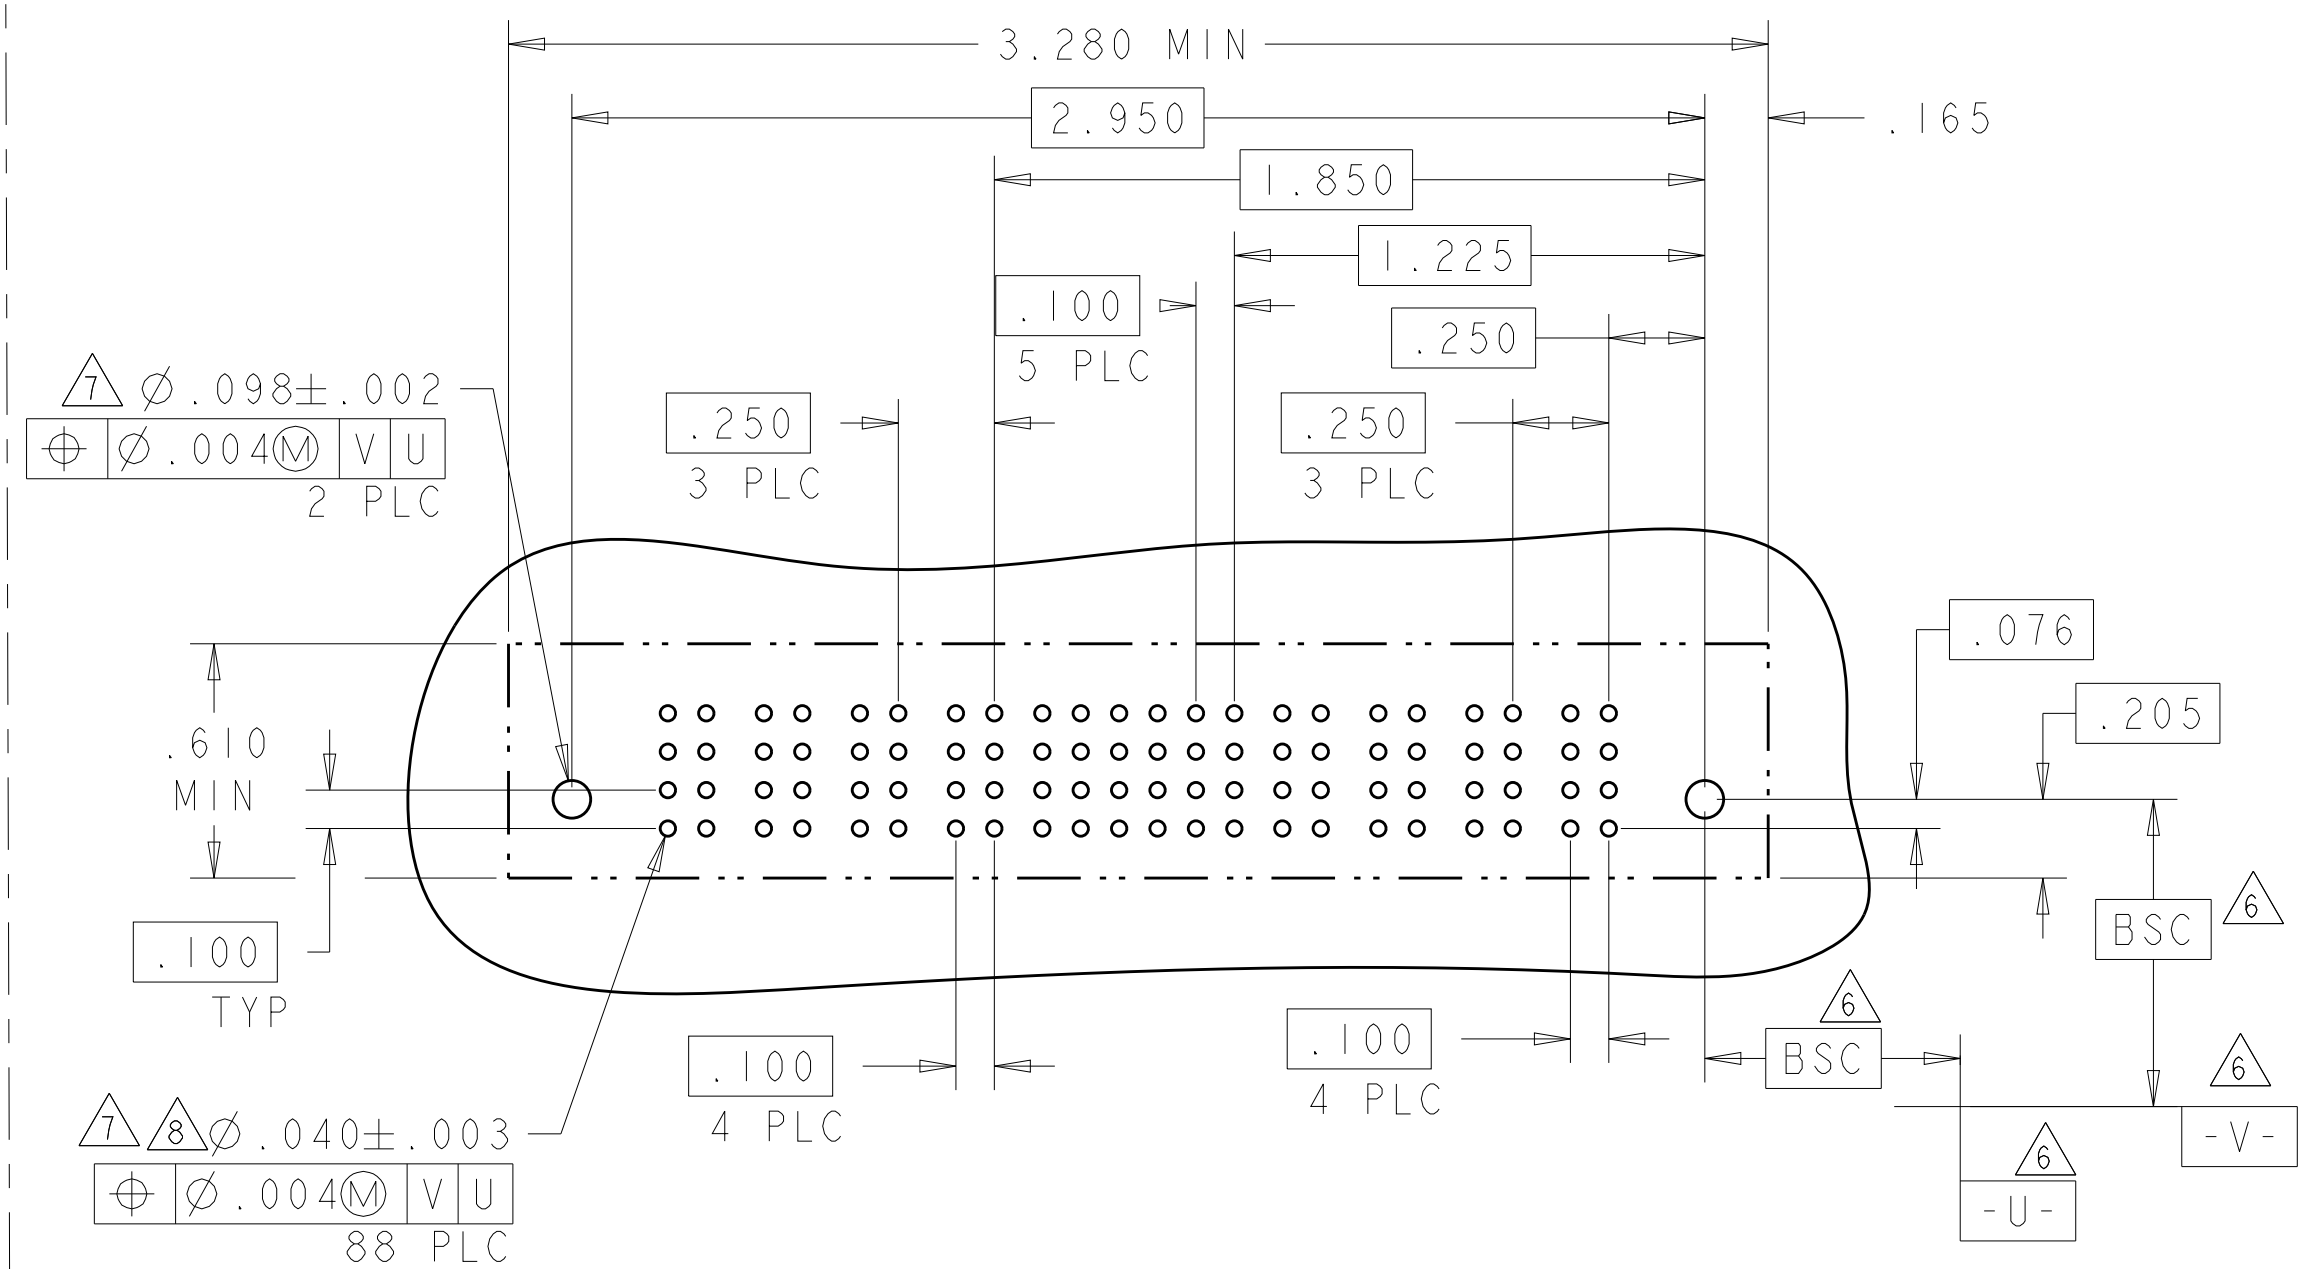
PRODUCT SPEC: 108-1973
APPLICATION SPEC: 114-13038
WEIGHT: -
CUSTOMER DRAWING

DIMENSIONS: INCHES
TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±.01
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°
FINISH

NAME: VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL
SIZE: A1
CAGE CODE: 100779
DRAWING NO: 6450540
SCALE: 2:1
SHEET: 12 OF 19
REV: K9

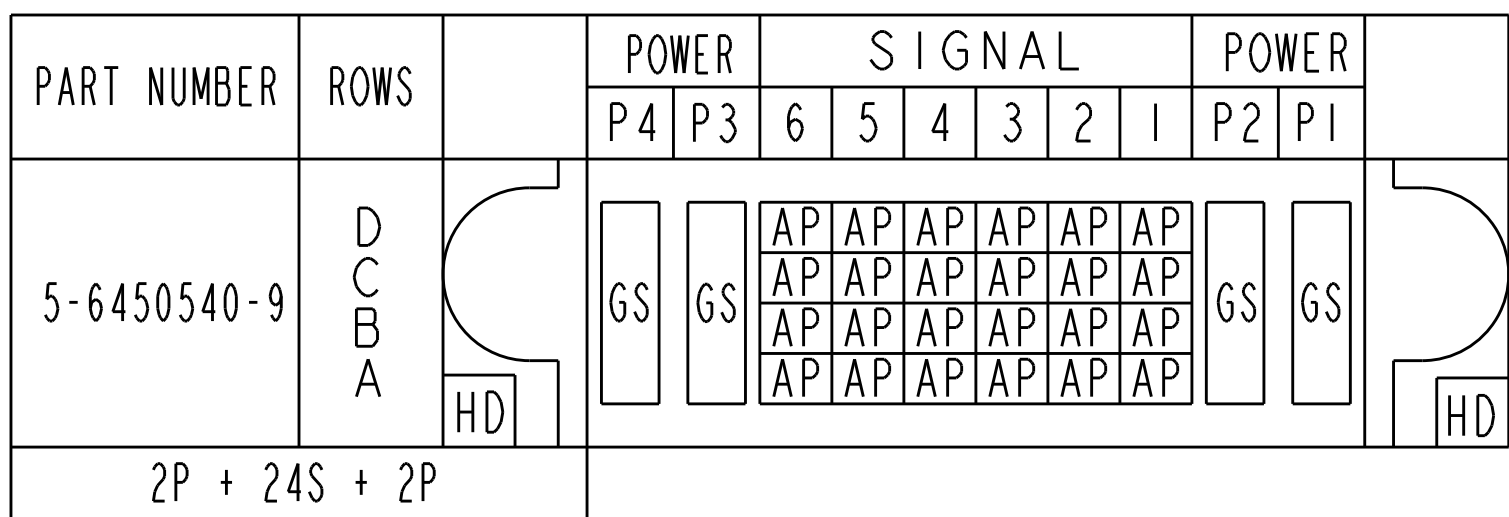
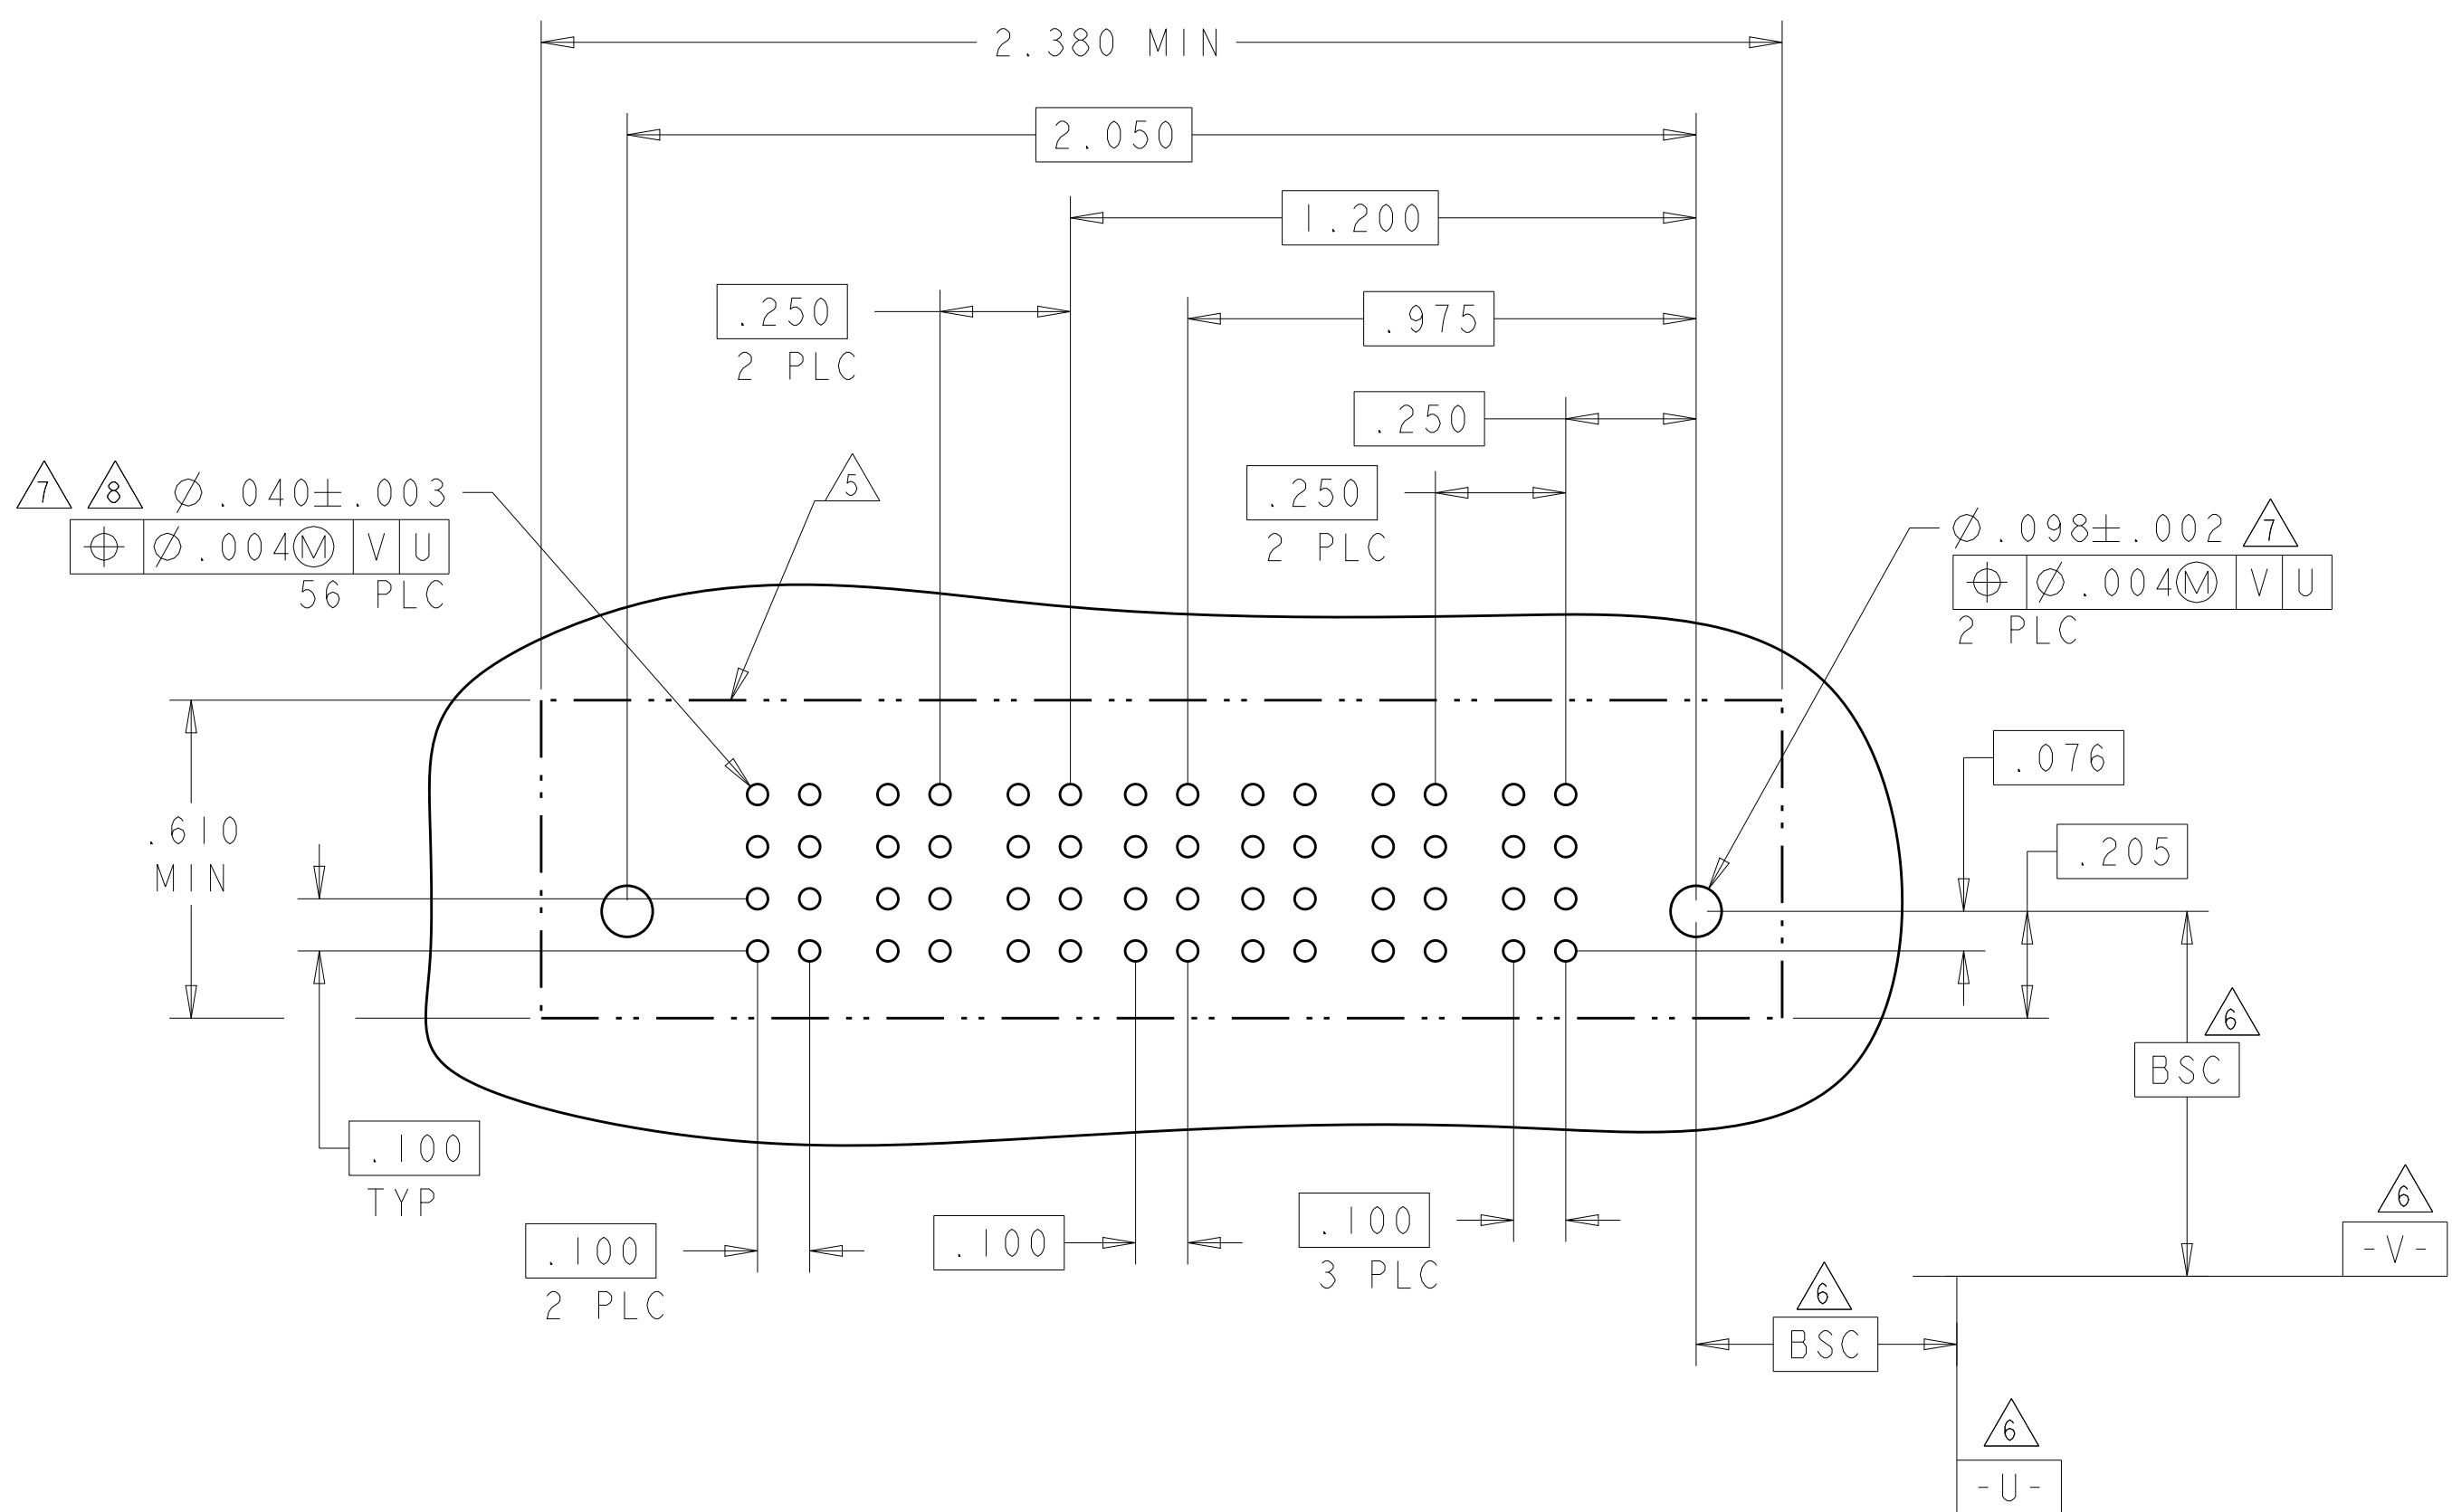
TE Connectivity

PART NUMBER	ROWS		POWER				SIGNAL						POWER				
			P8	P7	P6	P5	6	5	4	3	2	1	P4	P3	P2	P1	
5-6450540-3	D C B A					AP	AP	AP	AP	AP	AP						
						AP	AP	AP	AP	AP	AP						
						AP	AP	AP	AP	AP	AP						
						AP	AP	AP	AP	AP	AP						
4P + 24S + 4P																	



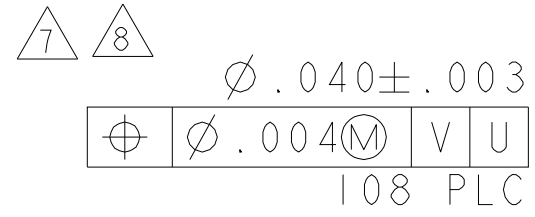
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI 29APR05		 TE Connectivity	
DIMENSIONS:		CHG M. PERCHERRE 29APR05			
INCHES		APVD M. PERCHERRE		NAME	
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL	
		0 P.LC ±.01 1 P.LC ±.01 2 P.LC ±.01 3 P.LC ±.005 4 P.LC ±.0020 ANGLES ±.7°		PRODUCT SPEC	
		108-1973		SIZE	
		114-13038		CAGE CODE	
MATERIAL		FINISH		DRAWING NO	
		WEIGHT		A100779	
		CUSTOMER DRAWING		C6450540	
		SCALE		2:1	
		SHEET		13 OF 19	
		REV		K9	

PART NUMBER	ROWS		POWER			SIGNAL		POWER			
			P6	P5	P4	2	1	P3	P2	P1	
5-6450540-5	D C B A										
3P + 8S + 3P											



4805 (3/11)

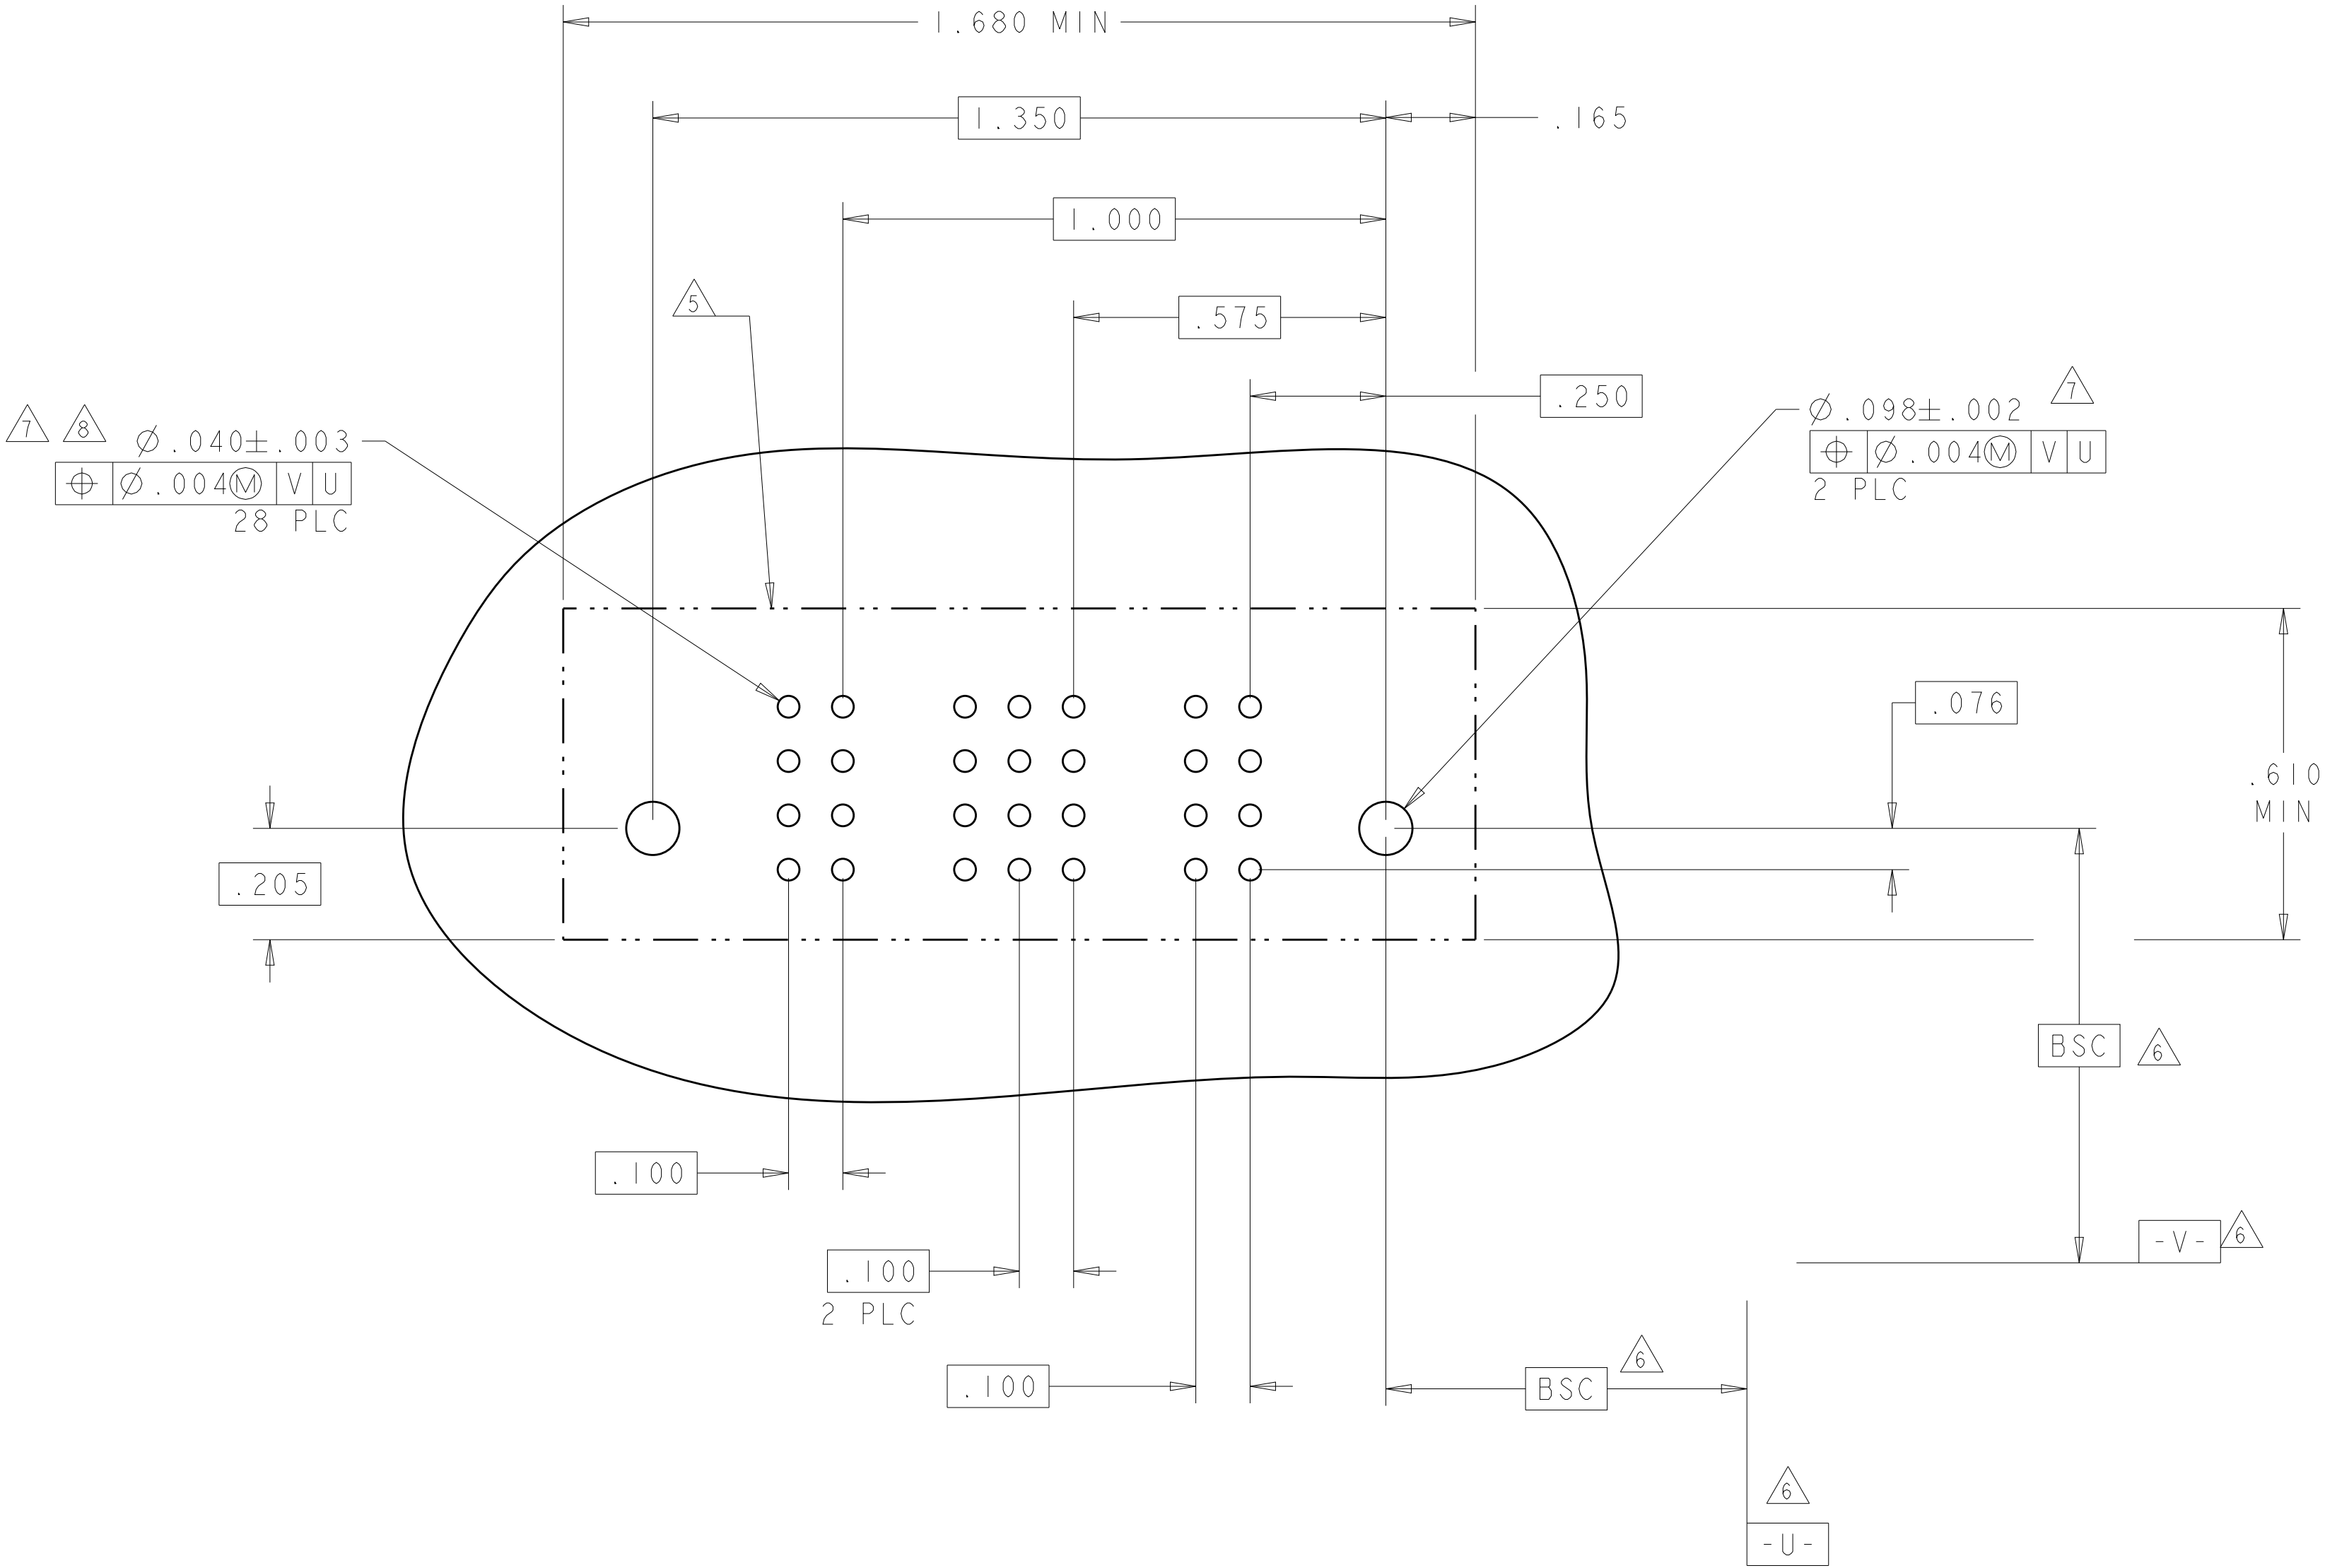
Ⓚ

4805 (3/11)

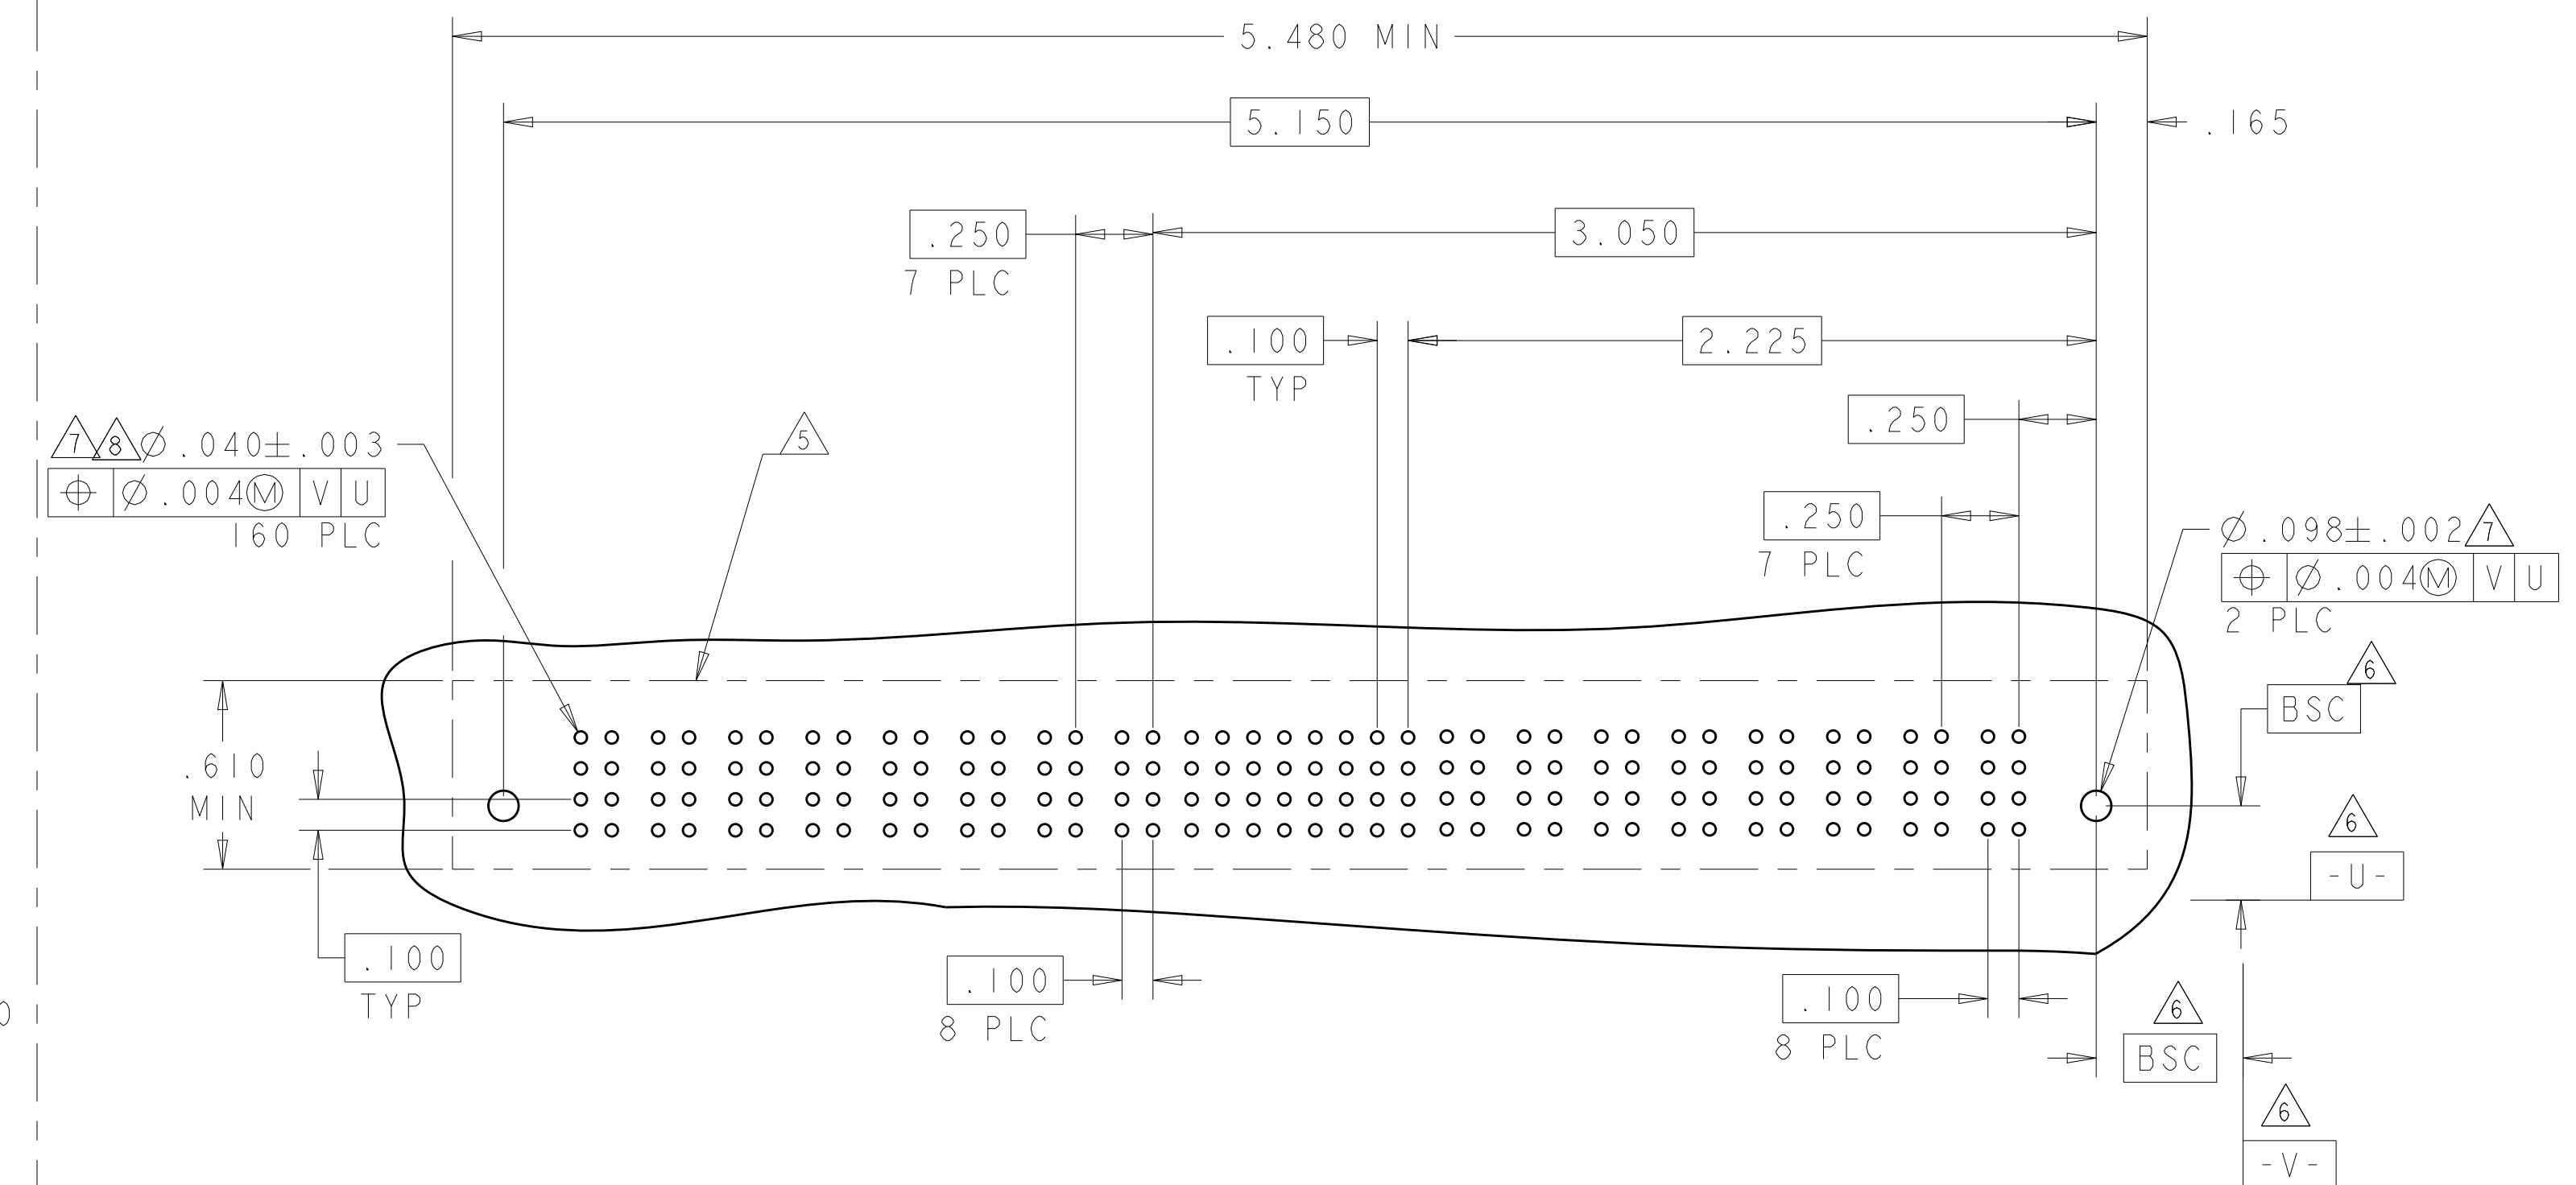
-NO SIGNAL CONTACTS4805 (3/11)


LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

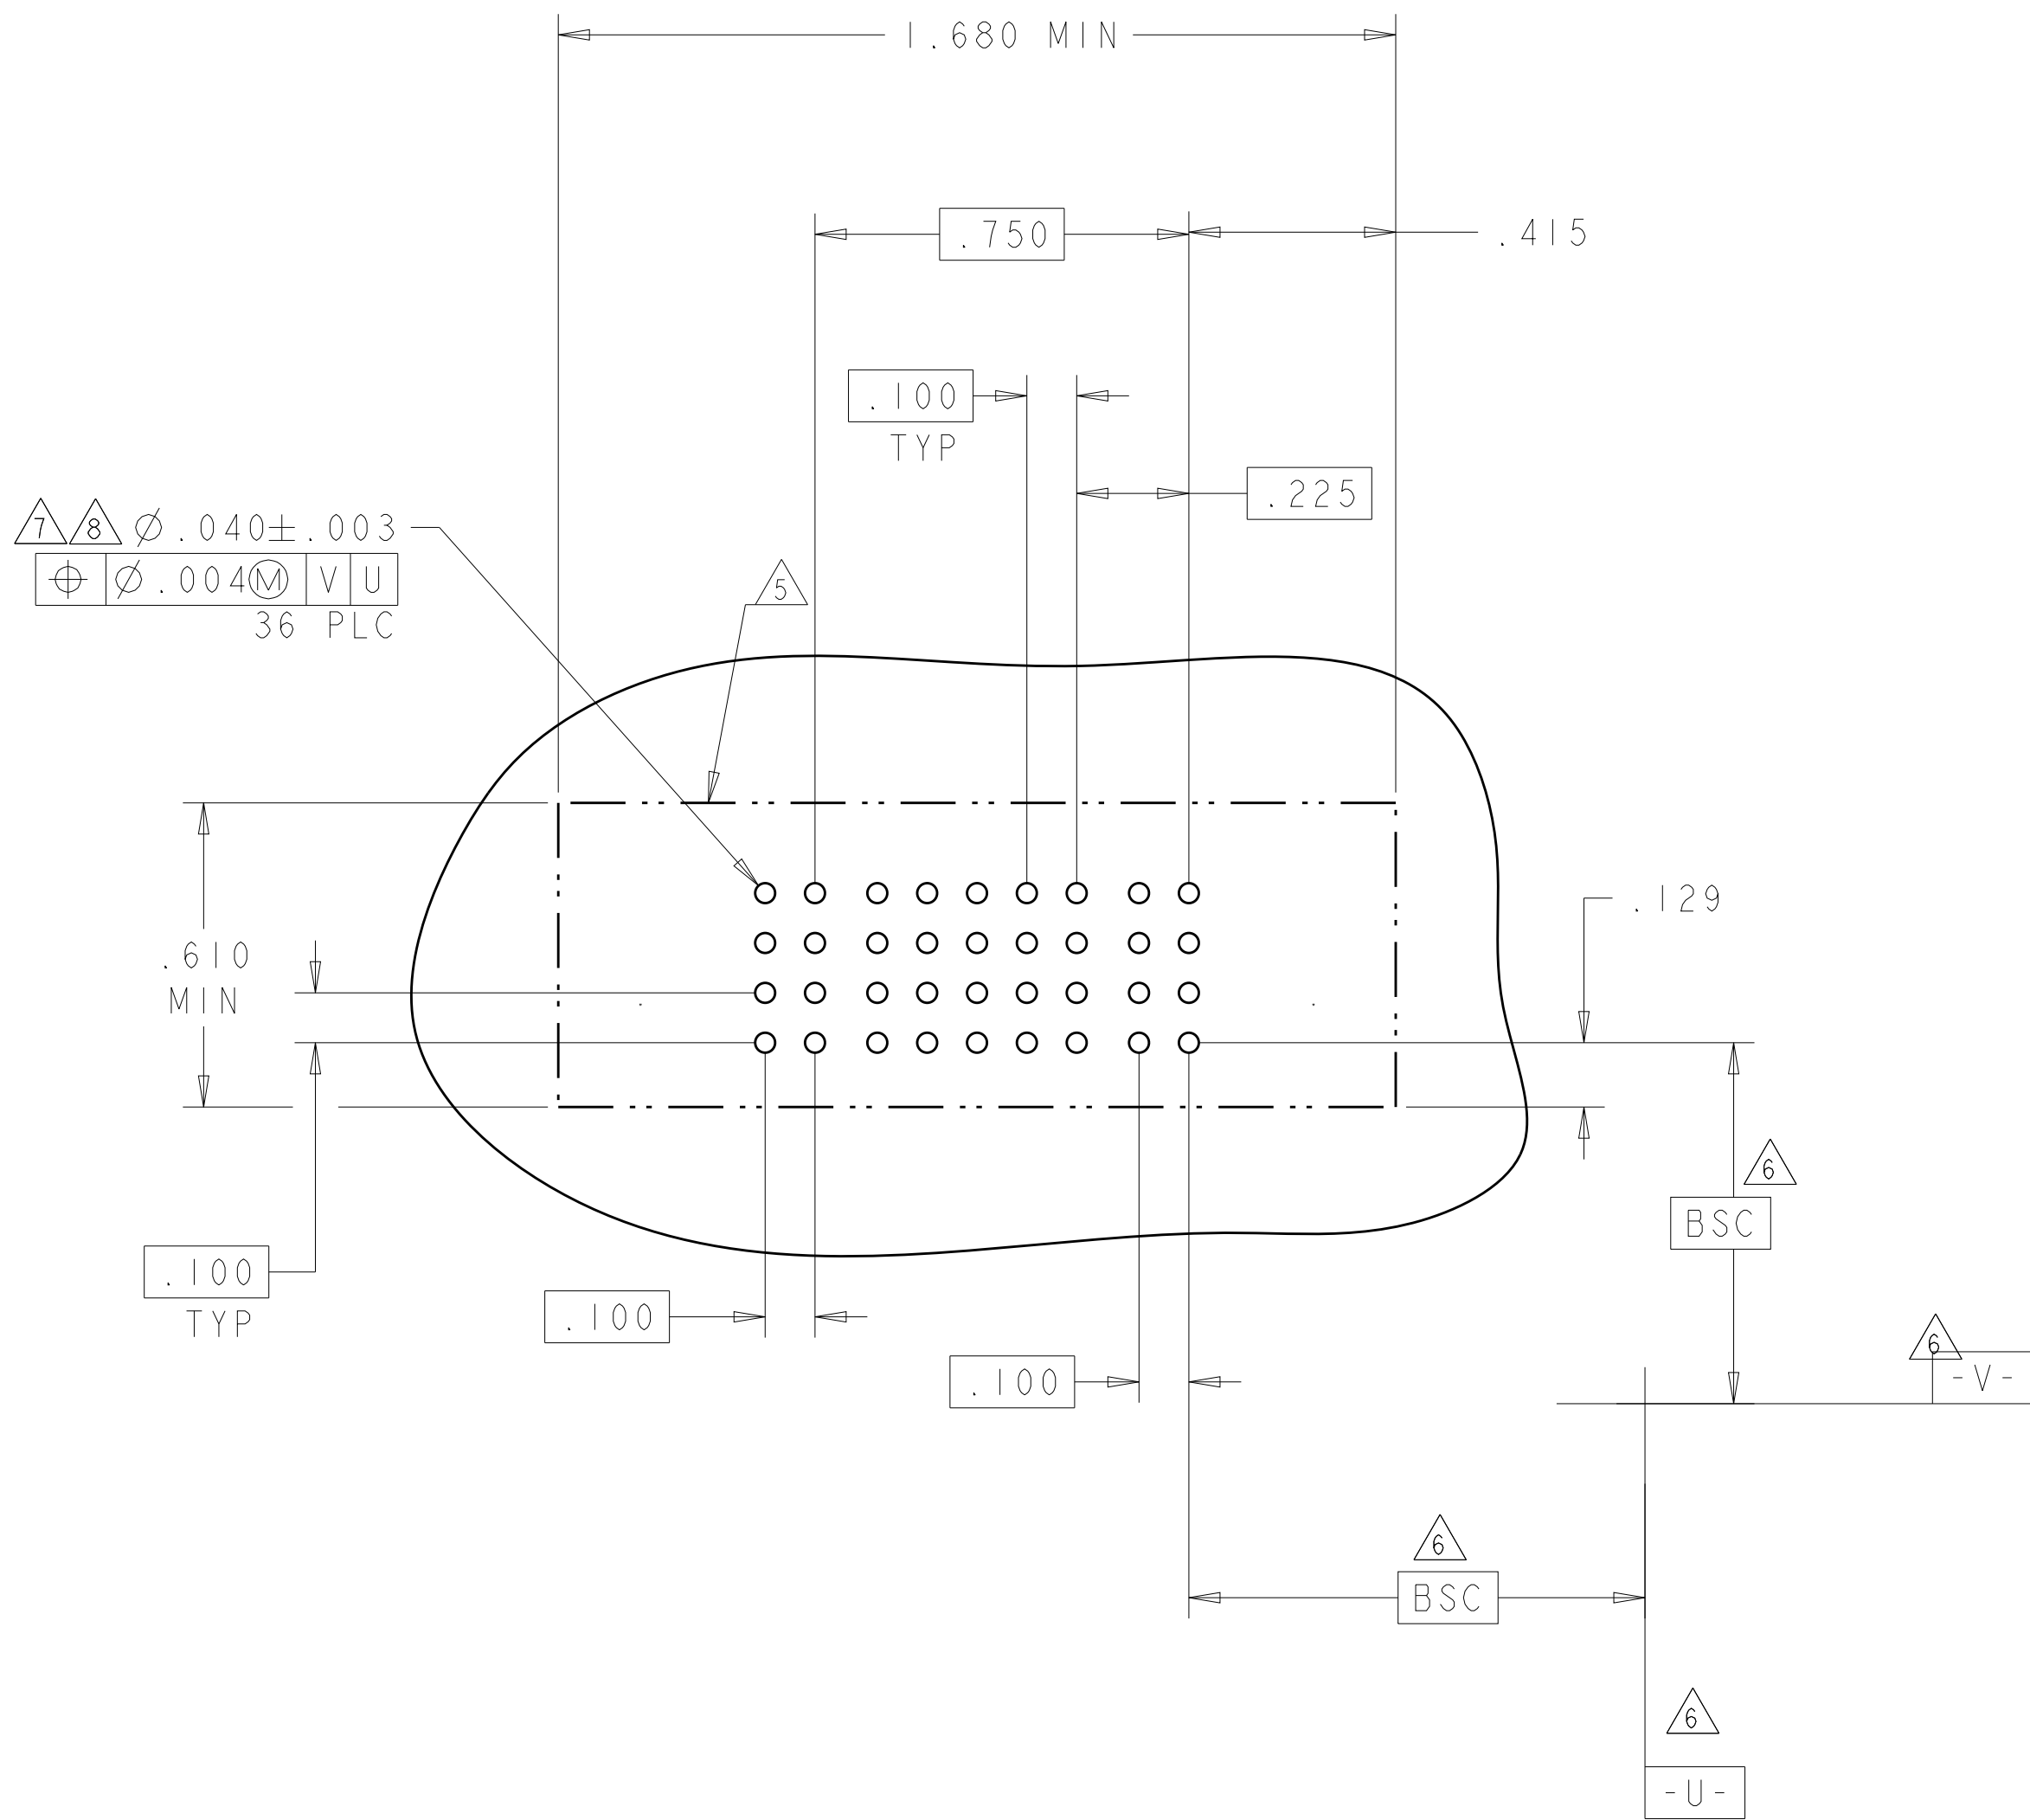
PART NUMBER	ROWS		POWER	SIGNAL					POWER	
			P2	5	4	3	2	1	PI	
6-6450540-2	D C B A	 	GP		AP	AP	AP		GP	 
					AP	AP	AP			
					AP	AP	AP			
					AP	AP	AP			
IP + 20S + IP										



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.GRZYBOWSKI CHK M.PERCHEKKE APVD M.PERCHEKKE	29APR05 29APR05 -
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
		0 PLC	±"
		1 PLC	±.01
		2 PLC	±.01
		3 PLC	±.005
		4 PLC	±.0020
		ANGLES	#2°
		FINISH	
MATERIAL		WEIGHT	-
		CUSTOMER DRAWING	
		SCALE	2:1
		SHEET	17
		OF	19
		REV	K9

[illegible]4805 (3/11)

PART NUMBER	ROWS		POWER	S I G N A L						POWER																		
			P2	5	4	3	2	1	P1																			
6-6450540-6	D C B A		GS <table><tr><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td></tr><tr><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td></tr><tr><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td></tr><tr><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td></tr></table> GS	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	
AP	AP	AP	AP	AP	AP																							
AP	AP	AP	AP	AP	AP																							
AP	AP	AP	AP	AP	AP																							
AP	AP	AP	AP	AP	AP																							
IP + 20S + IP																												

4805 (3/11)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9