


# IB IL 24 DO 2-2A-XC-PAC

**Inline digital output terminal,  
version for extreme conditions,  
2 outputs, 24 V DC, 2 A**

Data sheet  
106145\_en\_00

© PHOENIX CONTACT 2014-07-29

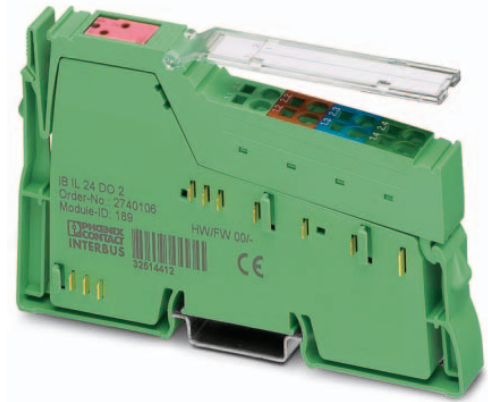

## 1 Description

The terminal is designed for use within an Inline station. It is used to output digital signals.

Thanks to special engineering measures and tests, the terminal can be used under extreme ambient conditions.

### Features

- Connections for two digital actuators
- Connection of actuators in 2, 3, and 4-wire technology
- Nominal current of each output: 2 A
- Total current of the terminal: 4 A
- Short-circuit and overload protected outputs
- Diagnostic and status indicators
- Can be used under extreme ambient conditions
- Painted PCBs
- Extended temperature range T2 (-40°C ... +55°C)



This data sheet is only valid in association with the IL SYS INST UM E user manual.



Make sure you always use the latest documentation.  
It can be downloaded from the product at [phoenixcontact.net/products](http://phoenixcontact.net/products).

<b>2</b>	<b>Table of contents</b>	
1	Description .....	1
2	Table of contents .....	2
3	Ordering data .....	3
4	Technical data .....	3
5	Additional tables .....	6
	5.1 Output characteristic curve.....	6
	5.2 Power dissipation .....	6
	5.3 Limitation of simultaneity, derating .....	6
6	Tested successfully: Use under extreme ambient conditions .....	7
7	Internal circuit diagram .....	7
8	Local status and diagnostic indicators .....	8
9	Terminal point assignment.....	8
10	Connection notes and examples .....	8
11	Process data.....	8

### 3 Ordering data

Description	Type	Order No.	Pcs. / Pkt.
Inline digital output terminal, version for extreme conditions, complete with accessories (connector plug and marking field), 2 outputs, 24 V DC, 2 A, 4-conductor connection technology	IB IL 24 DO 2-2A-XC-PAC	2702133	1


Accessories	Type	Order No.	Pcs. / Pkt.
Labeling field, width: 12.2 mm (Marking)	IB IL FIELD 2	2727501	10
Insert strip, Sheet, white, unlabeled, can be labeled with: Office printing systems, Plotter: Laser printer, Mounting type: Insert, Lettering field: 62 x 10 mm (Marking)	ESL 62X10	0809492	1
Insert strip, Sheet, white, unlabeled, can be labeled with: Office printing systems, Plotter: Laser printer, Mounting type: Insert, Lettering field: 62 x 46 mm (Marking)	ESL 62X46	0809502	5
Inline connector, colored (Connector/Adapter)	IB IL SCN-8-CP	2727608	10
Connector, for digital 1, 2 or 8-channel Inline terminals (Connector/Adapter)	IB IL SCN-8	2726337	10

Documentation	Type	Order No.	Pcs. / Pkt.
User manual, English, Automation terminals of the Inline product range	IL SYS INST UM E	-	-
Data sheet, English, INTERBUS addressing	DB GB IBS SYS ADDRESS	-	-

### 4 Technical data

#### Dimensions (nominal sizes in mm)

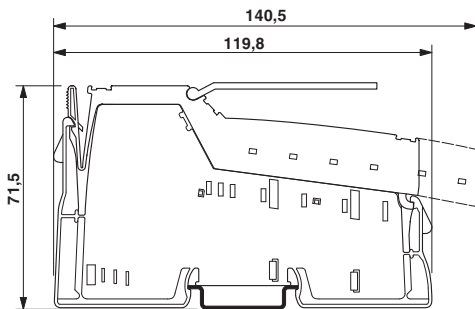

Width	12.2 mm
Height	119.8 mm
Depth	71.5 mm
Note on dimensions	Housing dimensions

#### General data

Color	green
Weight	61 g (with connector)
Operating mode	Process data mode with 2 bits
Ambient temperature (operation)	-40 °C ... 55 °C (See also the "Tested successfully: Use under extreme ambient conditions" section of the data sheet.)
Ambient temperature (operation)	-40 °C ... 60 °C (At $U_S < 24.5$ V; see also the "Tested successfully: Use under extreme ambient conditions" section of the data sheet.)

General data	
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Temperature class	T2 (-40°C ... 55°C, EN 50155)
Permissible humidity (operation)	10 % ... 95 % (according to DIN EN 61131-2)
Permissible humidity (storage/transport)	10 % ... 95 % (according to DIN EN 61131-2)
Air pressure (operation)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Air pressure (storage/transport)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Degree of protection	IP20
Protection class	III, IEC 61140, EN 61140, VDE 0140-1

Connection data	
Designation	Inline connector
Connection method	Spring-cage connection
Conductor cross section solid / stranded	0.08 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> / 0.08 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Conductor cross section [AWG]	28 ... 16
Stripping length	8 mm

Connection data for UL approvals	
Designation	Inline connector
Connection method	Spring-cage connection
Conductor cross section solid / stranded	0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> / 0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Conductor cross section [AWG]	24 ... 16
Stripping length	8 mm

Interface Inline local bus	
Connection method	Inline data jumper
Transmission speed	500 kBit/s

Power consumption	
Segment supply voltage $U_S$	24 V DC (nominal value)
Current consumption from $U_S$	max. 4 A
Communications power $U_L$	7.5 V DC (via voltage jumper)
Current consumption from $U_L$	max. 35 mA
Power consumption	max. 0.27 W (at $U_L$ )

Digital outputs	
Number of outputs	2
Connection method	Spring-cage connection
Connection method	2, 3, 4-wire
Nominal output voltage	24 V DC
Voltage difference with nominal current	≤ 1 V
Maximum output current per channel	2 A
Maximum output current per device	4 A
Nominal load, ohmic	48 W (12 Ω)
Nominal load, inductive	48 VA (1.2 H, 12 Ω)
Nominal load, lamp	48 W
Signal delay when switching on an ohmic nominal load	approx. 200 μs
Signal delay when switching on an inductive nominal load	approx. 250 ms (1.2 H, 12 Ω)
Signal delay when switching on a lamp nominal load	typ. 200 ms (for switching frequencies up to 8 Hz; above this frequency, the lamp load behaves like an ohmic load)
Signal delay when switching off an ohmic nominal load	approx. 200 μs
Signal delay when switching off an inductive nominal load	approx. 250 ms (1.2 H, 12 Ω)

### Digital outputs

Signal delay when switching off a lamp nominal load	approx. 200 µs
Maximum operating frequency with ohmic nominal load	max. 300 Hz (this switching frequency is limited by the data rate selected, the number of bus devices, the structure of the bus, the software used and the control or computer system used)
Maximum operating frequency with inductive nominal load	max. 0.5 Hz (1.2 H, 12 Ω)
Maximum operating frequency with lamp nominal load	max. 300 Hz (this switching frequency is limited by the data rate selected, the number of bus devices, the structure of the bus, the software used and the control or computer system used)
Behavior at voltage switch-off	The output follows the power supply without delay
Limitation of the voltage induced on circuit interruption	approx. -0.7 V
Behavior with overload	Auto restart
Behavior with inductive overload	Output can be destroyed
Reverse voltage resistance to short pulses	Reverse voltage proof
Resistance to permanent reverse voltage	to 2 A DC
Overload protection, short-circuit protection of outputs	Yes
Type of external protective circuit	Freewheeling diode per channel

### Programming Data

ID code (hex)	BD
ID code (dec.)	189
Length code (hex)	C2
Length code (dec.)	194
Process data channel	2 Bit
Input address area	0 Bit
Output address area	2 Bit
Parameter channel (PCP)	0 Bit
Register length (bus)	2 Bit



For the programming data/configuration data of other bus systems, please refer to the corresponding electronic device data sheet (e.g., GSD, EDS).

### Fieldbus data telegram

Fieldbus system	PROFIBUS DP
Required parameter data	3 Byte
Need for configuration data	4 Byte

### Error messages to the higher level control or computer system

Short-circuit / overload of the digital outputs	Error message in the diagnostic code (bus) and display (2 Hz) via the LED (D) on the module
---	---

### Electrical isolation/isolation of the voltage areas

Test section	Test voltage
5 V supply, incoming remote bus/7.5 V supply (bus logics)	500 V AC, 50 Hz, 1 min
5 V supply, outgoing remote bus/7.5 V supply (bus logics)	500 V AC, 50 Hz, 1 min
7.5 V supply (bus logics)/24 V supply (I/O)	500 V AC, 50 Hz, 1 min
24 V supply (I/O) / functional earth ground	500 V AC, 50 Hz, 1 min



To achieve electrical isolation between the logic level and the I/O area, supply these areas from separate power supply units. Interconnection of the power supply units in the 24 V area is not permitted (see also user manual).

### Approvals

For the latest approvals, please visit [phoenixcontact.net/products](http://phoenixcontact.net/products).

## 5 Additional tables

### 5.1 Output characteristic curve

Output characteristic curve when switched on (typical)	
Output current (A)	Differential output voltage (V)
0	0
0.2	0.02
0.4	0.04
0.6	0.06
0.8	0.08
1.0	0.10
1.2	0.12
1.4	0.14
1.6	0.16
1.8	0.18
2.0	0.20
2.2	0.22

### 5.2 Power dissipation

Formula for calculating the power dissipation of the electronics

$$P_{EL} = 0,18 \text{ W} + \sum_{i=1}^n (0,20 \text{ W} + I_{Li}^2 \times 0,10 \Omega)$$

Where:

- $P_{EL}$  Total power dissipation in the terminal
- $i$  Continuous index
- $n$  Number of set outputs ( $n = 1 \dots 2$ )
- $I_{Li}$  Load current of output  $i$

### Power dissipation of the housing

$$P_{HOU} = 2.4 \text{ W} \quad -25^{\circ}\text{C} < T_A \leq -5^{\circ}\text{C}$$

$$P_{HOU} = 2.4 \text{ W} - \{[T_A - (-5^{\circ}\text{C})]/37.5 \text{ K/W}\} \quad -5^{\circ}\text{C} < T_A \leq +55^{\circ}\text{C}$$

Where:

- $P_{HOU}$  Power dissipation of the housing
- $T_A$  Ambient temperature

### 5.3 Limitation of simultaneity, derating

Ambient temperature $T_{amb}$	Maximum load current	
	100 % simultaneity	50 % simultaneity
$\leq 55^{\circ}\text{C}$	1 A	2 A
$\leq 40^{\circ}\text{C}$	2 A	2 A

## 6 Tested successfully: Use under extreme ambient conditions

The terminal has been tested successfully over 250 temperature change cycles in accordance with IEC 61131-2 in the range from -40°C to +70°C.

The following conditions were observed:

- The Inline devices for all connecting cables were connected with a minimum conductor cross section of 0.5 mm<sup>2</sup>
- The Inline station was assembled on a wall-mounted horizontal DIN rail
- Fans were used to ensure continuous movement of air in the control cabinet
- The Inline station was not exposed to vibration or shock
- The Inline station was operated with a maximum of 24.5 V (ensured by using regulated power supply units)

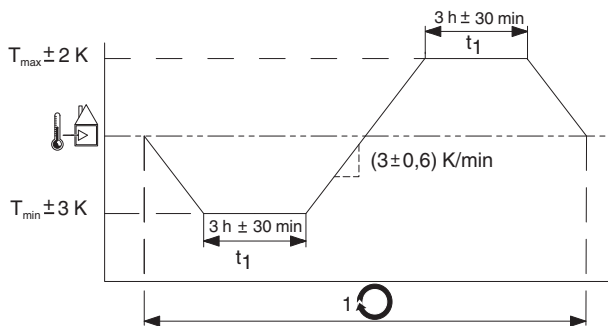


Figure 1 Temperature change cycle



Temperature in the control cabinet/ambient temperature



Cycle



**WARNING:**

The terminal is not approved for use in potentially explosive areas.  
The terminal is not approved for use in safety technology.

## 7 Internal circuit diagram

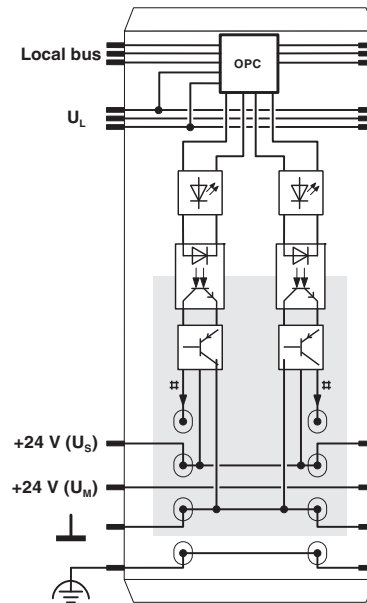


Figure 2 Internal wiring of the terminal points

Key:



Protocol chip  
(Bus logic including voltage conditioning)



LED (status indicator)



Optocoupler



Transistor



Digital output



Electrically isolated area



Explanation for other used symbols has been provided in the IL SYS INST UM E user manual.

## 8 Local status and diagnostic indicators




Figure 3 Local status and diagnostic indicators

Designation	Color	Meaning
D	Green	Diagnostics (bus and logic voltage)
1 ... 2	Yellow	Status of the outputs

### Function identification

Pink

## 9 Terminal point assignment

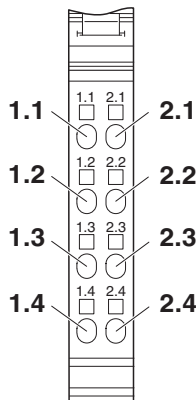


Figure 4 Terminal point assignment

Terminal point	Assignment
1.1 / 2.1	Signal output (OUT 1 / OUT 2)
1.2, 2.2	Segment voltage $U_S$ for 4-wire connection Measuring points for segment voltage $U_S$ (24 V DC)
1.3, 2.3	Ground connection (GND) for 2, 3 and 4-wire connection
1.4, 2.4	FE connection for 3 and 4-wire connection

## 10 Connection notes and examples



When connecting the actuators, observe the assignment of the terminal points to the process data.




Figure 5 Typical connection of actuators

The connection of actuators in 4 and 3-wire technology is illustrated.

## 11 Process data

### Assignment of the terminal points to the output process data

(Byte.Bit) view	Byte.Bit	0.1	0.0
Assignment	Terminal point (signal)	2.1	1.1
	Terminal point (24 V)	2.2	1.2
	Terminal point (GND)	2.3	1.3
	Terminal point (FE)	2.4	1.4
Status indicator	LED	2	1



For the assignment of the illustrated (byte.bit) view to your INTERBUS control or computer system, please refer to the DB GB IBS SYS ADDRESS data sheet.



## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9