


|                                                                                  |                |                          |                          |
|----------------------------------------------------------------------------------|----------------|--------------------------|--------------------------|
| 8                                                                                |                | 7                        |                          |
| THIS DRAWING IS UNPUBLISHED.                                                     |                | RELEASED FOR PUBLICATION |                          |
| © COPYRIGHT 20                                                                   |                | 20                       |                          |
| BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.                            |                |                          |                          |
| ATLANTIC VERSION<br>TERMINATOR<br>INTERFACE ADAPTER                              | PART<br>NUMBER | REVISION                 | DESCRIPTION              |
|  | 2151405-1      | F                        | FINE CRIMP HEIGHT ADJUST |
|                                                                                  | 2151405-2      | F                        | FINE CRIMP HEIGHT ADJUST |
|                                                                                  | 2151405-5      | F                        | FINE CRIMP HEIGHT ADJUST |
|                                                                                  | 2151405-6      | F                        | NON-CRIMP HEIGHT ADJUST  |
|                                                                                  | 2151405-7      | F                        | FINE CRIMP HEIGHT ADJUST |
|                                                                                  | 7-2151405-7    | E                        | CRIMP TOOLING KIT        |

|                                   |                |      |
|-----------------------------------|----------------|------|
| APPLICATOR DATA                   |                |      |
| CRIMP                             | SIZE           | TYPE |
| WIRE                              | .090 [2.29 mm] | F    |
| INSUL                             | .155 [3.94 mm] | O    |
| APPLICATOR INSTRUCTIONS 408-10389 |                |      |

|                                                   |             |                                                                                   |                                                           |
|---------------------------------------------------|-------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------|
| TERMINAL DATA: TE TERMINAL                        |             | TE CRIMP SPECIFICATION                                                            |                                                           |
| TERMINAL NAME: PIN & SOCKET ASSY, .062, TYPE III+ |             |                                                                                   |                                                           |
| WIRE STRIP LENGTH<br>.141-.171 IN [3.58-4.34 mm]  |             |  | INSULATION DIAMETER RANGE<br>Ø.109-.150 IN [2.77-3.81 mm] |
| TERMINAL APPLICATION SPECIFICATION                | 114-10004   | -                                                                                 | -                                                         |
| TERMINALS APPLIED                                 |             |                                                                                   |                                                           |
| TE TERMINAL                                       | TE TERMINAL | TE TERMINAL                                                                       | TE TERMINAL                                               |
| 66597-1                                           | 1-66597-0   | 66598-7                                                                           | 1-66598-3                                                 |
| 66597-2                                           | 1-66597-1   | 66598-9                                                                           | 213603-1                                                  |
| 66597-4                                           | 66598-1     | 1-66598-0                                                                         | 213603-3                                                  |
| 66597-5                                           | 66598-2     | 1-66598-1                                                                         | 213603-5                                                  |
| 66597-8                                           | 66598-6     | 1-66598-2                                                                         |                                                           |

|           |                             |                                |
|-----------|-----------------------------|--------------------------------|
| WIRE SIZE | CRIMP HEIGHT mm [INCH]      | CRIMP HEIGHT REFERENCE SETTING |
| 14 AWG    | 1.73+/-0.05 [1.068+/-0.002] | 6.8                            |
| 16 AWG    | 1.50+/-0.05 [1.059+/-0.002] | 9.1                            |
| 18 AWG    | 1.32+/-0.05 [1.052+/-0.002] | 10.9                           |




- RECOMMENDED SPARE PARTS
- GREASE BEARING SURFACES LIGHTLY
- LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.
- APPLICATOR SPECIFIC DATA TO BE ENTERED INTO BLANK MEMORY CHIP AT ASSEMBLY. SEE BELOW FOR PART NUMBER:  
MECHANICAL FEED WITH "SMART APPLICATOR" CONVERSION: 8-2151405-4  
PNEUMATIC FEED WITH "SMART APPLICATOR" CONVERSION: 8-2151405-4  
SERVO FEED WITH "FINE CRIMP HEIGHT ADJUST": 8-2151405-5  
SERVO FEED WITH "NON-CRIMP HEIGHT ADJUST": 8-2151405-6
- ADJUSTMENT OF THE STRIPPER MAY BE REQUIRED WHEN MOVING THE APPLICATOR BETWEEN BENCH AND LEADMAKER APPLICATIONS.
- APPLY PART NUMBER 1-23419-5 LOCTITE TO THREADS OF ITEM 50.62 & 242. FOR -6 ONLY APPLY PART NUMBER 1-23419-5 LOCTITE TO THREADS OF ITEM 37, 50 & 242.
- GREASE THREADS, GROOVE AND O-RING ON ITEMS 35 & 252.
- MAGNET, ITEM 166 MUST BE ORIENTED CORRECTLY IN ORDER TO PROPERLY ACTUATE THE COUNTER.
- CRIMP HEIGHT REFERENCE SETTING WAS THE SETTING USED WHEN THE APPLICATOR WAS QUALIFIED AT THE FACTORY. ADJUSTMENT MAY BE NECESSARY WHEN RUNNING APPLICATOR IN THE FIELD.
- SPARE FEED CAM STORAGE LOCATION REFER TO INSTRUCTION SHEET FOR ADDITIONAL INFORMATION.
- TO CONVERT THE APPLICATOR TO A NON-CARRIER CUTTING STYLE, REMOVE ITEM 13 AND ATTACH TO THE LOCATION ON THE BACK SIDE OF THE HOUSING. REFER TO INSTRUCTION SHEET FOR ADDITIONAL INFORMATION.
- WHEN ASSEMBLING -6 NON-CRIMP HEIGHT ADJUST APPLICATOR USE SHIM PACK 2119957-2 TO ALIGN APPLICATOR'S MAXIMUM WIRE CRIMP HEIGHT AT NORMAL TERMINATOR SHUT HEIGHT

|     |    |    |    |    |    |           |                                 |         |
|-----|----|----|----|----|----|-----------|---------------------------------|---------|
| -   | -  | 1  | -  | -  | -  | 2119957-2 | APPLICATOR SHIM PACK            | 260     |
| -   | 1  | -  | 1  | 1  | 1  | 8-21084-0 | O-RING, .676 ID, .070 DIA. MAT. | 252     |
| -   | -  | -  | -  | 1  | -  | 2119640-1 | PUSH ROD, AIR FEED              | 250     |
| -77 | -7 | -6 | -5 | -2 | -1 | PART NO   | DESCRIPTION                     | ITEM NO |

ATLANTIC VERSION  
Shown on sheets 1 of 4 & 2 of 4  
(Pacific version shown on sheets 3 of 4 & 4 of 4)


|                        |       |         |           |     |               |           |     |
|------------------------|-------|---------|-----------|-----|---------------|-----------|-----|
| SET UP GAUGE 2119599-1 | LOC A | DIST 66 | REVISIONS |     |               |           |     |
|                        |       |         | P         | LTR | DESCRIPTION   | DATE      | DWN |
|                        |       |         |           | E   | ECR-14-003644 | 11MAR2014 | RK  |
|                        |       |         |           | F   | ECR-14-006309 | 23APR2014 | YY  |
|                        |       |         |           |     |               |           |     |

|     |     |     |     |     |     |             |                                     |         |
|-----|-----|-----|-----|-----|-----|-------------|-------------------------------------|---------|
| -   | -   | -   | -   | 1   | -   | 2079988-1   | BUSHING, LCH5-12, MISUMI            | 249     |
| -   | -   | -   | -   | 1   | -   | 2119641-1   | FEED CAM, AIR FEED                  | 248     |
| -   | 1   | -   | 1   | 1   | 1   | 2119798-1   | DETENT PIN                          | 247     |
| -   | 1   | -   | 1   | 1   | 1   | 1-22279-3   | SPRING, COMPRESSION                 | 246     |
| -   | -   | 1   | -   | -   | -   | 2119758-1   | RAM, AMP STYLE, SIDE FEED, NON-ADJ. | 245     |
| -   | 1   | 1   | 1   | 1   | 1   | 2119082-9   | CAM, SNAIL, INSULATION ADJUSTMENT   | 244     |
| -   | 1   | 1   | 1   | 1   | 1   | 2079764-1   | WASHER, WAVE SPRING, CREST-TO-CREST | 243     |
| -   | 1   | 1   | 1   | 1   | 1   | 2119083-1   | RETAINER, INSULATION DIAL           | 242     |
| -   | 1   | 1   | 1   | 1   | 1   | 7-18023-7   | SCR, SKT HD CAP M3 X 4.0            | 241     |
| -   | -   | 2   | 2   | -   | -   | 2168400-6   | SHCS, LOW HEAD, RoHS, M5 X 16       | 240     |
| -   | -   | -   | -   | -   | 1   | 2119580-1   | MECHANICAL FEED ASSEMBLY            | 239     |
| -   | -   | -   | -   | 1   | -   | 2063440-1   | AIR FEED MODULE                     | 238     |
| -   | -   | 1   | 1   | -   | -   | 2119740-2   | TAG, IDENTIFICATION                 | 213     |
| -   | -   | 1   | 1   | -   | -   | 1901094-3   | SPACER, FEEDER                      | 198     |
| -   | 1   | 1   | 1   | 1   | 1   | 993111-1    | PIN, SLOTTED SPRING 3.0 X 20.0      | 177     |
| -   | 1   | 1   | 1   | 1   | 1   | 8-22280-7   | SPRING, COMPRESSION                 | 176     |
| -   | 1   | 1   | 1   | 1   | 1   | 1752353-2   | GUIDE PIN, HOLDDOWN                 | 175     |
| -   | 1   | 1   | 1   | 1   | 1   | 1901680-2   | GUIDE PIN, HOLDDOWN                 | 174     |
| -   | -   | -   | -   | 2   | -   | 21045-3     | RING, RETAIN, EXTERN, 3/16 CRESCENT | 172     |
| -   | 1   | 1   | 1   | 1   | 1   | 994969-1    | MAGNET, RARE EARTH HIGH ENERGY      | 166     |
| -   | REF | REF | REF | REF | REF | 994970-2    | COUNTER, MAGNETIC                   | 164     |
| -   | -   | -   | -   | 1   | -   | 240638-1    | SPRING, FEED FINGER                 | 163     |
| -   | -   | -   | -   | 1   | -   | 3-23627-7   | PIN, RETAIN, GRVD, 3/16 X .854      | 137     |
| -   | -   | -   | -   | 1   | -   | 2119799-1   | HOLDER, FEED FINGER, AF             | 136     |
| -   | -   | REF | REF | -   | -   | SEE NOTE 4  | MEMORY CHIP, PROGRAMMED             | 135     |
| -   | -   | 1   | 1   | -   | -   | 1633743-1   | SERVO FEED LATCH ASM                | 133     |
| -   | 1   | 1   | 1   | 1   | 1   | 1-18028-2   | WASHER, FLAT, REG M4                | 119     |
| -   | -   | REF | REF | -   | -   | 2119944-1   | FEED FINGER ASSEMBLY, SF            | 117     |
| -   | 1   | 1   | 1   | 1   | 1   | 455888-5    | SPACER, CRIMPER                     | 82      |
| -   | 1   | 1   | 1   | 1   | 1   | 2119956-1   | DOCUMENTATION PACKAGE               | 71      |
| -   | 1   | 1   | 1   | 1   | 1   | 2119791-5   | DEPRESSOR, WIRE                     | 70      |
| -   | 1   | -   | -   | 1   | 1   | 2119740-1   | TAG, IDENTIFICATION                 | 67      |
| -   | 2   | 2   | 2   | 2   | 2   | 2168078-1   | SCREW, DRIVE, RH, RoHS, 2 x .188    | 66      |
| -   | 1   | -   | 1   | 1   | 1   | 2119793-1   | LIMITER, ADJUSTMENT BOLT            | 63      |
| -   | 3   | -   | 3   | 3   | 3   | 992763-5    | SCR, SET, SOC, CONE POINT, M3 x 4.0 | 62      |
| -   | 1   | 1   | 1   | 1   | 1   | 2079383-4   | SCR, BHSC, RoHS (M4 X 8)            | 60      |
| -   | -   | -   | -   | 1   | 1   | 5-18022-5   | SCR, HEX HD CAP, M4 X 6.0           | 59      |
| -   | -   | -   | -   | 1   | 1   | 1338685-1   | PAWL, FEED                          | 56      |
| -   | 4   | 4   | 4   | 4   | 4   | 2168400-1   | SHCS, LOW HEAD, RoHS, M4 X 12       | 54      |
| -   | 1   | 1   | 1   | 1   | 1   | 1-5018030-0 | NUT, HEX, REG, RoHS, M3.5           | 52      |
| -   | 1   | 1   | 1   | 1   | 1   | 1901681-1   | HOLDDOWN, TERMINAL                  | 51      |
| -   | 1   | 1   | 1   | 1   | 1   | 2-1752354-2 | STANDOFF, HOLD-DOWN                 | 50      |
| -   | -   | -   | -   | 1   | 2   | 18023-9     | SCR, SKT HD CAP M4 X 6.0            | 49      |
| -   | -   | -   | -   | -   | 1   | 2119652-1   | FEED CAM, PRE FEED                  | 48      |
| -   | -   | -   | -   | -   | 1   | 2119653-1   | FEED CAM, POST FEED                 | 47      |
| -   | 1   | 1   | 1   | 1   | 1   | 2119656-9   | APPLICATOR BASIC ASSEMBLY, SF       | 46      |
| -   | 1   | -   | 1   | 1   | 1   | 2119370-1   | RAM, AMP STYLE, SIDE FEED           | 44      |
| -   | 1   | 1   | 1   | 1   | 1   | 2079383-7   | SCR, BHSC, RoHS (M8 X 25)           | 41      |
| -   | 1   | -   | 1   | 1   | 1   | 2119645-1   | DISC, NUMBERED FA WIRE ADJUSTMENT   | 40      |
| -   | 1   | -   | 1   | 1   | 1   | 2119957-1   | APPLICATOR SHIM PACK                | 39      |
| -   | 1   | 1   | 1   | 1   | 1   | 2119644-2   | RAM WASHER, PRECISION               | 38      |
| -   | 1   | 1   | 1   | 1   | 1   | 2119085-1   | FA HEAD, ATLANTIC STYLE             | 37      |
| -   | 1   | -   | 1   | 1   | 1   | 2119092-1   | BOLT, ADJUSTMENT                    | 35      |
| -   | 1   | 1   | 1   | 1   | 1   | 1-1752356-8 | SUPPORT, TERMINAL                   | 34      |
| -   | 2   | 2   | 2   | 2   | 2   | 2079383-5   | SCR, BHSC, RoHS (M4 X 20)           | 33      |
| -   | 1   | 1   | 1   | 1   | 1   | 2161328-1   | HEX HEAD, FLANGED, M5 x 8mm LONG    | 32      |
| -   | 1   | 1   | 1   | 1   | 1   | 1-1320908-0 | SPACER, STRIP GUIDE                 | 30      |
| -   | 1   | 1   | 1   | 1   | 1   | 2119959-1   | ASSEMBLY, STRIP GUIDE               | 29      |
| -   | 1   | 1   | 1   | 1   | 1   | 1320928-6   | STRIP GUIDE                         | 24      |
| -   | 1   | 1   | 1   | 1   | 1   | 2168083-2   | SCR, SKT HD CAP, RoHS, M4 X 8.0     | 21      |
| -   | 1   | 1   | 1   | 1   | 1   | 1-18028-2   | WASHER, FLAT, REG M4                | 20      |
| -   | 1   | 1   | 1   | 1   | 1   | 2119533-1   | STRIPPER, SIDE FEED                 | 19      |
| -   | 1   | 1   | 1   | 1   | 1   | 2119806-1   | INSERT, SHEAR                       | 13      |
| -   | 1   | 1   | 1   | 1   | 1   | 3-22280-3   | SPRING, COMPRESSION                 | 12      |
| -   | 1   | 1   | 1   | 1   | 1   | 1-356885-4  | STOP, SHEAR                         | 11      |
| -   | 1   | 1   | 1   | 1   | 1   | 2119805-1   | SHEAR HOLDER, FRONT                 | 10      |
| -   | 1   | 1   | 1   | 1   | 1   | 1803095-1   | FLOATING SHEAR, FRONT               | 9       |
| 1   | 1   | 1   | 1   | 1   | 1   | 3-1333205-0 | ANVIL, COMBINATION                  | 8       |
| -   | 1   | 1   | 1   | 1   | 1   | 2119757-8   | DEPRESSOR, SHEAR                    | 5       |
| -   | 1   | 1   | 1   | 1   | 1   | 238011-4    | BLOCK, CRIMPER SPACER               | 4       |
| 1   | 1   | 1   | 1   | 1   | 1   | 2-2119784-9 | CRIMPER, INSULATION O PREMIUM       | 3       |
| -   | 1   | 1   | 1   | 1   | 1   | 455888-1    | SPACER, CRIMPER                     | 2       |
| 1   | 1   | 1   | 1   | 1   | 1   | 1-456406-8  | CRIMPER, WIRE PREMIUM               | 1       |
| -77 | -7  | -6  | -5  | -2  | -1  | PART NO     | DESCRIPTION                         | ITEM NO |


|                                                                                                                                                                                          |  |                                                                          |  |                  |          |                           |                                                                                                                                    |           |  |              |  |       |  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--------------------------------------------------------------------------|--|------------------|----------|---------------------------|------------------------------------------------------------------------------------------------------------------------------------|-----------|--|--------------|--|-------|--|
| THIS IS SUBJECT TO CHANGE AND WITHOUT WARRANTY. THE USER SHALL BE RESPONSIBLE FOR VERIFYING THE DIMENSIONS OF THE PARTS AND THE ORGANIZATION SHALL BE CONTACTED FOR THE LATEST REVISION. |  |                                                                          |  | DWN              | C. MOYER | 13OCT2011                 |  TE Connectivity<br>Harrisburg, PA 17105-3608 |           |  |              |  |       |  |
|                                                                                                                                                                                          |  |                                                                          |  | CHK              | T. ELBIN | 13OCT2011                 |                                                                                                                                    |           |  |              |  |       |  |
| DIMENSIONS:                                                                                                                                                                              |  | TOLERANCES UNLESS OTHERWISE SPECIFIED:                                   |  | APVD             | T. ELBIN | 13OCT2011                 | NAME<br>Ocean Side Feed<br>Applicator<br>-                                                                                         |           |  |              |  |       |  |
| mm                                                                                                                                                                                       |  |                                                                          |  | PRODUCT SPEC     |          |                           |                                                                                                                                    |           |  |              |  |       |  |
|                                                                                                     |  | 0 PLC ±.01<br>1 PLC ±0.5<br>2 PLC ±0.13<br>3 PLC ±0.013<br>4 PLC ±0.0001 |  | APPLICATION SPEC |          |                           |                                                                                                                                    |           |  |              |  |       |  |
|                                                                                                                                                                                          |  | ANGLES ±°                                                                |  | WEIGHT           |          | SIZE CAGE CODE DRAWING NO |                                                                                                                                    |           |  |              |  |       |  |
| MATERIAL                                                                                                                                                                                 |  | FINISH                                                                   |  | RESTRICTED TO    |          | A   00779 C=2151405       |                                                                                                                                    |           |  |              |  |       |  |
| -                                                                                                                                                                                        |  | -                                                                        |  | -                |          | -                         |                                                                                                                                    |           |  |              |  |       |  |
| Customer Accessible Production Drawing                                                                                                                                                   |  |                                                                          |  |                  |          |                           |                                                                                                                                    | SCALE 1:2 |  | SHEET 1 OF 4 |  | REV F |  |

| LOC |    | DIST |     | REVISONS    |      |     |      |
|-----|----|------|-----|-------------|------|-----|------|
| A   | 66 | P    | LTR | DESCRIPTION | DATE | DWN | APVD |
|     |    | -    | -   | SEE SHEET 1 | -    | -   | -    |
|     |    |      |     |             |      |     |      |
|     |    |      |     |             |      |     |      |


FEED TYPE  
MECHANICAL

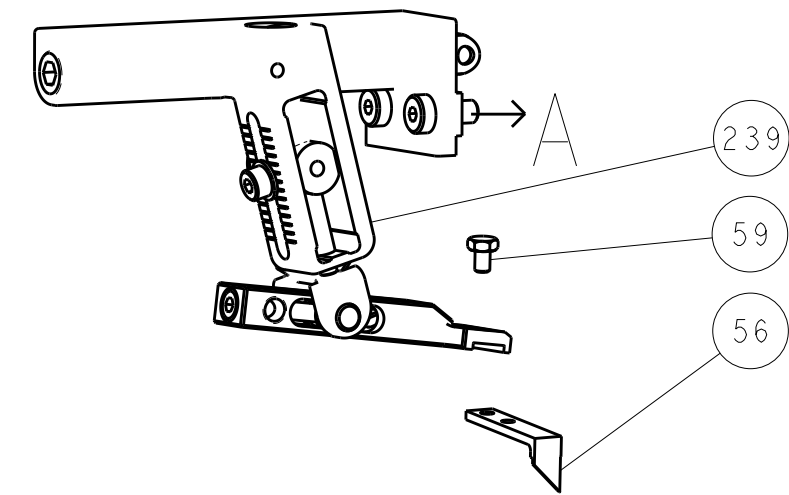




PNEUMATIC

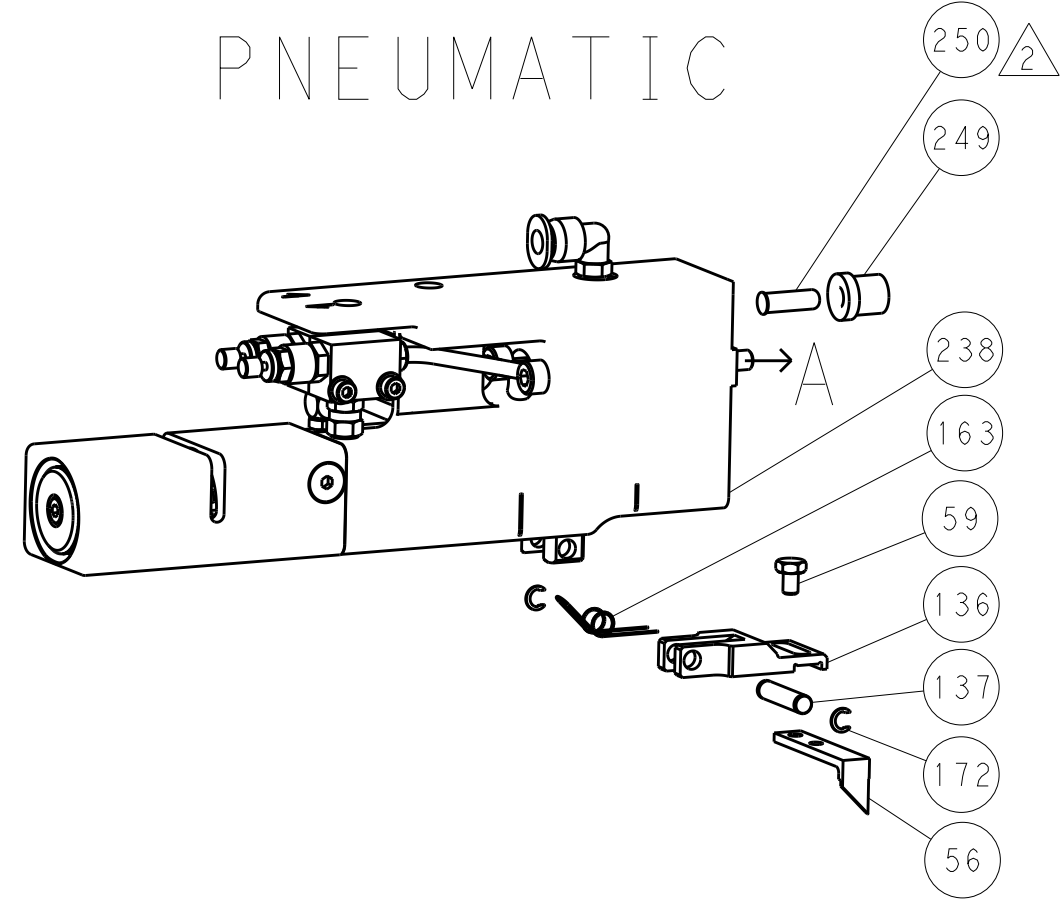


SERVO  
LATCH PLATE

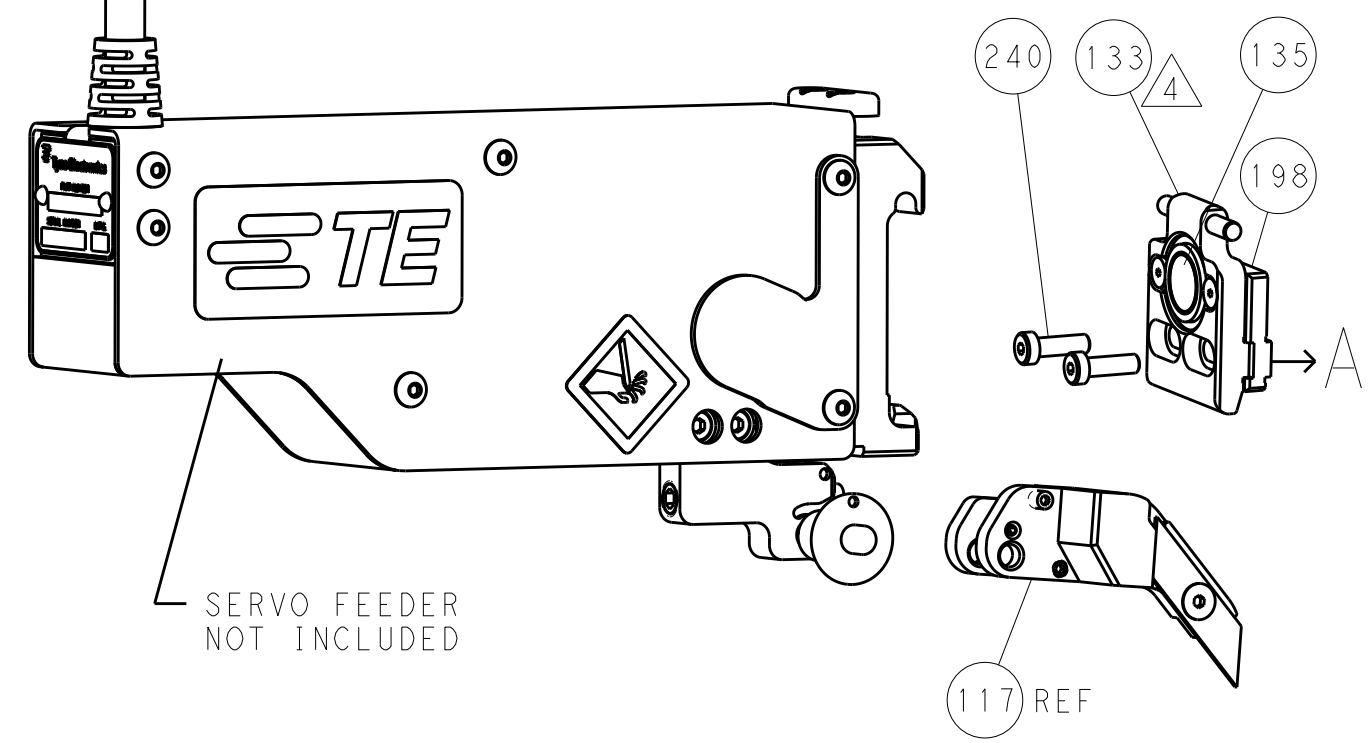


CAM POSITIONS

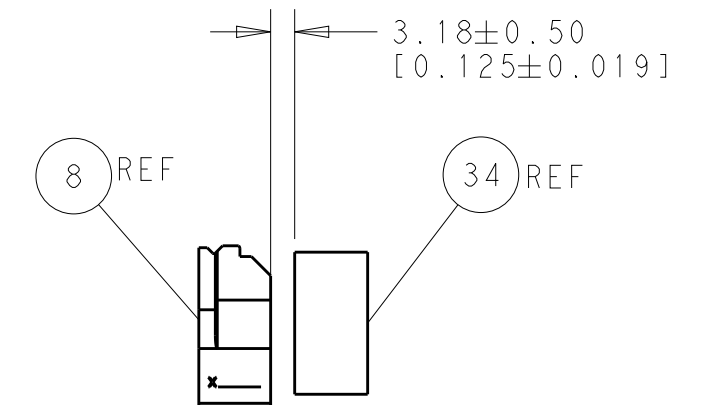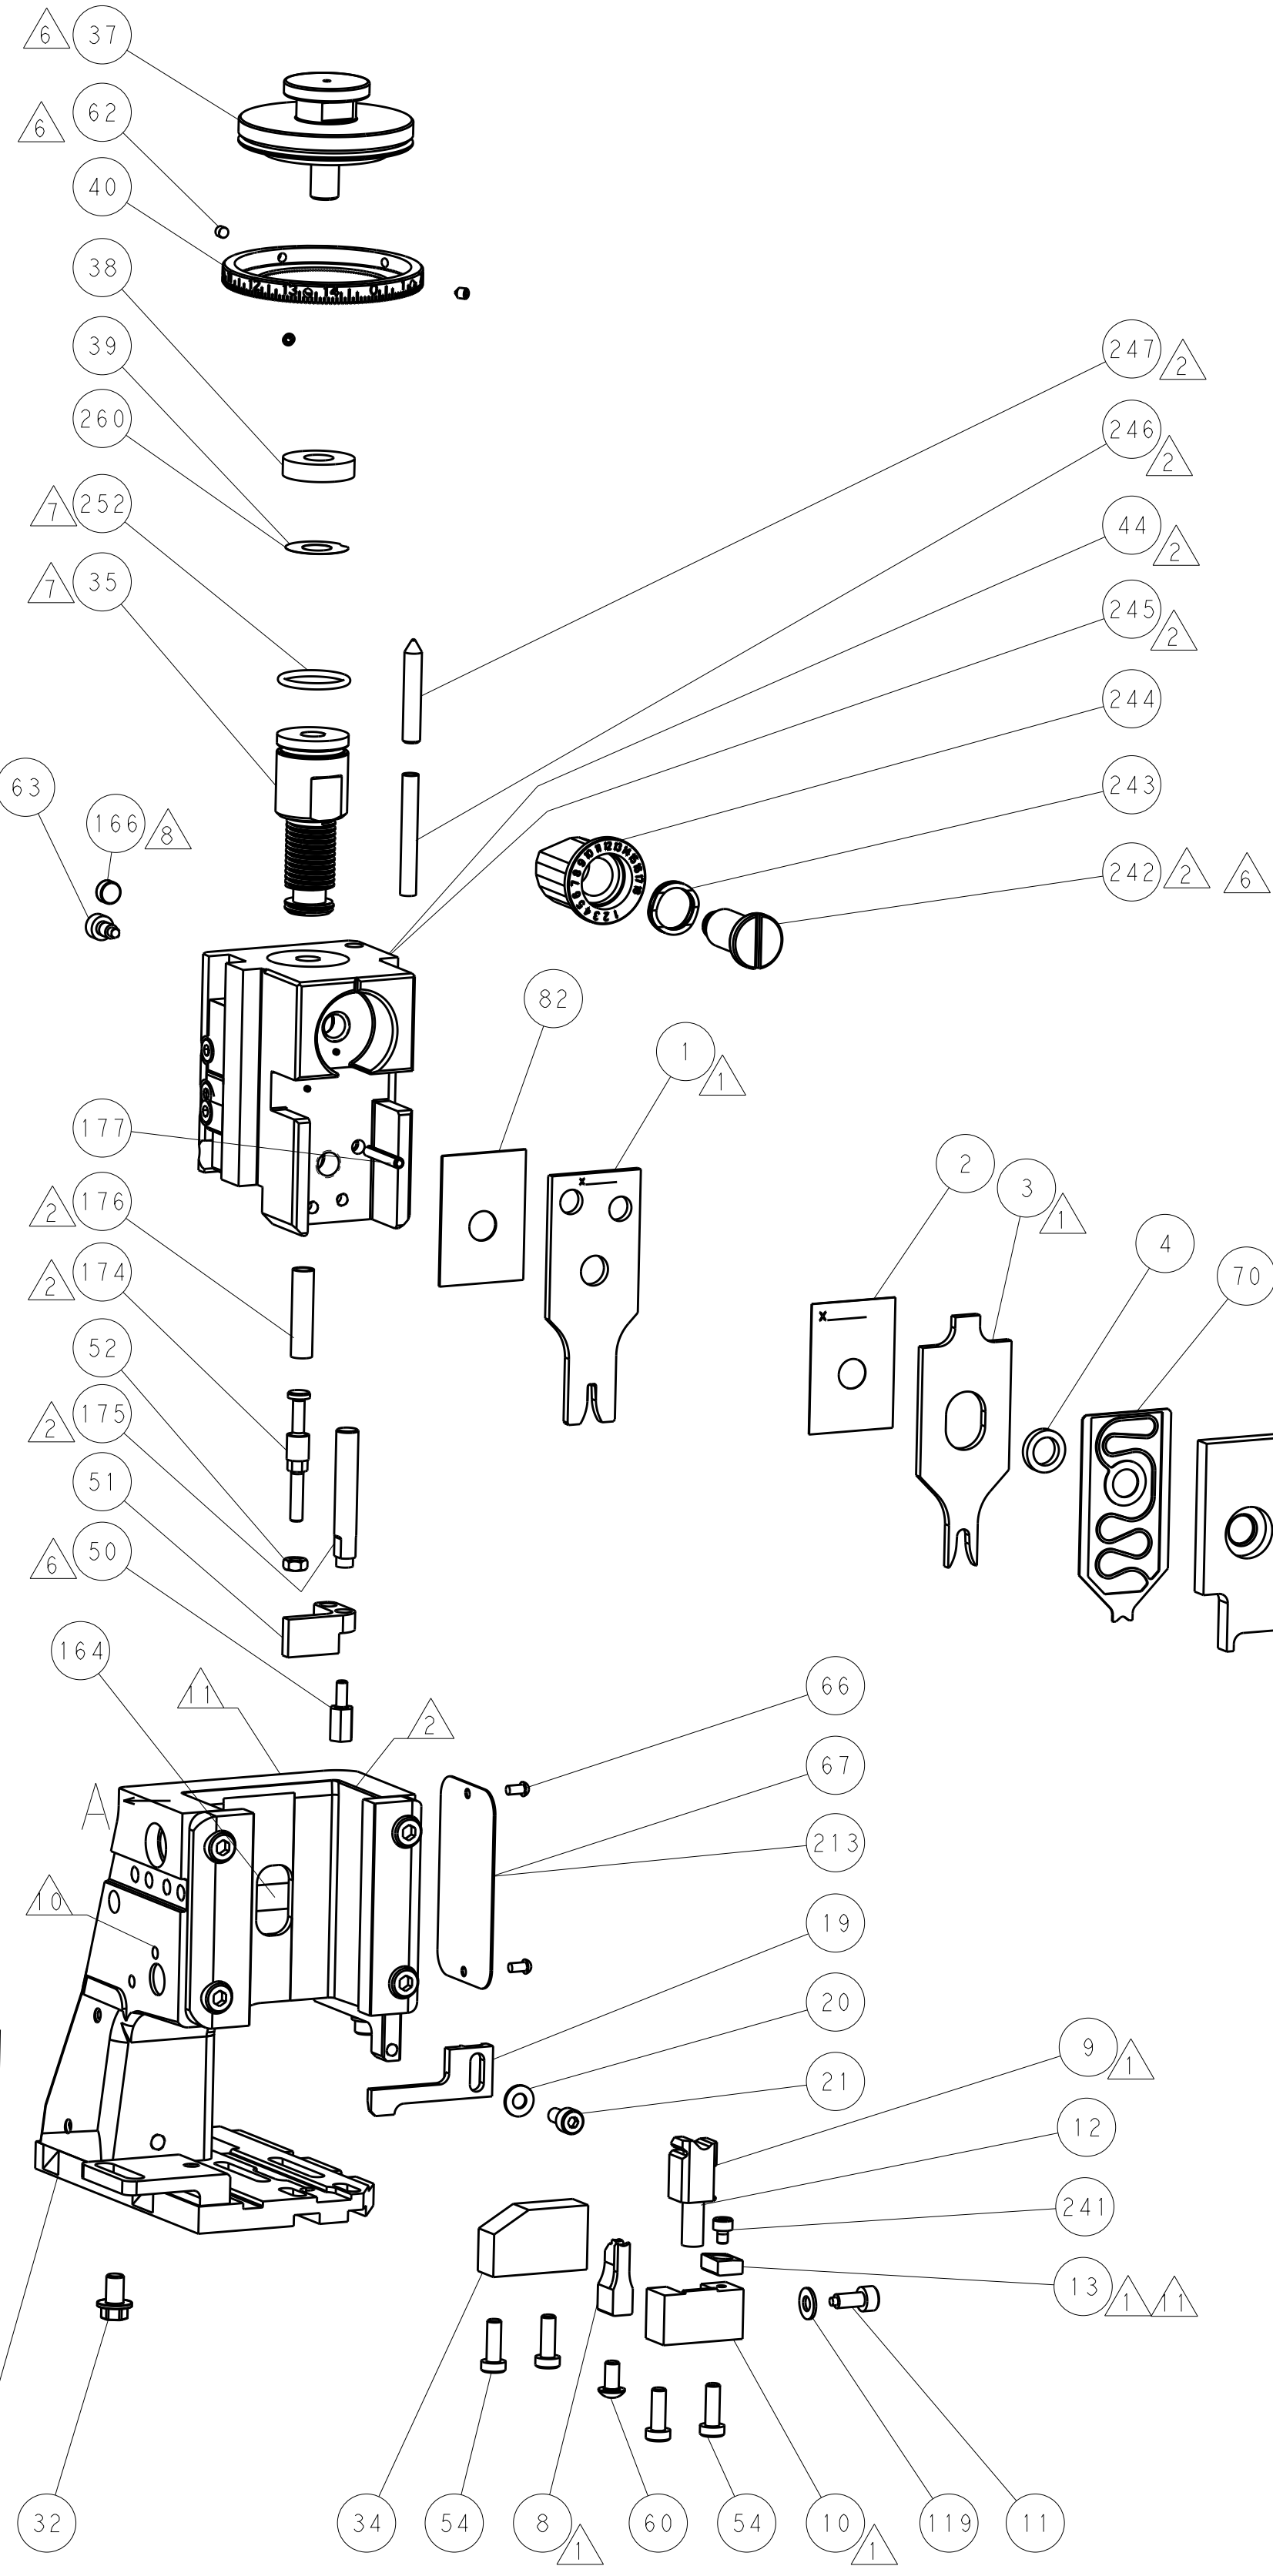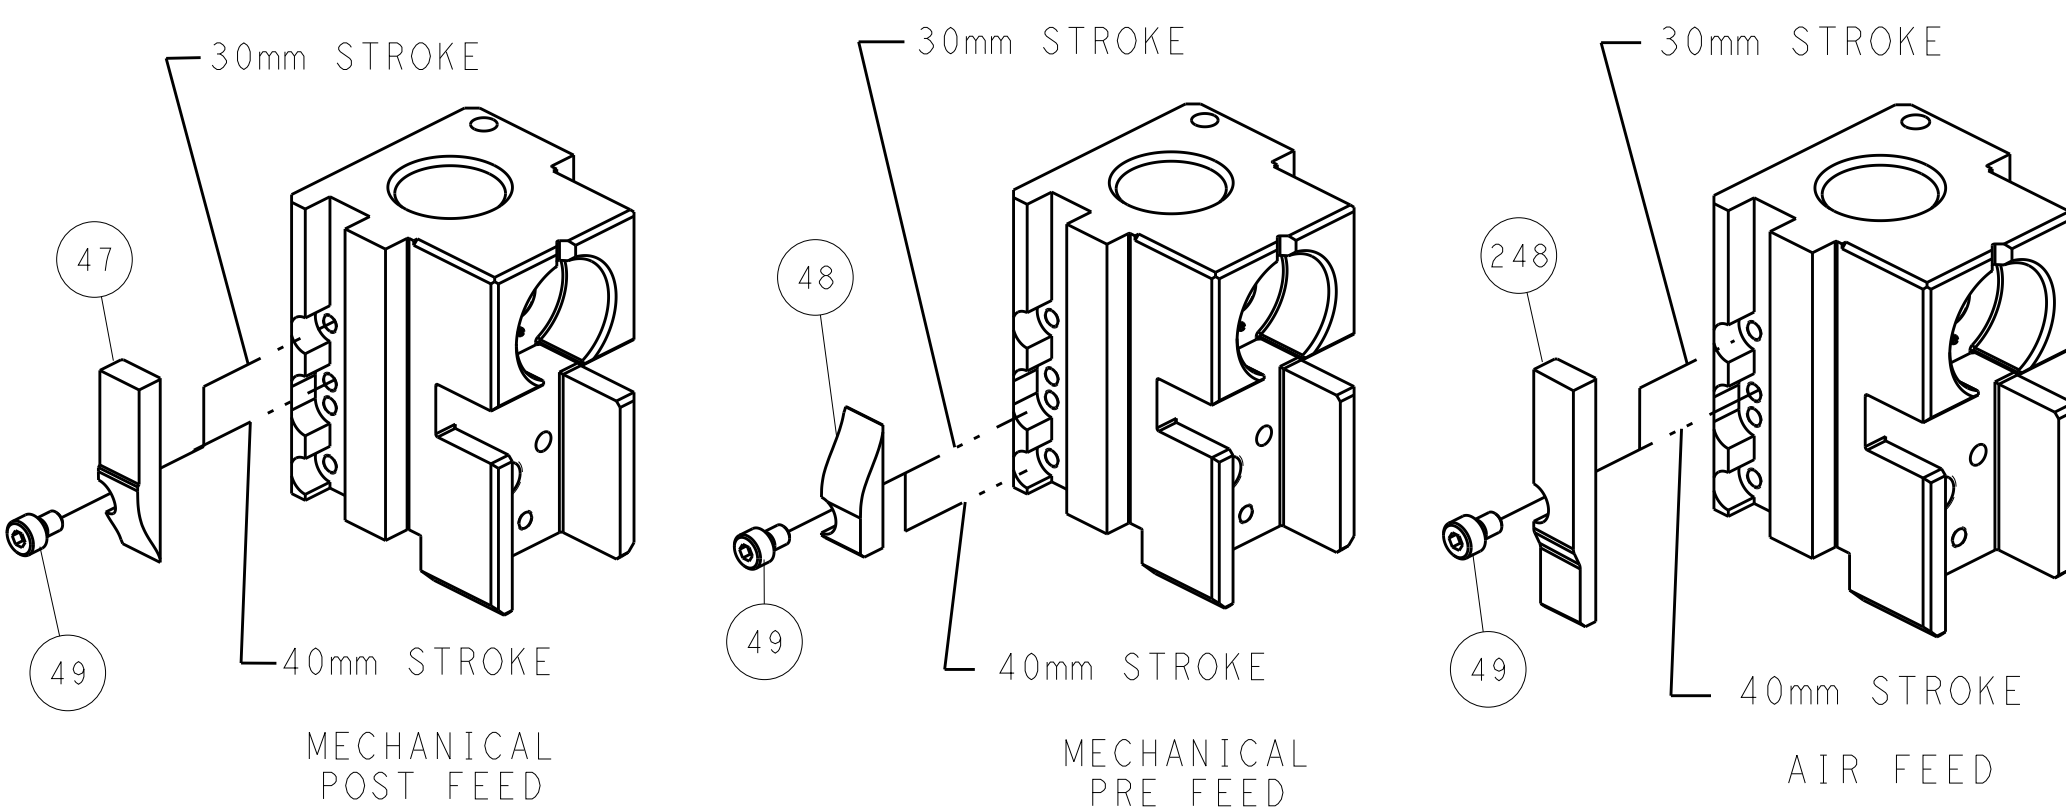

TERMINAL SUPPORT LOCATION

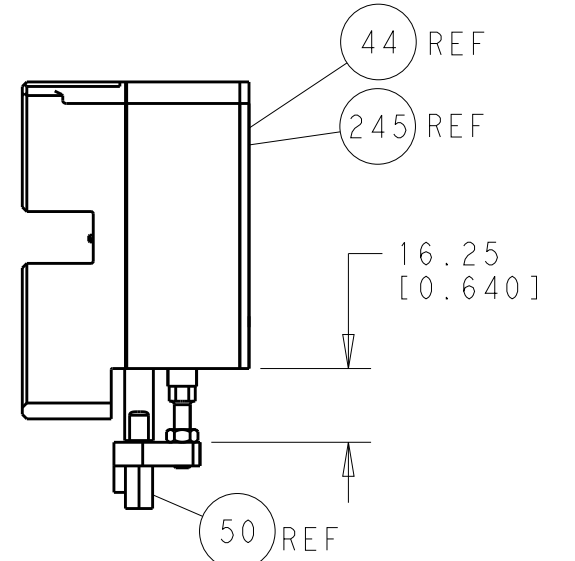


HOLDDOWN SET-UP

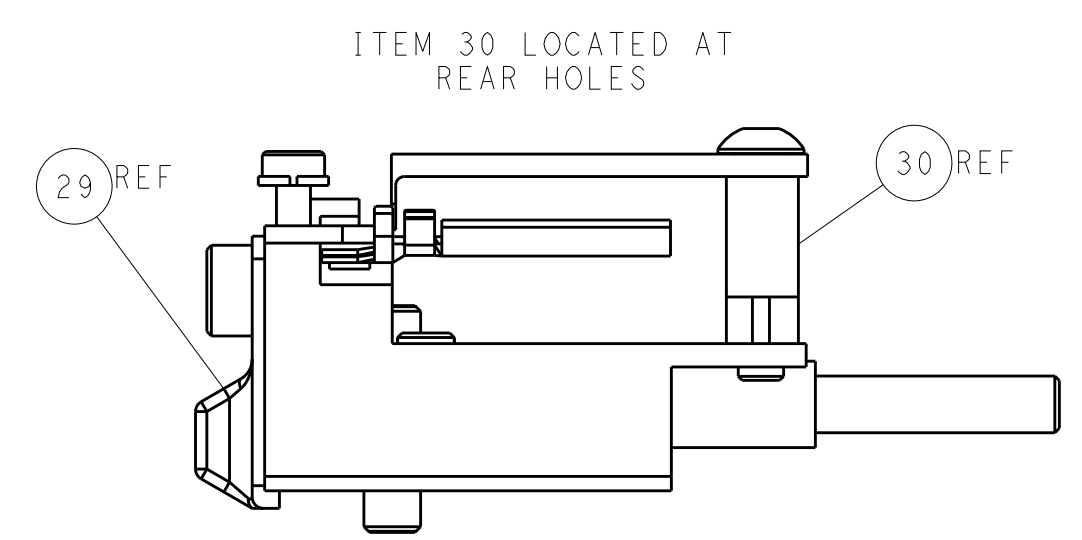


FEED TRACK POSITION  
GUIDE BY INSULATION BARREL

ATLANTIC VERSION  
Shown on sheets 1 of 4 & 2 of 4  
(Pacific version shown on sheets 3 of 4 & 4 of 4)

|             |  |                                                                         |  |                                        |  |                            |  |
|-------------|--|-------------------------------------------------------------------------|--|----------------------------------------|--|----------------------------|--|
| DIMENSIONS: |  | TOLERANCES UNLESS OTHERWISE SPECIFIED:                                  |  | DWN                                    |  | TE Connectivity            |  |
| mm          |  | 0 PLC ±.5<br>1 PLC ±0.13<br>2 PLC ±0.13<br>3 PLC ±0.13<br>4 PLC ±0.0001 |  | C. MOYER 13OCT2011                     |  | Harrisburg, PA 17105-3608  |  |
| MATERIAL    |  | FINISH                                                                  |  | CHK T. ELBIN 13OCT2011                 |  | NAME                       |  |
|             |  |                                                                         |  | APVD T. ELBIN 13OCT2011                |  | Ocean Side Feed Applicator |  |
|             |  |                                                                         |  | PRODUCT SPEC                           |  | SIZE                       |  |
|             |  |                                                                         |  | APPLICATION SPEC                       |  | CAGE CODE                  |  |
|             |  |                                                                         |  | WEIGHT                                 |  | DRAWING NO                 |  |
|             |  |                                                                         |  | Customer Accessible Production Drawing |  | A1 00779 ©=2151405         |  |
|             |  |                                                                         |  | SCALE                                  |  | SHEET                      |  |
|             |  |                                                                         |  | 1:2                                    |  | 2 of 4                     |  |
|             |  |                                                                         |  |                                        |  | REV                        |  |
|             |  |                                                                         |  |                                        |  | F                          |  |
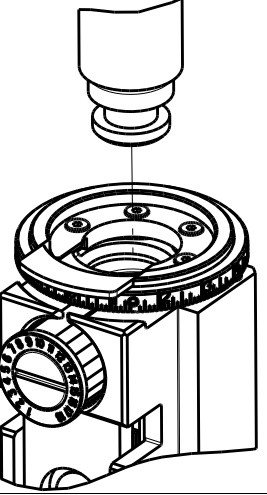
| PACIFIC VERSION<br>TERMINATOR<br>INTERFACE ADAPTER                               | PART<br>NUMBER | REVISION | DESCRIPTION              | FEED TYPE                         | APPLICATOR STYLE CONVERSION CHART |                       |           |             |           |           |                        |
|----------------------------------------------------------------------------------|----------------|----------|--------------------------|-----------------------------------|-----------------------------------|-----------------------|-----------|-------------|-----------|-----------|------------------------|
|                                                                                  |                |          |                          |                                   | CONVERT TO                        | PART NUMBERS REQUIRED |           |             |           |           |                        |
|                                                                                  |                |          |                          |                                   |                                   |                       |           |             |           |           |                        |
|  | 2-2151405-1    | F        | FINE CRIMP HEIGHT ADJUST | MECHANICAL                        | PNEUMATIC FEED                    | 2119950-1             | 1338685-1 | 5-18022-5   | 2119641-2 | 2119799-1 | 2063440-1              |
|                                                                                  |                |          |                          |                                   | SERVO LATCH PLATE                 | 2119951-1             | -         | 8-2151405-5 | 1901094-3 | -         | 2168400-6 (QUANTITY 2) |
|                                                                                  |                |          |                          |                                   | SMART APPLICATOR                  | 2161326-1             | -         | 8-2151405-4 | -         | -         | -                      |
|                                                                                  | 2-2151405-2    | F        | FINE CRIMP HEIGHT ADJUST | PNEUMATIC                         | MECHANICAL FEED                   | 2119949-1             | 1338685-1 | 5-18022-5   | 2119653-2 | -         | -                      |
|                                                                                  |                |          |                          |                                   | SERVO LATCH PLATE                 | 2119951-1             | -         | 8-2151405-5 | 1901094-3 | -         | 2168400-6 (QUANTITY 2) |
|                                                                                  |                |          |                          |                                   | SMART APPLICATOR                  | 2161326-1             | -         | 8-2151405-4 | -         | -         | -                      |
|                                                                                  | 2-2151405-5    | F        | FINE CRIMP HEIGHT ADJUST | SERVO<br>LATCH PLATE <sup>4</sup> | MECHANICAL FEED                   | 2119949-1             | 1338685-1 | 5-18022-5   | 2119653-2 | -         | -                      |
|                                                                                  |                |          |                          |                                   | PNEUMATIC FEED                    | 2119950-1             | 1338685-1 | 5-18022-5   | 2119641-2 | 2119799-1 | 2063440-1              |
|                                                                                  | 2-2151405-7    | F        | FINE CRIMP HEIGHT ADJUST | NONE                              | -                                 | -                     | -         | -           | -         | -         | -                      |
|                                                                                  | 7-2151405-7    | E        | CRIMP TOOLING KIT        | -                                 | -                                 | -                     | -         | -           | -         | -         | -                      |

| APPLICATOR DATA                                                                                                        |                |      |
|------------------------------------------------------------------------------------------------------------------------|----------------|------|
| CRIMP                                                                                                                  | SIZE           | TYPE |
| WIRE                                                                                                                   | .090 [2.29 mm] | F    |
| INSUL                                                                                                                  | .155 [3.94 mm] | O    |
| APPLICATOR INSTRUCTIONS<br>408-10389  |                |      |

|                                                                                                                      |             |                                                                                   |                                                           |
|----------------------------------------------------------------------------------------------------------------------|-------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------|
| TERMINAL DATA: TE TERMINAL                                                                                           |             | TE CRIMP SPECIFICATION                                                            |                                                           |
| TERMINAL NAME: PIN & SOCKET ASSY, .062, TYPE III+                                                                    |             |                                                                                   |                                                           |
| WIRE STRIP LENGTH<br>.141-.171 IN [3.58-4.34 mm]                                                                     |             |  | INSULATION DIAMETER RANGE<br>Ø.109-.150 IN [2.77-3.81 mm] |
| TERMINAL APPLICATION SPECIFICATION  | 114-10004   | -                                                                                 | -                                                         |
| TERMINALS APPLIED                                                                                                    |             |                                                                                   |                                                           |
| TE TERMINAL                                                                                                          | TE TERMINAL | TE TERMINAL                                                                       | TE TERMINAL                                               |
| 66597-1                                                                                                              | 1-66597-0   | 66598-7                                                                           | 1-66598-3                                                 |
| 66597-2                                                                                                              | 1-66597-1   | 66598-9                                                                           | 213603-1                                                  |
| 66597-4                                                                                                              | 66598-1     | 1-66598-0                                                                         | 213603-3                                                  |
| 66597-5                                                                                                              | 66598-2     | 1-66598-1                                                                         | 213603-5                                                  |
| 66597-8                                                                                                              | 66598-6     | 1-66598-2                                                                         |                                                           |

|                                                                                               |                                                                                                            |                                                                                                                    |
|-----------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|
| WIRE SIZE  | CRIMP HEIGHT mm [INCH]  | CRIMP HEIGHT REFERENCE SETTING  |
| 14 AWG                                                                                        | 1.73+/-0.05 [1.068+/-0.002]                                                                                | 6.8                                                                                                                |
| 16 AWG                                                                                        | 1.50+/-0.05 [1.059+/-0.002]                                                                                | 9.1                                                                                                                |
| 18 AWG                                                                                        | 1.32+/-0.05 [1.052+/-0.002]                                                                                | 10.9                                                                                                               |



- RECOMMENDED SPARE PARTS

GREASE BEARING SURFACES LIGHTLY
3. LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.

4. APPLICATOR SPECIFIC DATA TO BE ENTERED INTO BLANK MEMORY CHIP AT ASSEMBLY. SEE BELOW FOR PART NUMBER:  
MECHANICAL FEED WITH "SMART APPLICATOR" CONVERSION: 8-2151405-4  
PNEUMATIC FEED WITH "SMART APPLICATOR" CONVERSION: 8-2151405-4  
SERVO FEED WITH "FINE CRIMP HEIGHT ADJUST": 8-2151405-5
5. ADJUSTMENT OF THE STRIPPER MAY BE REQUIRED WHEN MOVING THE APPLICATOR BETWEEN BENCH AND LEADMAKER APPLICATIONS.


6. APPLY PART NUMBER 1-23419-5 LOCTITE TO THREADS OF ITEM 50, 62 & 242

7. GREASE THREADS, GROOVE AND O-RING ON ITEMS 139 & 152.

8. MAGNET MUST BE ORIENTED CORRECTLY IN ORDER TO PROPERLY ACTUATE THE COUNTER.

9. CRIMP HEIGHT REFERENCE SETTING WAS THE SETTING USED WHEN THE APPLICATOR WAS QUALIFIED AT THE FACTORY. ADJUSTMENT MAY BE NECESSARY WHEN RUNNING APPLICATOR IN THE FIELD.

10. SPARE FEED CAM STORAGE LOCATION REFER TO INSTRUCTION SHEET FOR ADDITIONAL INFORMATION.

11. TO CONVERT THE APPLICATOR TO A NON-CARRIER CUTTING STYLE, REMOVE ITEM 13 AND ATTACH TO THE LOCATION ON BACK SIDE OF THE HOUSING. REFER TO INSTRUCTION SHEET FOR ADDITIONAL INFORMATION.
- \*WARNING  
ON INSTALLATION, SET WIRE DISC, ITEM 40 TO LARGEST WIRE SIZE SETTING. USE OF SETTINGS BELOW MINIMUM REQUIRED CRIMP HEIGHT SETTING WILL CAUSE DAMAGE TO CRIMP TOOLING.
- |     |     |     |     |     |           |                                     |         |
|-----|-----|-----|-----|-----|-----------|-------------------------------------|---------|
| -   | 1   | 1   | 1   | 1   | 2119782-1 | FINE ADJUST HEAD ASM, PACIFIC STYLE | 251     |
| -77 | -27 | -25 | -22 | -21 | PART NO   | DESCRIPTION                         | ITEM NO |
- PACIFIC VERSION  
Shown on sheets 3 of 4 & 4 of 4  
(Atlantic version shown on sheets 1 of 4 & 2 of 4)
- | SET UP GAUGE<br>2119599-1 | LOC<br>A | DIST<br>66 | REVISIONS |     |             |      |
|---------------------------|----------|------------|-----------|-----|-------------|------|
|                           |          |            | P         | LTR | DESCRIPTION | DATE |
|                           |          |            |           |     |             |      |
|                           |          |            | -         | -   | SEE SHEET 1 | -    |
|                           |          |            |           |     |             |      |
|                           |          |            |           |     |             |      |
- |   |     |     |     |     |             |                                     |     |
|---|-----|-----|-----|-----|-------------|-------------------------------------|-----|
| - | -   | -   | 1   | -   | 2119640-1   | PUSH ROD, AIR FEED                  | 250 |
| - | -   | -   | 1   | -   | 2079988-1   | BUSHING, LCH5-12, MISUMI            | 249 |
| - | 1   | 1   | 1   | 1   | 1-22279-3   | SPRING, COMPRESSION                 | 246 |
| - | 1   | 1   | 1   | 1   | 2119082-9   | CAM, SNAIL, INSULATION ADJUSTMENT   | 244 |
| - | 1   | 1   | 1   | 1   | 2079764-1   | WASHER, WAVE SPRING, CREST-TO-CREST | 243 |
| - | 1   | 1   | 1   | 1   | 2119083-1   | RETAINER, INSULATION DIAL           | 242 |
| - | 1   | 1   | 1   | 1   | 7-18023-7   | SCR, SKT HD CAP M3 X 4.0            | 241 |
| - | -   | 2   | -   | -   | 2168400-6   | SHCS, LOW HEAD, RoHS, M5 X 16       | 240 |
| - | -   | -   | -   | 1   | 2119580-1   | MECHANICAL FEED ASSEMBLY            | 239 |
| - | -   | -   | 1   | -   | 2063440-1   | AIR FEED MODULE                     | 238 |
| - | -   | 1   | -   | -   | 2119740-2   | TAG, IDENTIFICATION                 | 213 |
| - | -   | 1   | -   | -   | 1901094-3   | SPACER, FEEDER                      | 198 |
| - | 1   | 1   | 1   | 1   | 993111-1    | PIN, SLOTTED SPRING 3.0 X 20.0      | 177 |
| - | 1   | 1   | 1   | 1   | 8-22280-7   | SPRING, COMPRESSION                 | 176 |
| - | 1   | 1   | 1   | 1   | 1752353-2   | GUIDE PIN, HOLDDOWN                 | 175 |
| - | 1   | 1   | 1   | 1   | 1901680-2   | GUIDE PIN, HOLDDOWN                 | 174 |
| - | -   | -   | 2   | -   | 21045-3     | RING, RETAIN, EXTERN, 3/16 CRESCENT | 172 |
| - | 1   | 1   | 1   | 1   | 994969-1    | MAGNET, RARE EARTH HIGH ENERGY      | 166 |
| - | REF | REF | REF | REF | 994970-2    | COUNTER, MAGNETIC                   | 164 |
| - | -   | -   | 1   | -   | 240638-1    | SPRING, FEED FINGER                 | 163 |
| - | 1   | 1   | 1   | 1   | 8-21084-1   | O-RING, .801 ID, .070 DIA. MAT.     | 152 |
| - | -   | -   | 1   | -   | 2119641-2   | FEED CAM, AIR FEED                  | 151 |
| - | 1   | 1   | 1   | 1   | 2119798-2   | DETENT PIN                          | 145 |
| - | 1   | 1   | 1   | 1   | 2079383-8   | SCR, BHSC, RoHS (M4 X 16)           | 144 |
| - | 4   | 4   | 4   | 4   | 2168400-5   | SHCS, LOW HEAD, RoHS, M4 X 20       | 143 |
| - | -   | -   | -   | 1   | 2119653-2   | FEED CAM, POST FEED                 | 142 |
| - | 1   | 1   | 1   | 1   | 1-2119656-0 | APPLICATOR BASIC ASSEMBLY, SF       | 141 |
| - | 1   | 1   | 1   | 1   | 2119650-1   | RAM, ASIAN STYLE, SIDE FEED         | 140 |
| - | 1   | 1   | 1   | 1   | 2119092-2   | BOLT, ADJUSTMENT                    | 139 |
| - | -   | -   | 1   | -   | 3-23627-7   | PIN, RETAIN, GRVD, 3/16 X .854      | 137 |
| - | -   | -   | 1   | -   | 2119799-1   | HOLDER, FEED FINGER, AF             | 136 |
| - | -   | REF | -   | -   | SEE NOTE 4  | MEMORY CHIP, PROGRAMMED             | 135 |
| - | -   | 1   | -   | -   | 1633743-1   | SERVO FEED LATCH ASM                | 133 |
| - | 1   | 1   | 1   | 1   | 1-18028-2   | WASHER, FLAT, REG M4                | 119 |
| - | -   | REF | -   | -   | 2119944-1   | FEED FINGER ASSEMBLY, SF            | 117 |
| - | 1   | 1   | 1   | 1   | 455888-5    | SPACER, CRIMPER                     | 82  |
| - | 1   | 1   | 1   | 1   | 2119956-1   | DOCUMENTATION PACKAGE               | 71  |
| - | 1   | 1   | 1   | 1   | 2119791-5   | DEPRESSOR, WIRE                     | 70  |
| - | 1   | -   | 1   | 1   | 2119740-1   | TAG, IDENTIFICATION                 | 67  |
| - | 2   | 2   | 2   | 2   | 2168078-1   | SCREW, DRIVE, RH, RoHS, 2 x .188    | 66  |
| - | 1   | 1   | 1   | 1   | 2119793-1   | LIMITER, ADJUSTMENT BOLT            | 63  |
| - | 3   | 3   | 3   | 3   | 992763-5    | SCR, SET, SOC, CONE POINT, M3 x 4.0 | 62  |
| - | -   | -   | 1   | 1   | 5-18022-5   | SCR, HEX HD CAP, M4 X 6.0           | 59  |
| - | -   | -   | 1   | 1   | 1338685-1   | PAWL, FEED                          | 56  |
| - | 1   | 1   | 1   | 1   | 1-5018030-0 | NUT, HEX, REG, RoHS, M3.5           | 52  |
| - | 1   | 1   | 1   | 1   | 1901681-1   | HOLDDOWN, TERMINAL                  | 51  |
| - | 1   | 1   | 1   | 1   | 2-1752354-2 | STANDOFF, HOLD-DOWN                 | 50  |
| - | -   | -   | 1   | 2   | 18023-9     | SCR, SKT HD CAP M4 X 6.0            | 49  |
| - | -   | -   | -   | 1   | 2119652-1   | FEED CAM, PRE FEED                  | 48  |
| - | 1   | 1   | 1   | 1   | 2079383-7   | SCR, BHSC, RoHS (M8 X 25)           | 41  |
| - | 1   | 1   | 1   | 1   | 2119645-1   | DISC, NUMBERED FA WIRE ADJUSTMENT   | 40  |
| - | 1   | 1   | 1   | 1   | 2119957-1   | APPLICATOR SHIM PACK                | 39  |
| - | 1   | 1   | 1   | 1   | 2119644-2   | RAM WASHER, PRECISION               | 38  |
| - | 1   | 1   | 1   | 1   | 1-1752356-8 | SUPPORT, TERMINAL                   | 34  |
| - | 2   | 2   | 2   | 2   | 2079383-5   | SCR, BHSC, RoHS (M4 X 20)           | 33  |
| - | 1   | 1   | 1   | 1   | 2161328-1   | HEX HEAD, FLANGED, M5 x 8mm LONG    | 32  |
| - | 1   | 1   | 1   | 1   | 1-1320908-0 | SPACER, STRIP GUIDE                 | 30  |
| - | 1   | 1   | 1   | 1   | 2119959-1   | ASSEMBLY, STRIP GUIDE               | 29  |
| - | 1   | 1   | 1   | 1   | 1320928-6   | STRIP GUIDE                         | 24  |
| - | 1   | 1   | 1   | 1   | 2168083-2   | SCR, SKT HD CAP, RoHS, M4 X 8.0     | 21  |
| - | 1   | 1   | 1   | 1   | 1-18028-2   | WASHER, FLAT, REG M4                | 20  |
| - | 1   | 1   | 1   | 1   | 2119533-1   | STRIPPER, SIDE FEED                 | 19  |
| - | 1   | 1   | 1   | 1   | 2119806-1   | INSERT, SHEAR                       | 13  |
| - | 1   | 1   | 1   | 1   | 3-22280-3   | SPRING, COMPRESSION                 | 12  |
| - | 1   | 1   | 1   | 1   | 1-356885-4  | STOP, SHEAR                         | 11  |
| - | 1   | 1   | 1   | 1   | 2119805-1   | SHEAR HOLDER, FRONT                 | 10  |
| - | 1   | 1   | 1   | 1   | 1803095-1   | FLOATING SHEAR, FRONT               | 9   |
| - | 1   | 1   | 1   | 1   | 3-1333205-0 | ANVIL, COMBINATION                  | 8   |
| - | 1   | 1   | 1   | 1   | 2119757-8   | DEPRESSOR, SHEAR                    | 5   |
| - | 1   | 1   | 1   | 1   | 238011-4    | BLOCK, CRIMPER SPACER               | 4   |
| - | 1   | 1   | 1   | 1   | 2-2119784-9 | CRIMPER, INSULATION O PREMIUM       | 3   |
| - | 1   | 1   | 1   | 1   | 455888-1    | SPACER, CRIMPER                     | 2   |
| - | 1   | 1   | 1   | 1   | 1-456406-8  | CRIMPER, WIRE PREMIUM               | 1   |
- |                                                                                                                                                                        |  |                  |           |                                              |  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|------------------|-----------|----------------------------------------------|--|
| THIS DRAWING IS UNPUBLISHED. IT IS SUBJECT TO CHANGE AND TO BE CONTROLLED BY THE ISSUING ORGANIZATION. NO OTHER REVISIONS SHOULD BE CONTACTED FOR THE LATEST REVISION. |  | DWN<br>C. MOYER  | 13OCT2011 | TE Connectivity<br>Harrisburg, PA 17105-3608 |  |
| DIMENSIONS:<br>mm                                                                                                                                                      |  | CHK<br>T. ELBIN  | 13OCT2011 | NAME<br>Ocean Side Feed<br>Applicator        |  |
|                                                                                   |  | APVD<br>T. ELBIN | 13OCT2011 | PRODUCT SPEC                                 |  |
|                                                                                                                                                                        |  | APPLICATION SPEC |           | SIZE<br>A1                                   |  |
| MATERIAL<br>-                                                                                                                                                          |  | FINISH<br>-      |           | WEIGHT<br>-                                  |  |
| Customer Accessible Production Drawing                                                                                                                                 |  | SCALE<br>1:2     |           | SHEET<br>3 OF 4                              |  |
|                                                                                                                                                                        |  |                  |           | REV<br>F                                     |  |
- SHEETS 1 & 2 ARE NOT REQUIRED FOR PACIFIC VERSION
- AMP 4805 REV 31MAR2000

| LOC |    | DIST |     | REVISONS    |      |     |      |
|-----|----|------|-----|-------------|------|-----|------|
| A   | 66 | P    | LTR | DESCRIPTION | DATE | DWN | APVD |
|     |    | -    |     | SEE SHEET 1 | -    | -   | -    |
|     |    |      |     |             |      |     |      |
|     |    |      |     |             |      |     |      |

D

C

B

A

D

C


B

A

# FEED TYPE MECHANICAL







# PNEUMATIC

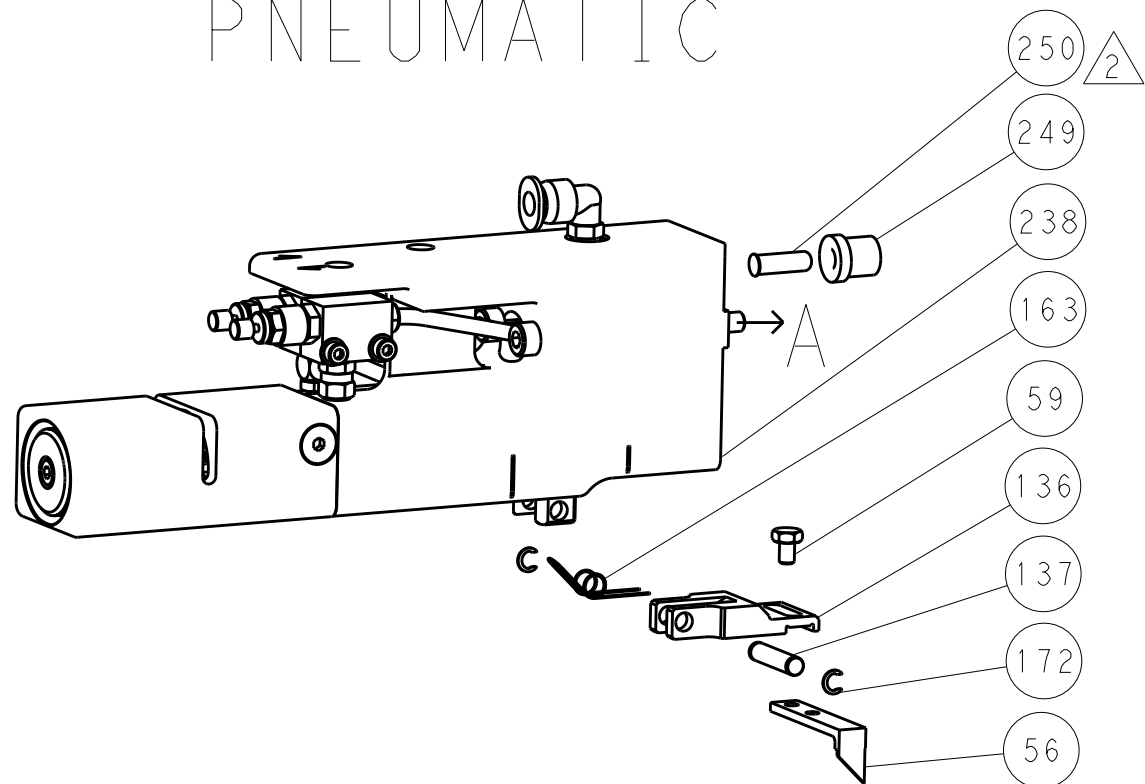

# SERVO LATCH PLATE



# CAM POSITIONS

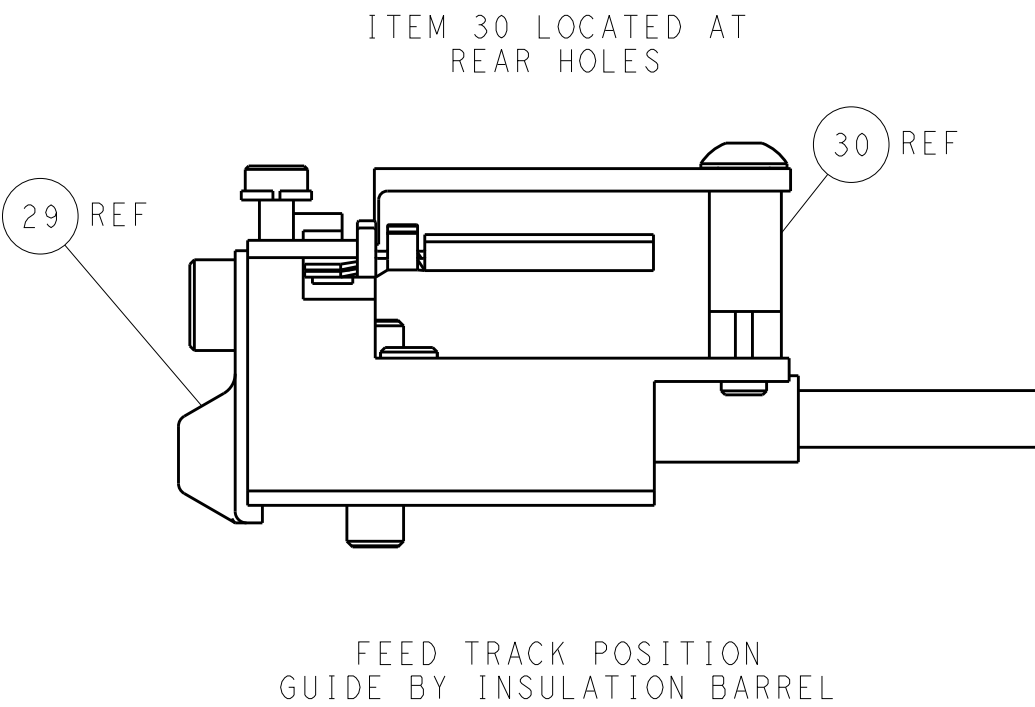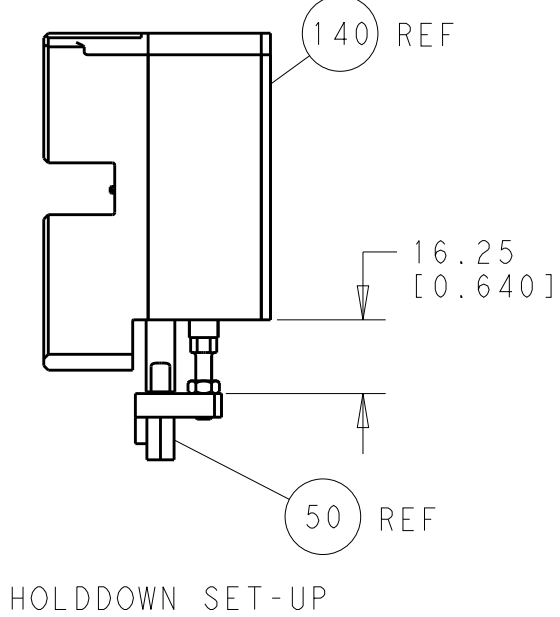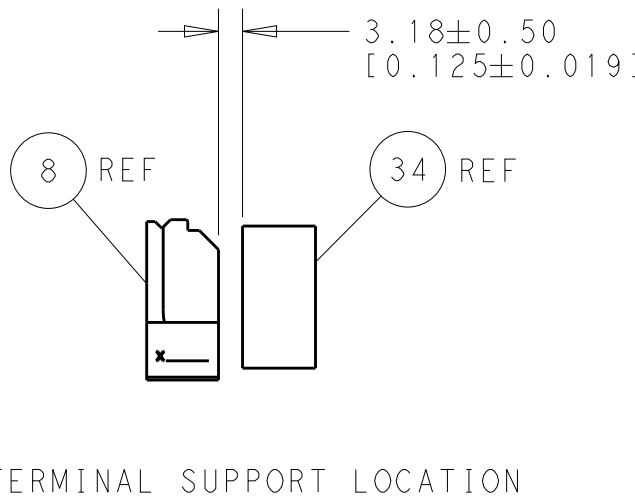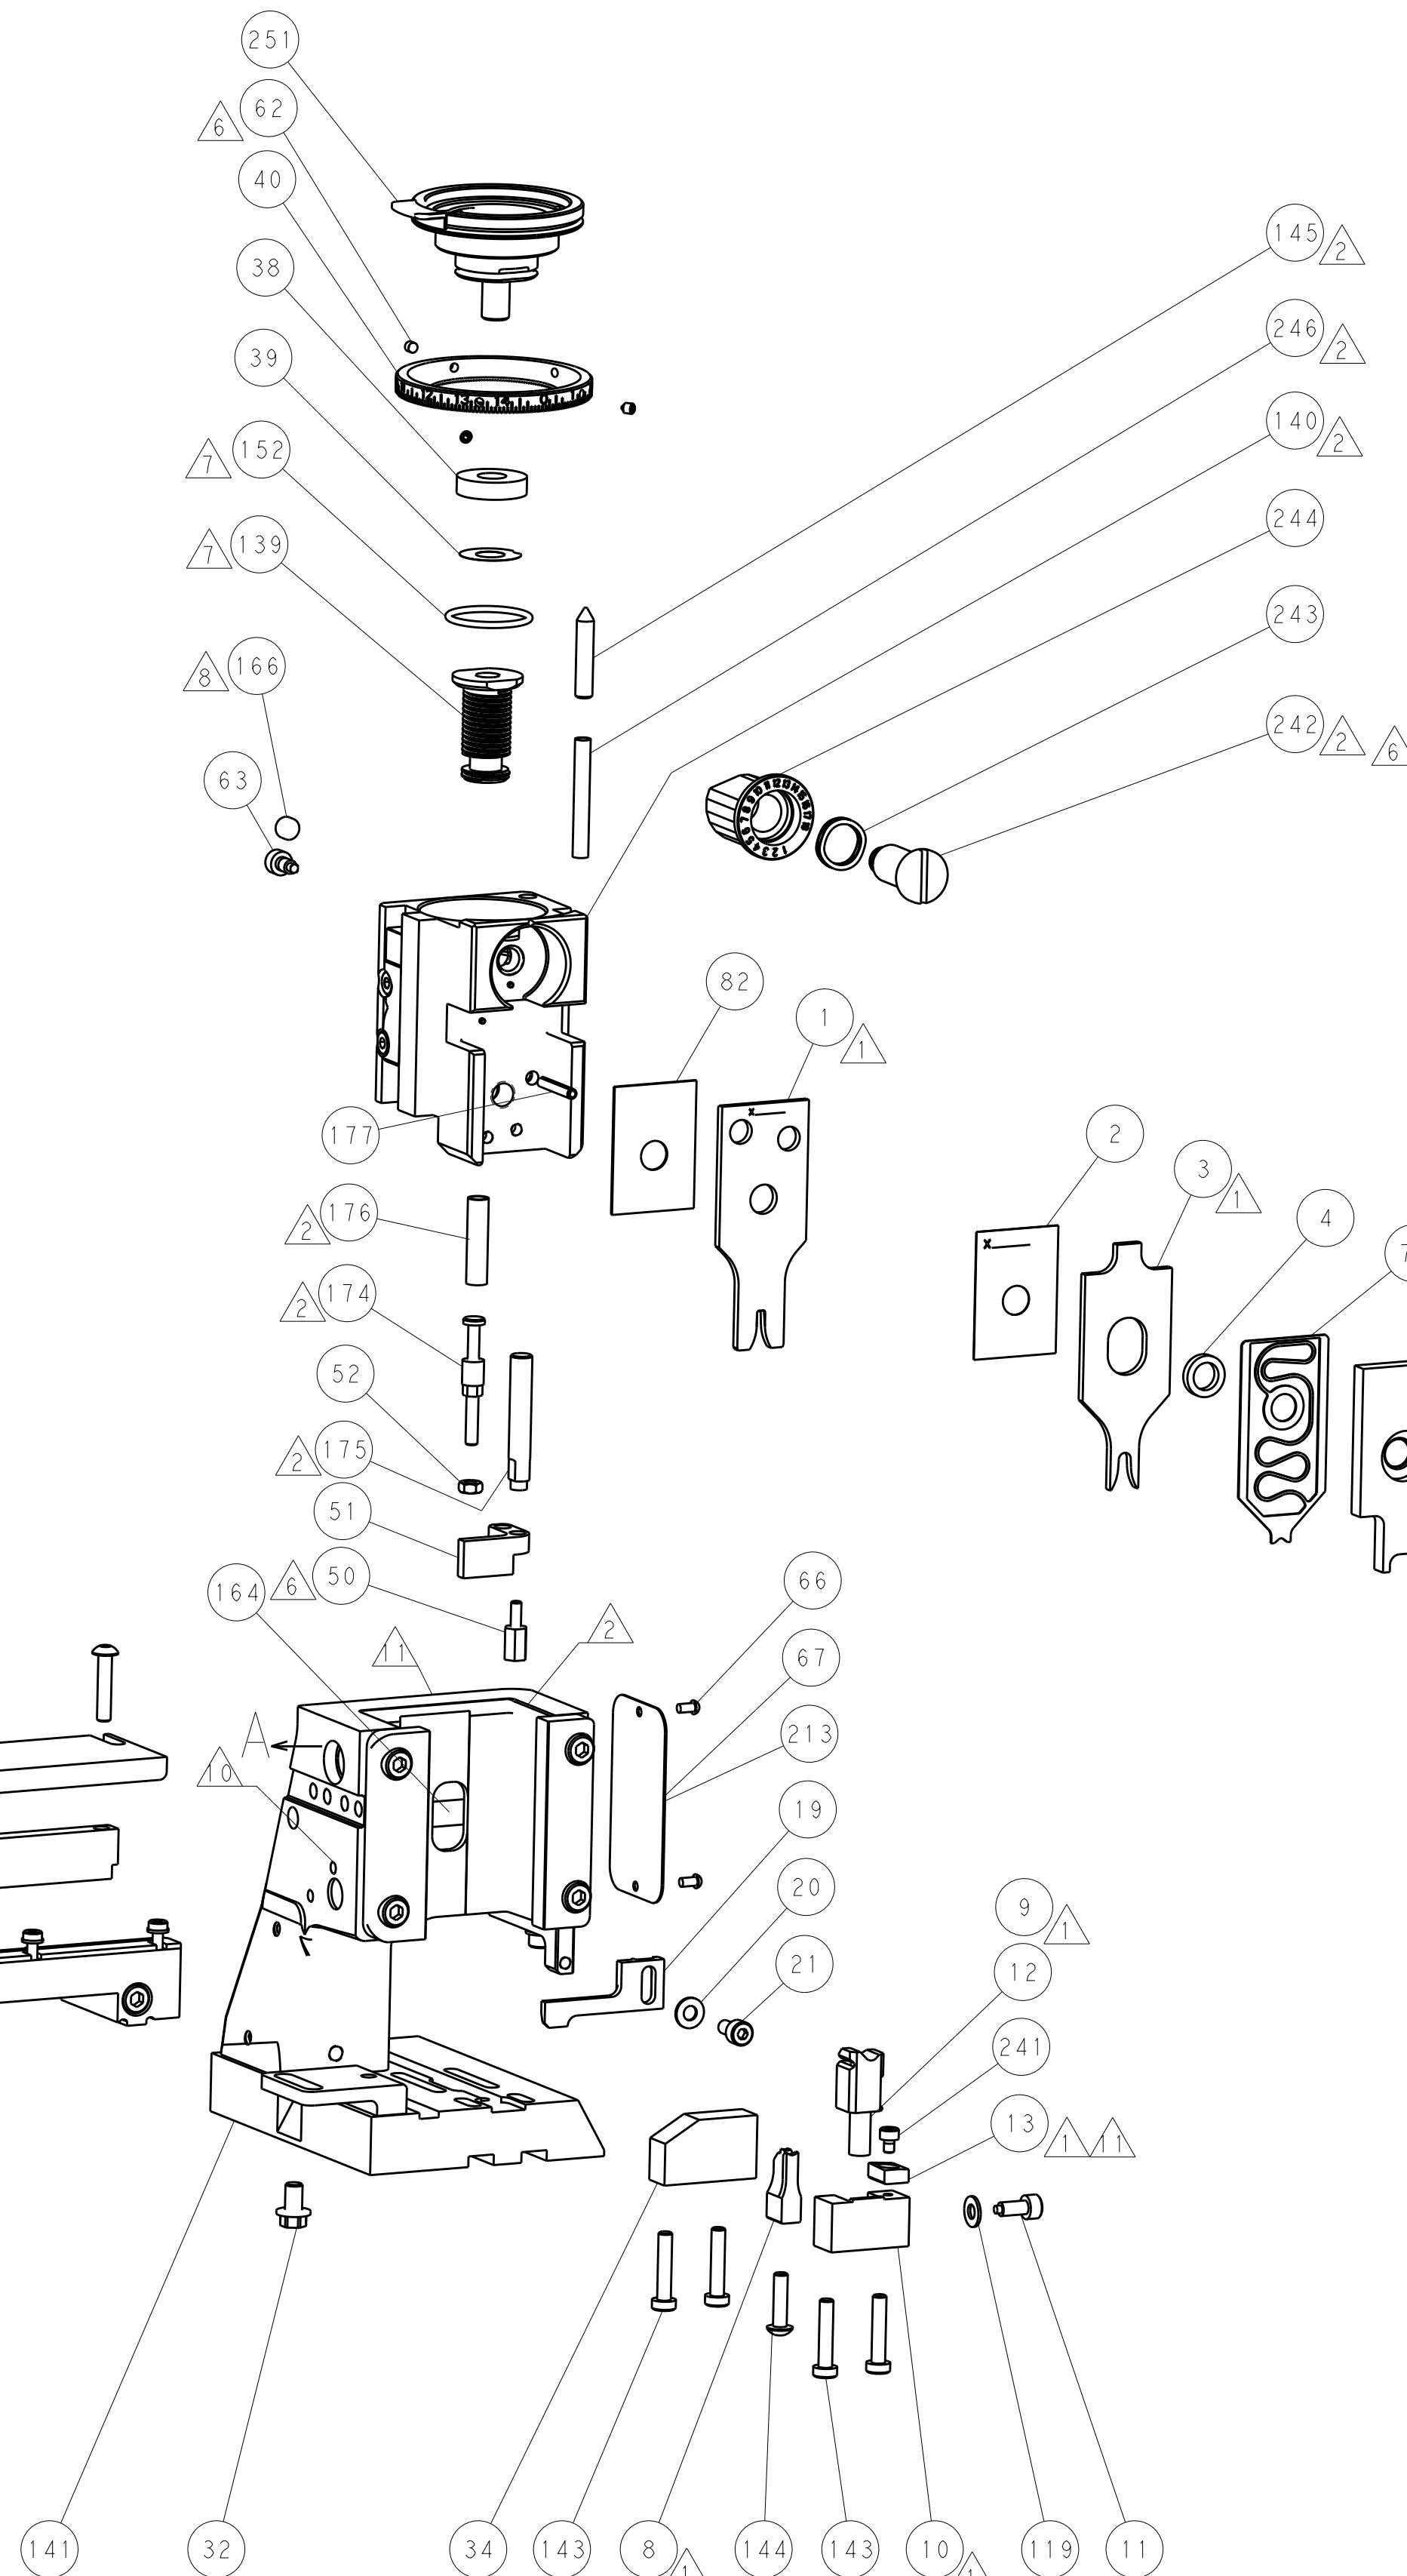

PACIFIC VERSION  
Shown on sheets 3 of 4 & 4 of 4  
(Atlantic version shown on sheets 1 of 4 & 2 of 4)

|             |  |                                        |  |      |  |           |  |                                        |  |
|-------------|--|----------------------------------------|--|------|--|-----------|--|----------------------------------------|--|
| DIMENSIONS: |  | TOLERANCES UNLESS OTHERWISE SPECIFIED: |  | DWN  |  | 13OCT2011 |  | TE Connectivity                        |  |
| mm          |  | 0 PLC ±.5                              |  | CHK  |  | 13OCT2011 |  | Harrisburg, PA 17105-3608              |  |
| MATERIAL    |  | 1 PLC ±.13                             |  | APVD |  | 13OCT2011 |  | NAME                                   |  |
|             |  | 2 PLC ±.013                            |  |      |  |           |  | Ocean Side Feed                        |  |
|             |  | 3 PLC ±.0001                           |  |      |  |           |  | Applicator                             |  |
|             |  | 4 PLC ±.0001                           |  |      |  |           |  | SIZE                                   |  |
|             |  | ANGLES                                 |  |      |  |           |  | CAGE CODE                              |  |
|             |  | FINISH                                 |  |      |  |           |  | DRAWING NO                             |  |
|             |  |                                        |  |      |  |           |  | 00779                                  |  |
|             |  |                                        |  |      |  |           |  | ©=2151405                              |  |
|             |  |                                        |  |      |  |           |  | Customer Accessible Production Drawing |  |
|             |  |                                        |  |      |  |           |  | SCALE                                  |  |
|             |  |                                        |  |      |  |           |  | 1:2                                    |  |
|             |  |                                        |  |      |  |           |  | SHEET                                  |  |
|             |  |                                        |  |      |  |           |  | 4                                      |  |
|             |  |                                        |  |      |  |           |  | OF                                     |  |
|             |  |                                        |  |      |  |           |  | 4                                      |  |
|             |  |                                        |  |      |  |           |  | REV                                    |  |
|             |  |                                        |  |      |  |           |  | F                                      |  |

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9