


**Silicon TVS diodes**


- ESD / transient protection of automotive CAN / LIN bus networks / transceivers, industrial bus systems and power supply lines according to:  
IEC61000-4-2 (ESD):  $\pm 30$  kV (air / contact)  
IEC61000-4-4 (EFT): 80 A (5/50 ns)  
IEC61000-4-5 (surge): 5 A (8/20  $\mu$ s)  
ISO7637-2: Pulse 1 (max. 50 V),  
Pulse 2 (max. 125 V), Pulse 3a, b (max. 800 V)

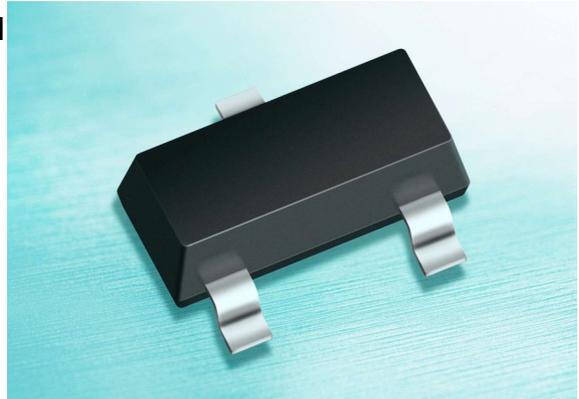

- Max. working voltage: 24 V
- Low capacitance: 24 pF typ.
- Low clamping voltage: < 41 V
- Extremely low reverse current: < 1 nA typ.
- Pb-free (RoHS compliant) package
- Qualified according AEC Q101

**Applications**

- Low and High-Speed CAN
- Fault Tolerant CAN
- Industrial control networks
- 12/24 V DC power supply lines


**ESD24VS2U**


Type	Package	Configuration	Marking
ESD24VS2U	SOT23	2 lines, uni-directional*	EUs

\* 1 line, bi-directional between pins 1 and 2, if pin 3 is not connected

**Maximum Ratings** at  $T_A = 25^\circ\text{C}$ , unless otherwise specified

Parameter	Symbol	Value	Unit
ESD contact discharge <sup>1)</sup>	$V_{\text{ESD}}$	30	kV
Peak pulse current ( $t_p = 8 / 20 \mu\text{s}$ ) <sup>2)</sup>	$I_{\text{pp}}$	5	A
Peak pulse power ( $t_p = 8 / 20 \mu\text{s}$ ) <sup>2)</sup>	$P_{\text{pk}}$	230	W
Operating temperature range	$T_{\text{op}}$	-55...150	°C
Storage temperature	$T_{\text{stg}}$	-65...150	

**Electrical Characteristics** at  $T_A = 25^\circ\text{C}$ , unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	

**Characteristics -**


Reverse working voltage	$V_{\text{RWM}}$	-	-	24	V
Breakdown voltage $I_{(\text{BR})} = 1 \text{ mA}$	$V_{(\text{BR})}$	26	-	32	
Reverse current $V_R = 24 \text{ V}$	$I_R$	-	<1	10	nA
Clamping voltage $I_{\text{PP}} = 1 \text{ A}, t_p = 8/20 \mu\text{s}$ <sup>2)</sup> $I_{\text{PP}} = 5 \text{ A}, t_p = 8/20 \mu\text{s}$ <sup>2)</sup>	$V_{\text{CL}}$	-	30 36	34 41	V
Line capacitance <sup>3)</sup> $V_R = 0 \text{ V}, f = 1 \text{ MHz}, \text{ESD24VS2U}$ , (pins 1 to 2, pin 3 n.c.) $V_R = 0 \text{ V}, f = 1 \text{ MHz}, \text{ESD24VS2U}$ , (pins 1 or 2 to 3)	$C_T$	-	24 48	28 52	

<sup>1)</sup> $V_{\text{ESD}}$  according to IEC61000-4-2. Device stressed with 10 positive / negative ESD pulses.

<sup>2)</sup> $I_{\text{pp}}$  according to IEC61000-4-5. Non-repetitive current pulse.


<sup>3)</sup>Total capacitance to ground (per line)

**Power derating curve  $P_{pk} = f(T_A)$**

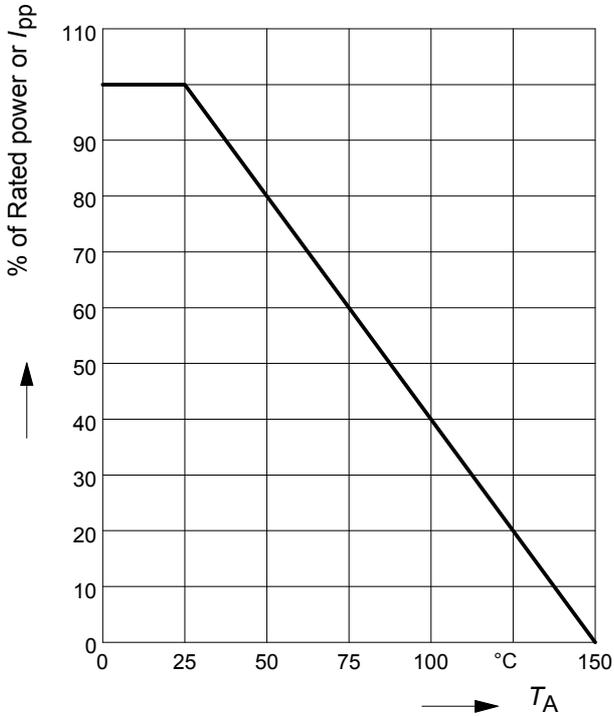


**Clamping voltage,  $V_{cl} = f(I_{pp})$**

$t_p = 8 / 20 \mu s$

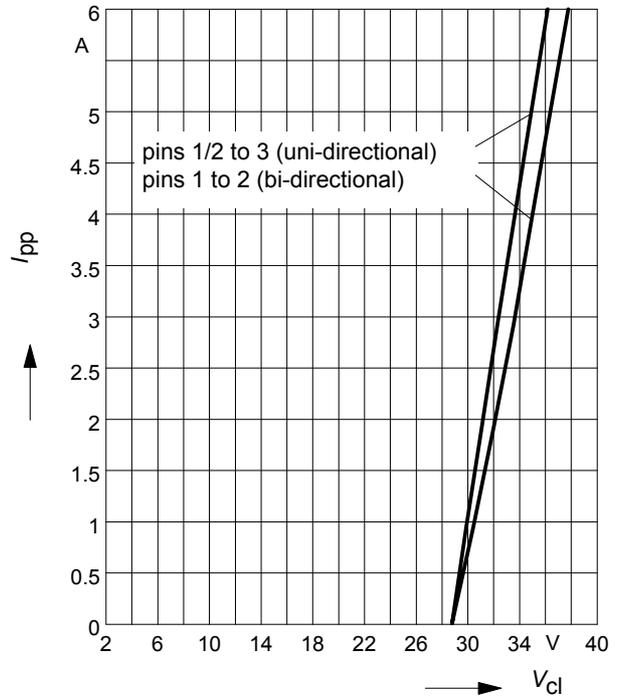


**Reverse current  $I_R = f(V_R)$**

$T_A =$  Parameter, pins 1 / 2 to 3  
( uni-directional )

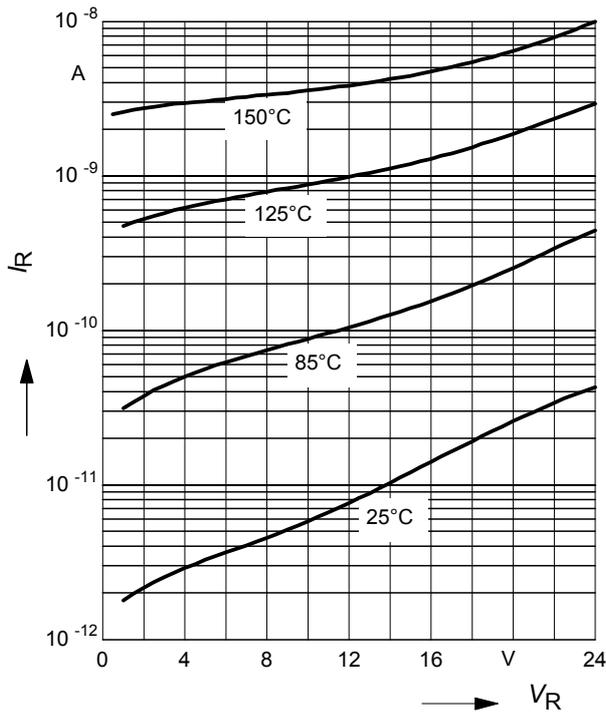


**Breakdown voltage  $V_{BR} = f(I_R)$**

$T_A =$  Parameter, pins 1 to 2  
( bi-directional )

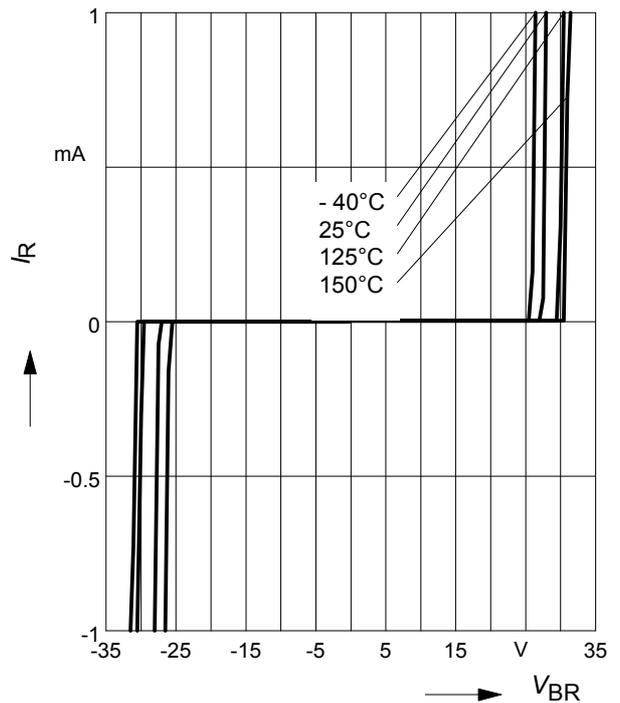


Line capacitance  $C_T = f(V_R)$


$f = 1\text{MHz}$

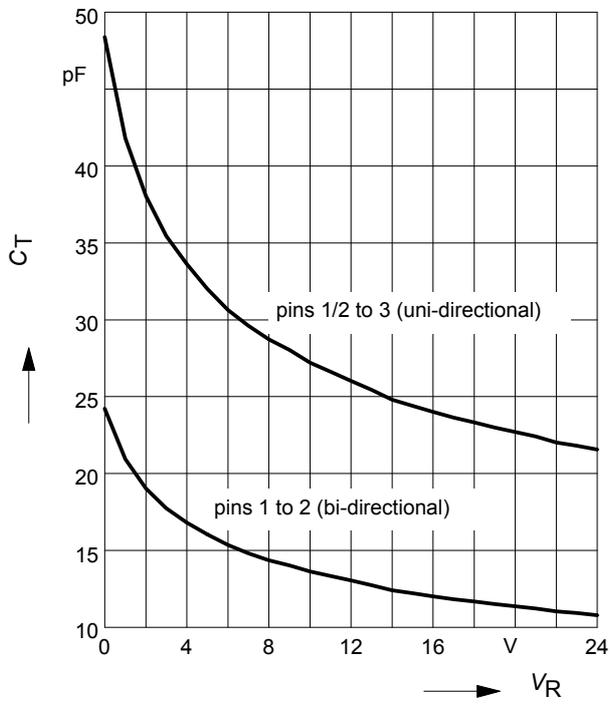

**Application example ESD24VS2U ( uni-directional )**  
 12V / 24V DC power supply line protection

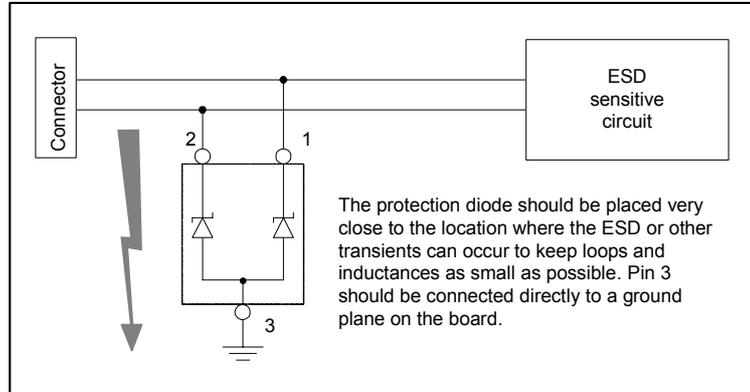


**Application example ESD24VS2U ( bi-directional )**  
 Single Wire CAN and LIN bus protection

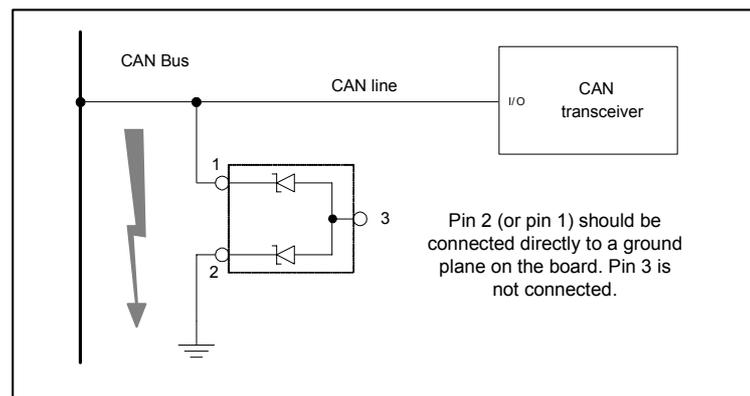


**Clamping voltage according to ISO 7637-2: Pulse 1**

Ri = 10 Ohm, td = 2 ms, 5000 pulses

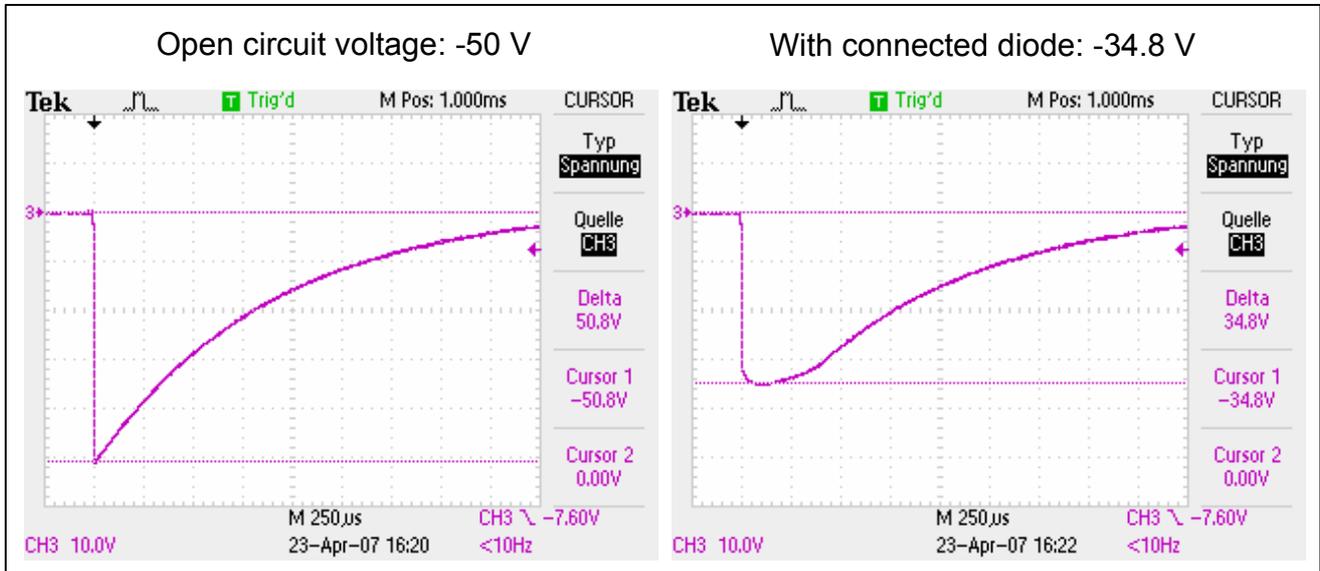


**Clamping voltage according to ISO 7637-2: Pulse 2a**

Ri = 10 Ohm, td = 2 us, 4000 pulses, 60 min

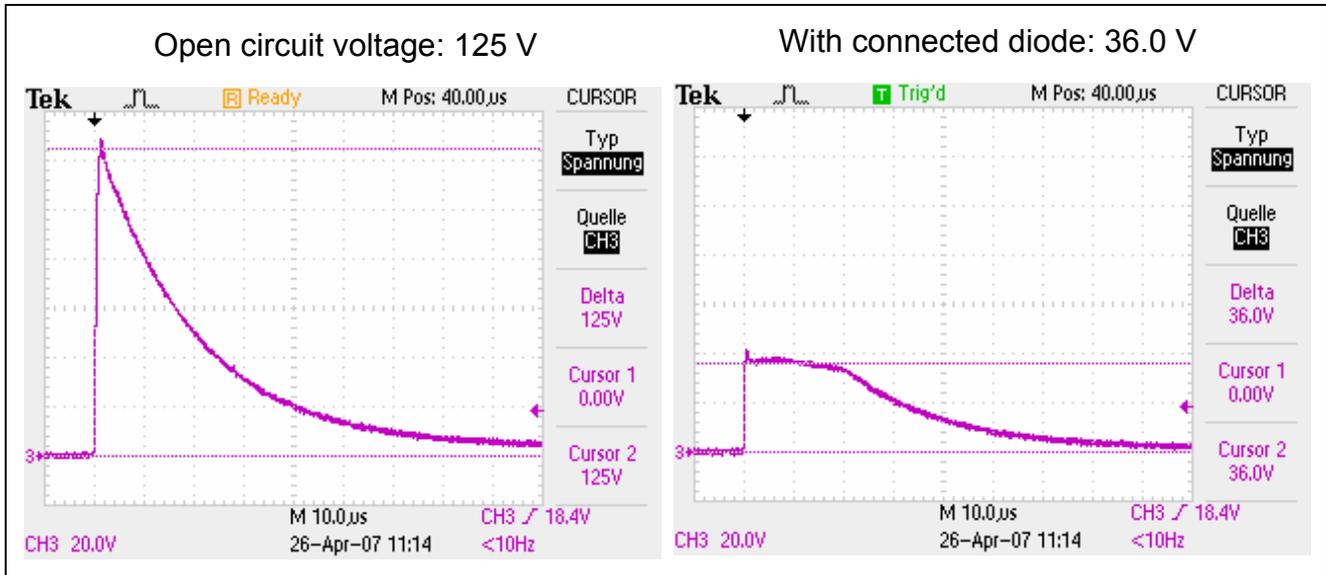


**Clamping voltage according to ISO 7637-2: Pulse 3**

Ri = 50 Ohm, td = 100 ns, 10 min

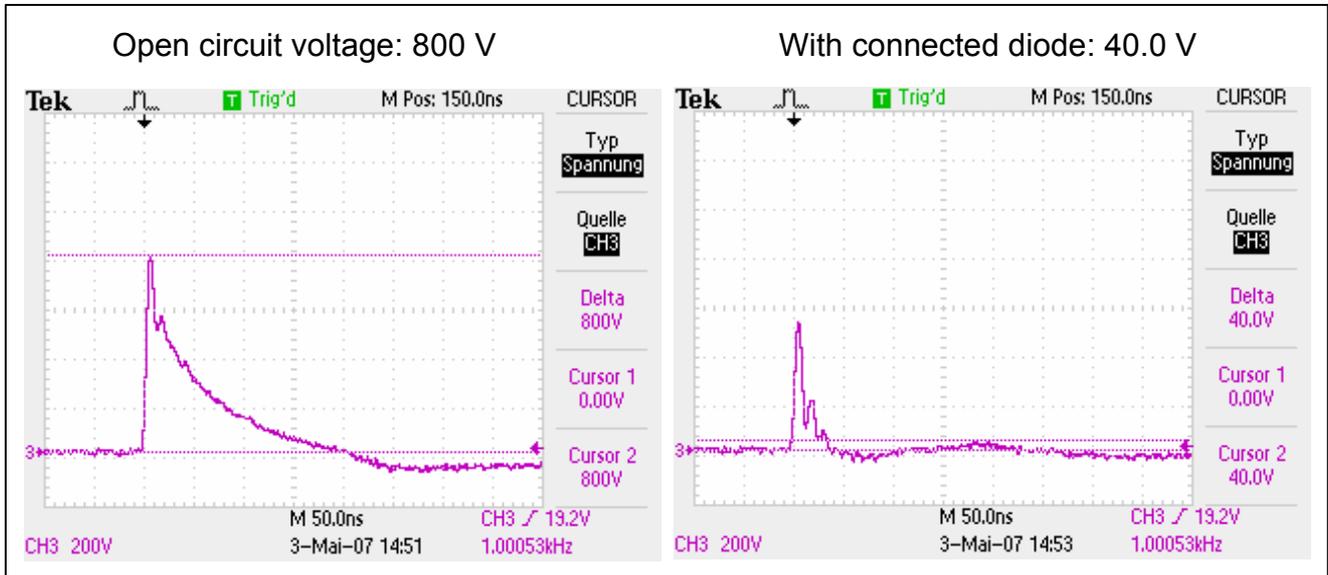


Package Outline

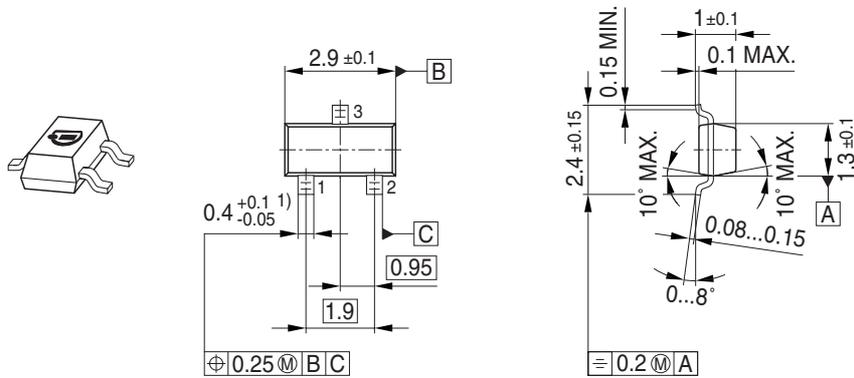


1) Lead width can be 0.6 max. in dambar area

Foot Print




Marking Layout (Example)

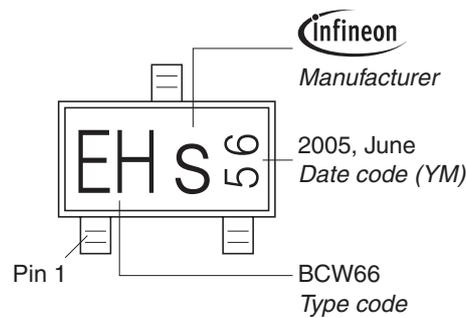

Standard Packing

Reel  $\varnothing 180$  mm = 3.000 Pieces/Reel  
 Reel  $\varnothing 330$  mm = 10.000 Pieces/Reel

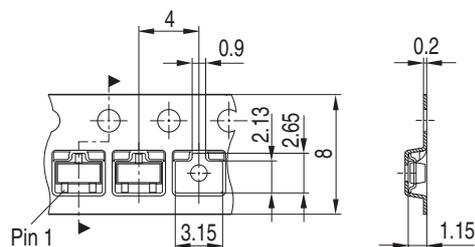

Edition 2006-02-01

Published by

Infineon Technologies AG

81726 München, Germany

© Infineon Technologies AG 2007.

All Rights Reserved.

### **Attention please!**

The information given in this dokument shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie"). With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

### **Information**

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office ([www.infineon.com](http://www.infineon.com)).

### **Warnings**

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system.

Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9