

SIDE ROTARY

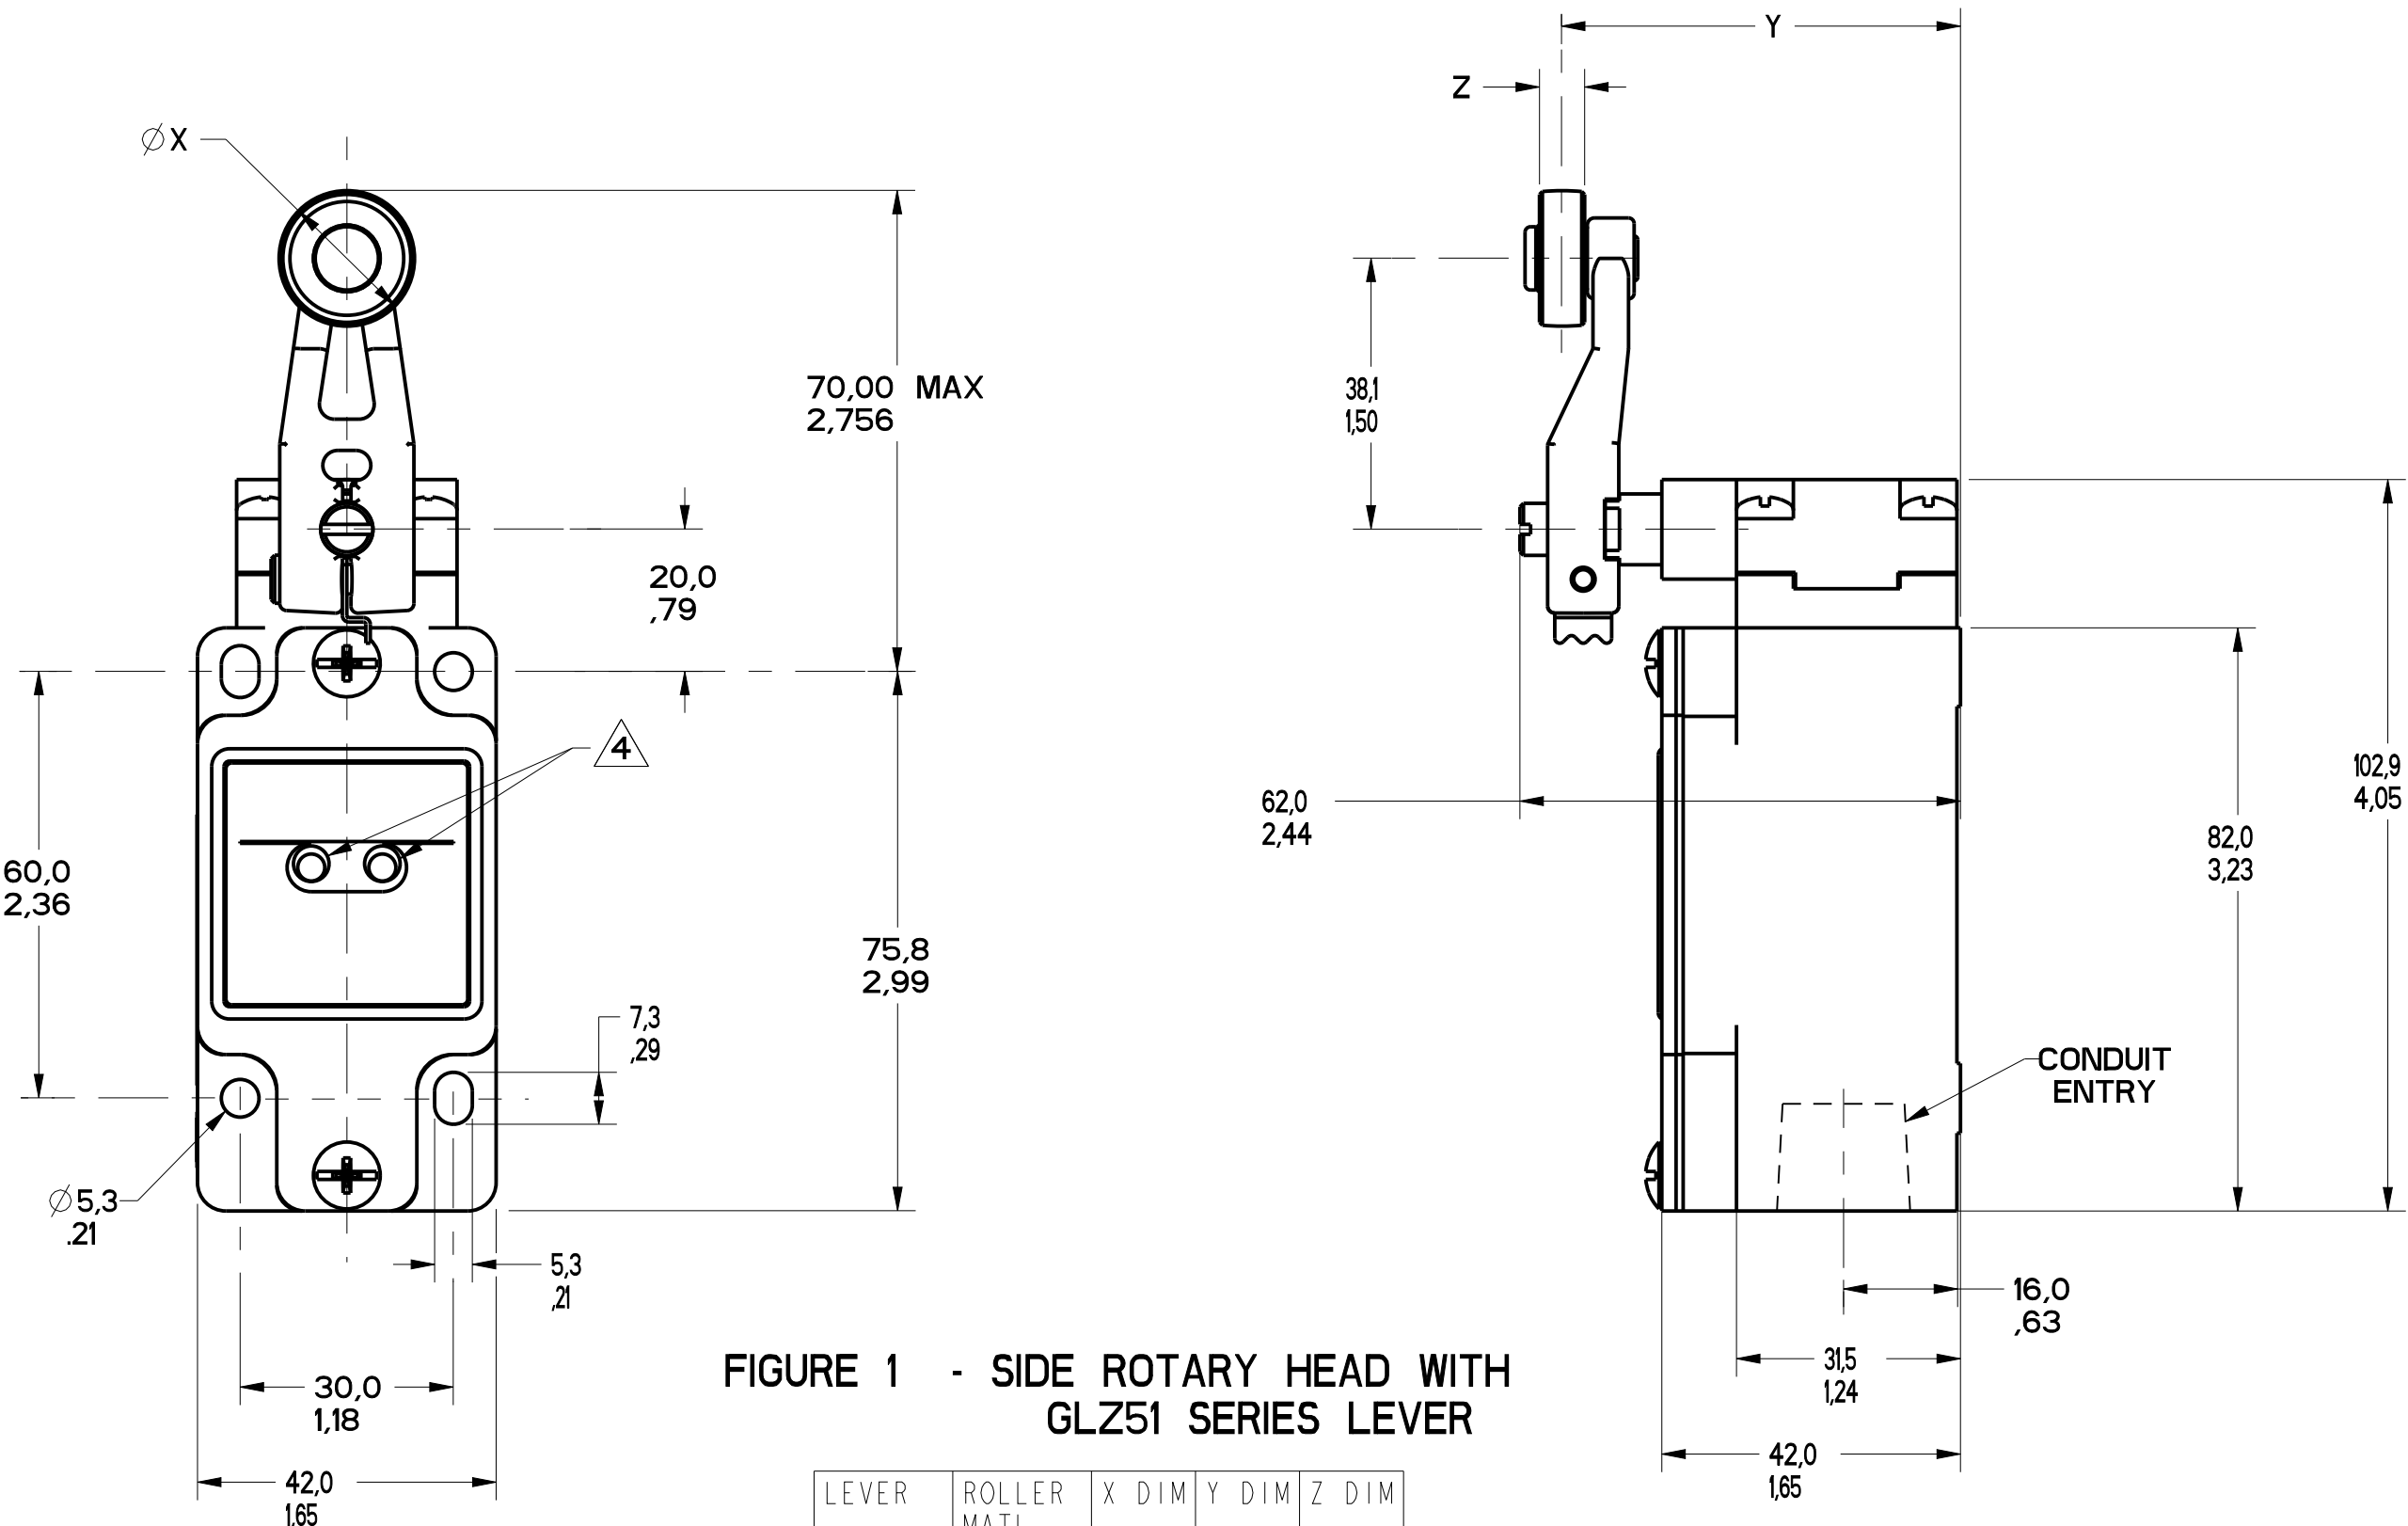


FIGURE 1 - SIDE ROTARY HEAD WITH GLZ51 SERIES LEVER

LEVER	ROLLER MATL	X DIM	Y DIM	Z DIM
GLZ51A	NYLON	19.1 .75	55.9 2.20	6.4 .25
GLZ51B	STEEL	19.1 .75	55.9 2.20	6.4 .25
GLZ51C	NYLON	24.5 1.00	59.1 2.33	12.7 .50
GLZ51Y	RUBBER	50.0 1.97	66.1 2.60	10.0 .39
GLZ51T	STAINLESS STEEL	19.1 .75	56.8 2.24	8.8 .345

GLZ54J: 200.00 / 7.870 MAX
GLZ54K: 140.00 / 5.510 MAX
ALUMINUM ROD

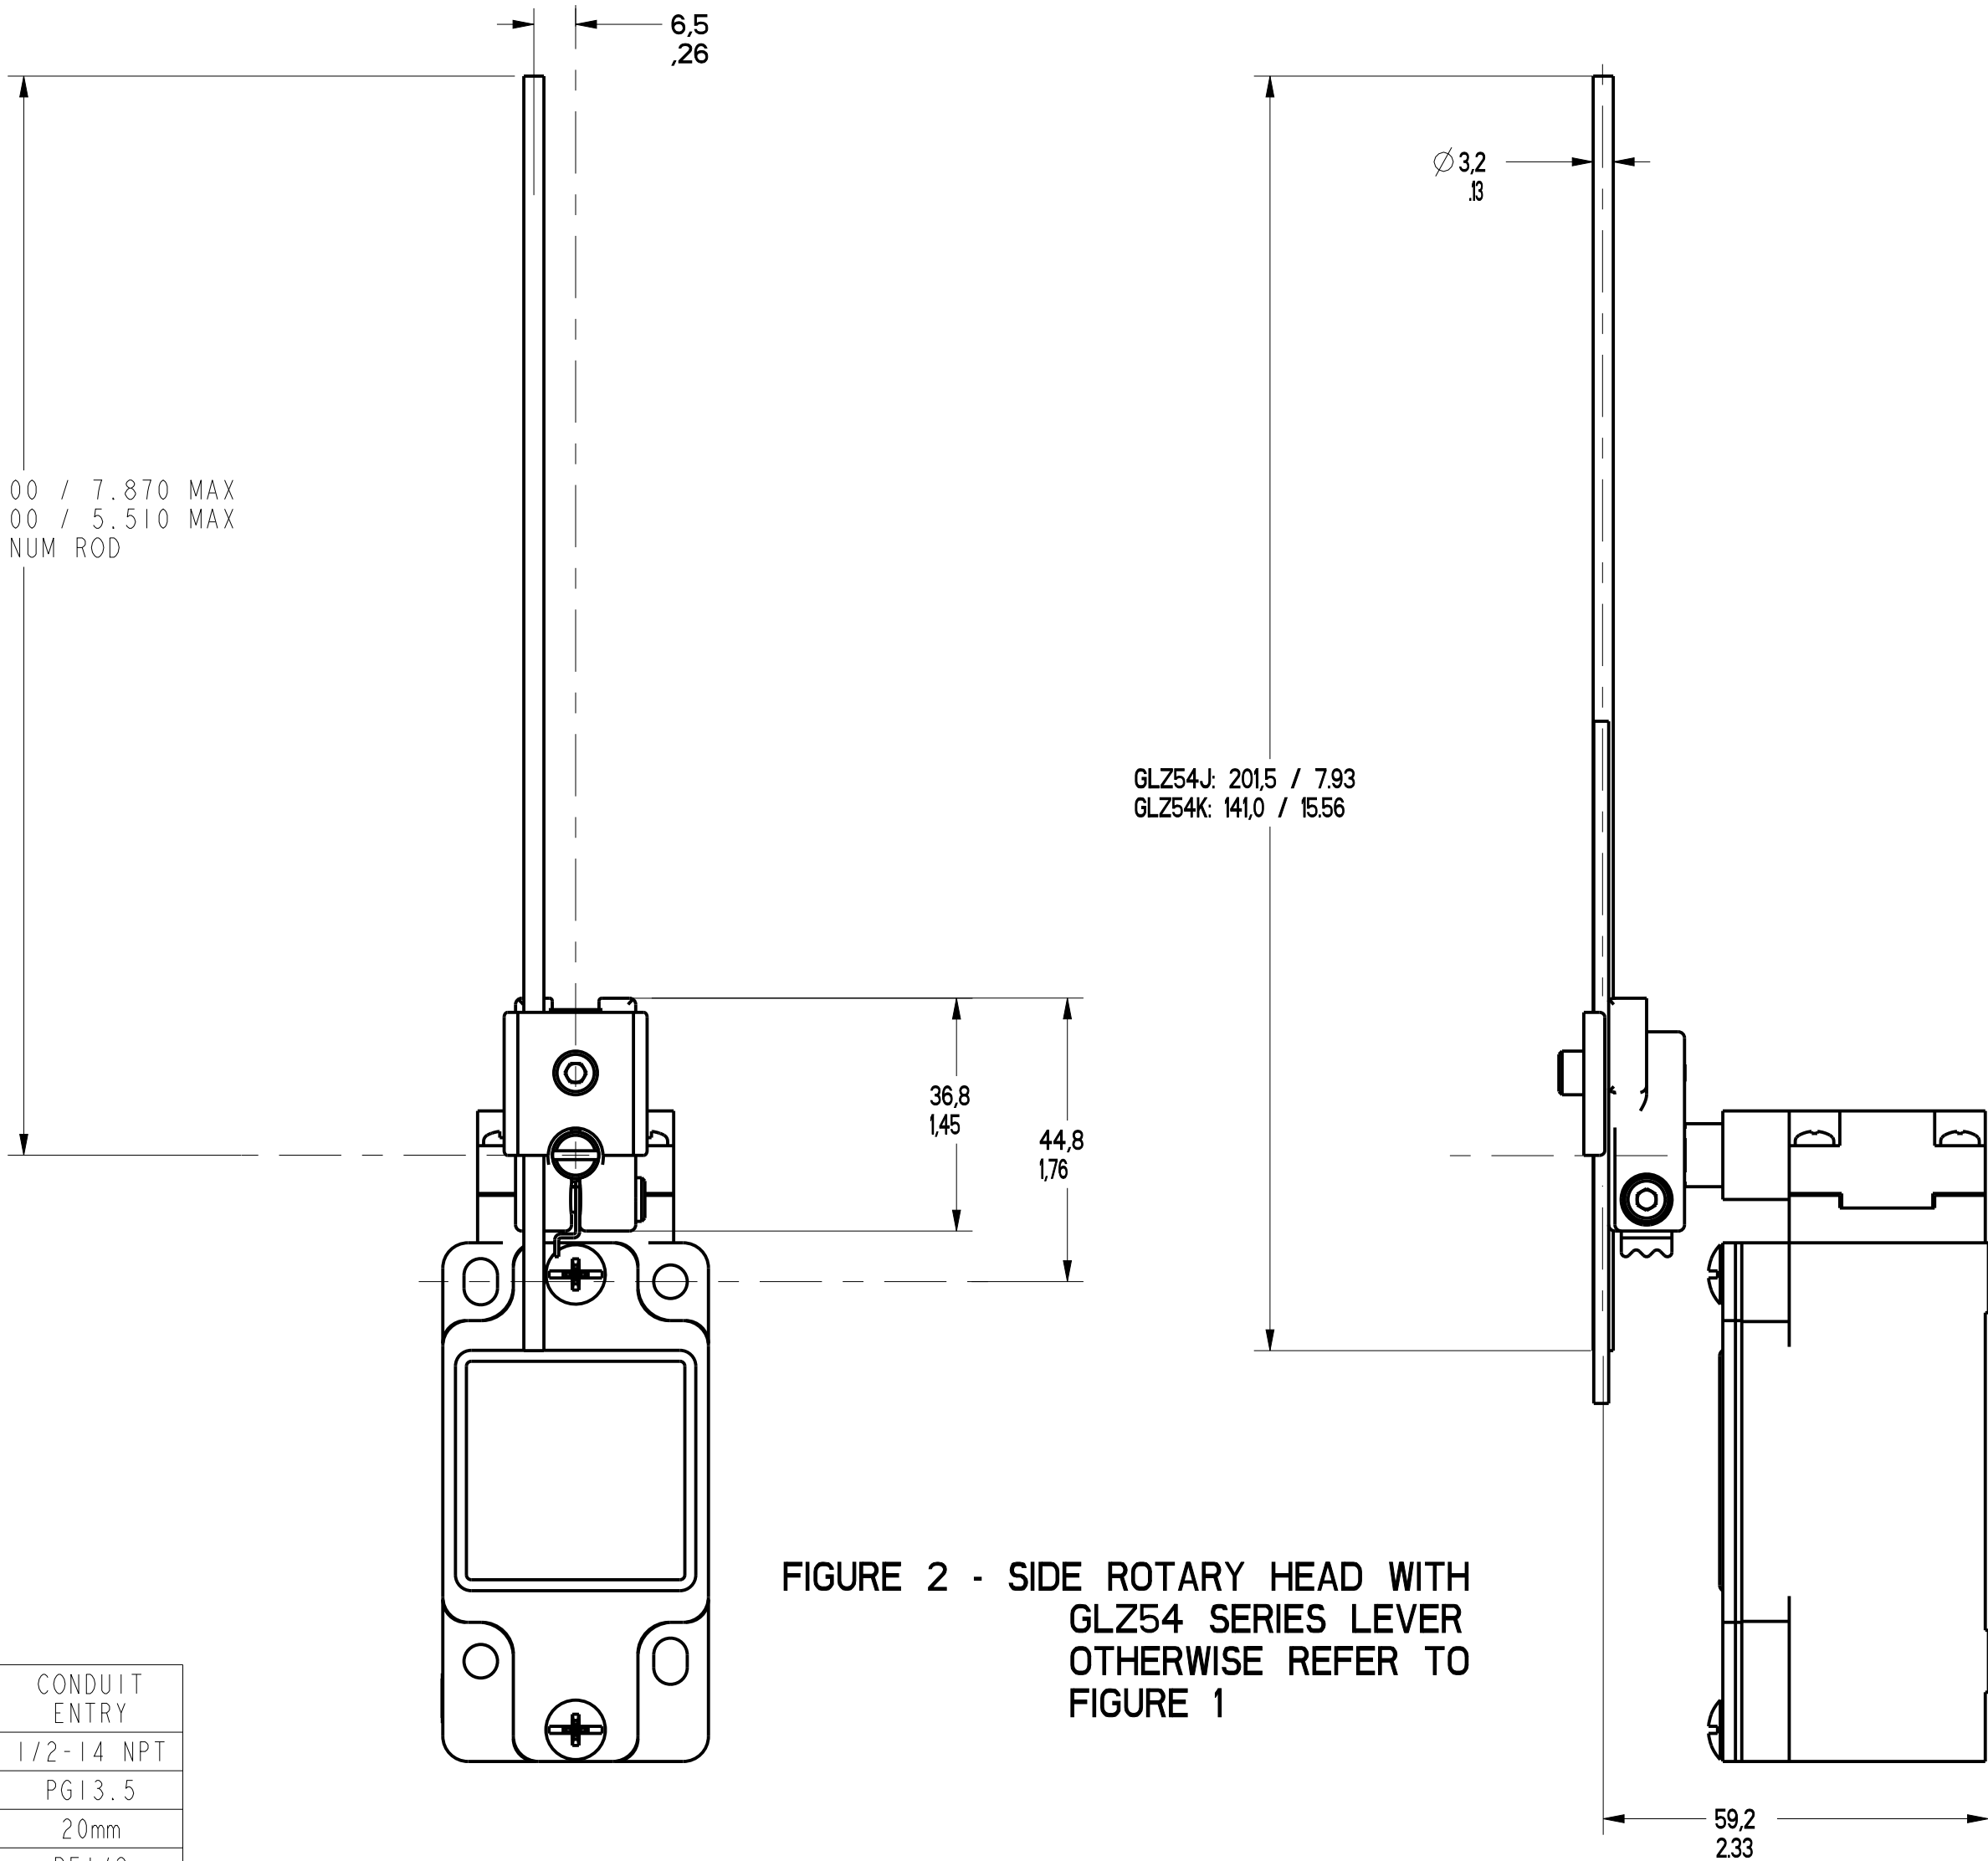


FIGURE 2 - SIDE ROTARY HEAD WITH GLZ54 SERIES LEVER OTHERWISE REFER TO FIGURE 1

FIGURE	CATALOG LISTING	CONDUIT ENTRY
1A	GL*A SERIES	1/2-14 NPT
1B	GL*B SERIES	PG13.5
1C	GL*C SERIES	20mm
1D	GL*D SERIES	PF1/2

ELECTRICAL RATING		5 8		GOLD PLATED CONTACTS
AC		DC		
A600 Ue	AC15 Ie	O300 Ue	DC13 Ie	
(VOLTS)	(AMPS)	(VOLTS)	(AMPS)	1V 10µA MIN 50V 100mA MAX
120	6	24	2.8	
240	3	125	.55	
380	1.9	250	.27	
480	1.5			
500	1.4			
600	1.2			

ENVIRONMENTAL RATING
IP67
NEMA/UL TYPES 1, 4, 12, 13

CATALOG LISTING	BODY DIMENSIONS, FIGURE	HEAD DIMENSIONS, FIGURE	HEAD ACTUATION, FIGURE
GLA***	I	N/A	N/A
GLF***	I	N/A	N/A
GLH***	I	N/A	N/A
GLA***	1A	N/A	N/A
GLB***	1B	N/A	N/A
GLC***	1C	N/A	N/A
GLD***	1D	N/A	N/A
GL***A1*	I	1	8
GL***A2*	I	3	9
GL***A4*	I	2	10
GL***A5*	I		8
GL***B	I	4	11
GL***C	I	5	13A, 13B
GL***D	I	6	14A, 14B
GL***E7A	I	7A	12
GL***E7B	I	7	12
GL***E7C	I	7E	15
GL***E7D	I	7B	12
GL***K8A	I	7C	15
GL***K8B	I	7D	15
GL***K8C	I	7	15

FIGURE 3 - SIDE ROTARY HEAD WITH GLZ52 SERIES LEVERS OTHERWISE REFER TO FIGURE 1

LEVER	ROLLER MATL	X DIM	Y DIM	Z DIM
GLZ52A	NYLON	19.1 .75	65.9 2.59	6.4 .25
GLZ52B	STEEL	19.1 .75	65.9 2.59	6.4 .25
GLZ52D	NYLON	38.1 1.5	65.9 2.59	6.4 .25
GLZ52E	NYLON	19.1 .75	79.37 3.125	33.07 1.300
GLZ52W	RUBBER	40.0 1.6	71.5 2.81	12.7 .5
GLZ52Y	RUBBER	50.0 1.97	68.8 2.71	10.0 .39

NOTES
1 - HEADS MAY BE INDEXED IN 90° INCREMENTS.
2 - LEVERS MAY BE KEYED TO THE SHAFT AT 90° INCREMENTS. THEY MAY ALSO BE ATTACHED, BUT NOT KEYED ANYWHERE ON THE SHAFT.
3 - FOR ADDITIONAL LEVERS SEE "M" DRAWING CHART GLZ5
4 - THE LEFT INDICATOR IS GREEN AND INDICATES "POWER ON" IT IS ON GLH SERIES PRODUCTS ONLY. THE RIGHT INDICATOR IS YELLOW AND INDICATES "OUTPUT STATUS" IT IS ON GLF AND GLH SERIES PRODUCTS ONLY.
5 - THE MAXIMUM VOLTAGE, V_e OF GLF AND GLH SERIES PRODUCTS IS THE MAXIMUM RATED VOLTAGE OF INDICATION LIGHTS
6 - FREE POSITION, OPERATE POINT, OVERTRAVEL AND PRETRAVEL ALL TO EN50041
7 - CAM TRAVEL FOR FIG 9 ONLY APPLIES WHEN LEVER IS ADJUSTED TO 38.1 / 1.50
8 - THE MAXIMUM VOLTAGE, V_e OF "06" AND "36" BASIC SWITCH CODE IS 300V (A300)
9 - TEMPERATURE RANGE
(ALL PRODUCTS EXCEPT W/SIDE ROTARY OPERATING HEAD)
OPERATING: -25°C TO +85°C / -13°F TO +185°F
STORAGE: -40°C TO +85°C / -40°F TO +185°F
(PRODUCTS W/SIDE ROTARY OPERATING HEAD)
OPERATING: -40°C TO +85°C / -40°F TO +185°F
STORAGE: -40°C TO +85°C / -40°F TO +185°F

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		CATALOG LISTING	
FED. MFG. CODE 91929		GL SERIES CHART 1	
MICRO SWITCH a Honeywell Division		SWITCH, ENCLOSED	

THIRD ANGLE PROJECTION			
SCALE 1:1			
DO NOT SCALE PRINT			
TOLERANCES APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE 1			
NO PLACES ONE PLACE TWO PLACES THREE PLACES ANGLES	SI METRIC X X.X X.XX ±.2	TOL mm 0.0154 0.151, .006 ±.2	US CUSTOMARY INCHES X X.X X.XX ±.005 ±.01 ±.015, .005
DESIGN UNITS			
WEIGHT			

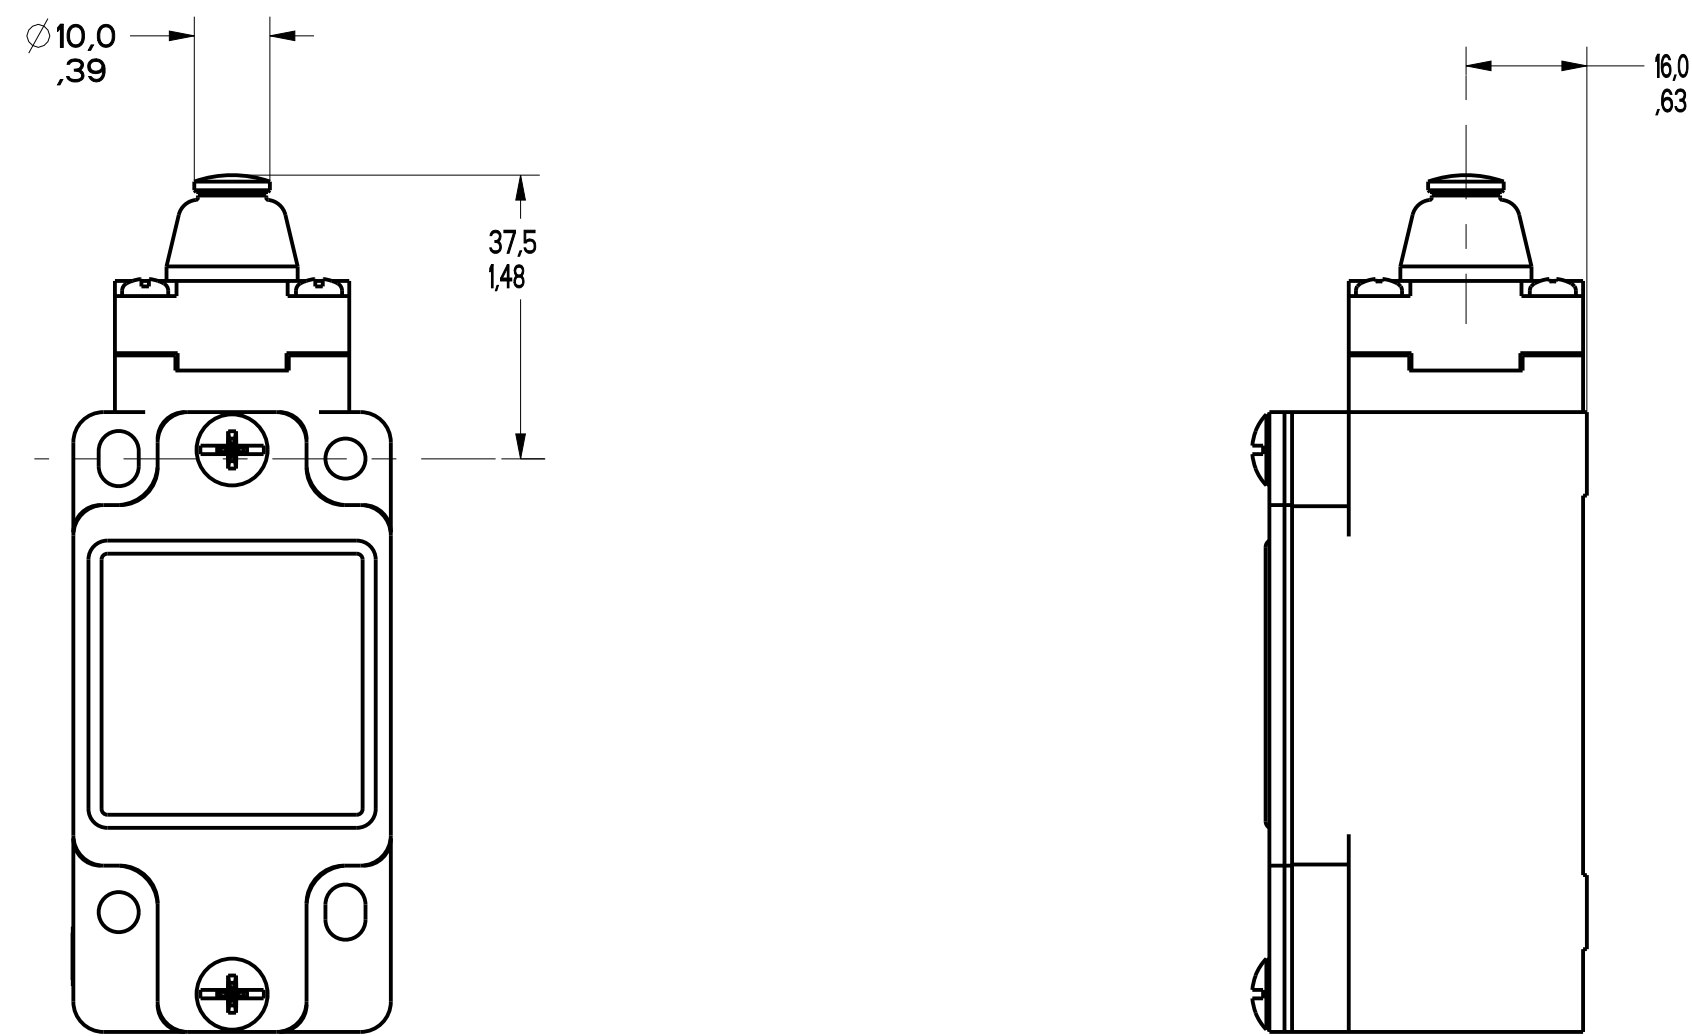


FIGURE 4 - TOP PIN PLUNGER HEAD
OTHERWISE REFER TO
FIGURE 1

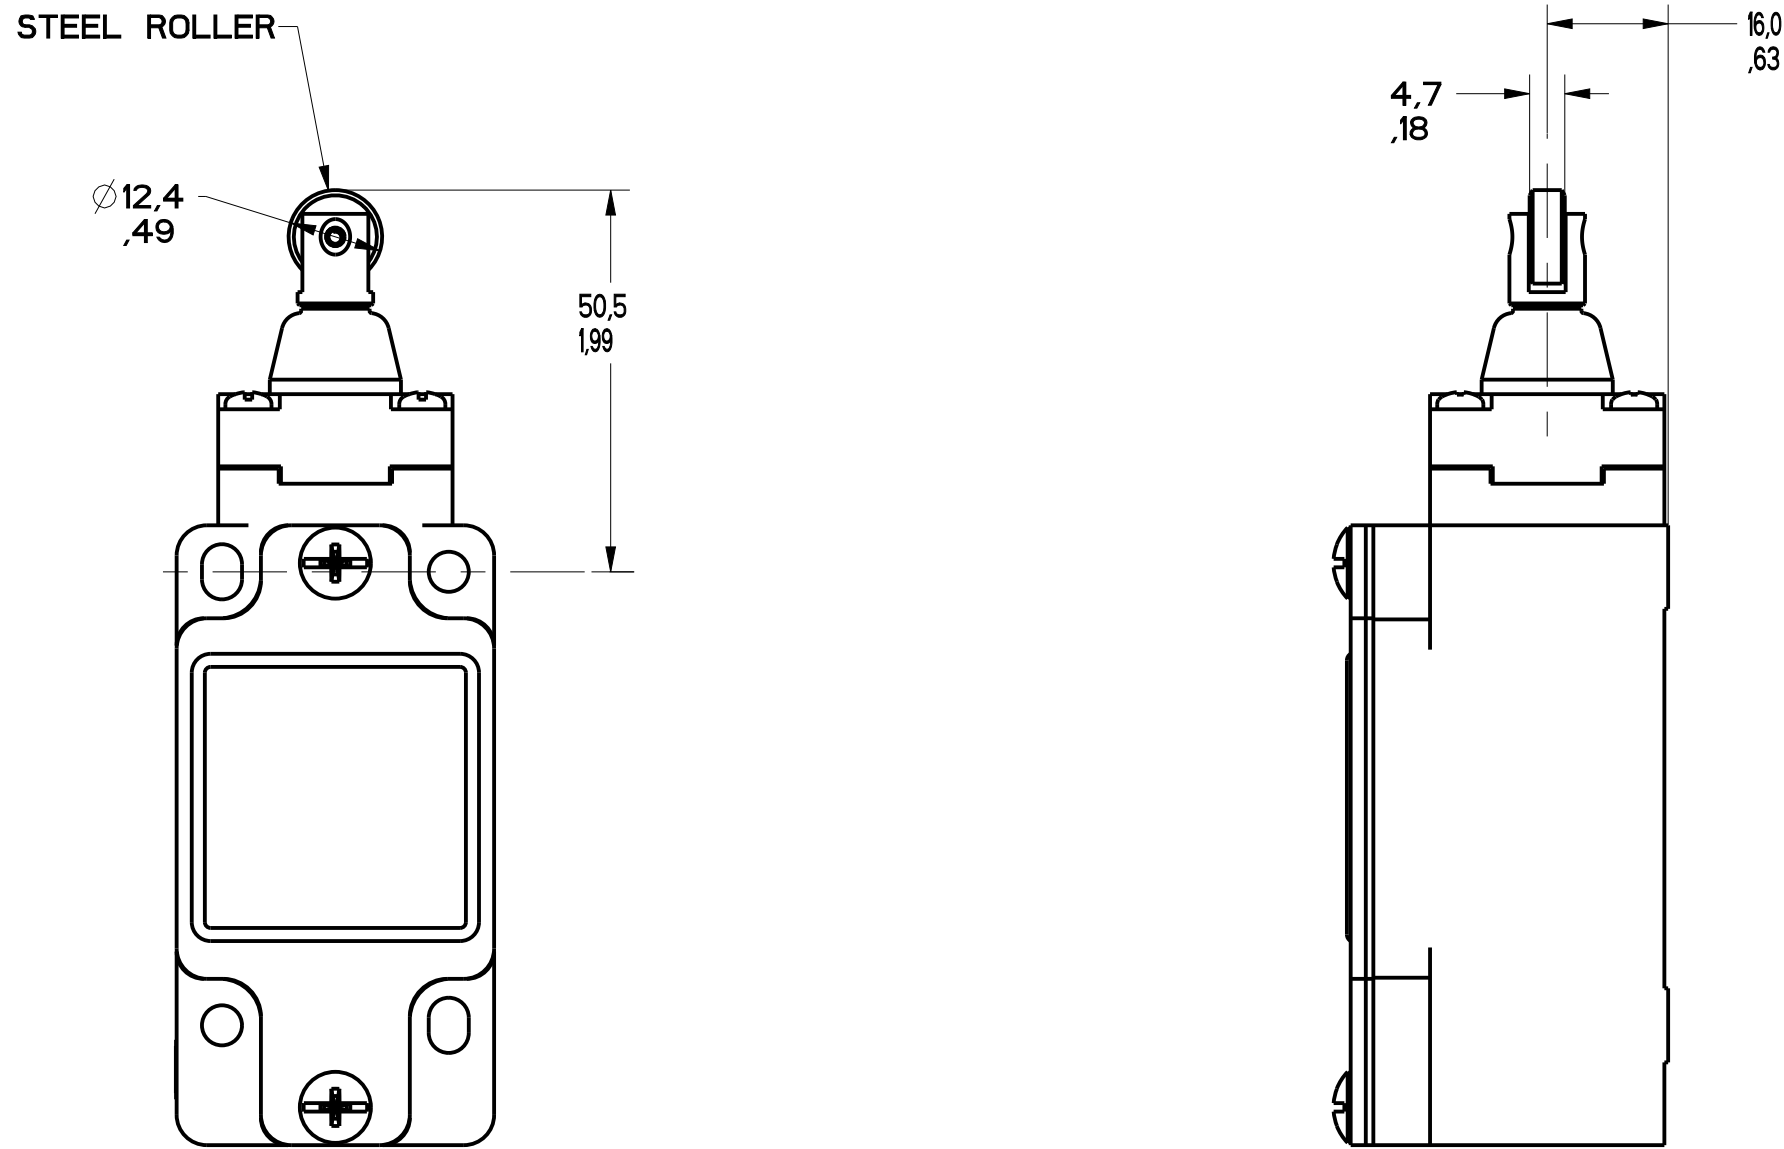


FIGURE 5 - TOP ROLLER PLUNGER HEAD
OTHERWISE REFER TO
FIGURE 1

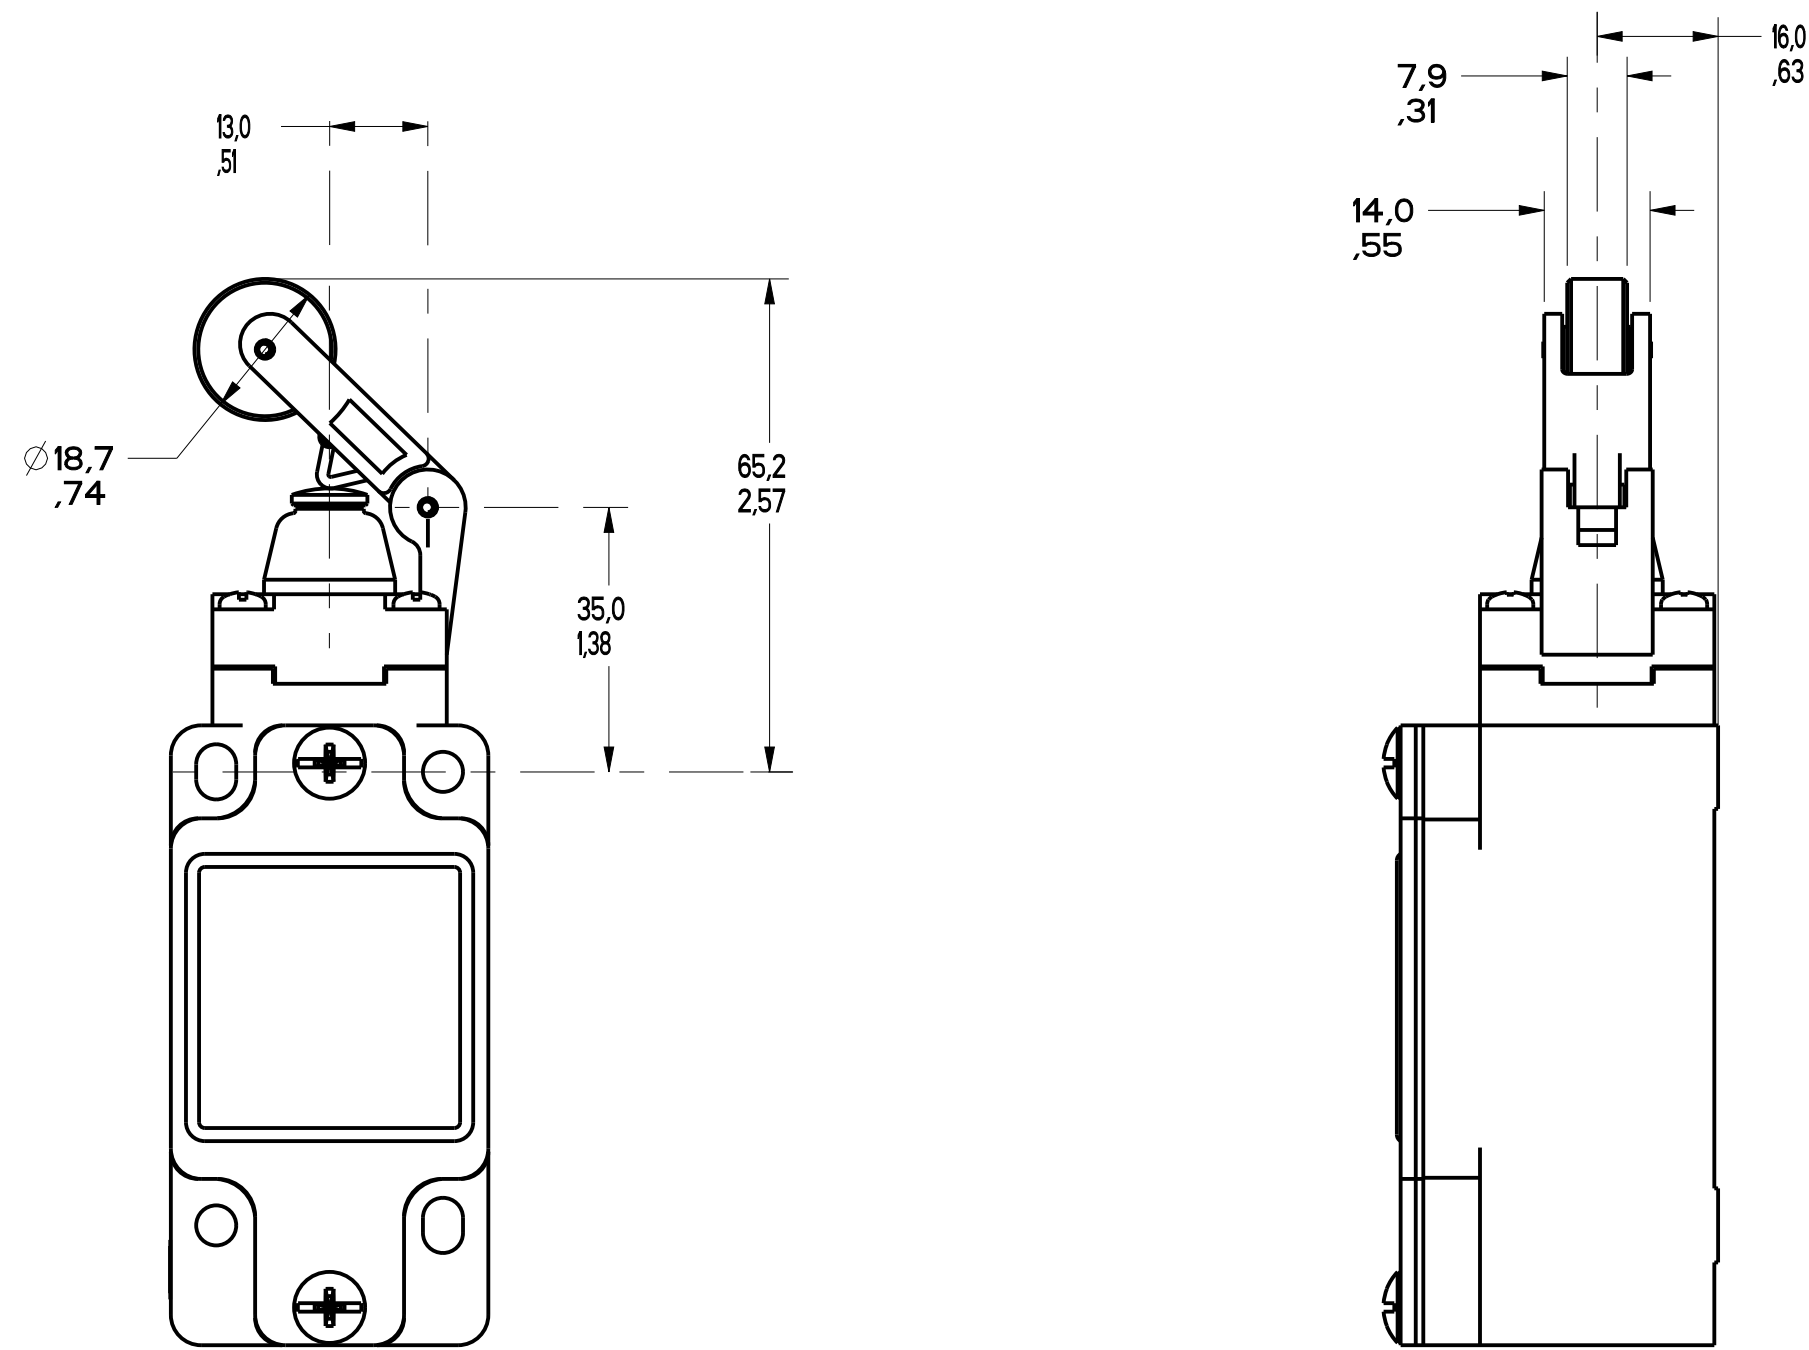


FIGURE 6 - TOP LEVER HEAD,
OTHERWISE REFER TO
FIGURE 1

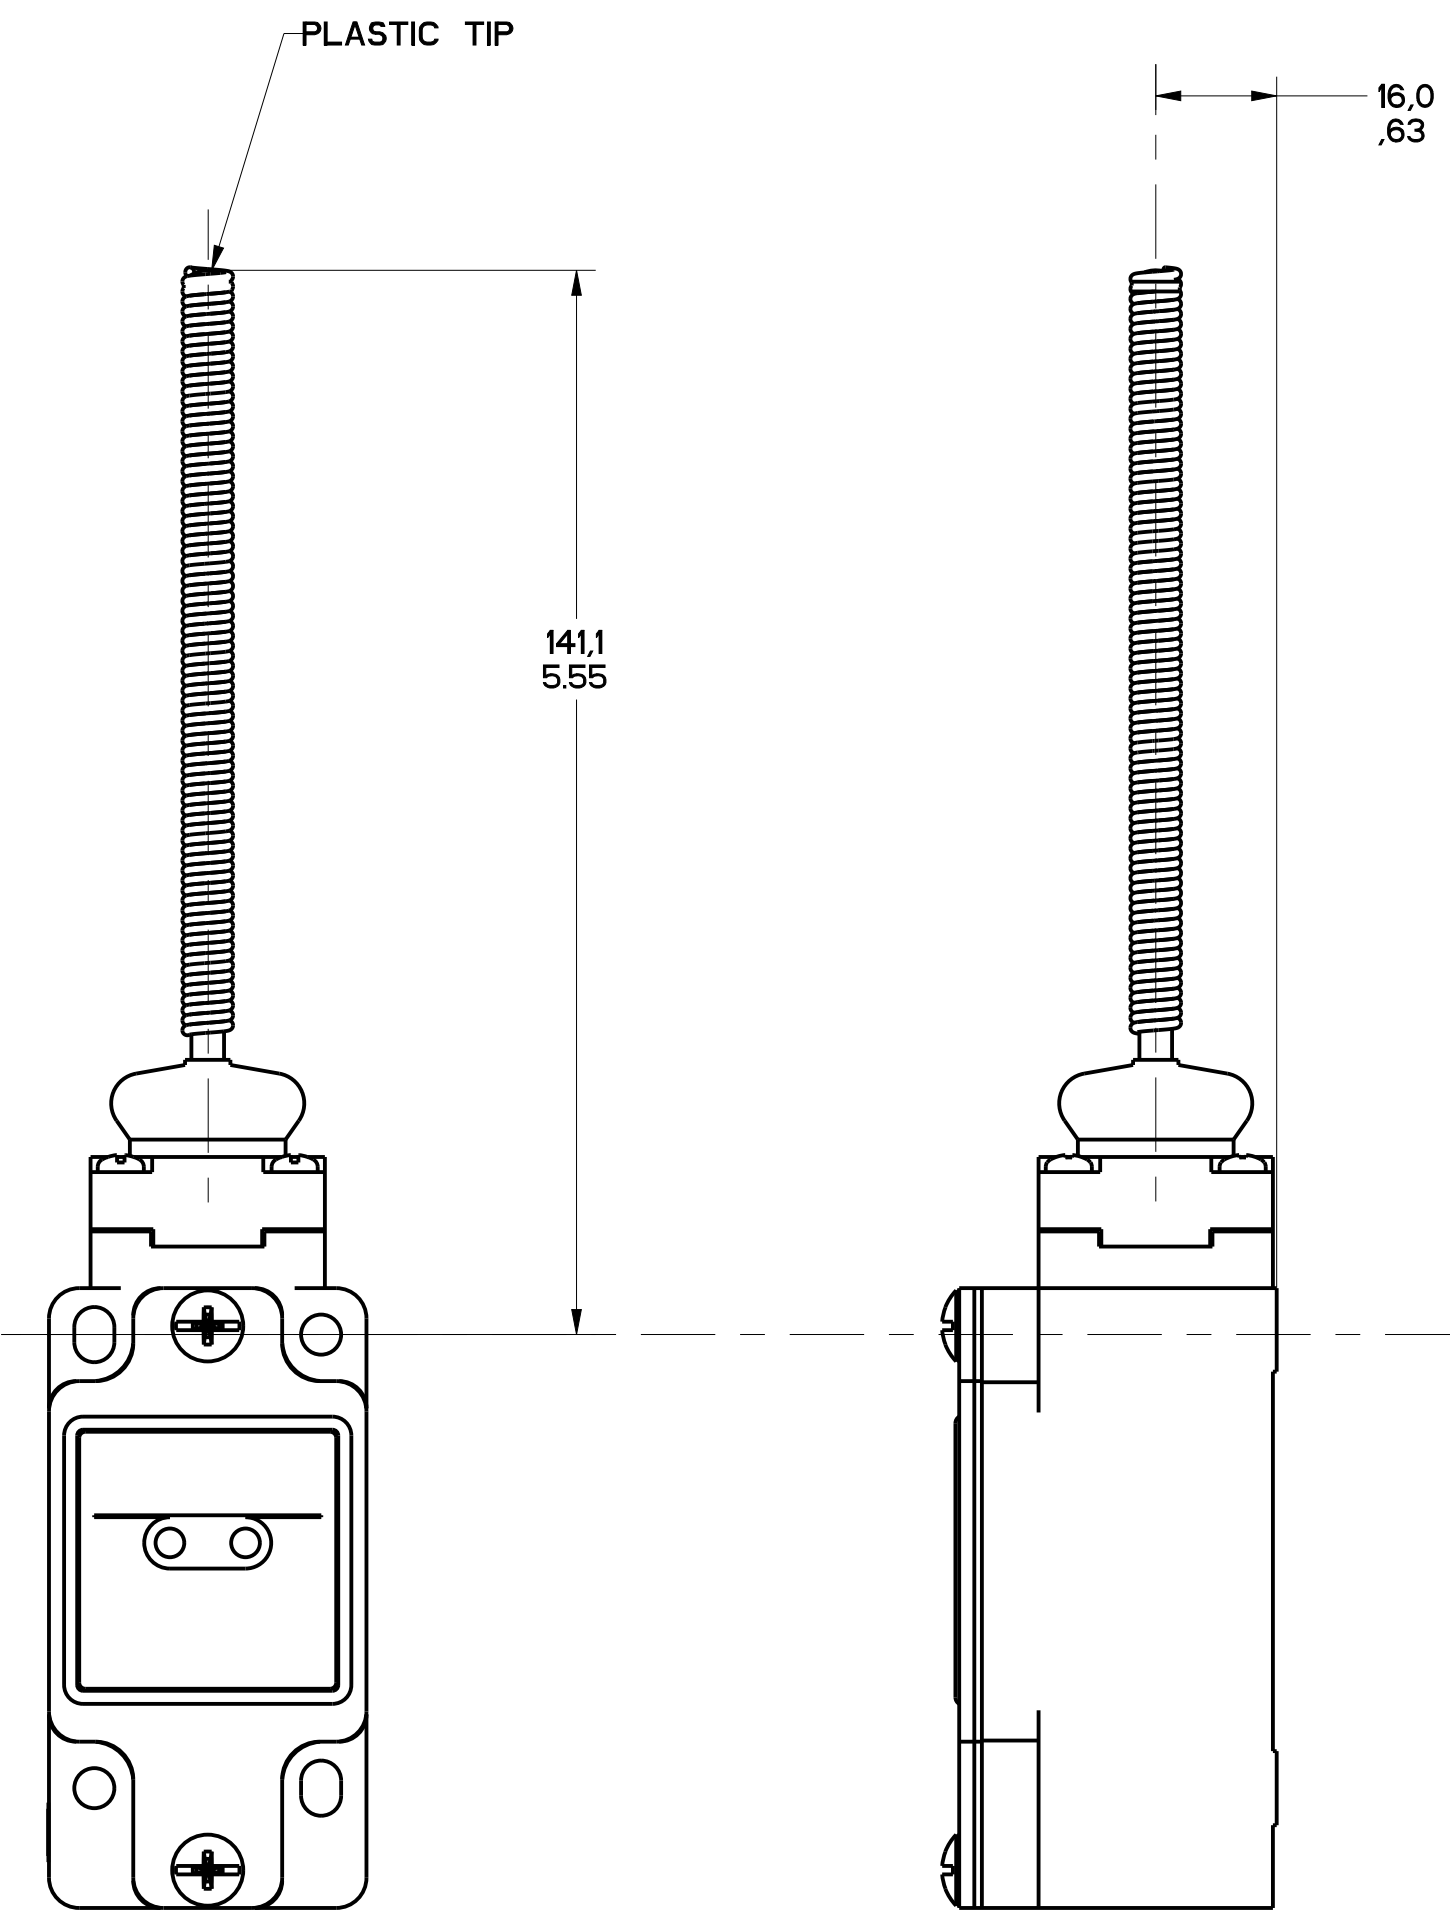


FIGURE 7 - WOBBLE HEAD, AND CAT WISKER HEAD
COIL ACTUATOR,
OTHERWISE REFER TO
FIGURE 1

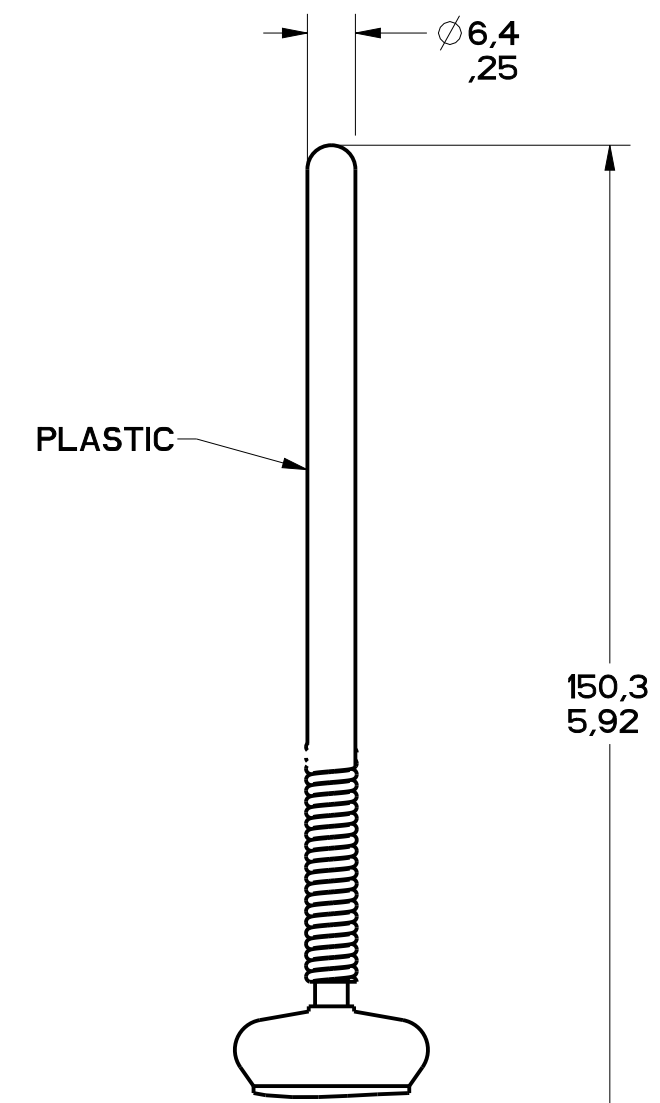


FIGURE 7A -
WOBBLE HEAD,
PLASTIC ACTUATOR,
OTHERWISE SAME AS FIGURE 7

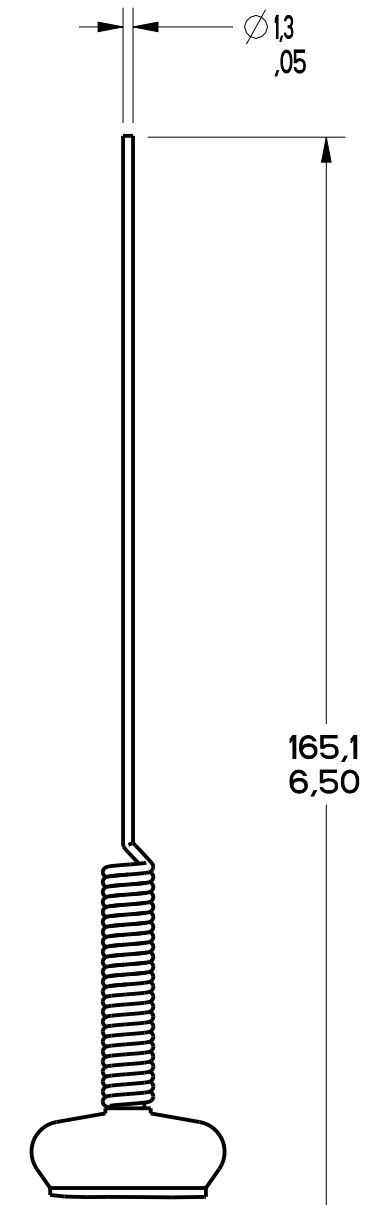


FIGURE 7B -
WOBBLE HEAD
STAINLESS STEEL SPRING
ACTUATOR, OTHERWISE
SAME AS FIGURE 7

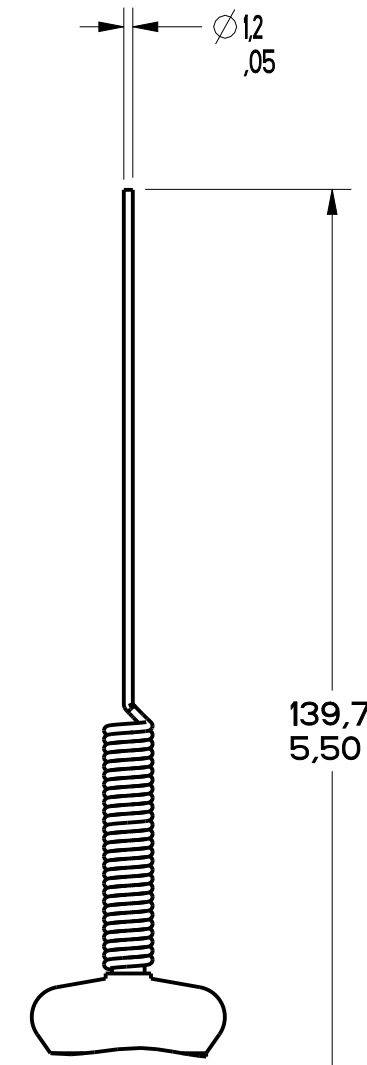


FIGURE 7C -
CAT WHISKER ACTUATOR,
STAINLESS STEEL SPRING,
OTHERWISE SAME AS FIGURE 7

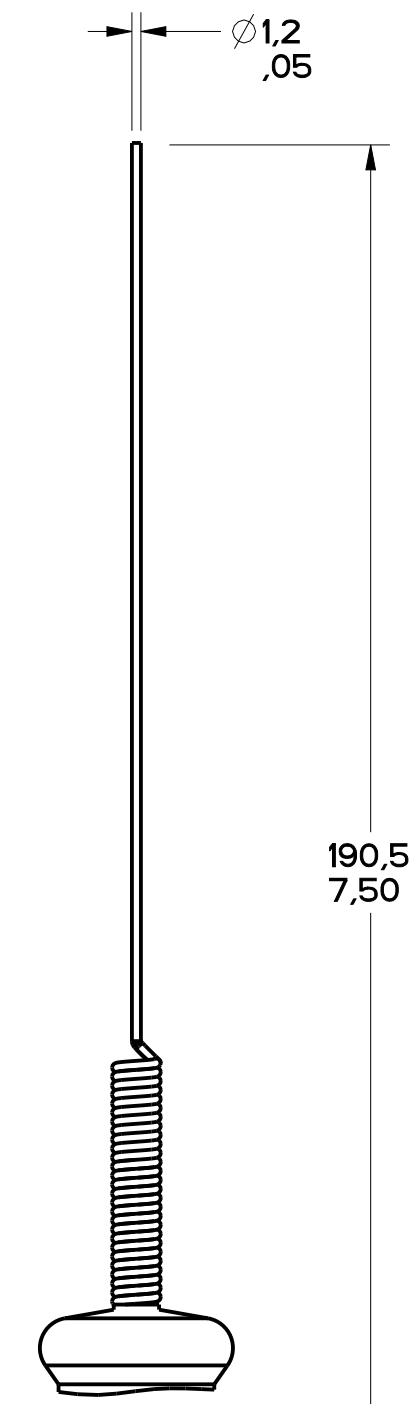


FIGURE 7D -
CAT WHISKER ACTUATOR,
STAINLESS STEEL
SPRING, OTHERWISE
SAME AS FIGURE 7

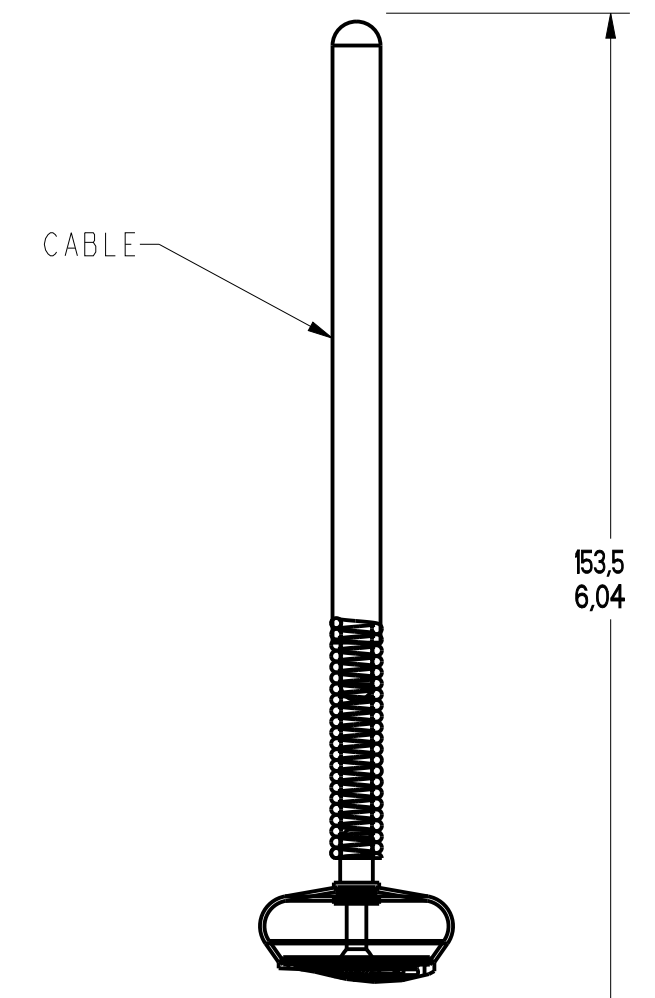


FIGURE 7E -
CABLE WOBBLE
ACTUATOR, OTHERWISE
SAME AS FIGURE 7

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.				<table><tr><td>SW</td><td>TOL</td><td>SW</td><td>TOL</td></tr><tr><td>mm</td><td>mm/16</td><td>mm</td><td>mm/16</td></tr><tr><td>1</td><td>0.04</td><td>2</td><td>0.04</td></tr><tr><td>3</td><td>0.04</td><td>3</td><td>0.04</td></tr><tr><td>4</td><td>0.04</td><td>4</td><td>0.04</td></tr></table>		SW	TOL	SW	TOL	mm	mm/16	mm	mm/16	1	0.04	2	0.04	3	0.04	3	0.04	4	0.04	4	0.04
SW	TOL	SW	TOL																						
mm	mm/16	mm	mm/16																						
1	0.04	2	0.04																						
3	0.04	3	0.04																						
4	0.04	4	0.04																						
FED. MFG. CODE 91929		CATALOG LISTING		<table><tr><td>NO PLACES</td><td>1</td><td>1.04</td><td>1.04</td></tr><tr><td>ONE PLACE</td><td>X</td><td>0.41</td><td>0.41</td></tr><tr><td>TWO PLACES</td><td>X</td><td>0.41</td><td>0.41</td></tr><tr><td>THREE PLACES</td><td>X</td><td>0.41</td><td>0.41</td></tr><tr><td>FOUR PLACES</td><td>X</td><td>0.41</td><td>0.41</td></tr></table>		NO PLACES	1	1.04	1.04	ONE PLACE	X	0.41	0.41	TWO PLACES	X	0.41	0.41	THREE PLACES	X	0.41	0.41	FOUR PLACES	X	0.41	0.41
NO PLACES	1	1.04	1.04																						
ONE PLACE	X	0.41	0.41																						
TWO PLACES	X	0.41	0.41																						
THREE PLACES	X	0.41	0.41																						
FOUR PLACES	X	0.41	0.41																						
 MICRO SWITCH a Honeywell Division		SWITCH, ENCLOSED		GL SERIES CHART 1																					
		SI METRIC		US CUSTOMARY																					
		DESIGN UNITS		☒																					
		WEIGHT		☐																					

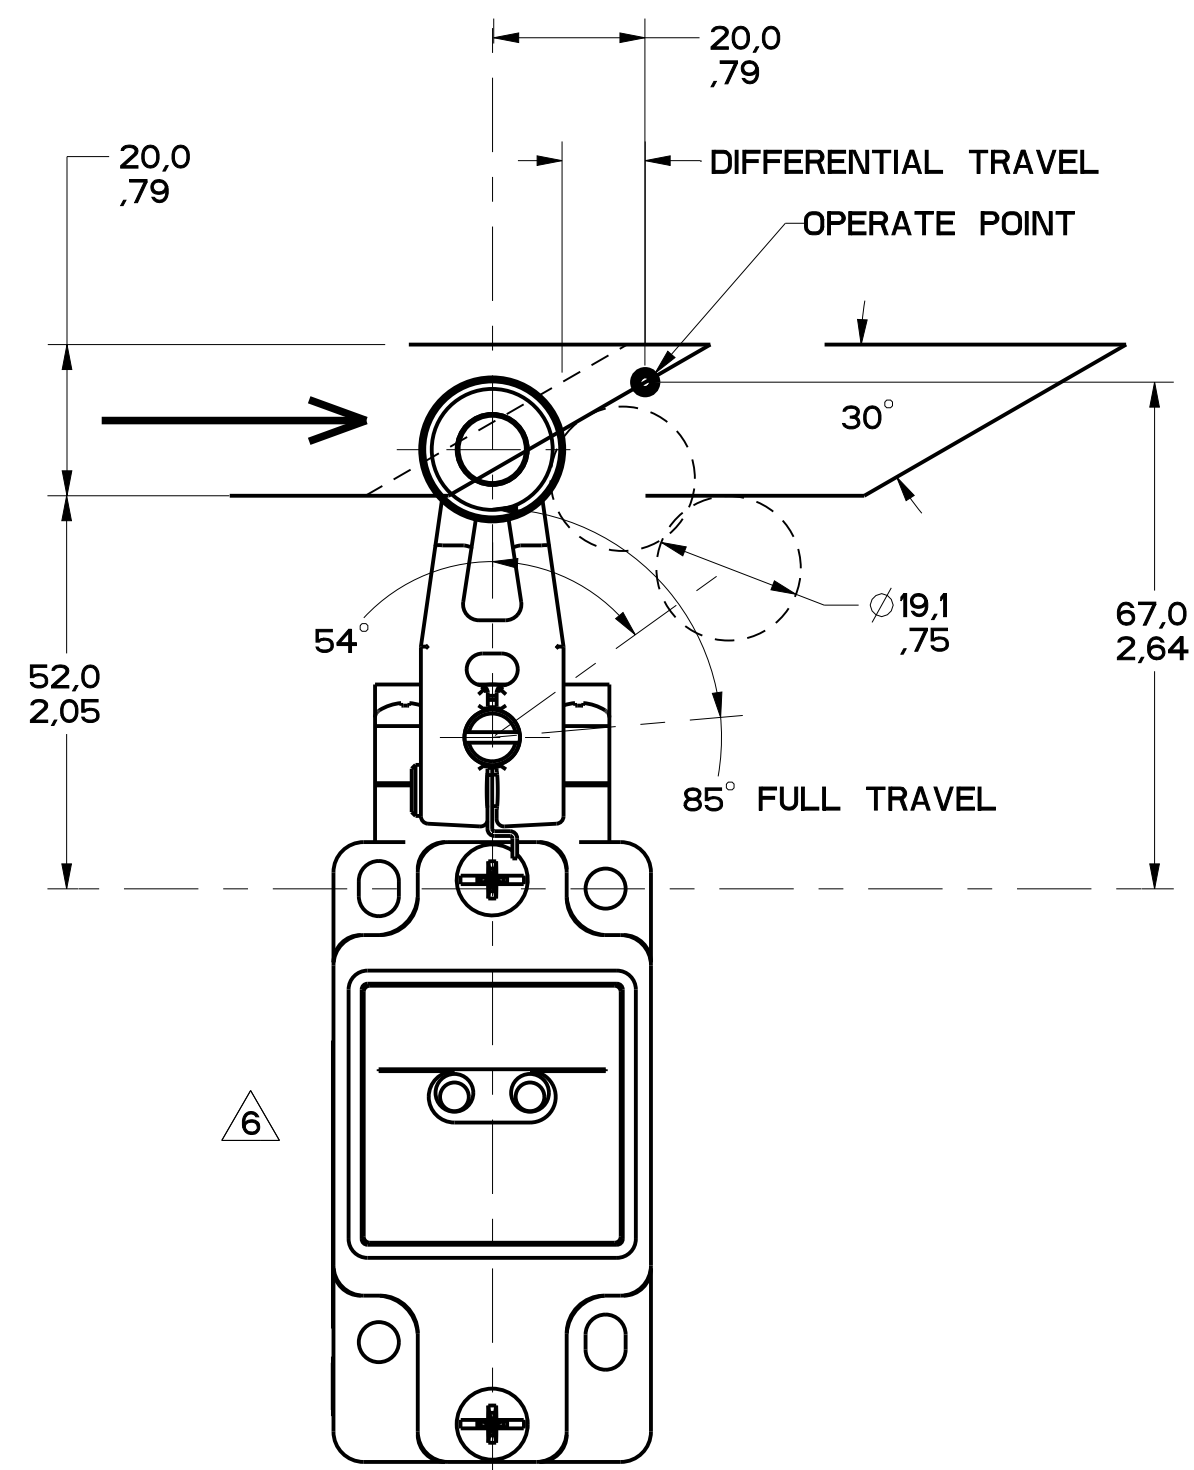


FIGURE 8

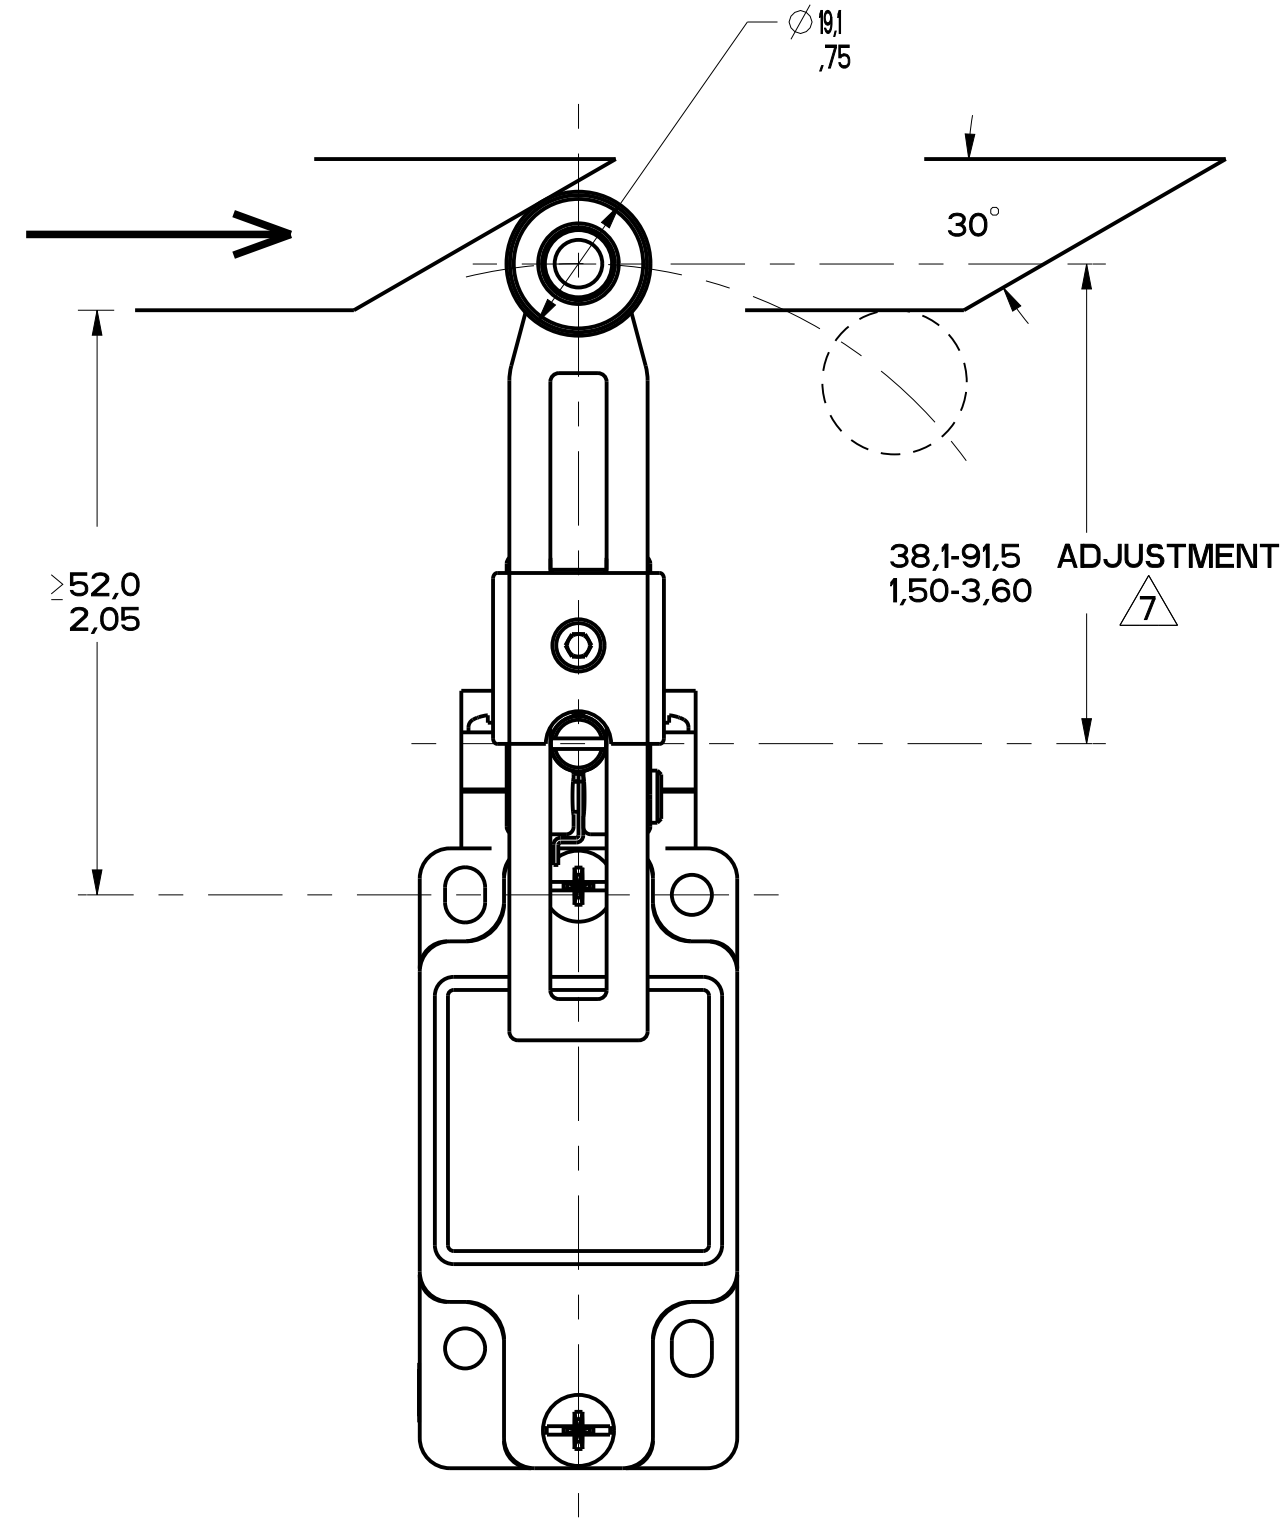


FIGURE 9

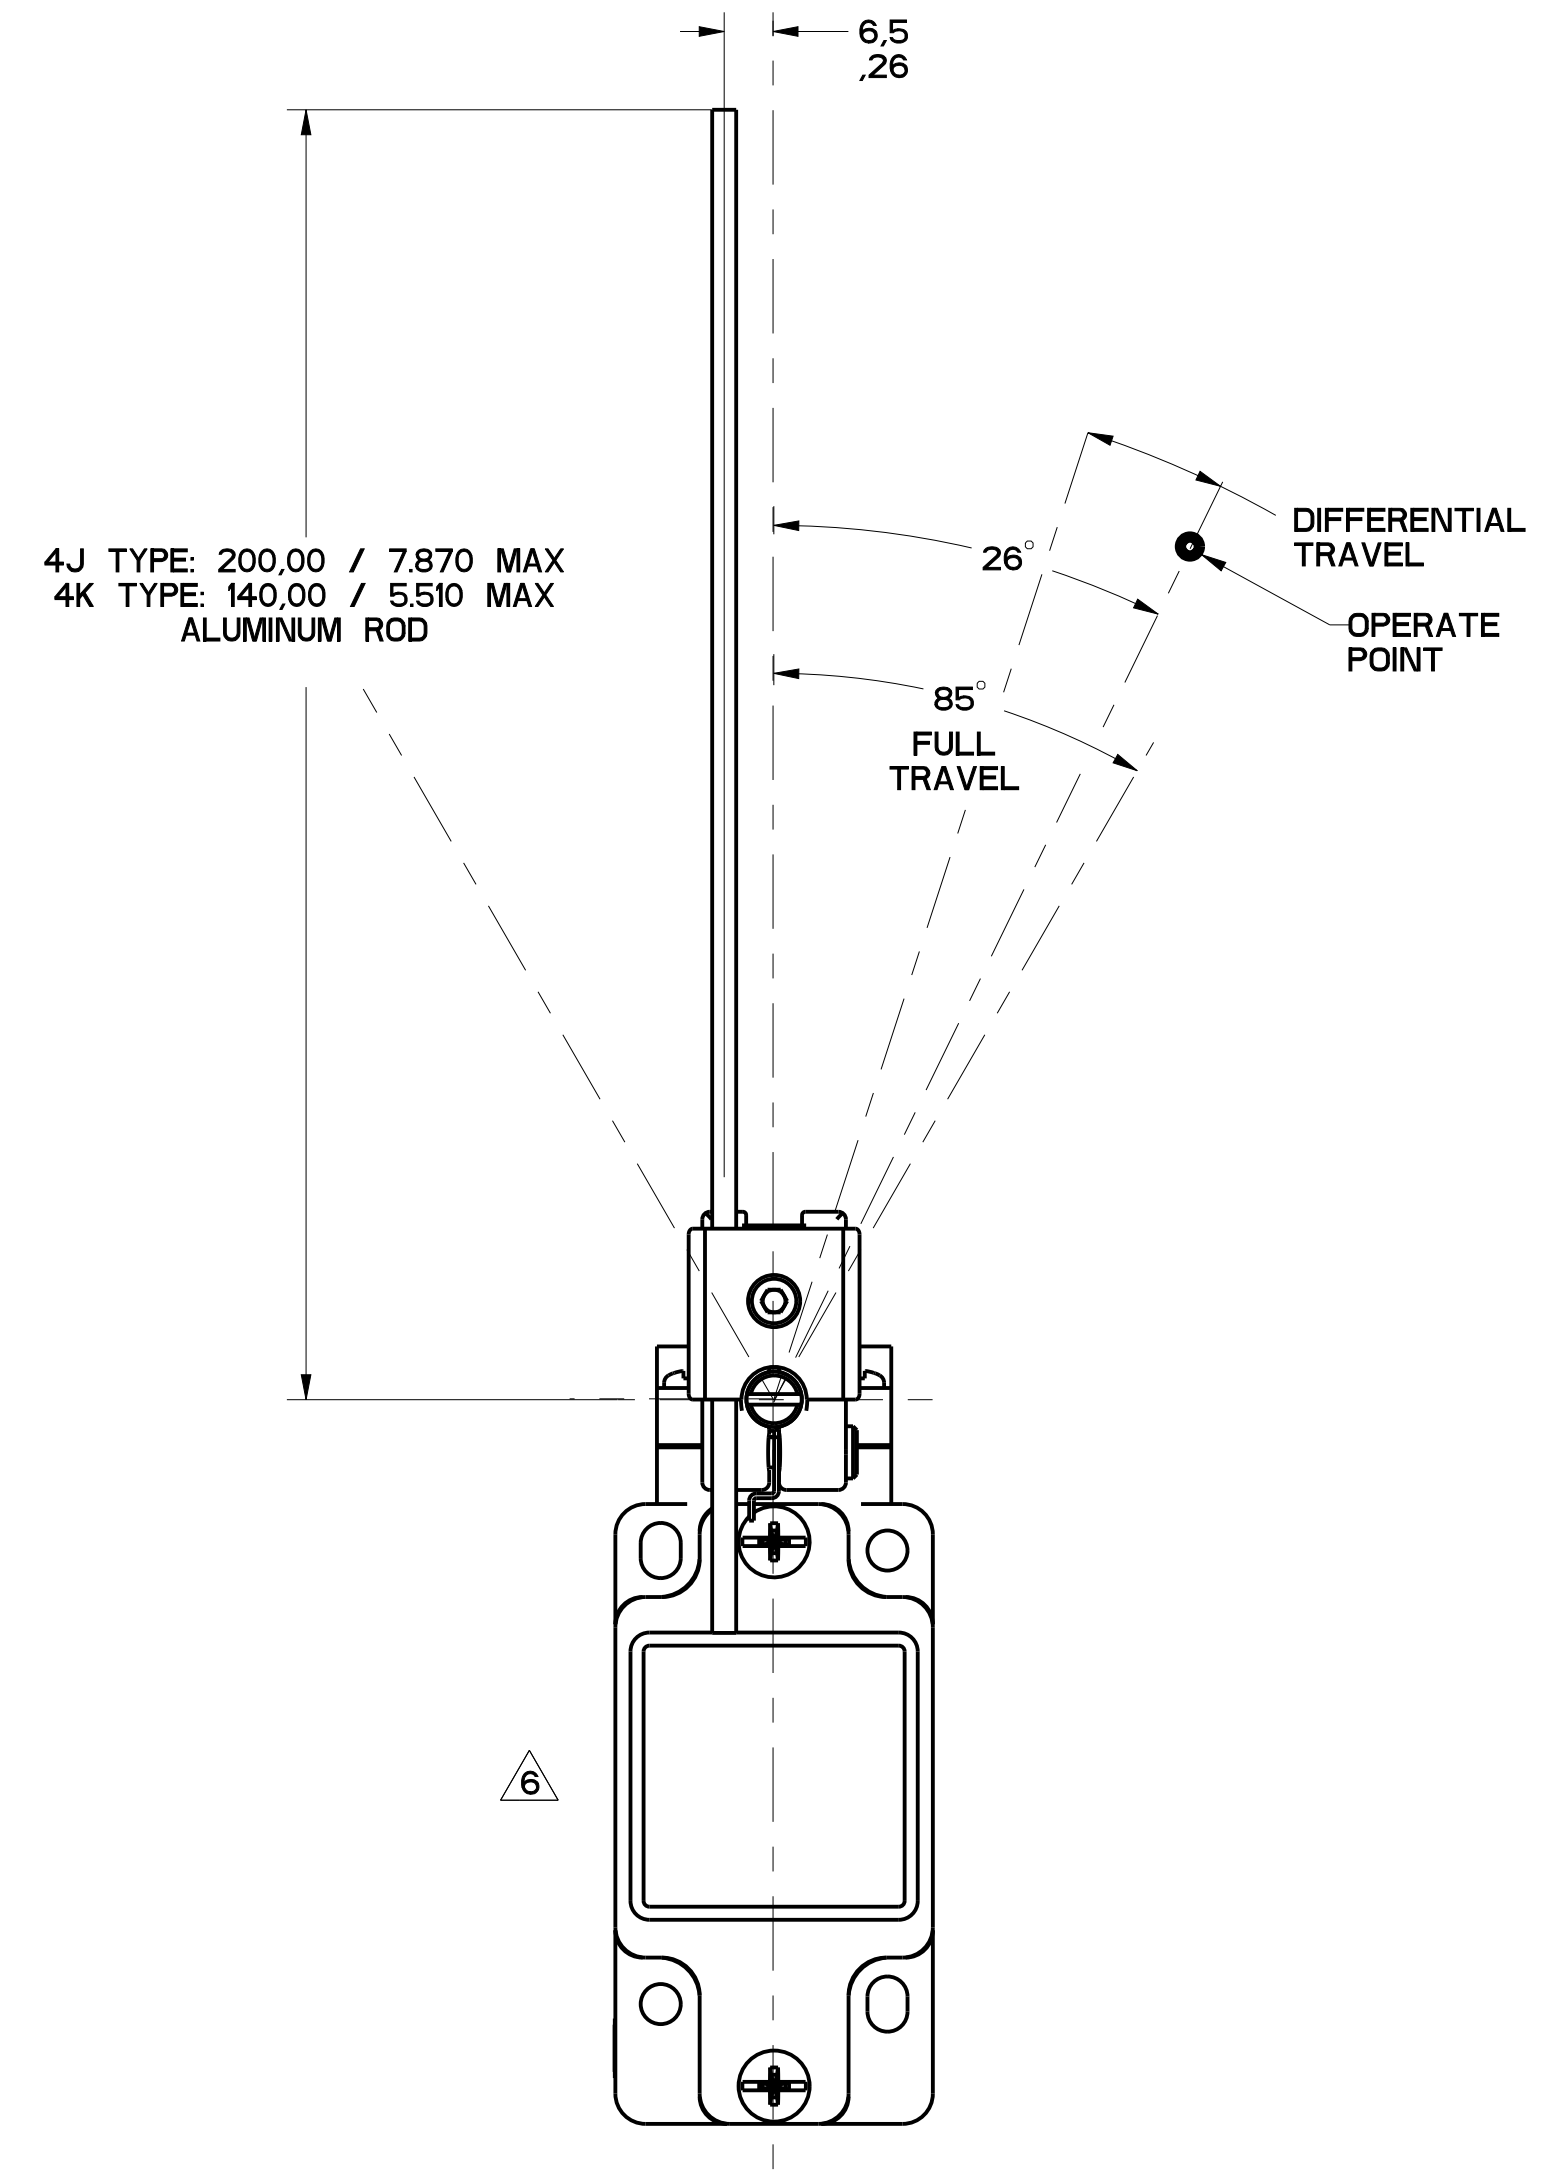


FIGURE 10

[illegible]

PTC/CAD	DRAWN	S A V 27MAR96	CHECK	DVM	07AUG06	CHECK	CMH	05OCT10	REVISIONS
									F 0000401
									GLH 2 JUN03
									G 0002986
									RS 20 JAN04
									H 0023759
									RFP 07AUG06
									J 0037216
									BS 09FEB08
									K 0034629
									SS 12SEP08
									L 0048605
									YKS 09FEB09
									M 0070059
									DN 05OCT10
									N 0049570
									SSH 12OCT12

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

FED. MFG. CODE 91929
MICRO SWITCH
a Honeywell Division

SWITCH, ENCLOSED

GL SERIES CHART 1

THIRD ANGLE PROJECTION			
			
SCALE	1 : 1		
DO NOT SCALE PRINT			
TOLERANCES			
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE: $\pm$			
NO PLACES	DIM X	TOL mm	DIM X
ONE PLACE	X .1	0.1 / 0.016	1.6
TWO PLACES	X .01	0.01 / 0.001	0.016
THREE PLACES	X .001	0.001 / 0.0001	0.0016
ANGLES	$\pm 20''$		
SI METRIC		US CUSTOMARY	
DESIGN UNITS			
WEIGHT			

FIGURES 8, 9, 10 SIDE ROTARY HEAD, ANGULAR ACTUATION							
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS ■ - CONTACT CLOSED, □ - CONTACT OPEN, ▨ - CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING TORQUE $\frac{N \cdot m}{LB \cdot IN}$	MAXIMUM DISCONNECT TORQUE $\frac{N \cdot m}{LB \cdot IN}$	MAX. OPERATE DEGREE/S	MIN. OPERATE DEGREE/S	MAX. OPERATE FREQUENCY OPS/MIN
GL**01A GL**07A	SNAP - ACTION CONTACTS SINGLE POLE 	 21-22 26° 55**° 85° 13-14 12° DIFFERENTIAL TRAVEL	$\frac{.330}{2.9}$	$\frac{.385}{3.4}$	1290	13	250
GL**03A GL**33A	SLOW ACTING BREAK BEFORE MAKE 	 21-22 26**° 85° 13-14 38°	$\frac{.330}{2.9}$	$\frac{.385}{3.4}$	1290	13	250
GL**04A GL**34A	SLOW ACTING MAKE BEFORE BREAK 	 21-22 38**° 85° 13-14 26°	$\frac{.330}{2.9}$	$\frac{.400}{3.5}$	1290	13	250
GL**05A GL**35A	SLOW ACTING 	 13-14 38° 85° 23-24	$\frac{.330}{2.9}$	$\frac{.385}{3.4}$	1290	13	250
GL**06A GL**36A	SLOW ACTING 	 11-12 26**° 85° 21-22	$\frac{.330}{2.9}$	$\frac{.385}{3.4}$	1290	13	250
GL**20A GL**22A GL**24A GL**32A	SNAP ACTION CONTACTS DOUBLE POLE 	 11-12, 21-22 26° 55**° 85° 13-14, 23-24 12° DIFFERENTIAL TRAVEL	$\frac{.330}{2.9}$	$\frac{.385}{3.4}$	1290	13	250
GL**21A GL**25A GL**28A GL**31A	STEP 1 STEP 2 SNAP ACTION CONTACTS DOUBLE POLE SEQUENTIAL 	 11-12 27 42 13-14 21-22 23-24 8 DIFFERENTIAL TRAVEL 8 DIFFERENTIAL TRAVEL	$\frac{.330}{2.9}$	N/A	1290	13	250

SIDE ROTARY HEAD, CAM ACTUATION PER EN50041, FIGURES 8 AND 9							
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS ■ - CONTACT CLOSED, □ - CONTACT OPEN, ▨ - CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1 DIMENSIONS IN mm	MAXIMUM OPERATING FORCE $\frac{N}{LB}$	MAXIMUM DISCONNECT FORCE $\frac{N}{LB}$	MAX. OPERATE VEL $\frac{m/s}{in/s}$	MIN. OPERATE VEL $\frac{mm/s}{in/s}$	MAX. OPERATE FREQUENCY OPS/MIN
GL**01A GL**07A	SNAP - ACTION CONTACTS SINGLE POLE 	 21-22 0 20 56** 13-14 12 DIFFERENTIAL TRAVEL	$\frac{9.7}{2.2}$	$\frac{11.4}{2.6}$	$\frac{.85}{33.5}$	$\frac{8.5}{.33}$	250
GL**03A GL**33A	SLOW ACTING BREAK BEFORE MAKE 	 21-22 0 20** 13-14 32	$\frac{9.7}{2.2}$	$\frac{11.4}{2.6}$	$\frac{.85}{33.5}$	$\frac{8.5}{.33}$	250
GL**04A GL**34A	SLOW ACTING MAKE BEFORE BREAK 	 21-22 0 32 13-14 20	$\frac{9.7}{2.2}$	$\frac{11.4}{2.6}$	$\frac{.85}{33.5}$	$\frac{8.5}{.33}$	250
GL**05A GL**35A	SLOW ACTING 	 13-14 0 32° 85° 23-24	$\frac{9.7}{2.2}$	$\frac{11.4}{2.6}$	$\frac{.85}{33.5}$	$\frac{8.5}{.33}$	250
GL**06A GL**36A	SLOW ACTING 	 11-12 0 20** 21-22	$\frac{9.7}{2.2}$	$\frac{11.4}{2.6}$	$\frac{.85}{33.5}$	$\frac{8.5}{.33}$	250
GL**20A GL**22A GL**24A GL**32A	SNAP ACTION CONTACTS DOUBLE POLE 	 11-12, 21-22 0 20 56** 13-14, 23-24 12 DIFFERENTIAL TRAVEL	$\frac{9.7}{2.2}$	$\frac{11.8}{2.7}$	$\frac{.85}{33.5}$	$\frac{8.5}{.33}$	250
GL**21A GL**25A GL**28A GL**31A	STEP 1 STEP 2 SNAP ACTION CONTACTS DOUBLE POLE SEQUENTIAL 	 11-12 0 20 38.5 13-14 21-22 23-24 8.5 DIFFERENTIAL TRAVEL 7 DIFFERENTIAL TRAVEL	$\frac{9.7}{2.2}$	N/A	$\frac{.85}{33.5}$	$\frac{8.5}{.33}$	250
GL**26J GL**27J GL**29J GL**30J	CCW CW SNAP ACTION CONTACTS DOUBLE POLE CENTER NEUTRAL 	 11-12 0 16 13-14 21-22 23-24 8 DIFFERENTIAL TRAVEL 8 DIFFERENTIAL TRAVEL	$\frac{9.7}{2.2}$	N/A	$\frac{.85}{33.5}$	$\frac{8.5}{.33}$	250

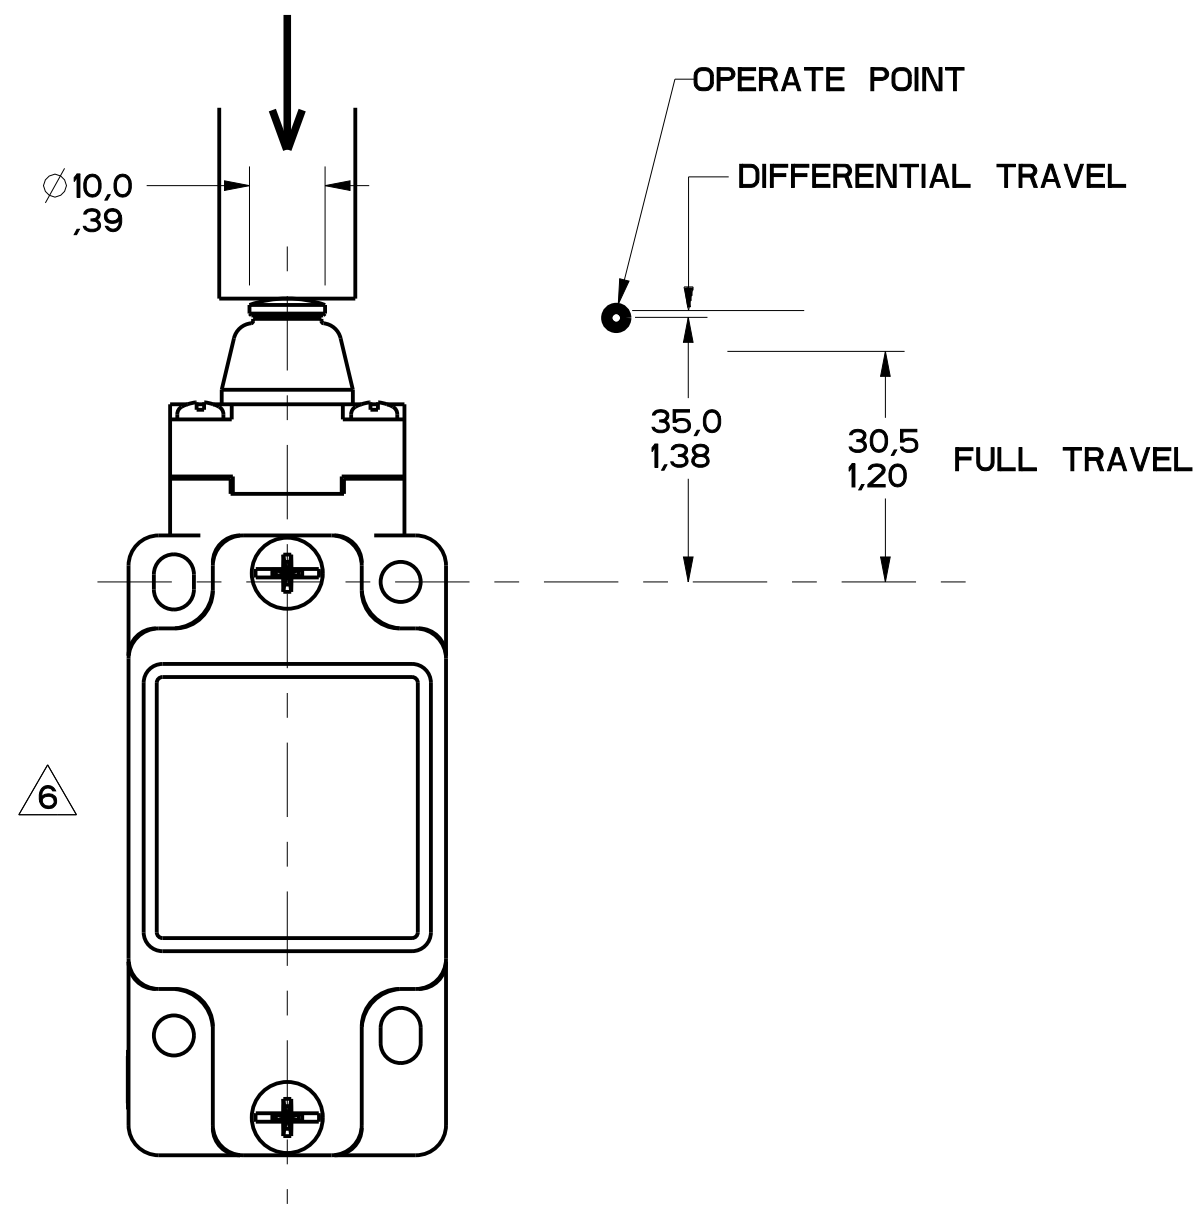


FIGURE 11

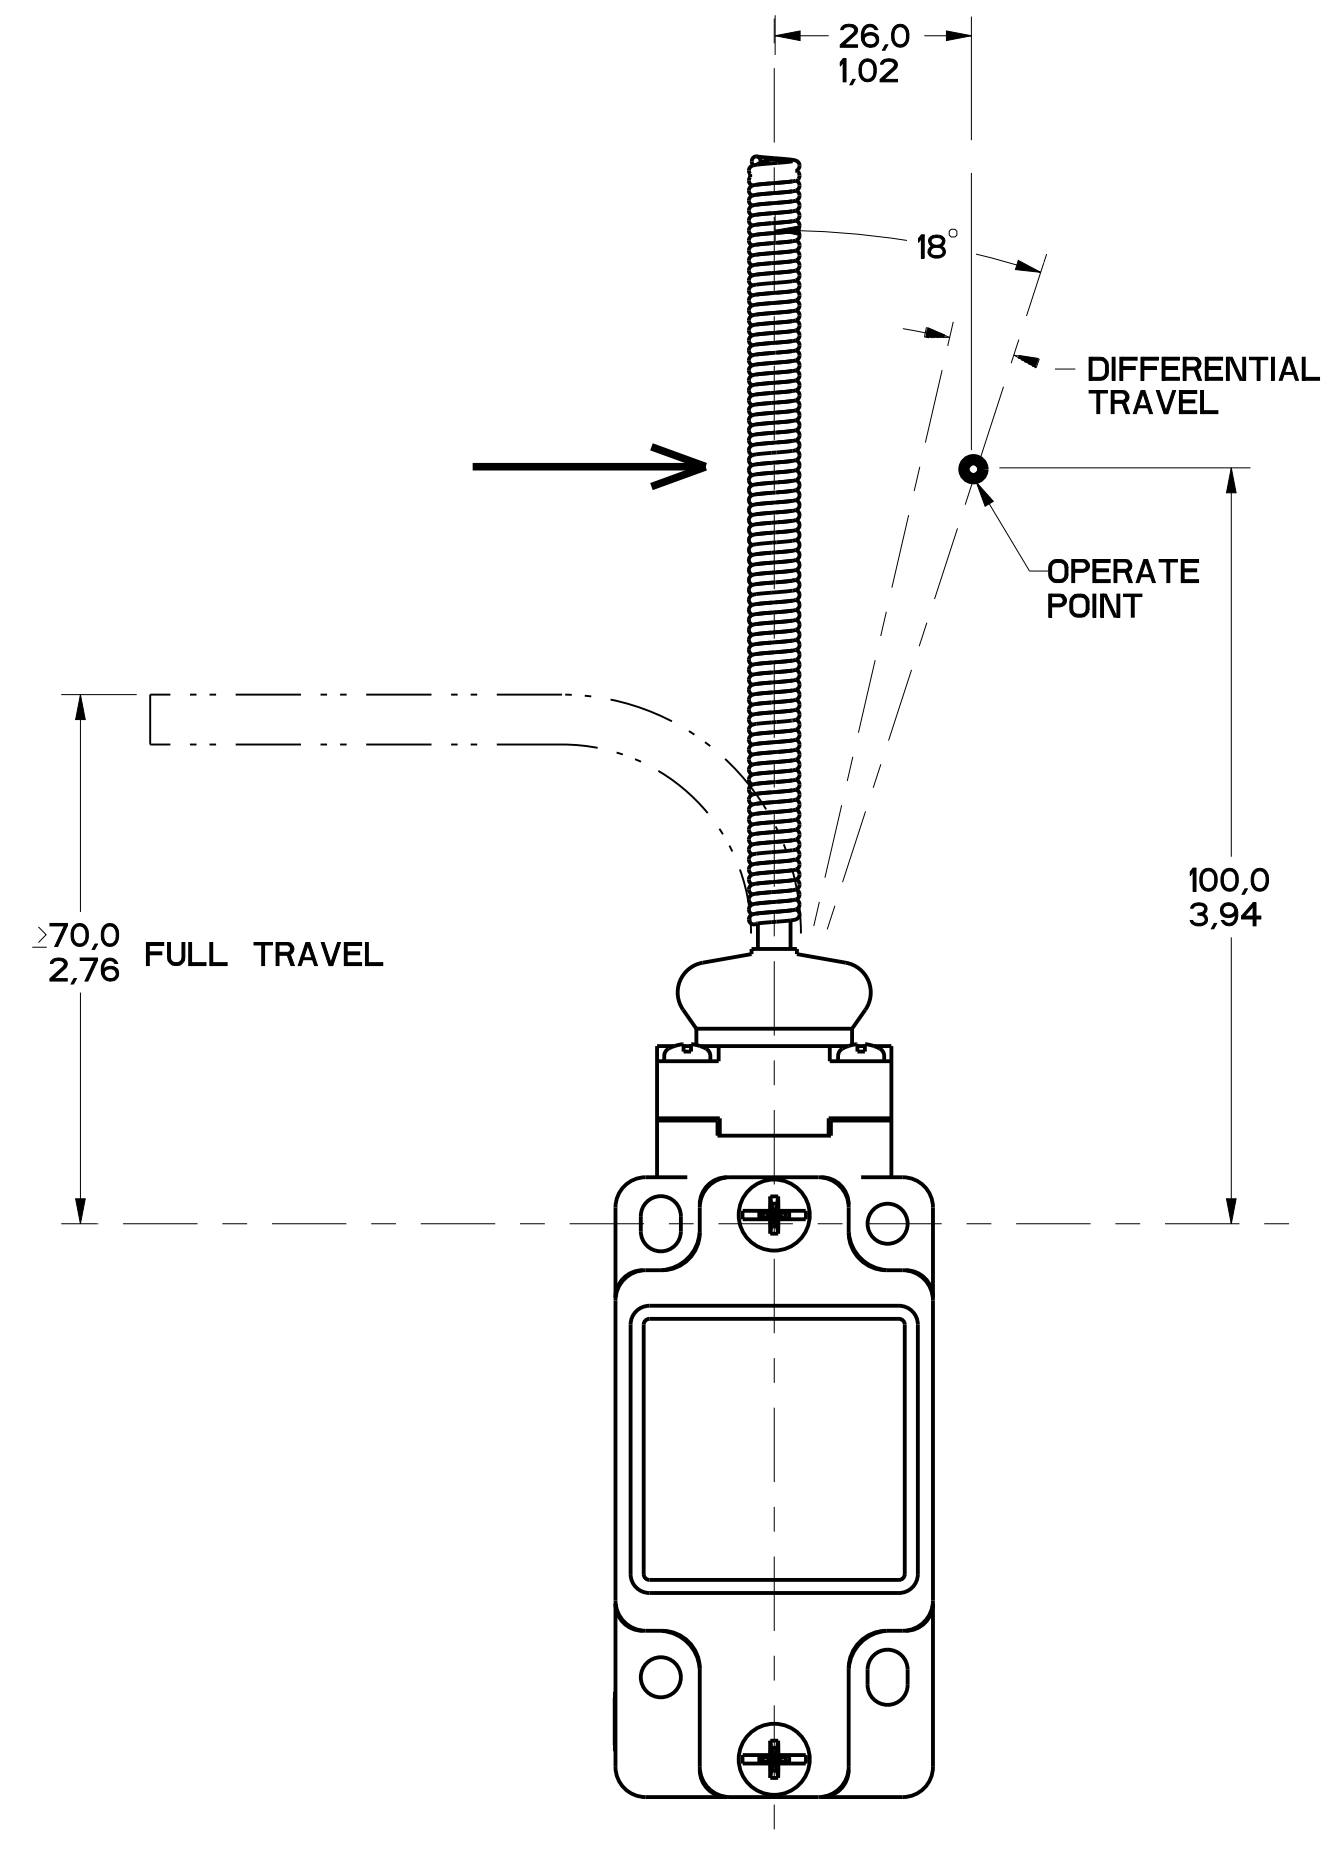


FIGURE 12

PTC/CAD 3D		DRAWING		DRAWING NO. 16		MGL SERIES CHART 1	
REV. 1		REV. 2		REV. 3		REV. 4	
REV. 5		REV. 6		REV. 7		REV. 8	
REV. 9		REV. 10		REV. 11		REV. 12	
REV. 13		REV. 14		REV. 15		REV. 16	
REV. 17		REV. 18		REV. 19		REV. 20	
REV. 21		REV. 22		REV. 23		REV. 24	
REV. 25		REV. 26		REV. 27		REV. 28	
REV. 29		REV. 30		REV. 31		REV. 32	
REV. 33		REV. 34		REV. 35		REV. 36	
REV. 37		REV. 38		REV. 39		REV. 40	
REV. 41		REV. 42		REV. 43		REV. 44	
REV. 45		REV. 46		REV. 47		REV. 48	
REV. 49		REV. 50		REV. 51		REV. 52	
REV. 53		REV. 54		REV. 55		REV. 56	
REV. 57		REV. 58		REV. 59		REV. 60	
REV. 61		REV. 62		REV. 63		REV. 64	
REV. 65		REV. 66		REV. 67		REV. 68	
REV. 69		REV. 70		REV. 71		REV. 72	
REV. 73		REV. 74		REV. 75		REV. 76	
REV. 77		REV. 78		REV. 79		REV. 80	
REV. 81		REV. 82		REV. 83		REV. 84	
REV. 85		REV. 86		REV. 87		REV. 88	
REV. 89		REV. 90		REV. 91		REV. 92	
REV. 93		REV. 94		REV. 95		REV. 96	
REV. 97		REV. 98		REV. 99		REV. 100	
REV. 101		REV. 102		REV. 103		REV. 104	
REV. 105		REV. 106		REV. 107		REV. 108	
REV. 109		REV. 110		REV. 111		REV. 112	
REV. 113		REV. 114		REV. 115		REV. 116	
REV. 117		REV. 118		REV. 119		REV. 120	
REV. 121		REV. 122		REV. 123		REV. 124	
REV. 125		REV. 126		REV. 127		REV. 128	
REV. 129		REV. 130		REV. 131		REV. 132	
REV. 133		REV. 134		REV. 135		REV. 136	
REV. 137		REV. 138		REV. 139		REV. 140	
REV. 141		REV. 142		REV. 143		REV. 144	
REV. 145		REV. 146		REV. 147		REV. 148	
REV. 149		REV. 150		REV. 151		REV. 152	
REV. 153		REV. 154		REV. 155		REV. 156	
REV. 157		REV. 158		REV. 159		REV. 160	
REV. 161		REV. 162		REV. 163		REV. 164	
REV. 165		REV. 166		REV. 167		REV. 168	
REV. 169		REV. 170		REV. 171		REV. 172	
REV. 173		REV. 174		REV. 175		REV. 176	
REV. 177		REV. 178		REV. 179		REV. 180	
REV. 181		REV. 182		REV. 183		REV. 184	
REV. 185		REV. 186		REV. 187		REV. 188	
REV. 189		REV. 190		REV. 191		REV. 192	
REV. 193		REV. 194		REV. 195		REV. 196	
REV. 197		REV. 198		REV. 199		REV. 200	
REV. 201		REV. 202		REV. 203		REV. 204	
REV. 205		REV. 206		REV. 207		REV. 208	
REV. 209		REV. 210		REV. 211		REV. 212	
REV. 213		REV. 214		REV. 215		REV. 216	
REV. 217		REV. 218		REV. 219		REV. 220	
REV. 221		REV. 222		REV. 223		REV. 224	
REV. 225		REV. 226		REV. 227		REV. 228	
REV. 229		REV. 230		REV. 231		REV. 232	
REV. 233		REV. 234		REV. 235		REV. 236	
REV. 237		REV. 238		REV. 239		REV. 240	
REV. 241		REV. 242		REV. 243		REV. 244	
REV. 245		REV. 246		REV. 247		REV. 248	
REV. 249		REV. 250		REV. 251		REV. 252	
REV. 253		REV. 254		REV. 255		REV. 256	
REV. 257		REV. 258		REV. 259		REV. 260	
REV. 261		REV. 262		REV. 263		REV. 264	
REV. 265		REV. 266		REV. 267		REV. 268	
REV. 269		REV. 270		REV. 271		REV. 272	
REV. 273		REV. 274		REV. 275		REV. 276	
REV. 277		REV. 278		REV. 279		REV. 280	
REV. 281		REV. 282		REV. 283		REV. 284	
REV. 285		REV. 286		REV. 287		REV. 288	
REV. 289		REV. 290		REV. 291		REV. 292	
REV. 293		REV. 294		REV. 295		REV. 296	
REV. 297		REV. 298		REV. 299		REV. 300	
REV. 301		REV. 302		REV. 303		REV. 304	
REV. 305		REV. 306		REV. 307		REV. 308	
REV. 309		REV. 310		REV. 311		REV. 312	
REV. 313		REV. 314		REV. 315		REV. 316	
REV. 317		REV. 318		REV. 319		REV. 320	
REV. 321		REV. 322		REV. 323		REV. 324	
REV. 325		REV. 326		REV. 327		REV. 328	
REV. 329		REV. 330		REV. 331		REV. 332	
REV. 333		REV. 334		REV. 335		REV. 336	
REV. 337		REV. 338		REV. 339		REV. 340	
REV. 341		REV. 342		REV. 343		REV. 344	
REV. 345		REV. 346		REV. 347		REV. 348	
REV. 349		REV. 350		REV. 351		REV. 352	
REV. 353		REV. 354		REV. 355		REV. 356	
REV. 357		REV. 358		REV. 359		REV. 360	
REV. 361		REV. 362		REV. 363		REV. 364	
REV. 365		REV. 366		REV. 367		REV. 368	
REV. 369		REV. 370		REV. 371		REV. 372	
REV. 373		REV. 374		REV. 375		REV. 376	
REV. 377		REV. 378		REV. 379		REV. 380	
REV. 381		REV. 382		REV. 383		REV. 384	
REV. 385		REV. 386		REV. 387		REV. 388	
REV. 389		REV. 390		REV. 391		REV. 392	
REV. 393		REV. 394		REV. 395		REV. 396	
REV. 397		REV. 398		REV. 399		REV. 400	
REV. 401		REV. 402		REV. 403		REV. 404	
REV. 405		REV. 406		REV. 407		REV. 408	
REV. 409		REV. 410		REV. 411		REV. 412	
REV. 413		REV. 414		REV. 415		REV. 416	
REV. 417		REV. 418		REV. 419		REV. 420	
REV. 421		REV. 422		REV. 423		REV. 424	
REV. 425		REV. 426		REV. 427		REV. 428	
REV. 429		REV. 430		REV. 431		REV. 432	
REV. 433		REV. 434		REV. 435		REV. 436	
REV. 437		REV. 438		REV. 439		REV. 440	
REV. 441		REV. 442		REV. 443		REV. 444	
REV. 445		REV. 446		REV. 447		REV. 448	
REV. 449		REV. 450		REV. 451		REV. 452	
REV. 453		REV. 454		REV. 455		REV. 456	
REV. 457		REV. 458		REV. 459		REV. 460	
REV. 461		REV. 462		REV. 463		REV. 464	
REV. 465		REV. 466		REV. 467		REV. 468	
REV. 469		REV. 470		REV. 471		REV. 472	
REV. 473		REV. 474		REV. 475		REV. 476	
REV. 477		REV. 478		REV. 479		REV. 480	
REV. 481		REV. 482		REV. 483		REV. 484	
REV. 485		REV. 486		REV. 487		REV. 488	
REV. 489		REV. 490		REV. 491		REV. 492	
REV. 493		REV. 494		REV. 495		REV. 496	
REV. 497		REV. 498		REV. 499		REV. 500	
REV. 501		REV. 502		REV. 503		REV. 504	
REV. 505		REV. 506		REV. 507		REV. 508	
REV. 509		REV. 510		REV. 511		REV. 512	
REV. 513		REV. 514		REV. 515		REV. 516	
REV. 517		REV. 518		REV. 519		REV. 520	
REV. 521		REV. 522		REV. 523		REV. 524	
REV. 525		REV. 526		REV. 527		REV. 528	
REV. 529		REV. 530		REV. 531		REV. 532	
REV. 533		REV. 534		REV. 535		REV. 536	
REV. 537		REV. 538		REV. 539		REV. 540	
REV. 541		REV. 542		REV. 543		REV. 544	
REV. 545		REV. 546		REV. 547		REV. 548	
REV. 549		REV. 550		REV. 551		REV. 552	
REV. 553		REV. 554		REV. 555		REV. 556	
REV. 557		REV. 558		REV. 559		REV. 560	
REV. 561		REV. 562		REV. 563		REV. 564	
REV. 565		REV. 566		REV. 567		REV. 568	
REV. 569		REV. 570		REV. 571		REV. 572	
REV. 573		REV. 574		REV. 575		REV. 576	
REV. 577		REV. 578		REV. 579		REV. 580	
REV. 581		REV. 582		REV. 583		REV. 584	
REV. 585		REV. 586		REV. 587		REV. 588	
REV. 589		REV. 590		REV. 591		REV. 592	
REV. 593		REV. 594		REV. 595		REV. 596	
REV. 597		REV. 598		REV. 599		REV. 600	
REV. 601		REV. 602		REV. 603		REV. 604	
REV. 605		REV. 606		REV. 607		REV. 608	
REV. 609		REV. 610		REV. 611		REV. 612	
REV. 613		REV. 614		REV. 615		REV. 616	
REV. 617		REV. 618		REV. 619		REV. 620	
REV. 621		REV. 622		REV. 623		REV. 624	
REV. 625		REV. 626		REV. 627		REV. 628	
REV. 629		REV. 630		REV. 631		REV. 632	
REV. 633		REV. 634		REV. 635		REV. 636	
REV. 637		REV. 638		REV. 639		REV. 640	
REV. 641		REV. 642		REV. 643		REV. 644	
REV. 645		REV. 646		REV. 647		REV. 648	
REV. 649		REV. 650		REV. 651		REV. 652	
REV. 653		REV. 654		REV. 655		REV. 656	
REV. 657		REV. 658		REV. 659		REV. 660	
REV. 661		REV. 662		REV. 663		REV. 664	
REV. 665		REV. 666		REV. 667		REV. 668	
REV. 669		REV. 670		REV. 671		REV. 672	
REV. 673		REV. 674		REV. 675		REV. 676	
REV. 677		REV. 678		REV. 679		REV. 680	
REV. 681		REV. 682		REV. 683		REV. 684	
REV. 685		REV. 686		REV. 687		REV. 688	
REV. 689		REV. 690		REV. 691		REV. 692	
REV. 693		REV. 694		REV. 695		REV. 696	
REV. 697		REV. 698		REV. 699		REV. 700	
REV. 701		REV. 702		REV. 703		REV. 704	
REV. 705		REV. 706		REV. 707		REV. 708	
REV. 709		REV. 710		REV. 711		REV. 712	
REV. 713		REV. 714		REV. 715		REV. 716	
REV. 717		REV. 718		REV. 719		REV. 720	
REV. 721		REV. 722		REV. 723		REV. 724	
REV. 725		REV. 726		REV. 727		REV. 728	
REV. 729		REV. 730		REV. 731		REV. 732	
REV. 733		REV. 734		REV. 735		REV. 736	
REV. 737		REV. 738		REV. 739		REV. 740	
REV. 741		REV. 742		REV. 743		REV. 744	
REV. 745		REV. 746		REV. 747		REV. 748	
REV. 749		REV. 750		REV. 751		REV. 752	
REV. 753		REV. 754		REV. 755		REV. 756	
REV. 757		REV. 758		REV. 759		REV. 760	
REV. 761		REV. 762		REV. 763		REV. 764	
REV. 765		REV. 766		REV. 767		REV. 768	
REV. 769		REV. 770		REV. 771		REV. 772	
REV. 773		REV. 774		REV. 775		REV. 776	
REV. 777		REV. 778		REV. 779		REV. 780	
REV. 781		REV. 782		REV. 783		REV. 784	
REV. 785		REV. 786		REV. 787		REV. 788	
REV. 789		REV. 790		REV. 791		REV. 792	
REV. 793		REV. 794		REV. 795		REV. 796	
REV. 797		REV. 798		REV. 799		REV. 800	
REV. 801		REV. 802		REV. 803		REV. 804	
REV. 805		REV. 806		REV. 807		REV. 808	
REV. 809		REV. 810		REV. 811		REV. 812	
REV. 813		REV. 814		REV. 815		REV. 816	
REV. 817		REV. 818		REV. 819		REV. 820	
REV. 821		REV. 822		REV. 823		REV. 824	
REV. 825		REV. 826		REV. 827		REV. 828	
REV. 8							

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		<table><tr><td>QTY</td><td>TOL</td><td>QTY</td><td>TOL</td></tr><tr><td>100</td><td>0.001" / 0.001"</td><td>100</td><td>0.001" / 0.001"</td></tr></table>		QTY	TOL	QTY	TOL	100	0.001" / 0.001"	100	0.001" / 0.001"							
QTY	TOL	QTY	TOL															
100	0.001" / 0.001"	100	0.001" / 0.001"															
FED. MFG. CODE 91929	CATALOG LISTING	<table><tr><td>NO PLACES</td><td>1.04</td><td>1.04</td></tr><tr><td>ONE PLACE</td><td>0.40-0.16</td><td>0.35-0.13</td></tr><tr><td>TWO PLACES</td><td>0.15-0.06</td><td>0.13-0.05</td></tr><tr><td>THREE PLACES</td><td>0.09</td><td>0.07-0.03</td></tr><tr><td>ANGLES</td><td>± 2°</td><td></td></tr></table>		NO PLACES	1.04	1.04	ONE PLACE	0.40-0.16	0.35-0.13	TWO PLACES	0.15-0.06	0.13-0.05	THREE PLACES	0.09	0.07-0.03	ANGLES	± 2°	
NO PLACES	1.04	1.04																
ONE PLACE	0.40-0.16	0.35-0.13																
TWO PLACES	0.15-0.06	0.13-0.05																
THREE PLACES	0.09	0.07-0.03																
ANGLES	± 2°																	
MICRO SWITCH a Honeywell Division	SWITCH, ENCLOSED	<table><tr><td>SI METRIC</td><td>US CUSTOMARY</td></tr><tr><td>☒</td><td>☐</td></tr></table>		SI METRIC	US CUSTOMARY	☒	☐											
		SI METRIC	US CUSTOMARY															
☒	☐																	
GL SERIES CHART 1		WEIGHT																

FIGURES 11, PIN PLUNGER HEAD, LINEAR ACTUATION							
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS ■- CONTACT CLOSED, □- CONTACT OPEN, ▨- CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE $\frac{N}{LB}$	MAXIMUM DISCONNECT FORCE $\frac{N}{LB}$	MAX OPERATE VEL $\frac{M}{S}$ $\frac{IN}{S}$	MIN OPERATE VEL $\frac{MM}{S}$ $\frac{IN}{S}$	MAX OPERATE FREQUENCY OPS/MIN
GL**01B GL**07B	SNAP - ACTION CONTACTS SINGLE POLE 		$\frac{16}{3.6}$	$\frac{27}{6.0}$	$\frac{0.1}{3.9}$	$\frac{1.0}{.04}$	250
GL**03B GL**33B	SLOW ACTING BREAK BEFORE MAKE 		$\frac{16}{3.6}$	$\frac{27}{6.0}$	$\frac{0.1}{3.9}$	$\frac{1.0}{.04}$	250
GL**04B GL**34B	SLOW ACTING MAKE BEFORE BREAK 		$\frac{16}{3.6}$	$\frac{27}{6.0}$	$\frac{0.1}{3.9}$	$\frac{1.0}{.04}$	250
GL**05B GL**35B	SLOW ACTING 		$\frac{16}{3.6}$	$\frac{27}{6.0}$	$\frac{0.1}{3.9}$	$\frac{1.0}{.04}$	250
GL**06B GL**36B	SLOW ACTING 		$\frac{16}{3.6}$	$\frac{27}{6.0}$	$\frac{0.1}{3.9}$	$\frac{1.0}{.04}$	250
GL**20B GL**22B GL**24B GL**32B	SNAP ACTION CONTACTS DOUBLE POLE 		$\frac{16}{3.6}$	$\frac{37}{8.2}$	$\frac{0.1}{3.9}$	$\frac{1.0}{.04}$	250
GL**21B GL**25B GL**28B GL**31B	STEP 1 STEP 2 SNAP ACTION CONTACTS DOUBLE POLE SEQUENTIAL 		$\frac{16}{3.6}$	N/A	$\frac{0.1}{3.9}$	$\frac{1.0}{.04}$	250

FIGURE 12, WOBBLE HEAD, ANGULAR ACTUATION							
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS ■- CONTACT CLOSED, □- CONTACT OPEN, ▨- CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING TORQUE $\frac{N\cdot m}{LB\cdot IN}$	MAXIMUM DISCONNECT TORQUE $\frac{N\cdot m}{LB\cdot IN}$	MAX OPERATE DEGREE/S	MIN OPERATE VELOCITY DEGREE/S	MAX OPERATE RATE CYCLES/MIN
GL**01E GL**07E	SNAP - ACTION CONTACTS SINGLE POLE 		$\frac{0.2}{1.8}$	N/A	360	8	100
GL**03E GL**33E	SLOW ACTING BREAK BEFORE MAKE 		$\frac{0.2}{1.8}$	N/A	360	8	100
GL**04E GL**34E	SLOW ACTING MAKE BEFORE BREAK 		$\frac{0.2}{1.8}$	N/A	360	8	100
GL**05E GL**35E	SLOW ACTING 		$\frac{0.2}{1.8}$	N/A	360	8	100
GL**06E GL**36E	SLOW ACTING 		$\frac{0.2}{1.8}$	N/A	360	8	100
GL**20E GL**22E GL**24E GL**32E	SNAP ACTION CONTACTS DOUBLE POLE 		$\frac{0.2}{1.8}$	N/A	360	8	100

FIGURE 12, WOBBLE HEAD, SIDE ACTUATION AT 100mm							
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS ■- CONTACT CLOSED, □- CONTACT OPEN, ▨- CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE $\frac{N}{LB}$	MAXIMUM DISCONNECT FORCE $\frac{N}{LB}$	MAX OPERATE VEL $\frac{M}{S}$ $\frac{IN}{S}$	MIN OPERATE VEL $\frac{MM}{S}$ $\frac{IN}{S}$	MAX OPERATE FREQUENCY OPS/MIN
GL**01E GL**07E	SNAP - ACTION CONTACTS SINGLE POLE 		$\frac{2.5}{0.6}$	N/A	$\frac{.5}{19.7}$	$\frac{11}{.43}$	100
GL**03E GL**33E	SLOW ACTING BREAK BEFORE MAKE 		$\frac{2.5}{0.6}$	N/A	$\frac{.5}{19.7}$	$\frac{11}{.43}$	100
GL**04E GL**34E	SLOW ACTING MAKE BEFORE BREAK 		$\frac{2.5}{0.6}$	N/A	$\frac{.5}{19.7}$	$\frac{11}{.43}$	100
GL**05E GL**35E	SLOW ACTING 		$\frac{2.5}{0.6}$	N/A	$\frac{.5}{19.7}$	$\frac{11}{.43}$	100
GL**06E GL**36E	SLOW ACTING 		$\frac{2.5}{0.6}$	N/A	$\frac{.5}{19.7}$	$\frac{11}{.43}$	100
GL**20E GL**22E GL**24E GL**32E	SNAP ACTION CONTACTS DOUBLE POLE 		$\frac{2.5}{0.6}$	N/A	360	8	100

THIRD ANGLE PROJECTION

SCALE -

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE:

	IN	TOL	MM	TOL
NO PLACES	X	1/64	X	0.13
ONE PLACE	X.X	0.0156	X.X	0.39
TWO PLACES	X.XX	0.0039	X.XX	0.10
THREE PLACES	X.XXX	0.0009	X.XXX	0.025

DESIGN UNITS
☒ SI METRIC
☐ US CUSTOMARY

WEIGHT

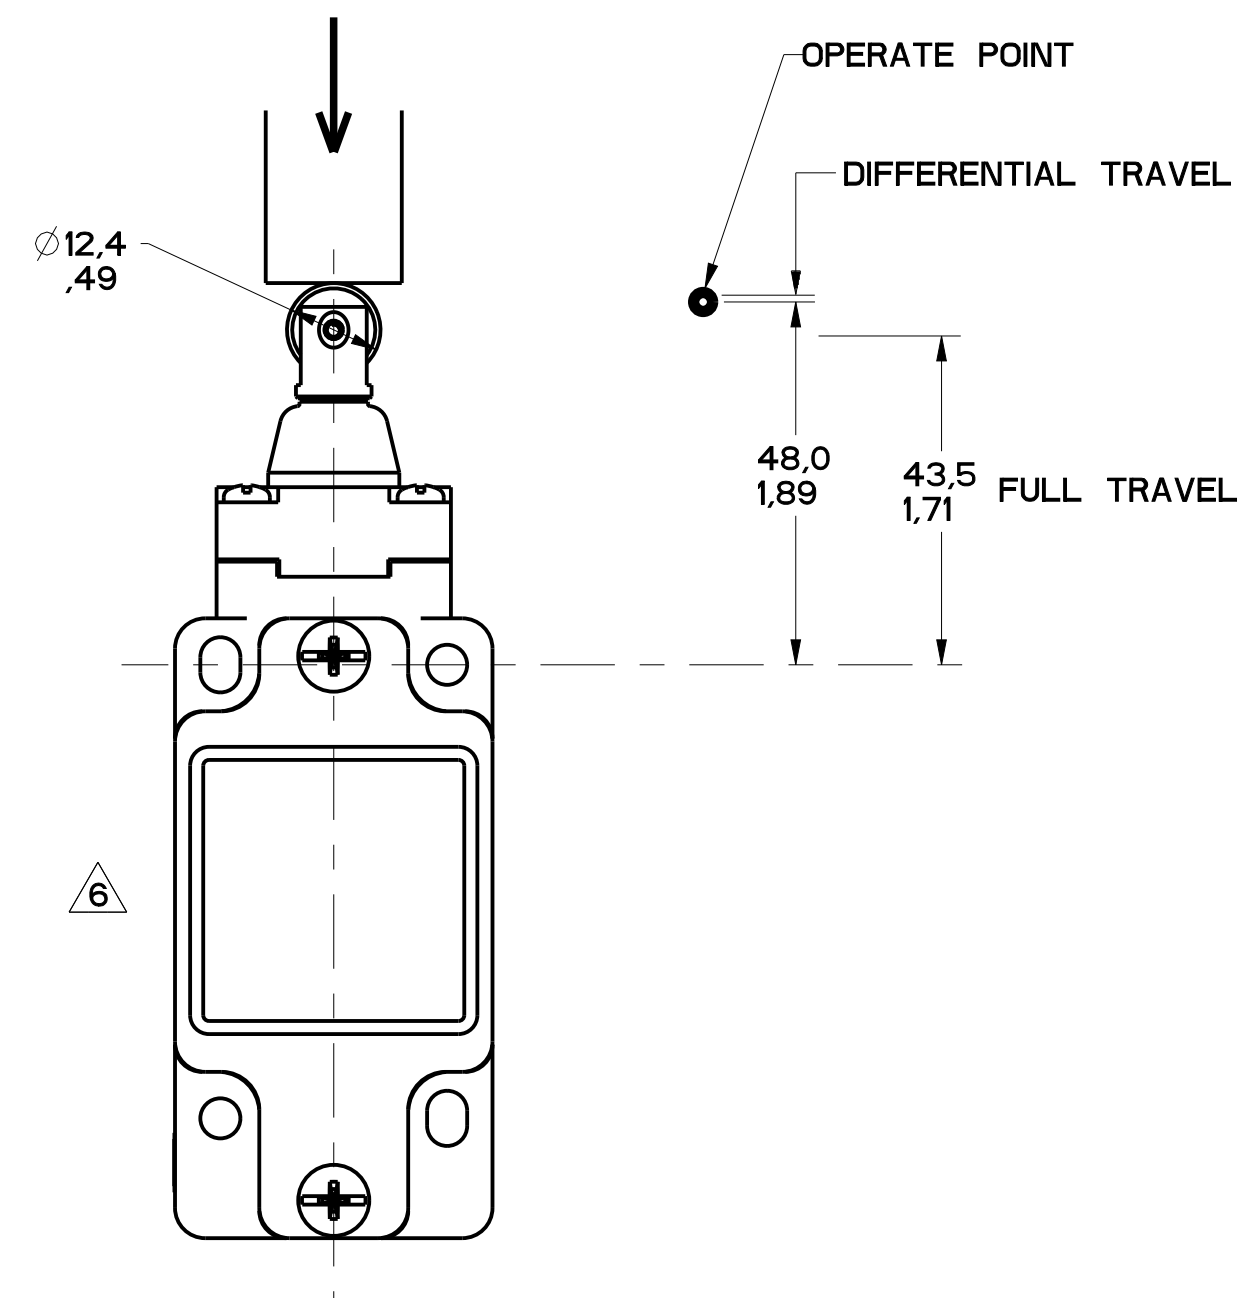


FIGURE 13A

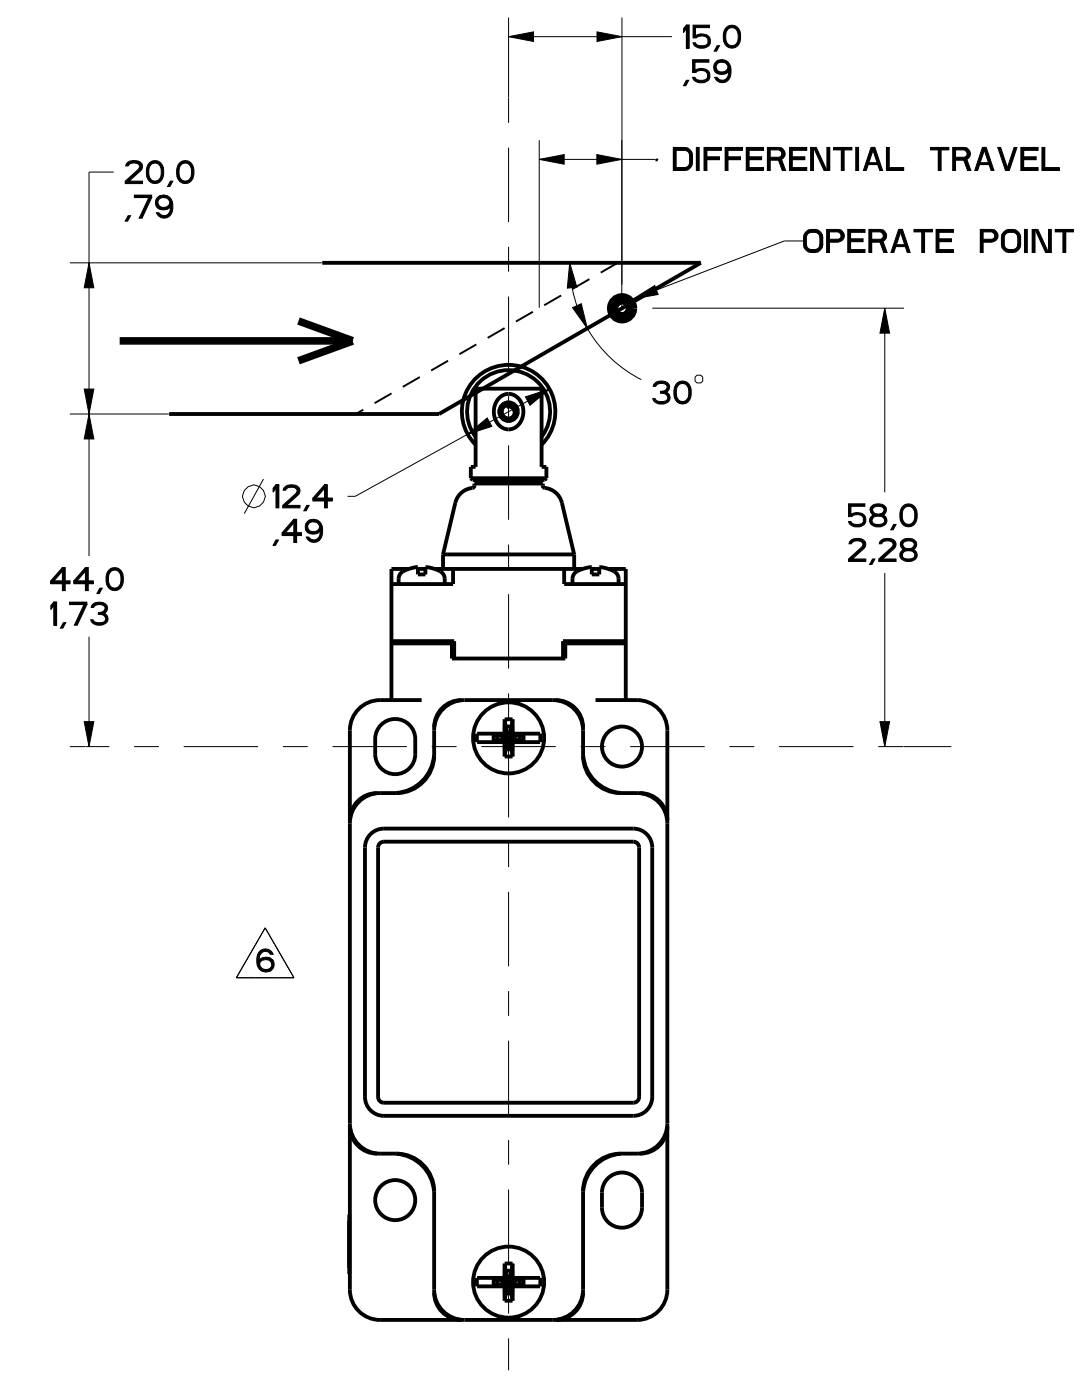


FIGURE 13B

[illegible]

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		<table><tr><td>QTY</td><td>TOL</td><td>QTY</td><td>TOL</td></tr><tr><td>ONE PLACES</td><td>1/64"</td><td>1.1</td><td>0.010"</td></tr><tr><td>TWO PLACES</td><td>0.0100"</td><td>1.193</td><td>0.0105"</td></tr><tr><td>THREE PLACES</td><td>0.151006"</td><td></td><td></td></tr><tr><td>ANGLES</td><td>± 2°</td><td></td><td></td></tr></table>		QTY	TOL	QTY	TOL	ONE PLACES	1/64"	1.1	0.010"	TWO PLACES	0.0100"	1.193	0.0105"	THREE PLACES	0.151006"			ANGLES	± 2°		
QTY	TOL	QTY	TOL																				
ONE PLACES	1/64"	1.1	0.010"																				
TWO PLACES	0.0100"	1.193	0.0105"																				
THREE PLACES	0.151006"																						
ANGLES	± 2°																						
FED. MFG. CODE 91929	CATALOG LISTING	<table><tr><td>SI METRIC</td><td>US CUSTOMARY</td></tr><tr><td>☒</td><td>☐</td></tr></table>		SI METRIC	US CUSTOMARY	☒	☐																
SI METRIC	US CUSTOMARY																						
☒	☐																						
MICRO SWITCH a Honeywell Division	SWITCH, ENCLOSED	DESIGN UNITS ☒																					
		WEIGHT																					

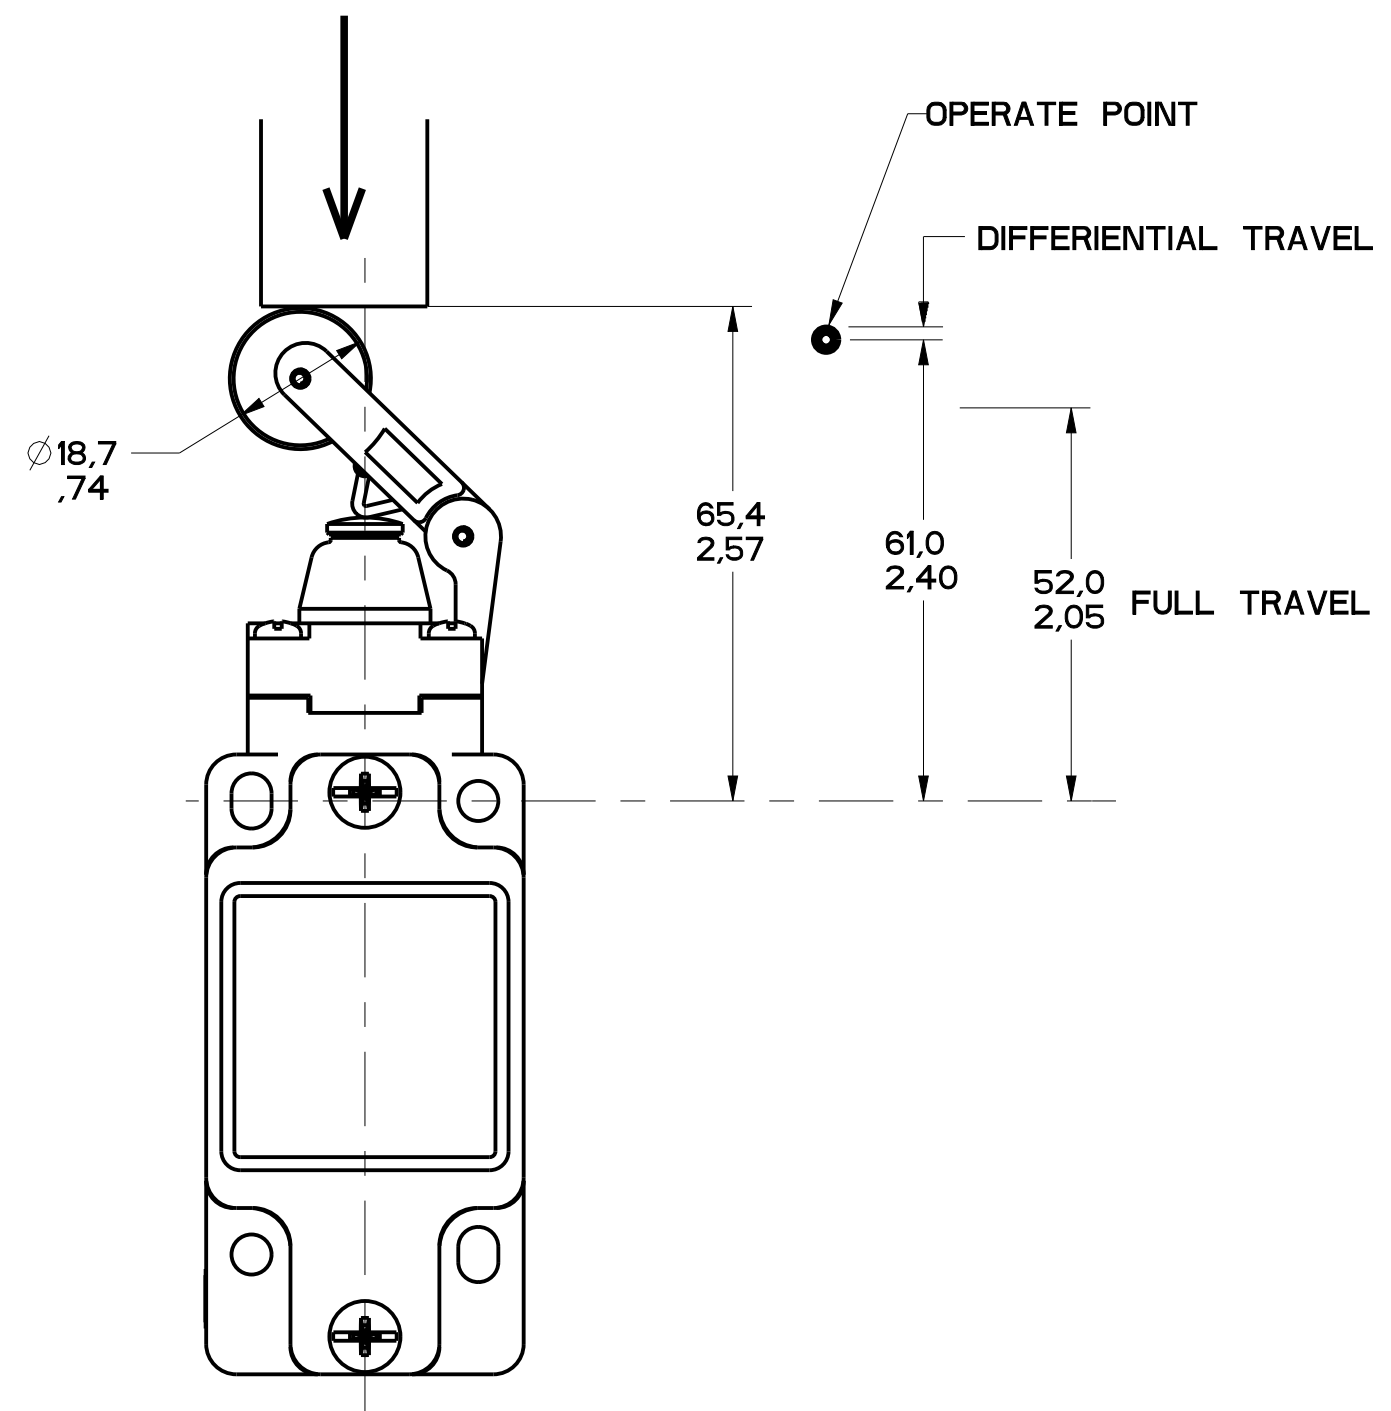


FIGURE 14A

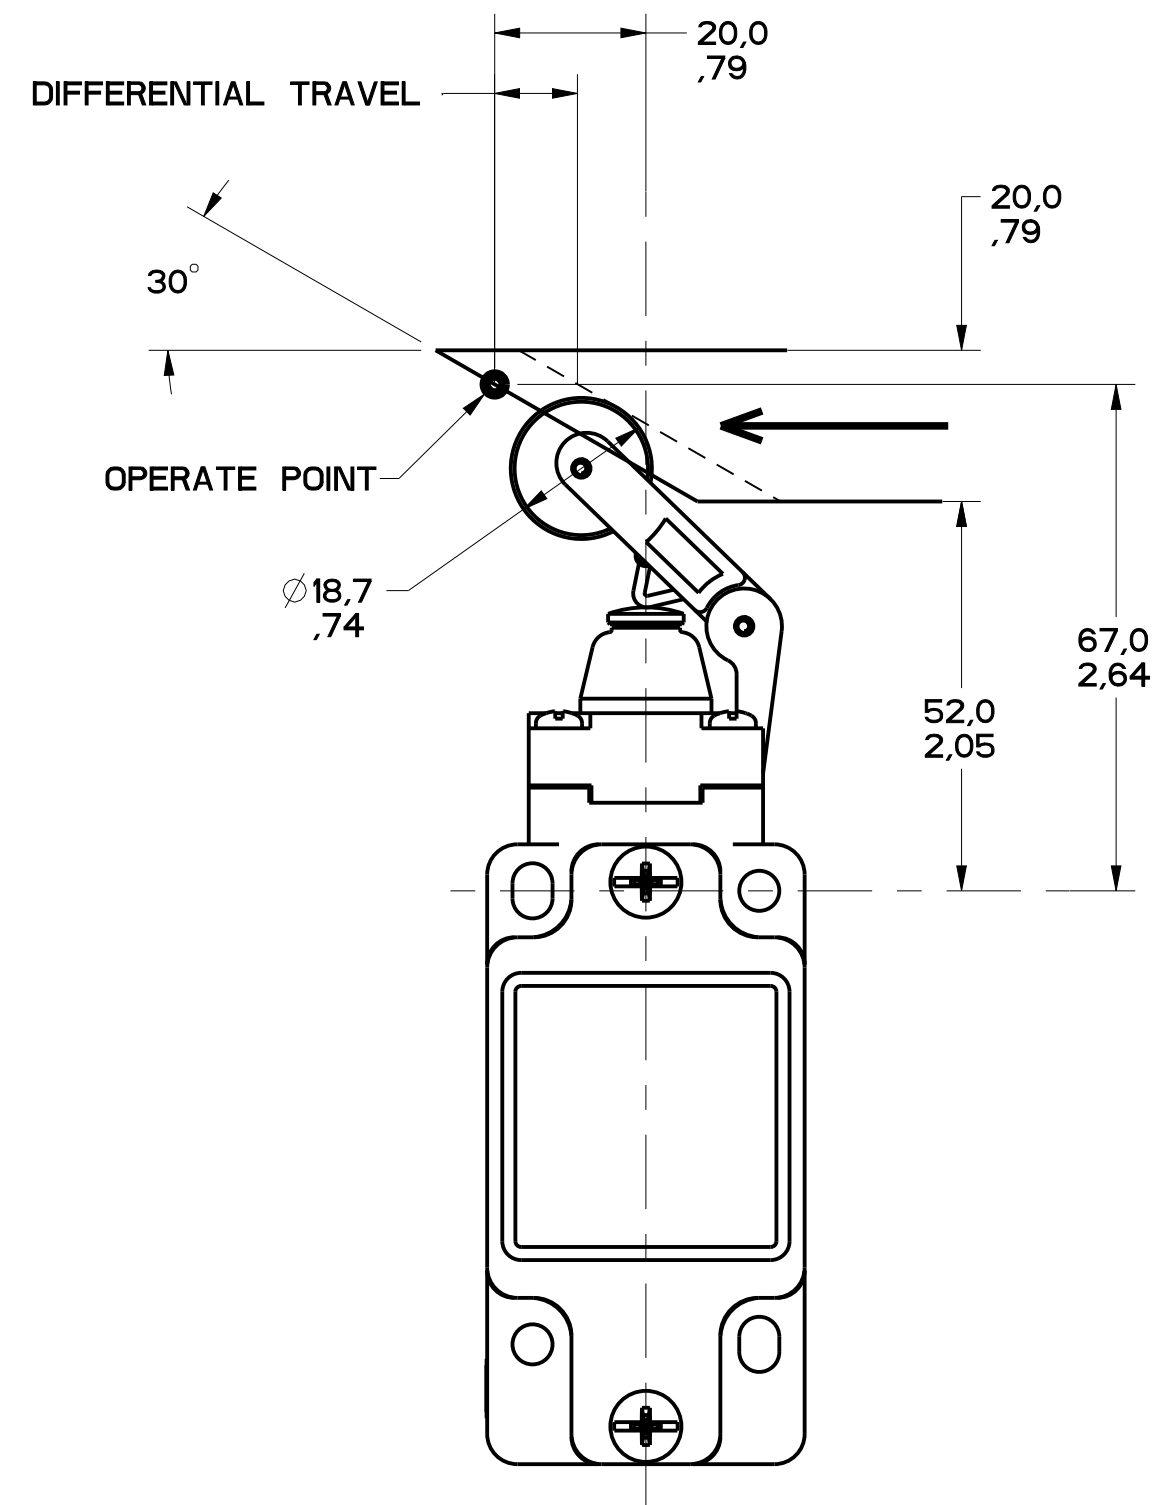


FIGURE 14B

[illegible]

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		FED. MFG. CODE 91929		CATALOG LISTING	
 MICRO SWITCH a Honeywell Division		SWITCH, ENCLOSED		GL SERIES CHART 1	
NO PLACES 3 ONE PLACE 3 X X TWO PLACES 1 X X THREE PLACES ANGLES		DIM mm TOL mil ± 1 / .04 / .016 0.15 / .006 ±.005		DIM in TOL mil ± 1 / .04 / .016 0.15 / .006 ±.005	
DESIGN UNITS		SI METRIC ☒		US CUSTOMARY ☐	
WEIGHT					

FIGURE 14A, TOP ROLLER LEVER HEAD WITH PIN ACTUATION							
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS ■ - CONTACT CLOSED, □ - CONTACT OPEN, ▨ - CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE N LB	MAXIMUM DISCONNECT FORCE N LB	MAX OPERATE VEL M/S IN/S	MIN OPERATE VEL M/S IN/S	MAX OPERATE FREQUENCY OPS/MIN
GL**01D GL**07D	SNAP - ACTION CONTACTS SINGLE POLE 	 1.7 DIFFERENTIAL TRAVEL	$\frac{9.5}{2.1}$	$\frac{12}{2.7}$	$\frac{0.17}{6.7}$	$\frac{1.7}{.067}$	250
GL**03D GL**33D	SLOW ACTING BREAK BEFORE MAKE 	 59.1	$\frac{9.5}{2.1}$	$\frac{12}{2.7}$	$\frac{0.17}{6.7}$	$\frac{1.7}{.067}$	250
GL**04D GL**34D	SLOW ACTING MAKE BEFORE BREAK 	 61	$\frac{9.5}{2.1}$	$\frac{12}{2.7}$	$\frac{0.17}{6.7}$	$\frac{1.7}{.067}$	250
GL**05D GL**35D	SLOW ACTING 	 59.1	$\frac{9.5}{2.1}$	$\frac{12}{2.7}$	$\frac{0.17}{6.7}$	$\frac{1.7}{.067}$	250
GL**06D GL**36D	SLOW ACTING 	 61	$\frac{9.5}{2.1}$	$\frac{12}{2.7}$	$\frac{0.17}{6.7}$	$\frac{1.7}{.067}$	250
GL**20D GL**22D GL**24D GL**32D	SNAP ACTION CONTACTS DOUBLE POLE 	 1.7 DIFFERENTIAL TRAVEL	$\frac{9.5}{2.1}$	$\frac{16.4}{3.7}$	$\frac{0.17}{6.7}$	$\frac{1.7}{.067}$	250
GL**21D GL**25D GL**28D GL**31D	STEP 1 STEP 2 SNAP ACTION CONTACTS DOUBLE POLE SEQUENTIAL 	 1.6 DIFFERENTIAL TRAVEL	$\frac{9.5}{2.1}$	N/A	$\frac{0.17}{6.7}$	$\frac{1.7}{.067}$	250

FIGURE 14B, TOP ROLLER LEVER HEAD WITH CAM ACTUATION							
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS ■ - CONTACT CLOSED, □ - CONTACT OPEN, ▨ - CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE N LB	MAXIMUM DISCONNECT FORCE N LB	MAX OPERATE VEL M/S IN/S	MIN OPERATE VEL M/S IN/S	MAX OPERATE FREQUENCY OPS/MIN
GL**01D GL**07D	SNAP - ACTION CONTACTS SINGLE POLE 	 4.1 DIFFERENTIAL TRAVEL	$\frac{5.5}{1.2}$	$\frac{7.0}{1.6}$	$\frac{0.29}{11.4}$	$\frac{2.9}{.11}$	250
GL**03D GL**33D	SLOW ACTING BREAK BEFORE MAKE 	 24.1	$\frac{5.5}{1.2}$	$\frac{7.0}{1.6}$	$\frac{0.29}{11.4}$	$\frac{2.9}{.11}$	250
GL**04D GL**34D	SLOW ACTING MAKE BEFORE BREAK 	 20	$\frac{5.5}{1.2}$	$\frac{9.6}{2.2}$	$\frac{0.29}{11.4}$	$\frac{2.9}{.11}$	250
GL**05D GL**35D	SLOW ACTING 	 24.1	$\frac{5.5}{1.2}$	$\frac{7.0}{1.6}$	$\frac{0.29}{11.4}$	$\frac{2.9}{.11}$	250
GL**06D GL**36D	SLOW ACTING 	 20	$\frac{5.5}{1.2}$	$\frac{7.0}{1.6}$	$\frac{0.29}{11.4}$	$\frac{2.9}{.11}$	250
GL**20D GL**22D GL**24D GL**32D	SNAP ACTION CONTACTS DOUBLE POLE 	 4.1 DIFFERENTIAL TRAVEL	$\frac{5.5}{1.2}$	$\frac{7.0}{1.6}$	$\frac{0.29}{11.4}$	$\frac{2.9}{.11}$	250
GL**21D GL**25D GL**28D GL**31D	STEP 1 STEP 2 SNAP ACTION CONTACTS DOUBLE POLE SEQUENTIAL 	 3.7 DIFFERENTIAL TRAVEL	$\frac{5.5}{1.2}$	N/A	$\frac{0.29}{11.4}$	$\frac{2.9}{.11}$	250

FIGURE 15, CAT WISKER HEAD, ANGULAR ACTUATION							
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS ■ - CONTACT CLOSED, □ - CONTACT OPEN, ▨ - CONTACT CLOSED DIFFERENTIAL TRAVEL	MAXIMUM OPERATING TORQUE $\frac{N \cdot m}{LB \cdot IN}$	MAXIMUM DISCONNECT TORQUE $\frac{N \cdot m}{LB \cdot IN}$	MAX OPERATE DEGREE/S	MIN OPERATE VELOCITY DEGREE/S	MAX OPERATE RATE CYCLES/MIN
GL**01K GL**07K	SNAP - ACTION CONTACTS SINGLE POLE 	 18° 8° DIFFERENTIAL TRAVEL	$\frac{0.1}{.9}$	N/A	360	8	100
GL**03K GL**33K	SLOW ACTING BREAK BEFORE MAKE 	 18° 25	$\frac{0.1}{.9}$	N/A	360	8	100
GL**04K GL**34K	SLOW ACTING MAKE BEFORE BREAK 	 25° 18°	$\frac{0.1}{.9}$	N/A	360	8	100
GL**05K GL**35K	SLOW ACTING 	 25°	$\frac{0.1}{.9}$	N/A	360	8	100
GL**06K GL**36K	SLOW ACTING 	 18°	$\frac{0.1}{.9}$	N/A	360	8	100
GL**20K GL**22K GL**24K GL**32K	SNAP ACTION CONTACTS DOUBLE POLE 	 18° 8° DIFFERENTIAL TRAVEL	$\frac{0.1}{.9}$	N/A	360	8	100

FIGURE 15, CAT WISKER HEAD, SIDE ACTUATION AT 100mm							
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS ■ - CONTACT CLOSED, □ - CONTACT OPEN, ▨ - CONTACT CLOSED DIFFERENTIAL TRAVEL	MAXIMUM OPERATING FORCE $\frac{N}{LB}$	MAXIMUM DISCONNECT FORCE $\frac{N}{LB}$	MAX OPERATE VEL $\frac{M/S}{IN/S}$	MIN OPERATE VEL $\frac{mm/S}{IN/S}$	MAX OPERATE FREQUENCY OPS/MIN
GL**01K GL**07K	SNAP - ACTION CONTACTS SINGLE POLE 	 26 12 DIFFERENTIAL TRAVEL	$\frac{1.3}{.3}$	N/A	$\frac{.5}{19.7}$	$\frac{11}{.43}$	100
GL**03K GL**33K	SLOW ACTING BREAK BEFORE MAKE 	 26.5 38.1	$\frac{1.3}{0.3}$	N/A	$\frac{.5}{19.7}$	$\frac{11}{.43}$	100
GL**04K GL**34K	SLOW ACTING MAKE BEFORE BREAK 	 26.5 38.1	$\frac{1.3}{0.3}$	N/A	$\frac{.5}{19.7}$	$\frac{11}{.43}$	100
GL**05K GL**35K	SLOW ACTING 	 38.1	$\frac{1.3}{0.3}$	N/A	$\frac{.5}{19.7}$	$\frac{11}{.43}$	100
GL**06K GL**36K	SLOW ACTING 	 26.5	$\frac{1.3}{0.3}$	N/A	$\frac{.5}{19.7}$	$\frac{11}{.43}$	100
GL**20K GL**22K GL**24K GL**32K	SNAP ACTION CONTACTS DOUBLE POLE 	 26 12 DIFFERENTIAL TRAVEL	$\frac{1.3}{0.3}$	N/A	$\frac{.5}{19.7}$	$\frac{11}{.43}$	100

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9