

IGBT (NPT) Module

$$V_{CES} = 1200V$$

$$I_{C25} = 135A$$

$$V_{CE(sat)} = 2.2V$$

Buck Chopper + free wheeling Diode


Part number

MDI100-12A3



Backside: isolated

 E72873



Features / Advantages:

- NPT IGBT technology
- low saturation voltage
- low switching losses
- switching frequency up to 30 kHz
- square RBSOA, no latch up
- high short circuit capability
- positive temperature coefficient for easy parallelling
- MOS input, voltage controlled
- ultra fast free wheeling diodes

Applications:

- AC motor drives
- Solar inverter
- Medical equipment
- Uninterruptible power supply
- Air-conditioning systems
- Welding equipment
- Switched-mode and resonant-mode power supplies
- Inductive heating, cookers
- Pumps, Fans


Package: Y4

- Isolation Voltage: 3600 V~
- Industry standard outline
- RoHS compliant
- Soldering pins for PCB mounting
- Base plate: DCB ceramic
- Reduced weight
- Advanced power cycling

Free Wheeling Diode FWD				Ratings			
Symbol	Definition	Conditions	min.	typ.	max.	Unit	
V_{RSM}	max. non-repetitive reverse blocking voltage				1200	V	
V_{RRM}	max. repetitive reverse blocking voltage				1200	V	
I_R	reverse current, drain current	$V_R = 1200\text{ V}$			1	mA	
		$V_R = 1200\text{ V}$			3	mA	
V_F	forward voltage drop	$I_F = 75\text{ A}$			2.50	V	
		$I_F = 150\text{ A}$			2.90	V	
		$I_F = 75\text{ A}$	$T_{VJ} = 125^\circ\text{C}$			1.80	V
		$I_F = 150\text{ A}$	$T_{VJ} = 125^\circ\text{C}$			2.10	V
I_{FAV}	average forward current	$T_C = 80^\circ\text{C}$ DC current $d = 1$			75	A	
V_{FO}	threshold voltage	} for power loss calculation only			1.30	V	
r_F	slope resistance				7.5	mΩ	
R_{thJC}	thermal resistance junction to case				0.45	K/W	
R_{thCH}	thermal resistance case to heatsink			0.45		K/W	
P_{tot}	total power dissipation				280	W	
I_{FSM}	max. forward surge current	$t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}; V_R = 0\text{ V}$			700	A	
C_J	junction capacitance	$V_R = 600\text{ V}$ $f = 1\text{ MHz}$			48	pF	




Buck IGBT				Ratings			
Symbol	Definition	Conditions	min.	typ.	max.	Unit	
V_{CES}	collector emitter voltage				1200	V	
V_{GES}	max. DC gate voltage				±20	V	
V_{GEM}	max. transient gate emitter voltage				±30	V	
I_{C25}	collector current				135	A	
I_{C80}					90	A	
P_{tot}	total power dissipation				560	W	
$V_{CE(sat)}$	collector emitter saturation voltage	$I_C = 75A; V_{GE} = 15V$			2.2	V	
					2.7	V	
$V_{GE(th)}$	gate emitter threshold voltage	$I_C = 3mA; V_{GE} = V_{CE}$	4.5	5.5	6.5	V	
I_{CES}	collector emitter leakage current	$V_{CE} = V_{CES}; V_{GE} = 0V$			5	mA	
					7.5	mA	
I_{GES}	gate emitter leakage current	$V_{GE} = \pm 20V$			300	nA	
$Q_{G(on)}$	total gate charge	$V_{CE} = 600V; V_{GE} = 15V; I_C = 75A$		350		nC	
$t_{d(on)}$	turn-on delay time	inductive load $V_{CE} = 600V; I_C = 75A$ $V_{GE} = \pm 15V; R_G = 15\Omega$		100		ns	
t_r	current rise time			50		ns	
$t_{d(off)}$	turn-off delay time			650		ns	
t_f	current fall time			50		ns	
E_{on}	turn-on energy per pulse			12.1		mJ	
E_{off}	turn-off energy per pulse			10.5		mJ	
RBSOA	reverse bias safe operating area	$V_{GE} = \pm 15V; R_G = 15\Omega$					
I_{CM}		$V_{CEmax} = 1200V$			150	A	
SCSOA	short circuit safe operating area	$V_{CEmax} = 1200V$					
t_{SC}	short circuit duration	$V_{CE} = 1200V; V_{GE} = \pm 15V$			10	µs	
I_{SC}	short circuit current	$R_G = 15\Omega; \text{non-repetitive}$		270		A	
R_{thJC}	thermal resistance junction to case				0.22	K/W	
R_{thCH}	thermal resistance case to heatsink			0.22		K/W	
Buck Diode BD							
V_{RRM}	max. repetitive reverse voltage				1200	V	
I_{F25}	forward current				150	A	
I_{F80}					95	A	
V_F	forward voltage	$I_F = 75A$			2.50	V	
					1.70	V	
I_R	reverse current	$V_R = V_{RRM}$			1	mA	
					1.5	mA	
Q_{rr}	reverse recovery charge	$V_R = 600V$ $-di_F/dt = 600A/\mu s$ $I_F = 75A; V_{GE} = 0V$		7		µC	
I_{RM}	max. reverse recovery current			62		A	
t_{rr}	reverse recovery time			200		ns	
E_{rec}	reverse recovery energy			1.2		mJ	
R_{thJC}	thermal resistance junction to case				0.45	K/W	
R_{thCH}	thermal resistance case to heatsink			0.45		K/W	

Package Y4				Ratings		
Symbol	Definition	Conditions	min.	typ.	max.	Unit
I_{RMS}	RMS current	per terminal			300	A
T_{VJ}	virtual junction temperature		-40		150	°C
T_{op}	operation temperature		-40		125	°C
T_{stg}	storage temperature		-40		125	°C
Weight				108		g
M_D	mounting torque		2.25		2.75	Nm
M_T	terminal torque		4.5		5.5	Nm
$d_{Sppl/App}$	creepage distance on surface striking distance through air	terminal to terminal	14.0	10.0		mm
$d_{Spb/Apb}$		terminal to backside	16.0	16.0		mm
V_{ISOL}	isolation voltage	t = 1 second			3600	V
		t = 1 minute	50/60 Hz, RMS; $I_{ISOL} \leq 1$ mA		3000	V

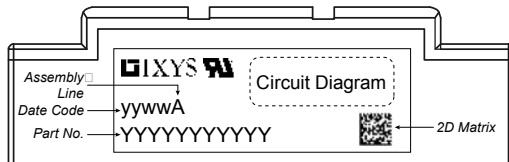

Ordering	Part Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	MDI100-12A3	MDI100-12A3	Box	6	466824

Outlines Y4

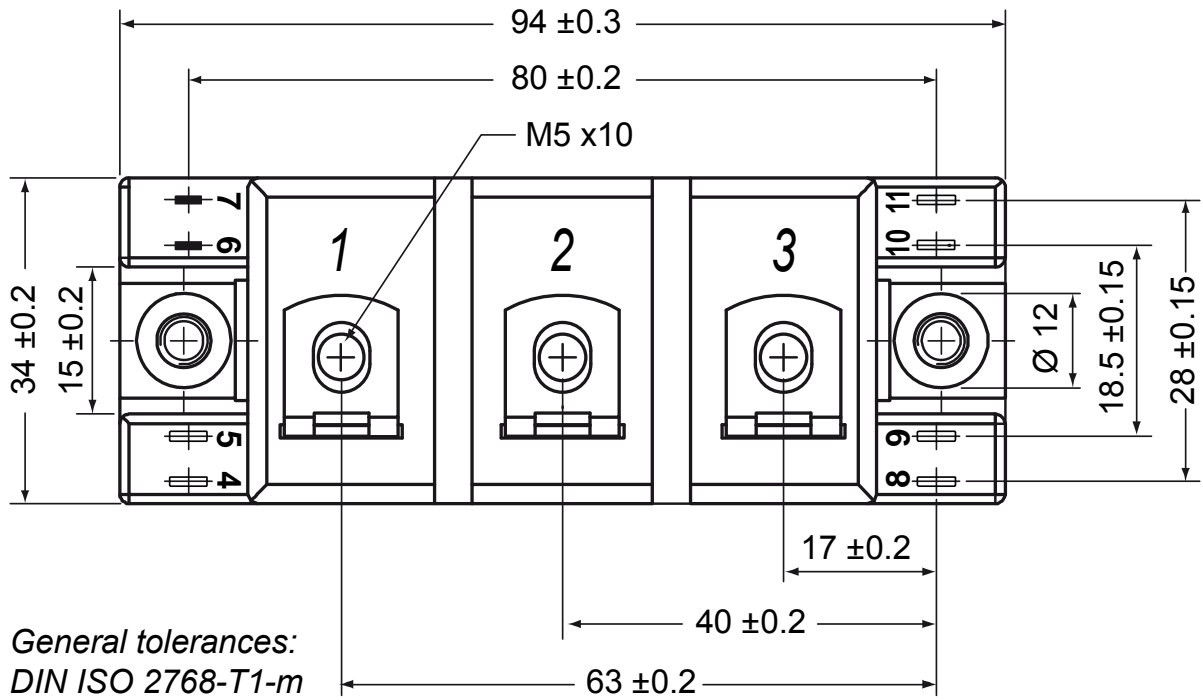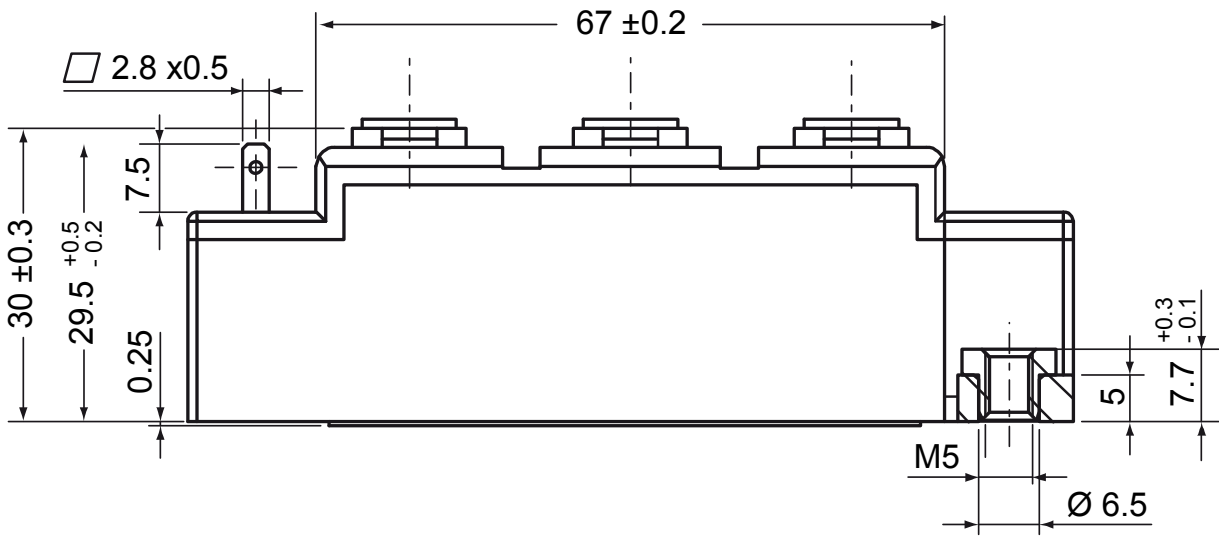

Buck IGBT

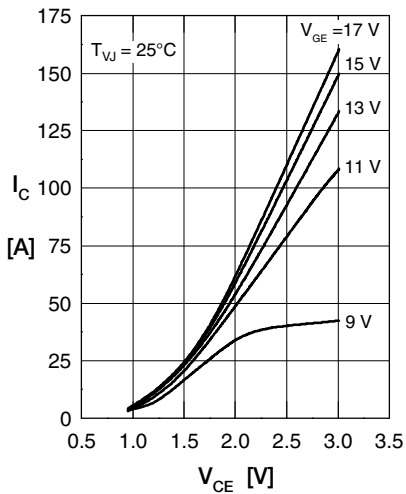


Fig. 1 Typ. output characteristics

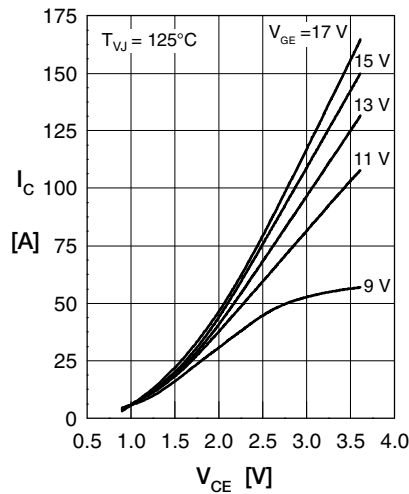


Fig. 2 Typ. output characteristics

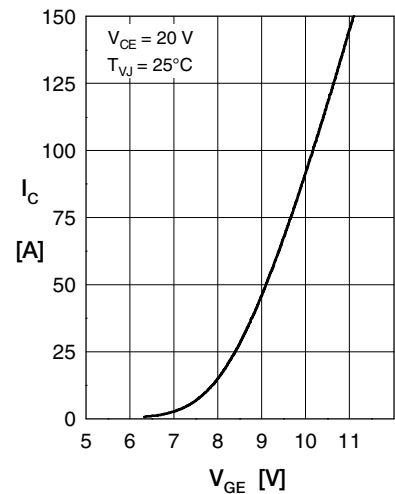


Fig. 3 Typ. transfer characteristics

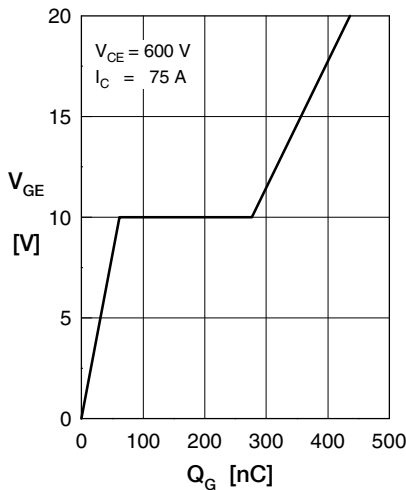


Fig. 4 Typ. turn-on gate charge

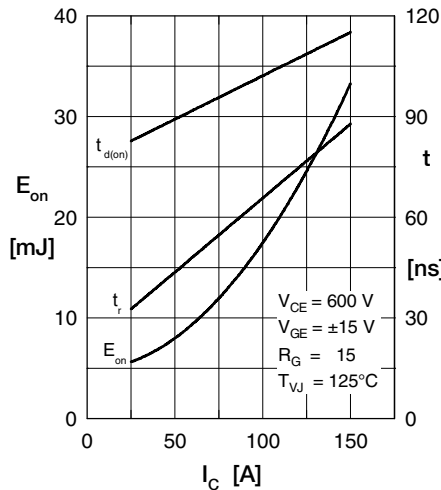


Fig. 5 Typ. turn on energy & switching times versus collector current

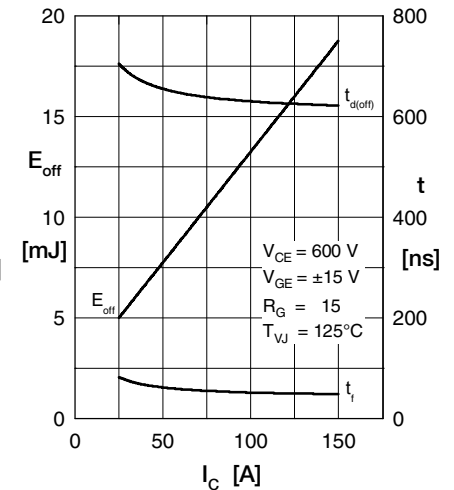


Fig. 6 Typ. turn off energy & switching times versus collector current

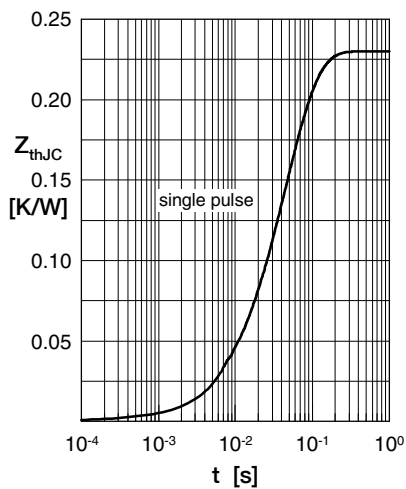


Fig. 12 Typical transient thermal impedance

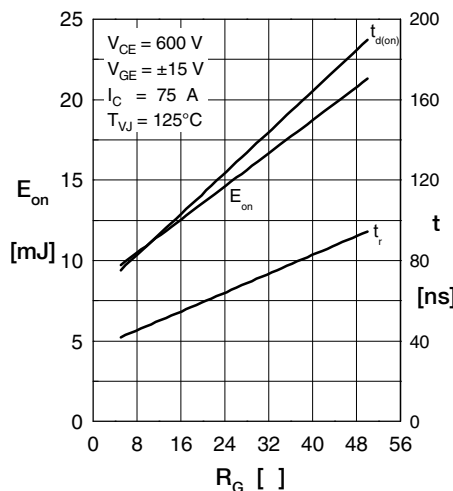


Fig. 9 Typ. turn on energy & switching times versus gate resistor

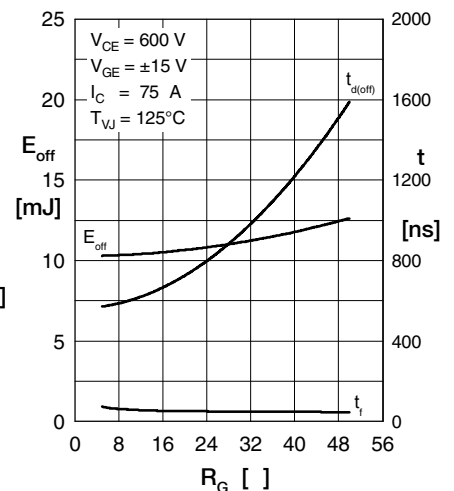


Fig. 9 Typ. turn off energy & switching times versus gate resistor

Buck Diode BD

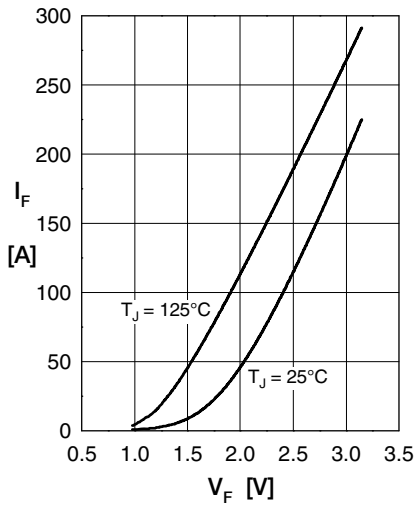


Fig. 1 Typ. Forward current vs. V_F

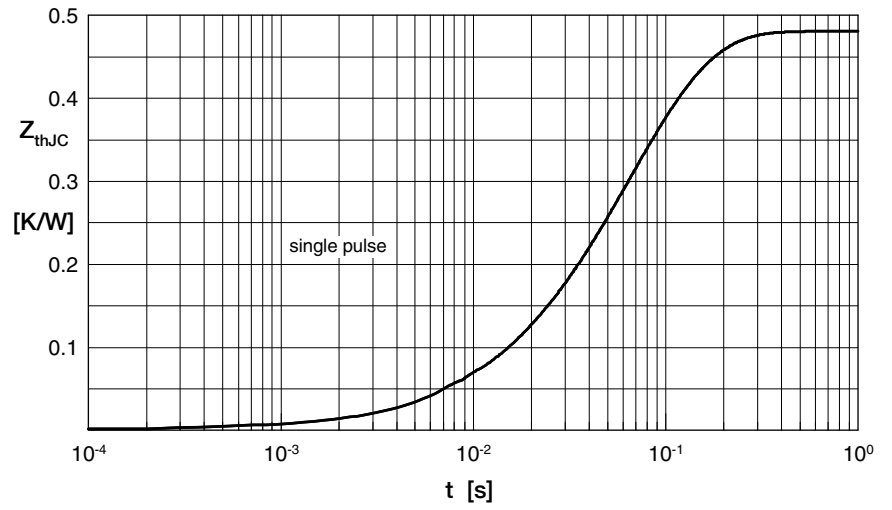


Fig. 2 Typ. transient thermal impedance junction to case

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9