

## LP-CC — 600Vac/300Vdc, ½-30A Time-Delay Fuses



**Description:** Ultimate protection Class CC current-limiting, time-delay fuses. Time-delay – 12 seconds (minimum) at 200% of rated current.

**Catalog Symbol:** LP-CC-(amp)

### Ratings:

- Volts — 600Vac,
- 300Vdc (½-2%<sub>10</sub>A, 20-30A)
- 150Vdc (3-15A)
- Amps — ½-30A
- IR — 200kA Vac RMS Sym.
- 20kA Vdc

### Agency Information:

CE, Std. 248-4, Class CC, UL Listed, Guide JDDZ, File E4273  
CSA Certified; Class 1422-02, File 53787


### Catalog Numbers (amps)

|                        |                        |                        |          |          |
|------------------------|------------------------|------------------------|----------|----------|
| LP-CC-½                | LP-CC-1½               | LP-CC-3                | LP-CC-6  | LP-CC-12 |
| LP-CC-¼                | LP-CC-1% <sub>10</sub> | LP-CC-3% <sub>10</sub> | LP-CC-6¼ | LP-CC-15 |
| LP-CC-¼                | LP-CC-1% <sub>10</sub> | LP-CC-3½               | LP-CC-7  | LP-CC-20 |
| LP-CC-1                | LP-CC-2                | LP-CC-4                | LP-CC-7½ | LP-CC-25 |
| LP-CC-1½               | LP-CC-2¼               | LP-CC-4½               | LP-CC-8  | LP-CC-30 |
| LP-CC-1¼               | LP-CC-2½               | LP-CC-5                | LP-CC-9  |          |
| LP-CC-1% <sub>10</sub> | LP-CC-2% <sub>10</sub> | LP-CC-5% <sub>10</sub> | LP-CC-10 |          |

### Carton Quantity:

| Amp Rating | Carton Qty. |
|------------|-------------|
| 0-30       | 10          |

### Dimensions - in (mm)

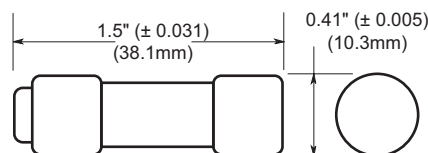

### Features:

- 200kA interrupting rating complies with NEC® Section 110.9 for today's large capacity systems.
- Fast short-circuit protection and dual-element, time-delay performance provide ultimate protection.
- Reduces existing fuse inventory by up to 33% when upgrading to Low-Peak fuses.
- Consistent 2:1 ampacity ratios for all Low-Peak fuses make selective coordination easy.
- Time-delay characteristic avoids unwanted fuse openings from surge currents while fast response speed under short-circuit conditions provides a high degree of current limitation.
- Current-limitation protects downstream components against damaging thermal and magnetic effects of short-circuit currents.
- A superior, all-purpose, space-saving branch circuit fuse that meets most protection requirements up to 30A.
- Very compact, with a physical size only 1½" x 1½" (10.3 x 38.1mm) with rejection tip.
- Proper sizing can provide "no damage" Type 2 coordinated protection for NEMA and IEC motor controllers.
- Can be used where either a time-delay or a fast-acting fuse is needed, making selection easier and reducing spare fuse inventories for substantial cost reduction.
- Superior protection for small horsepower motor circuits.

### Recommended Fuse Blocks and Holders


| Fuse Amps                  | 1-Pole  | 2-Pole  | 3-Pole      |
|----------------------------|---------|---------|-------------|
| <b>Open Blocks</b>         |         |         |             |
| 0-30                       | BC6031_ | BC6032_ | BC6033_     |
| <b>DIN-Rail Holders</b>    |         |         |             |
|                            | CHCC1D_ | CHCC2D_ | CHCC3D_     |
| 0-30                       | —       | —       | OPM-NG_     |
|                            | —       | —       | OPM-1038_   |
|                            | —       | —       | OPM-1038_SW |
| <b>Panel Mount Holders</b> |         |         |             |
| 0-30                       | HPS     | —       | —           |
|                            | HPF     | —       | —           |
| <b>In-Line Holders</b>     |         |         |             |
| 0-30                       | —       | HEY     | —           |
|                            | HEZ     | —       | —           |

For additional information on the Class CC fuse blocks and holders, see data sheets:

- Open Blocks # 1105 (BC Series)
- DIN-Rail Holders # 3185 (CHCC), # 1109 (OPM), # 1102 (OPM-1038), 1103 (OPM-1038\_SW),
- Panel Mount Holders # 2113 (HPS), # 2114 (HPF)
- In-Line Holders # 2126 (HEY), # 2130 (HEZ)


## LP-CC — 600Vac/300Vdc, ½-30A Time-Delay Fuses

Time-Current Curves - Average Melt

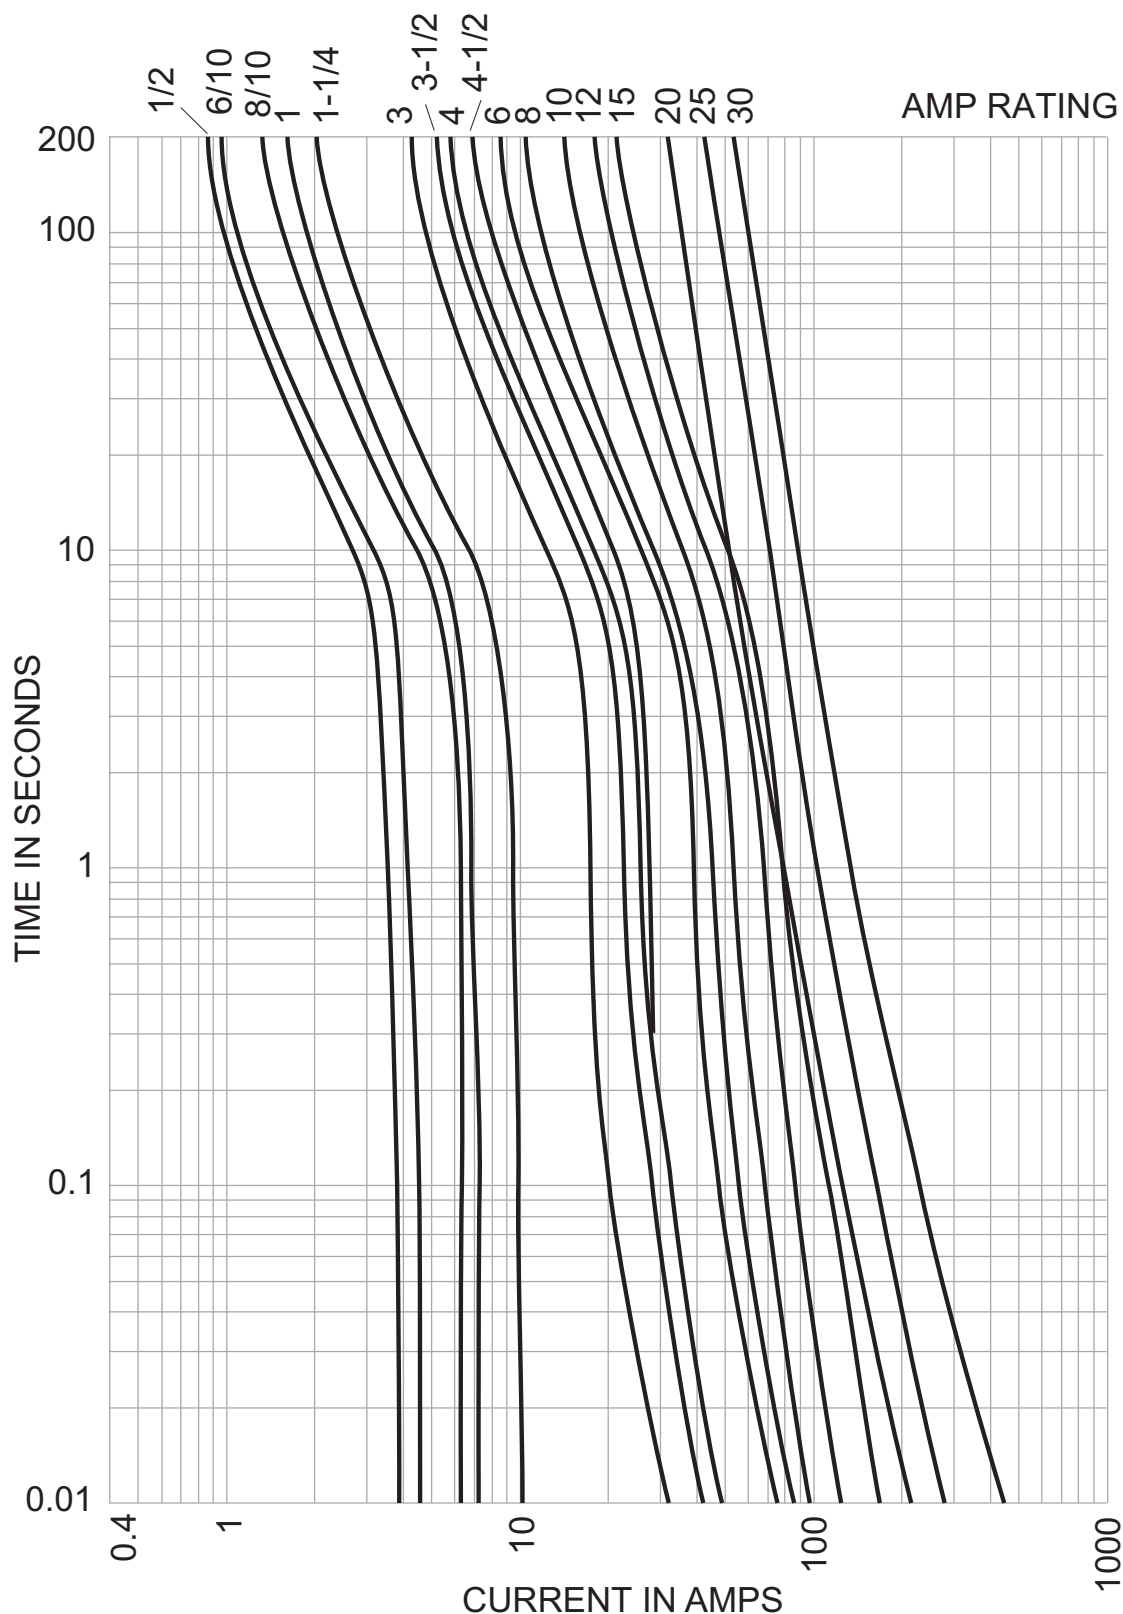

## LP-CC — 600Vac/300Vdc, ½-30A Time-Delay Fuses

### Current-Limitation Curves

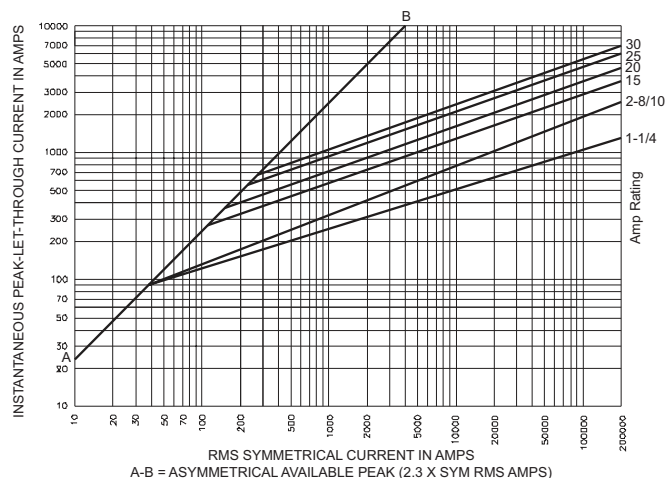

### Current-Limiting Effects

| Prosp.<br>S.C.C. | Let-Through Current<br>(Apparent RMS Symmetrical Vs. Fuse Rating) |      |      |      |      |      |
|------------------|-------------------------------------------------------------------|------|------|------|------|------|
| —                | 1¼A                                                               | 2½A  | 15A  | 20A  | 25A  | 30A  |
| 1000             | 100                                                               | 135  | 240  | 305  | 380  | 435  |
| 3000             | 140                                                               | 210  | 350  | 440  | 575  | 580  |
| 5000             | 165                                                               | 255  | 420  | 570  | 690  | 710  |
| 10,000           | 210                                                               | 340  | 540  | 700  | 870  | 1000 |
| 20,000           | 260                                                               | 435  | 680  | 870  | 1090 | 1305 |
| 30,000           | 290                                                               | 525  | 800  | 1030 | 1300 | 1520 |
| 40,000           | 315                                                               | 610  | 870  | 1150 | 1390 | 1700 |
| 50,000           | 340                                                               | 650  | 915  | 1215 | 1520 | 1820 |
| 60,000           | 350                                                               | 735  | 1050 | 1300 | 1650 | 1980 |
| 80,000           | 390                                                               | 785  | 1130 | 1500 | 1780 | 2180 |
| 100,000          | 420                                                               | 830  | 1210 | 1600 | 2000 | 2400 |
| 200,000          | 525                                                               | 1100 | 1600 | 2000 | 2520 | 3050 |

**NOTE:** To calculate  $I_p$  ( $I_{peak}$ ) multiply  $I_{RMS}$  value by 2.3.

The only controlled copy of this Data Sheet is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9