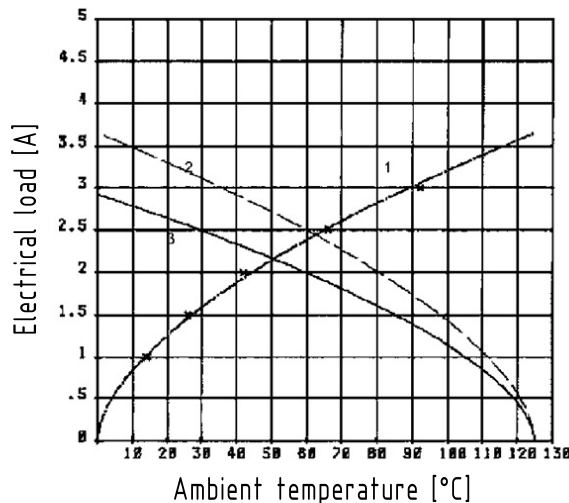


	1	2	3	4	5	6	7	8																																																
A	 SEK 18 female connector IDC  RoHS compliant 				Cable information <table><tr><td>Wire material</td><td>Cu, tinned</td></tr><tr><td>Gauge</td><td>AWG 26/7 (0,141mm²) - 28/7 (0,089 mm²)</td></tr><tr><td>Insulation material</td><td>PVC or non-halogenated flame retardant Polyolefin (only for halogen free flat cable)</td></tr></table>				Wire material	Cu, tinned	Gauge	AWG 26/7 (0,141mm²) - 28/7 (0,089 mm²)	Insulation material	PVC or non-halogenated flame retardant Polyolefin (only for halogen free flat cable)	A																																									
Wire material	Cu, tinned																																																							
Gauge	AWG 26/7 (0,141mm²) - 28/7 (0,089 mm²)																																																							
Insulation material	PVC or non-halogenated flame retardant Polyolefin (only for halogen free flat cable)																																																							
B	General information <table><tr><td>Design</td><td colspan="3">IEC 60603-13</td></tr><tr><td>No. of contacts</td><td colspan="3">6, 10, 14, 16, 20, 24, 26, 30, 34, 40, 50, 60, 64</td></tr><tr><td>Contact spacing</td><td colspan="3">on PCB side 2,54 mm; on cable side 1,27 mm</td></tr><tr><td>Test voltage Ur.m.s</td><td colspan="3">1 kV</td></tr><tr><td>Working voltage</td><td colspan="3">320 V for pollution degree 1</td></tr><tr><td>Contact resistance</td><td colspan="3">max. 20mOhm</td></tr><tr><td>Insulation resistance</td><td colspan="3">min. 10⁹Ohm</td></tr><tr><td>Working current</td><td colspan="3">1 A</td></tr><tr><td>Temperature range</td><td colspan="3">-55°C ... +125°C</td></tr><tr><td>Termination technology</td><td colspan="3">IDC flat cable, 1,27 mm pitch</td></tr></table>				Design	IEC 60603-13			No. of contacts	6, 10, 14, 16, 20, 24, 26, 30, 34, 40, 50, 60, 64			Contact spacing	on PCB side 2,54 mm; on cable side 1,27 mm			Test voltage Ur.m.s	1 kV			Working voltage	320 V for pollution degree 1			Contact resistance	max. 20mOhm			Insulation resistance	min. 10⁹Ohm			Working current	1 A			Temperature range	-55°C ... +125°C			Termination technology	IDC flat cable, 1,27 mm pitch			B											
Design	IEC 60603-13																																																							
No. of contacts	6, 10, 14, 16, 20, 24, 26, 30, 34, 40, 50, 60, 64																																																							
Contact spacing	on PCB side 2,54 mm; on cable side 1,27 mm																																																							
Test voltage Ur.m.s	1 kV																																																							
Working voltage	320 V for pollution degree 1																																																							
Contact resistance	max. 20mOhm																																																							
Insulation resistance	min. 10⁹Ohm																																																							
Working current	1 A																																																							
Temperature range	-55°C ... +125°C																																																							
Termination technology	IDC flat cable, 1,27 mm pitch																																																							
C	<table><tr><td rowspan="7">Insertion and withdrawal forces</td><td>6-pole max. 12N for PL1-2 / 18N for PL3</td><td colspan="2">; 30-pole max. 60N for PL1-2 / 90N for PL3</td></tr><tr><td>10-pole max. 20N for PL1-2 / 30N for PL3</td><td colspan="2">; 34-pole max. 68N for PL1-2 / 102N for PL3</td></tr><tr><td>14-pole max. 28N for PL1-2 / 42 for PL3</td><td colspan="2">; 40-pole max. 80N for PL1-2 / 120N for PL3</td></tr><tr><td>16-pole max. 32N for PL1-2 / 48N for PL3</td><td colspan="2">; 50-pole max. 100N for PL1-2 / 150N for PL3</td></tr><tr><td>20-pole max. 40N for PL1-2 / 60N for PL3</td><td colspan="2">; 60-pole max. 120N for PL1-2 / 180N for PL3</td></tr><tr><td>24-pole max. 48N for PL1-2 / 72N for PL3</td><td colspan="2">; 64-pole max. 128N for PL1-2 / 192N for PL3</td></tr><tr><td>26-pole max. 52N for PL1-2 / 78N for PL3</td><td colspan="2"></td></tr><tr><td rowspan="4">Mating cycles</td><td>S4 surface treatment</td><td colspan="2">min. 0,76 µm Au</td></tr><tr><td>PL 1 acc. to IEC 60603-13</td><td>500 mating cycles</td><td>10 days gas test</td></tr><tr><td>PL 2 acc. to IEC 60603-13</td><td>250 mating cycles</td><td>4 days gas test</td></tr><tr><td>PL 3 acc. to IEC 60603-13</td><td>50 mating cycles</td><td>No gas test</td></tr><tr><td>UL file</td><td colspan="3">E 102079</td></tr><tr><td>RoHS - compliant</td><td colspan="3">Yes</td></tr><tr><td>Leadfree</td><td colspan="3">Yes</td></tr><tr><td>Hot plugging</td><td colspan="3">No</td></tr></table>				Insertion and withdrawal forces	6-pole max. 12N for PL1-2 / 18N for PL3	; 30-pole max. 60N for PL1-2 / 90N for PL3		10-pole max. 20N for PL1-2 / 30N for PL3	; 34-pole max. 68N for PL1-2 / 102N for PL3		14-pole max. 28N for PL1-2 / 42 for PL3	; 40-pole max. 80N for PL1-2 / 120N for PL3		16-pole max. 32N for PL1-2 / 48N for PL3	; 50-pole max. 100N for PL1-2 / 150N for PL3		20-pole max. 40N for PL1-2 / 60N for PL3	; 60-pole max. 120N for PL1-2 / 180N for PL3		24-pole max. 48N for PL1-2 / 72N for PL3	; 64-pole max. 128N for PL1-2 / 192N for PL3		26-pole max. 52N for PL1-2 / 78N for PL3			Mating cycles	S4 surface treatment	min. 0,76 µm Au		PL 1 acc. to IEC 60603-13	500 mating cycles	10 days gas test	PL 2 acc. to IEC 60603-13	250 mating cycles	4 days gas test	PL 3 acc. to IEC 60603-13	50 mating cycles	No gas test	UL file	E 102079			RoHS - compliant	Yes			Leadfree	Yes			Hot plugging	No			C
Insertion and withdrawal forces	6-pole max. 12N for PL1-2 / 18N for PL3	; 30-pole max. 60N for PL1-2 / 90N for PL3																																																						
	10-pole max. 20N for PL1-2 / 30N for PL3	; 34-pole max. 68N for PL1-2 / 102N for PL3																																																						
	14-pole max. 28N for PL1-2 / 42 for PL3	; 40-pole max. 80N for PL1-2 / 120N for PL3																																																						
	16-pole max. 32N for PL1-2 / 48N for PL3	; 50-pole max. 100N for PL1-2 / 150N for PL3																																																						
	20-pole max. 40N for PL1-2 / 60N for PL3	; 60-pole max. 120N for PL1-2 / 180N for PL3																																																						
	24-pole max. 48N for PL1-2 / 72N for PL3	; 64-pole max. 128N for PL1-2 / 192N for PL3																																																						
	26-pole max. 52N for PL1-2 / 78N for PL3																																																							
Mating cycles	S4 surface treatment	min. 0,76 µm Au																																																						
	PL 1 acc. to IEC 60603-13	500 mating cycles	10 days gas test																																																					
	PL 2 acc. to IEC 60603-13	250 mating cycles	4 days gas test																																																					
	PL 3 acc. to IEC 60603-13	50 mating cycles	No gas test																																																					
UL file	E 102079																																																							
RoHS - compliant	Yes																																																							
Leadfree	Yes																																																							
Hot plugging	No																																																							
D	Insulator material <table><tr><td>Material</td><td colspan="3">PBT (thermoplastics, glass fiber reinforcement 30%)</td></tr><tr><td>Color</td><td colspan="3">Black (RAL 7001) or grey (RAL 7032)</td></tr><tr><td>UL classification</td><td colspan="3">UL94-V0</td></tr><tr><td>Material group acc. IEC 60664-1</td><td colspan="3">IIIa (175 ≤ CTI < 400)</td></tr><tr><td>NF F 16-101 classification</td><td colspan="3">I3,F3</td></tr></table>				Material	PBT (thermoplastics, glass fiber reinforcement 30%)			Color	Black (RAL 7001) or grey (RAL 7032)			UL classification	UL94-V0			Material group acc. IEC 60664-1	IIIa (175 ≤ CTI < 400)			NF F 16-101 classification	I3,F3			D																															
Material	PBT (thermoplastics, glass fiber reinforcement 30%)																																																							
Color	Black (RAL 7001) or grey (RAL 7032)																																																							
UL classification	UL94-V0																																																							
Material group acc. IEC 60664-1	IIIa (175 ≤ CTI < 400)																																																							
NF F 16-101 classification	I3,F3																																																							
E	Derating diagram acc to IEC 60512-2 (Current carrying capacity) The current carrying capacity is limited by maximum temperature of materials for inserts and contacts including terminals. The current capacity-curve is valid for continuous, not interrupted current-loaded contacts of connectors when simultaneous power on all contacts is given without exceeding the maximum temperature. Control and test procedures according to DIN IEC 60512. 1) Temperature rise 2) Derating 3) Derating curve at I max x 0.8(IEC 60512-2) 				E																																																			
F					 All rights reserved Department EC PD - DE HARTING Electronics GmbH D-32339 Espelkamp Created by STORCK Inspected by LEHNERT Standardisation HOFFMANN Date 2016-09-05 State Final Release Title SEK 18 female connector IDC Type DS Number 09182100600 Doc-Key / ECM-Nr. 100661764/UGD/000/B 500000107692 Rev. B Page 1/1				F																																															
	1	2	3	4	5	6	7	8																																																

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

HARTING:

[09185065804](#) [09185065813](#) [09185066804](#) [09185066813](#) [09185067803](#) [09185105803](#) [09185107804](#)
[09185107813](#) [09185107814](#) [09185165804](#) [09185165813](#) [09185167803](#) [09185167804](#) [09185167814](#) [09185205804](#)
[09185205814](#) [09185206814](#) [09185266803](#) [09185266804](#) [09185267814](#) [09185345804](#) [09185345814](#)
[09185346814](#) [09185347813](#) [09185347814](#) [09185405803](#) [09185405804](#) [09185405814](#) [09185406814](#) [09185407804](#)
[09185407813](#) [09185407814](#) [09185506804](#) [09185605803](#) [09185605813](#) [09185606814](#) [09185607804](#)
[09185645804](#) [09185645814](#) [09185646813](#) [09185647803](#) [09185647804](#) [09185647813](#) [09185106813](#) [09185206813](#)
[09185267813](#) [09185506803](#) [09185067813](#) [09185265803](#) [09185146804](#) [09185166804](#) [09185067814](#)
[09185107803](#) [09185207814](#) [09185066814](#) [09185145804](#) [09185145813](#) [09185147813](#) [09185167813](#) [09185205803](#)
[09185266814](#) [09185307803](#) [09185346804](#) [09185505804](#) [09185506814](#) [09185605814](#) [09185606813](#)
[09185646804](#) [09185066803](#) [09185067804](#) [09185145803](#) [09185206804](#) [09185265804](#) [09185267804](#) [09185305803](#)
[09185307813](#) [09185405813](#) [09185505803](#) [09185065803](#) [09185105804](#) [09185105814](#) [09185146814](#)
[09185147804](#) [09185347804](#) [09185505814](#) [09185507814](#) [09185605804](#) [09185645803](#) [09185147814](#) [09185166814](#)
[09185305813](#) [09185306803](#) [09185306813](#) [09185345803](#) [09185345813](#) [09185406813](#) [09185507804](#)
[09185606804](#) [09185607814](#) [09185645813](#)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9