


Features

- Ultra Miniature Surface Mount Package
- Complementary PNP Type Available (2DA1774Q,R,S)
- **Lead Free/RoHS Compliant (Note 3)**
- "Green" Device (Note 4 and 5)

Mechanical Data

- Case: SOT-523
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020C
- Terminal Connections: See diagram
- Terminals: Solderable per MIL-STD-202, Method 208
- Lead Free Plating (Matte Tin annealed over Alloy 42 leadframe).
- Marking Information: (See Page 3): 2DC4617Q: 8D
2DC4617R: 8E
2DC4617S: 8F
- Ordering Information: See Page 3
- Weight: 0.002 grams (approximate)

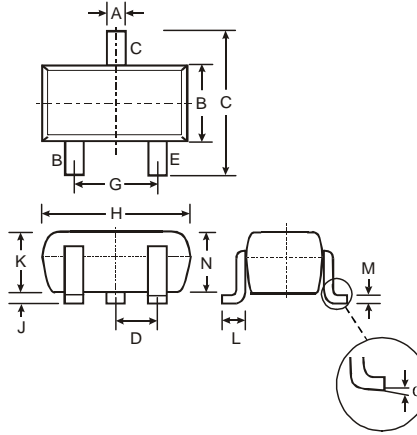

| SOT-523 | | | |
|----------------------|------|------|------|
| Dim | Min | Max | Typ |
| A | 0.15 | 0.30 | 0.22 |
| B | 0.75 | 0.85 | 0.80 |
| C | 1.45 | 1.75 | 1.60 |
| D | — | — | 0.50 |
| G | 0.90 | 1.10 | 1.00 |
| H | 1.50 | 1.70 | 1.60 |
| J | 0.00 | 0.10 | 0.05 |
| K | 0.60 | 0.80 | 0.75 |
| L | 0.10 | 0.30 | 0.22 |
| M | 0.10 | 0.20 | 0.12 |
| N | 0.45 | 0.65 | 0.50 |
| α | 0° | 8° | — |
| All Dimensions in mm | | | |

Maximum Ratings @T_A = 25°C unless otherwise specified

| Characteristic | Symbol | Value | Unit |
|---|------------------|-------|------|
| Collector-Base Voltage | V _{CB0} | 60 | V |
| Collector-Emitter Voltage | V _{CE0} | 50 | V |
| Emitter-Base Voltage | V _{EBO} | 7.0 | V |
| Collector Current - Continuous (Note 1) | I _C | 150 | mA |

Thermal Characteristics @T_A = 25°C unless otherwise specified

| Characteristic | Symbol | Value | Unit |
|--|-----------------------------------|-------------|------|
| Power Dissipation (Note 1) | P _d | 150 | mW |
| Thermal Resistance, Junction to Ambient (Note 1) | R _{θJA} | 833 | °C/W |
| Operating and Storage Temperature Range | T _J , T _{STG} | -55 to +150 | °C |

Electrical Characteristics @T_A = 25°C unless otherwise specified

| Characteristic | Symbol | Min | Typ | Max | Unit | Test Condition |
|--------------------------------------|----------------------|-------------------|-----|-------------------|------|--|
| OFF CHARACTERISTICS (Note 2) | | | | | | |
| Collector-Base Breakdown Voltage | V _{(BR)CBO} | 60 | — | — | V | I _C = 50μA, I _E = 0 |
| Collector-Emitter Breakdown Voltage | V _{(BR)CEO} | 50 | — | — | V | I _C = 1.0mA, I _B = 0 |
| Emitter-Base Breakdown Voltage | V _{(BR)EBO} | 7.0 | — | — | V | I _E = 50μA, I _C = 0 |
| Collector Cutoff Current | I _{CBO} | — | — | 100 | nA | V _{CB} = 60V |
| Emitter Cutoff Current | I _{EBO} | — | — | 100 | nA | V _{EB} = 7.0V |
| ON CHARACTERISTICS (Note 2) | | | | | | |
| DC Current Gain | h _{FE} | 120 180 270 | — | 270 390 560 | — | V _{CE} = 6.0V, I _C = 1.0mA |
| Collector-Emitter Saturation Voltage | V _{CE(SAT)} | — | — | 0.4 | V | I _C = 50mA, I _B = 5.0mA |
| SMALL SIGNAL CHARACTERISTICS | | | | | | |
| Output Capacitance | C _{obo} | — | 2.0 | 3.5 | pF | V _{CB} = 12V, f = 1.0MHz, I _E = 0 |
| Current Gain-Bandwidth Product | f _T | — | 180 | — | MHz | V _{CE} = 12V, I _E = -2mA, f = 1MHz |
| Current Gain-Bandwidth Product | f _T | 180 Typ. | — | — | MHz | V _{CE} = 12V, I _E = 0A, f = 1MHz |
| Current Gain-Bandwidth Product | f _T | 180 Typ. | — | — | MHz | V _{CE} = 12V, I _C = -2.0mA, f = 100MHz |

- Notes:
1. Part mounted on FR-4 board with recommended pad layout, which can be found on our website at <http://www.diodes.com/datasheets/ap02001.pdf>.
 2. Short duration pulse test used to minimize self-heating effect.
 3. No purposefully added lead.
 4. Diodes Inc.'s "Green" policy can be found on our website at http://www.diodes.com/products/lead_free/index.php.
 5. Product manufactured with Date Code UO (week 40, 2007) and newer are built with Green Molding Compound. Product manufactured prior to Date Code UO are built with Non-Green Molding Compound and may contain Halogens or Sb2O3 Fire Retardants.

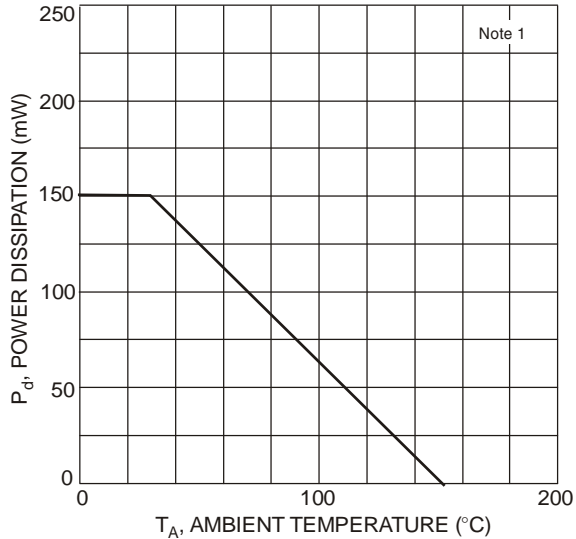


Fig. 1 Power Derating Curve

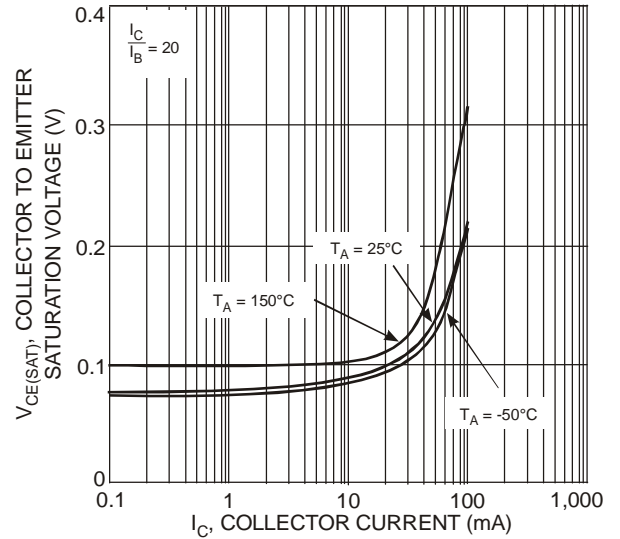


Fig. 2 Collector Emitter Saturation Voltage vs. Collector Current

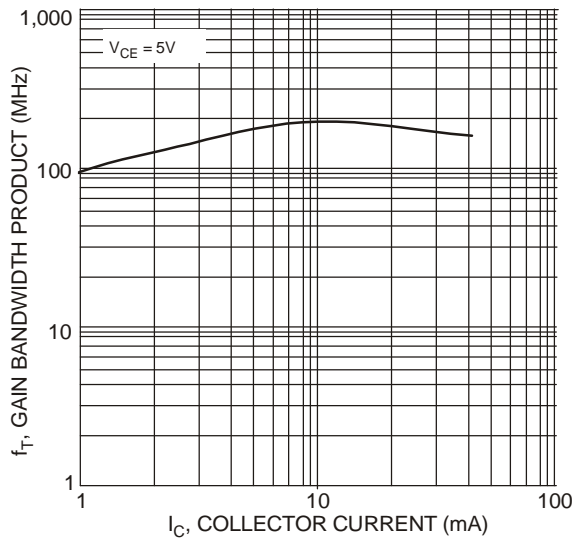



Fig. 3 Gain Bandwidth Product vs. Collector Current

Ordering Information (Note 6)

| Device | Packaging | Shipping |
|--------------|-----------|------------------|
| 2DC4617Q-7-F | SOT-523 | 3000/Tape & Reel |
| 2DC4617R-7-F | SOT-523 | 3000/Tape & Reel |
| 2DC4617S-7-F | SOT-523 | 3000/Tape & Reel |

Notes: 6. For packaging details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

Marking Information



XX = Product Type Marking Code (See Page 1, e.g. 8D = 2DC4617Q)
 YM = Date Code Marking
 Y = Year (ex: N = 2002)
 M = Month (ex: 9 = September)

Date Code Key

| Year | 1998 | 1999 | 2000 | 2001 | 2002 | 2003 | 2004 | 2005 | 2006 | 2007 | 2008 | 2009 | 2010 | 2011 | 2012 |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| Code | J | K | L | M | N | P | R | S | T | U | V | W | X | Y | Z |

| Month | Jan | Feb | Mar | Apr | May | Jun | Jul | Aug | Sep | Oct | Nov | Dec |
|-------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Code | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | O | N | D |

IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9