




Shielded Power Inductor – SER2000

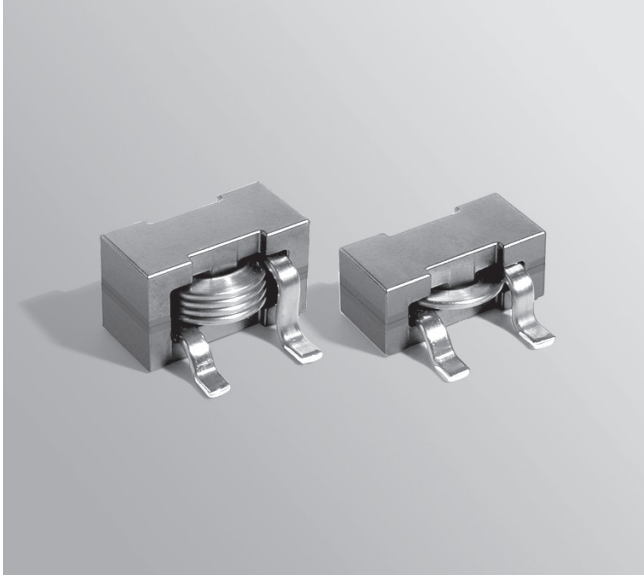

- Designed for high current power supply applications
- Flat wire windings provide exceptionally low DCR
- Isat ratings as high as 100 A

Designer's Kit C374 contains 2 each of nine parts.

Core material Ferrite

Core and winding loss See www.coilcraft.com/coreloss

Terminations RoHS compliant tin-silver over copper. Other terminations available at additional cost.

Ambient temperature -40°C to $+85^{\circ}\text{C}$ with Irms current, $+85^{\circ}\text{C}$ to $+125^{\circ}\text{C}$ with derated current



Storage temperature Component: -40°C to $+125^{\circ}\text{C}$.
Tape and reel packaging: -40°C to $+80^{\circ}\text{C}$

Resistance to soldering heat Max three 40 second reflows at $+260^{\circ}\text{C}$, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at $<30^{\circ}\text{C}$ / 85% relative humidity)

Failures in Time (FIT) / Mean Time Between Failures (MTBF)
38 per billion hours / 26,315,789 hours, calculated per Telcordia SR-332

PCB washing Only pure water or alcohol recommended

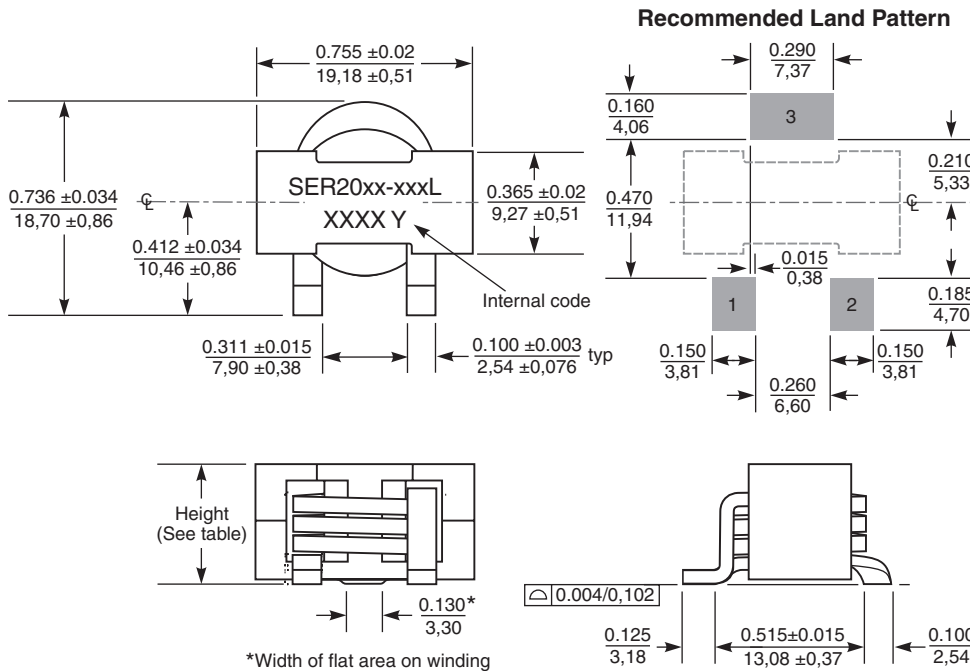

Caution:

Terminal 3 is provided for mounting stability only. This terminal is connected to the winding of the inductor and must not be connected to ground or any circuitry.

	Maximum height	Weight
SER2009	0.34 / 8,64	6.65 – 6.89 g
SER2010	0.37 / 9,40	7.46 – 7.90 g
SER2011	0.42 / 10,67	8.63 – 9.08 g
SER2012	0.47 / 11,94	9.92 – 10.3 g
SER2013	0.51 / 12,95	10.8 – 11.4 g
SER2014	0.55 / 13,97	11.7 – 12.4 g

Packaging

SER2009 200 per 13" reel; Plastic tape: 44 mm wide, 0.4 mm thick, 32 mm pocket spacing, 9.25 pocket depth
 SER2010 200 per 13" reel; Plastic tape: 44 mm wide, 0.4 mm thick, 32 mm pocket spacing, 10.5 pocket depth
 SER2011 170 per 13" reel; Plastic tape: 44 mm wide, 0.4 mm thick, 32 mm pocket spacing, 11.6 pocket depth
 SER2012 150 per 13" reel; Plastic tape: 44 mm wide, 0.4 mm thick, 32 mm pocket spacing, 13.0 pocket depth
 SER2013 150 per 13" reel; Plastic tape: 44 mm wide, 0.5 mm thick, 32 mm pocket spacing, 14.0 pocket depth
 SER2014 125 per 13" reel; Plastic tape: 44 mm wide, 0.5 mm thick, 32 mm pocket spacing, 15.0 pocket depth



www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore +65-6484 8412 sales@coilcraft.com.sg

Document 349-1 Revised 09/05/12

© Coilcraft Inc. 2012

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check out web site for latest information.



Shielded Power Inductors – SER2000 Series

SPICE models
ON OUR WEB SITE

Part number ¹	Inductance $\pm 20\%^2$ (μ H)	DCR max ³ (m Ω)	DCR typ ³ (m Ω)	SRF typ ⁴ (MHz)	Isat ⁵ (A)	Irms (A) ⁶		Height (mm)
						20°C rise	40°C rise	
SER2009-301ML	0.30	0.740	0.630	550	100	41	54	8,64
SER2010-301ML	0.30	1.00	0.900	182	100	36	45	9,40
SER2009-501ML	0.50	0.740	0.630	544	60	41	54	8,64
SER2010-501ML	0.50	1.00	0.900	148	81	36	45	9,40
SER2011-501ML	0.50	1.34	1.20	161	100	30	40	10,67
SER2009-601ML	0.60	0.740	0.630	648	49	41	54	8,64
SER2010-601ML	0.60	1.00	0.900	115	70	36	45	9,40
SER2011-601ML	0.60	1.34	1.20	124	90	30	40	10,67
SER2012-601ML	0.60	1.60	1.44	115	97	25	35	11,94
SER2009-681ML	0.68	0.740	0.630	454	45	41	54	8,64
SER2010-681ML	0.68	1.00	0.900	136	62	36	45	9,40
SER2011-681ML	0.68	1.34	1.20	135	78	30	40	10,67
SER2012-681ML	0.68	1.60	1.44	103	85	25	35	11,94
SER2013-681ML	0.68	1.82	1.70	104	98	23	30	12,95
SER2009-801ML	0.80	0.740	0.630	567	38	41	54	8,64
SER2010-801ML	0.80	1.00	0.900	92	53	36	45	9,40
SER2011-801ML	0.80	1.34	1.20	113	70	30	40	10,67
SER2012-801ML	0.80	1.60	1.44	91	75	25	35	11,94
SER2013-801ML	0.80	1.82	1.70	93	85	23	30	12,95
SER2014-801ML	0.80	2.15	1.94	104	98	21	27	13,97
SER2009-901ML	0.90	0.740	0.630	557	33	41	54	8,64
SER2010-901ML	0.90	1.00	0.900	96	48	36	45	9,40
SER2011-901ML	0.90	1.34	1.20	104	62	30	40	10,67
SER2012-901ML	0.90	1.60	1.44	85	69	25	35	11,94
SER2013-901ML	0.90	1.82	1.70	98	73	23	30	12,95
SER2014-901ML	0.90	2.15	1.94	102	87	21	27	13,97
SER2009-102ML	1.0	0.740	0.630	488	29	41	54	8,64
SER2010-102ML	1.0	1.00	0.900	81	42	36	45	9,40
SER2011-102ML	1.0	1.34	1.20	97	56	30	40	10,67
SER2012-102ML	1.0	1.60	1.44	75	64	25	35	11,94
SER2013-102ML	1.0	1.82	1.70	98	68	23	30	12,95
SER2014-102ML	1.0	2.15	1.94	88	70	21	27	13,97
SER2009-122ML	1.2	0.740	0.630	81	28	41	54	8,64
SER2010-122ML	1.2	1.00	0.900	69	37	36	45	9,40
SER2011-122ML	1.2	1.34	1.20	81	49	30	40	10,67
SER2012-122ML	1.2	1.60	1.44	73	54	25	35	11,94
SER2013-122ML	1.2	1.82	1.70	82	58	23	30	12,95
SER2014-122ML	1.2	2.15	1.94	78	63	21	27	13,97
SER2009-202ML	2.0	0.740	0.630	40	16	41	54	8,64
SER2010-202ML	2.0	1.00	0.900	48	27	36	45	9,40
SER2011-202ML	2.0	1.34	1.20	56	37	30	40	10,67
SER2012-202ML	2.0	1.60	1.44	51	35	25	35	11,94
SER2013-202ML	2.0	1.82	1.70	61	40	23	30	12,95
SER2014-202ML	2.0	2.15	1.94	62	45	21	27	13,97
SER2013-362ML	3.6	1.82	1.70	38	25	23	30	12,95
SER2013-402ML	4.0	1.82	1.70	35	20	23	30	12,95
SER2014-402ML	4.0	2.15	1.94	36	25	21	27	13,97
SER2013-472ML	4.7	1.82	1.70	30	18	23	30	12,95

Parts shown in bold are included in Coilcraft Designer's Kit C374.

1. Please specify **termination** and **packaging** codes:

SER2014-202MLD

Termination: L = RoHS compliant tin-silver over copper.

Special order:

T = RoHS tin-silver-copper

(95.5/4/0.5) or S = non-RoHS tin-lead (63/37).

Packaging: D = 13" machine-ready reel. EIA-481 embossed plastic tape.

B = Less than full reel. In tape, but not machine ready. To have a leader and trailer added (\$25 charge), use code letter D instead.

2. Inductance measured at 100 kHz, 0.1 Vrms, 0 Adc on an Agilent/HP 4263B LCR meter or equivalent.

3. DCR measured on a Keithley 580 micro-ohmmeter.

4. SRF measured using an Agilent/HP 4395A network analyzer and an Agilent/HP 16092A test fixture.


5. DC current at which the inductance drops 10% (typ) from its value without current.

6. Current that causes the specified temperature rise from 25°C ambient. When Irms is greater than Isat, Isat is the more critical specification, and Irms is shown in gray type. See Temperature Rise vs Current curve below.


7. Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

Temperature Rise vs Current

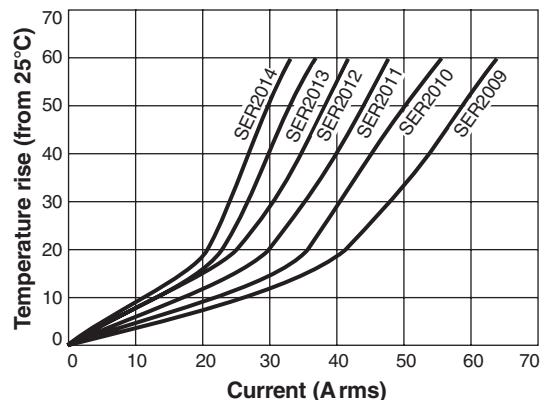







Current Derating

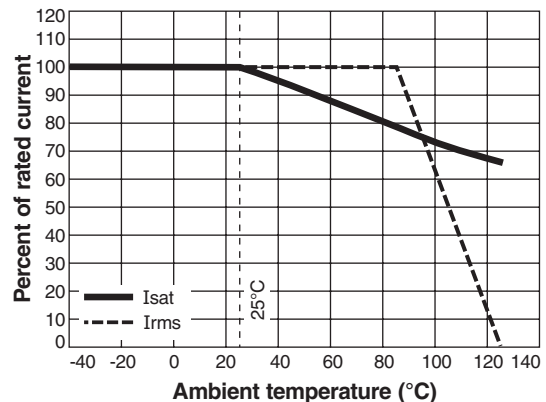



Shielded Power Inductors – SER2000 Series

L vs Frequency

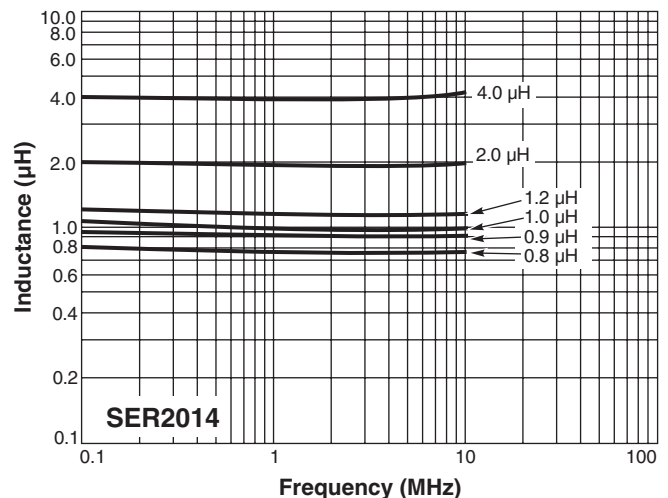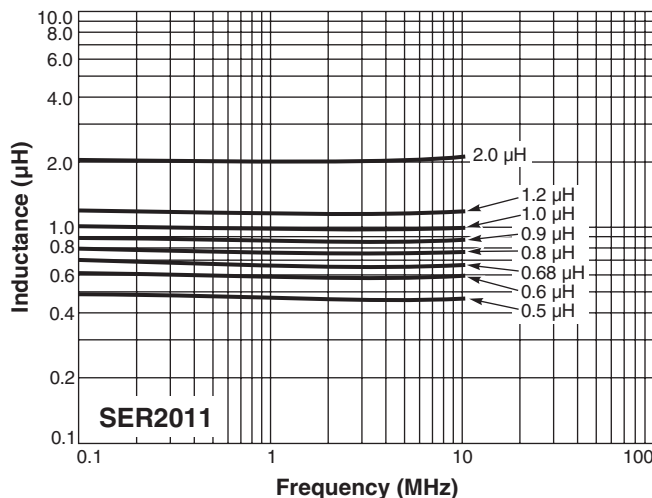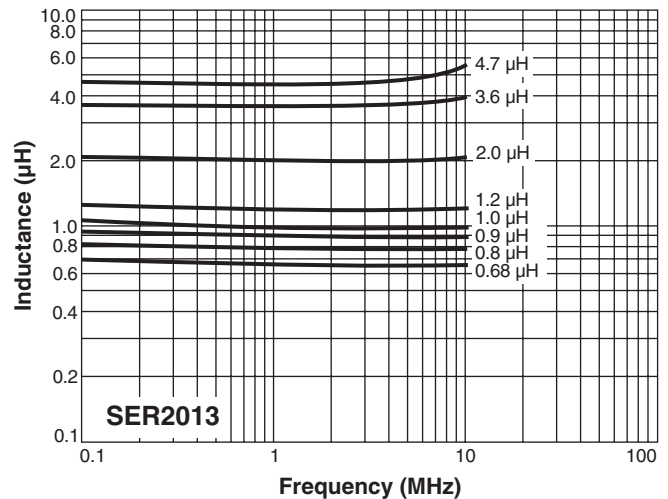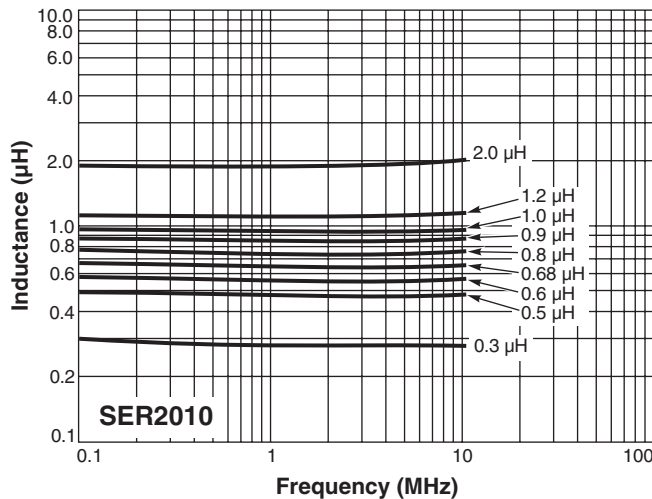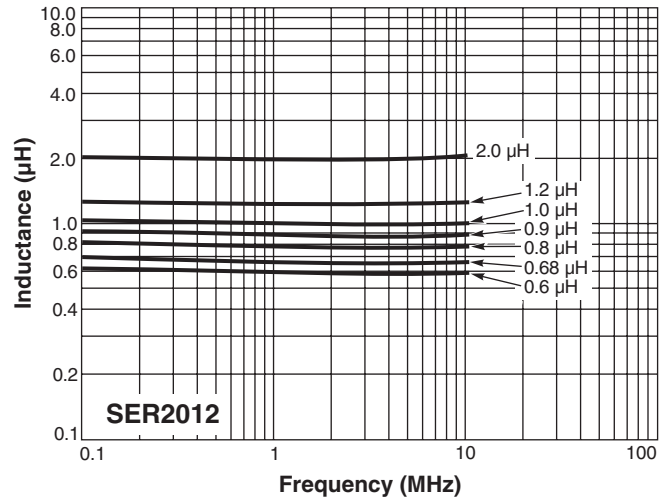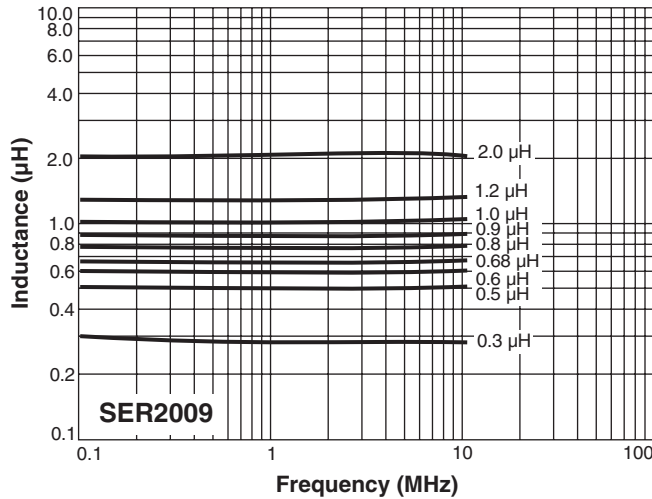

www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 349-2 Revised 09/05/12







© Coilcraft Inc. 2012

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check out web site for latest information.



Shielded Power Inductors – SER2000 Series

L vs Current

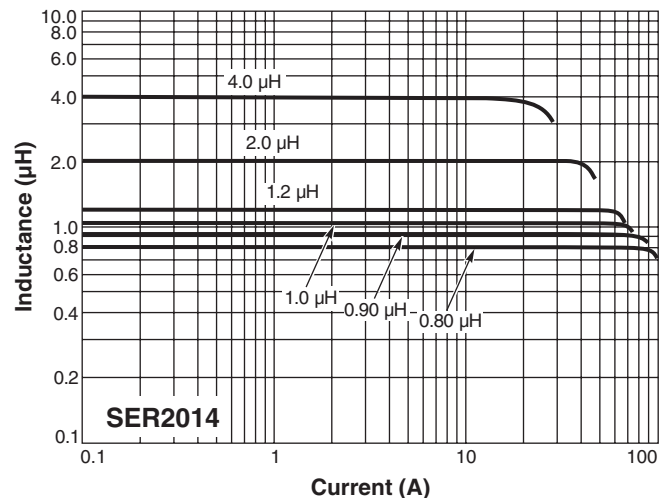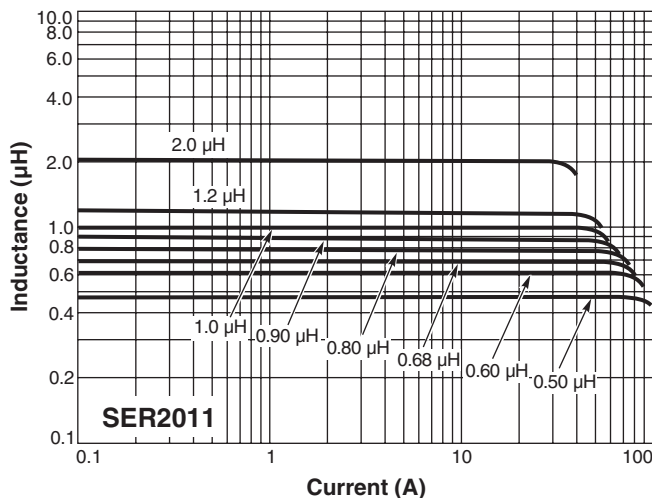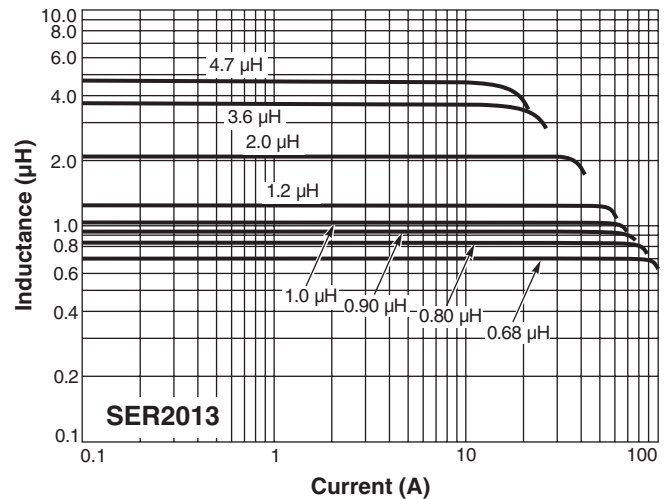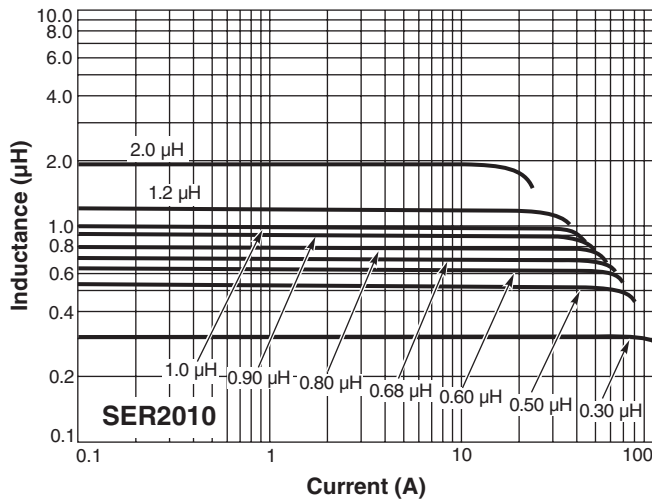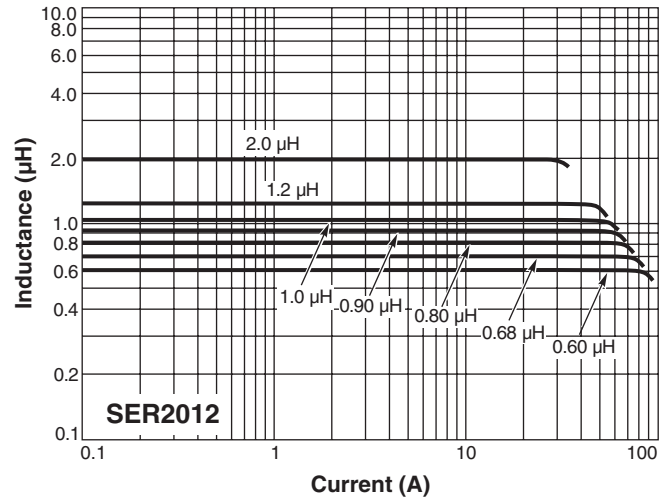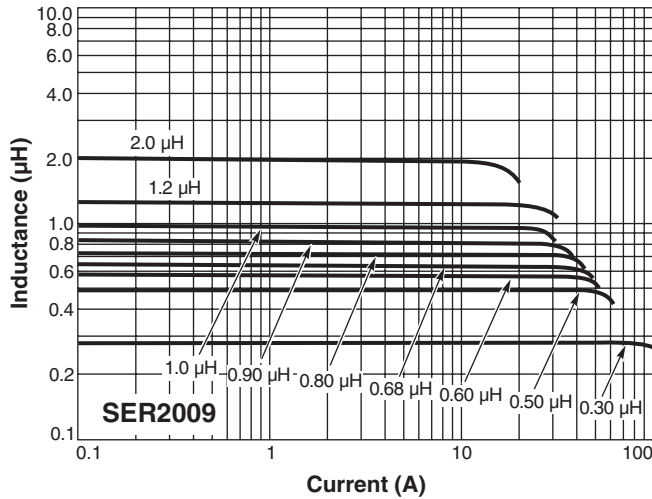

www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore +65-6484 8412 sales@coilcraft.com.sg

Document 349-2 Revised 09/05/12

© Coilcraft Inc. 2012

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check out web site for latest information.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9