

## Plug - IPC 5/ 6-STGCL-7,62 - 1718300

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Plug component, Nominal current: 41 A, Rated voltage (III/2): 1000 V, Number of positions: 6, Pitch: 7.62 mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface: Tin

The figure shows a 5-pos. version of the product

### Product Features

- Can be plugged into PC 5 plugs or inverted IPC 5 headers
- Unlimited 600 V UL approval
- Inverted IPC 5 plugs with pin contacts for touch-proof device outputs (with IPC 5 G) or free-hanging cable/cable connections
- STGF plugs with threaded flange



### Key Commercial Data

|                                      |          |
|--------------------------------------|----------|
| Packing unit                         | 1 pc     |
| Minimum order quantity               | 50 pc    |
| Weight per Piece (excluding packing) | 27.14 g  |
| Custom tariff number                 | 85366990 |
| Country of origin                    | Poland   |

### Technical data

#### Dimensions

|             |         |
|-------------|---------|
| Pitch       | 7.62 mm |
| Dimension a | 38.1 mm |

#### General

|                             |                 |
|-----------------------------|-----------------|
| Range of articles           | IPC 5/...-STGCL |
| Insulating material group   | I               |
| Rated surge voltage (III/3) | 8 kV            |

## Plug - IPC 5/ 6-STGCL-7,62 - 1718300

### Technical data

#### General

|                                        |                   |
|----------------------------------------|-------------------|
| Rated surge voltage (III/2)            | 8 kV              |
| Rated surge voltage (II/2)             | 6 kV              |
| Rated voltage (III/3)                  | 1000 V            |
| Rated voltage (III/2)                  | 1000 V            |
| Rated voltage (II/2)                   | 1000 V            |
| Connection in acc. with standard       | EN-VDE            |
| Nominal current $I_N$                  | 41 A              |
| Nominal cross section                  | 6 mm <sup>2</sup> |
| Maximum load current                   | 41 A              |
| Insulating material                    | PA                |
| Flammability rating according to UL 94 | V0                |
| Stripping length                       | 10 mm             |
| Number of positions                    | 6                 |
| Screw thread                           | M3                |
| Tightening torque, min                 | 0.7 Nm            |
| Tightening torque max                  | 0.8 Nm            |

#### Connection data

|                                                                                         |                      |
|-----------------------------------------------------------------------------------------|----------------------|
| Conductor cross section solid min.                                                      | 0.2 mm <sup>2</sup>  |
| Conductor cross section solid max.                                                      | 10 mm <sup>2</sup>   |
| Conductor cross section flexible min.                                                   | 0.2 mm <sup>2</sup>  |
| Conductor cross section flexible max.                                                   | 6 mm <sup>2</sup>    |
| Conductor cross section flexible, with ferrule without plastic sleeve min.              | 0.25 mm <sup>2</sup> |
| Conductor cross section flexible, with ferrule without plastic sleeve max.              | 6 mm <sup>2</sup>    |
| Conductor cross section flexible, with ferrule with plastic sleeve min.                 | 0.25 mm <sup>2</sup> |
| Conductor cross section flexible, with ferrule with plastic sleeve max.                 | 4 mm <sup>2</sup>    |
| Conductor cross section AWG min.                                                        | 24                   |
| Conductor cross section AWG max.                                                        | 10                   |
| 2 conductors with same cross section, solid min.                                        | 0.2 mm <sup>2</sup>  |
| 2 conductors with same cross section, solid max.                                        | 2.5 mm <sup>2</sup>  |
| 2 conductors with same cross section, stranded min.                                     | 0.2 mm <sup>2</sup>  |
| 2 conductors with same cross section, stranded max.                                     | 4 mm <sup>2</sup>    |
| 2 conductors with same cross section, stranded, ferrules without plastic sleeve, min.   | 0.25 mm <sup>2</sup> |
| 2 conductors with same cross section, stranded, ferrules without plastic sleeve, max.   | 1.5 mm <sup>2</sup>  |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, min. | 0.25 mm <sup>2</sup> |

## Plug - IPC 5/ 6-STGCL-7,62 - 1718300

### Technical data

#### Connection data

|                                                                                         |         |
|-----------------------------------------------------------------------------------------|---------|
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max. | 2.5 mm² |
| Minimum AWG according to UL/CUL                                                         | 24      |
| Maximum AWG according to UL/CUL                                                         | 8       |

#### Standards and Regulations

|                                        |        |
|----------------------------------------|--------|
| Connection in acc. with standard       | EN-VDE |
|                                        | CUL    |
| Flammability rating according to UL 94 | V0     |

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 272607xx |
| eCl@ss 4.1 | 27260701 |
| eCl@ss 5.0 | 27260701 |
| eCl@ss 5.1 | 27260701 |
| eCl@ss 6.0 | 27260704 |
| eCl@ss 7.0 | 27440402 |
| eCl@ss 8.0 | 27440309 |
| eCl@ss 9.0 | 27440309 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC001121 |
| ETIM 4.0 | EC002638 |
| ETIM 5.0 | EC002638 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211810 |
| UNSPSC 7.0901 | 39121409 |
| UNSPSC 11     | 39121409 |
| UNSPSC 12.01  | 39121409 |
| UNSPSC 13.2   | 39121409 |

### Approvals

#### Approvals

---

## Plug - IPC 5/ 6-STGCL-7,62 - 1718300

### Approvals

#### Approvals

UL Recognized / cUL Recognized / EAC / EAC / cULus Recognized

#### Ex Approvals

#### Approvals submitted

#### Approval details

| UL Recognized  |       |       |
|-------------------------------------------------------------------------------------------------|-------|-------|
|                                                                                                 | B     | C     |
| mm²/AWG/kcmil                                                                                   | 24-8  | 24-8  |
| Nominal current I <sub>N</sub>                                                                  | 41 A  | 41 A  |
| Nominal voltage U <sub>N</sub>                                                                  | 600 V | 600 V |

| cUL Recognized  |       |       |
|----------------------------------------------------------------------------------------------------|-------|-------|
|                                                                                                    | B     | C     |
| mm²/AWG/kcmil                                                                                      | 24-8  | 24-8  |
| Nominal current I <sub>N</sub>                                                                     | 41 A  | 41 A  |
| Nominal voltage U <sub>N</sub>                                                                     | 600 V | 600 V |

|     |
|-----|
| EAC |
|-----|

|     |
|-----|
| EAC |
|-----|

|                                                                                                      |
|------------------------------------------------------------------------------------------------------|
| cULus Recognized  |
|------------------------------------------------------------------------------------------------------|

### Accessories

#### Accessories

#### Coding element

## Plug - IPC 5/ 6-STGCL-7,62 - 1718300

### Accessories

Coding profile - CP-PC RD - 1701967



Coding profile, for plugging into the coding ribs of the plug at a later date, insulating material, color: Red

---

### Labeled terminal marker

Marker card - SK 7,62/3,8:FORTL.ZAHLEN - 0804549



Marker card, Card, white, labeled, Horizontal: Consecutive numbers 1 - 10, 11 - 20, etc. up to 91 - 100, Mounting type: Adhesive, for terminal block width: 7.62 mm, Lettering field: 7.62 x 3.8 mm

Marker card - SK 3,8 REEL P7,62 WH CUS - 0825128



Marker card, can be ordered: By card, white, labeled according to customer specifications, Mounting type: Adhesive, for terminal block width: 7.62 mm, Lettering field: continuous x 3.8 mm

---

### Screwdriver tools

Philips screwdriver - SZK PZ1 VDE - 1206450



Screwdriver, PZ crosshead, VDE insulated, size: PZ 1 x 80 mm, 2-component grip, with non-slip grip

---

### Terminal marking

## Plug - IPC 5/ 6-STGCL-7,62 - 1718300

### Accessories

Marker card - SK U/3,8 WH:UNBEDRUCKT - 0803906



Marker card, Sheet, white, unlabeled, can be labeled with: Plotter, Office printing systems, Mounting type: Adhesive, Lettering field: 186 x 3.8 mm


Marker strip - SK 3,8 WH:REEL - 0805218



Marker strip, Roll, white, unlabeled, can be labeled with: THERMOMARK ROLL, THERMOMARK X, THERMOMARK S1.1, THERMOMARK ROLL X1, Mounting type: Adhesive, Lettering field: continuous x 3.8 mm


### Drawings

Diagram

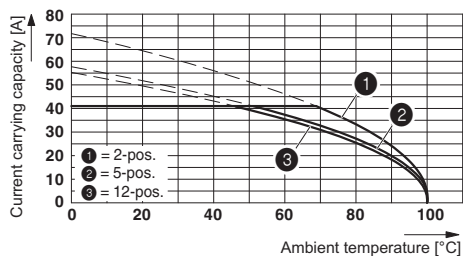


Derating curve for: IPC 5/...-ST-7,62 with PC 5/...-ST-7,62  
Conductor cross section = 10 mm<sup>2</sup>

Diagram

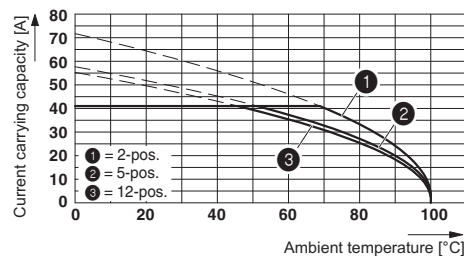


Derating curve for: IPC 5/...-ST-7,62 with IPC 5/...-G-7,62  
Conductor cross section = 10 mm<sup>2</sup>

Diagram

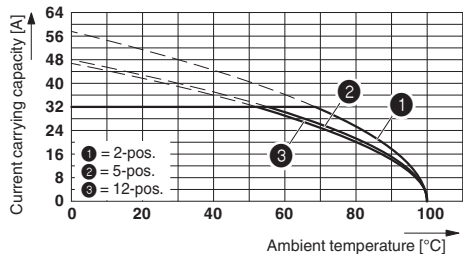

Derating curve for: IPC 5/...-ST-7,62 with IPC 5/...-G-7,62  
Conductor cross section 6 mm<sup>2</sup>

Dimensional drawing

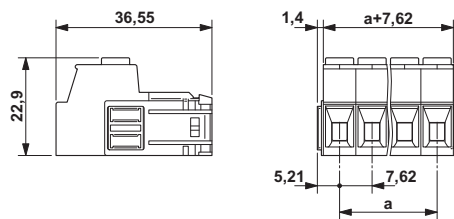



## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9