

**SCB/SCC Series, Specification Grade Discrete Plug-in, Time Delay Relay**



**Product Facts**

- On-Delay, Off-Delay and Interval timing modes
- 13 timing ranges from 0.1 sec. to 60 min.
- 10A DPDT output contacts
- Knob, fixed or external timing adjustment.
- Rated for pilot duty
- Premium components
- File 3520, File E60363, File LR51332, File E60363 (SCC only)



**Timing Specifications**

**Timing Modes** — On-Delay, Off-Delay and Interval  
**Timing Ranges** — 6 to 180 cycles; 0.1 to 3 / 0.1 to 10 / 0.33 to 10 / 1 to 30 / 4 to 120 sec.; 0.33 to 10 / 1 to 30 / 2 to 60 min.; 0.33 to 10 hr. (All are +5%, -0% of maximum values).

**Timing Adjustment** — Knob or fixed time (internal fixed resistor) — all models; customer supplied external potentiometer or resistor — On-Delay and Interval models only.

**Accuracy** — Repeat Accuracy — ±0.5% ±0.004 sec. Overall Accuracy — ±2% max.

**Reset Time** — 25 ms.

**Relay Operate Time** — Off-Delay mode — 30 ms; Interval mode — 20 ms..

**Relay Release Time** — On-Delay mode only — 15 ms.

Users should thoroughly review the technical data before selecting a product part number. It is recommended that user also seek out the pertinent approvals files of the agencies/laboratories and review them to ensure the product meets the requirements for a given application.

**Contact Data @ 25°C**

**Arrangements** — 2 Form C (DPDT)  
**Rating** — 10A @ 28VDC or 120VAC, resistive; 1/3 HP @ 120/240VAC; 345VA. Same polarity.

**Expected Mechanical Life** — 10 million operations

**Expected Electrical Life** — 500,000 operations, min., at rated resistive load

**Initial Dielectric Strength** — Between Terminals and Case — 1,000VAC plus twice the nominal voltage for one minute.

**Input Data @ 25°C**

**Voltage** — See Ordering Information section for details.

**Power Requirement** — 3W, max.

Transient Protection: Non-repetitive transients of the following magnitudes will not cause spurious operation of affect function and accuracy.


| Operating Voltage  | <0.1 ms         | <1 ms |
|--------------------|-----------------|-------|
| All except 12 & 24 | 3,000V          | 2,500 |
| 12 & 24            | Consult Factory |       |

**Environmental Data**

**Temperature Range** — Storage — SCB and SCC — -40°C to +85°C Operating — SCB: -30°C to +65°C; SCC: -30°C to +50°C


**Mechanical Data**

**Mounting/Termination** — SCB — UL recognized. Optional 8- or 11-pin octal-type sockets may be ordered separately. SCC — 8- or 11-pin octal type sockets supplied with timer. (Must be used to qualify as "UL Listed" device.)  
**Weight** — SCB: 5.3 oz. (149g) approx.; SCC: 7.5 oz. (210g) approx.

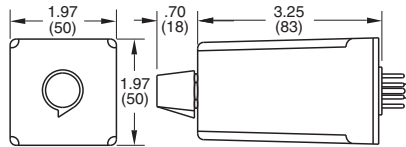

Outline Dimensions

**Wiring Diagrams (Bottom Views)**

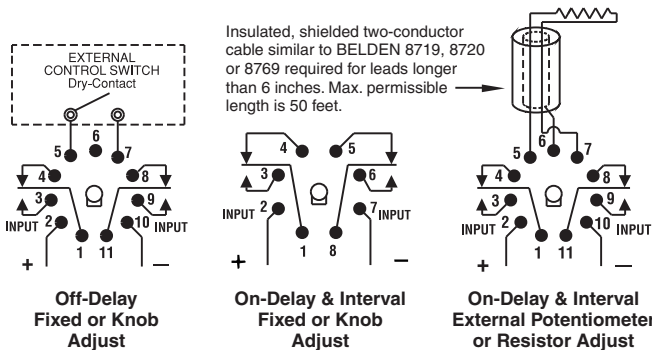

**Ordering Information** (All "X's" must be included to complete part number)

| SCB   | RX | 01  | 2XX                               | A   | A  | XA   |
|---|----|---|-----------------------------------|---|--|--|
| <b>Series SCB</b><br>Discrete Industrial Timer  |    | <b>Operating Mode</b><br>01 = On-Delay<br>02 = Off-Delay<br>03 = Interval | <b>Output</b><br>2XX = DPDT Relay |   | <b>Timing Range</b><br>A = 0.1 to 3 sec.<br>B = 0.5 to 15 sec.<br>C = 1 to 30 sec.<br>D = 2 to 60 sec.<br>E = 4 to 120 sec.<br>F = 6 to 180 sec.<br>G = 10 to 300 sec.<br>I = 2 to 60 min.<br>K = 3 to 180 cycles<br>L = 0.33 to 10 min.<br>M = 0.5 to 15 min.<br>N = 1 to 30 min.<br>P = 0.1 to 10 min. | <b>Timing Adjustment</b><br>XA = Knob Adjust<br>XB = External Potentiometer or resistor (Operating modes 1 and 3 only).<br>XF = Fixed Times —Specify time delay in seconds per the following examples:<br>XF9.000 = 9 sec.<br>XF99.00 = 99 sec.<br>XF999.0 = 9999 sec.<br>XF1000 = 1000 sec. |
| <b>Mounting Series SCB</b><br>RX = 8- or 11-pin socket (order separately)   |    |   |                                   |   |  |  |
| <b>Mounting Series SCC</b><br>LA = 8-pin socket p/n BCSA08SC for operating mode 01 or 03 with knob adjust or fixed time.<br>LC = 11-pin socket p/n BCSA11SC for operating mode 02; or 01 or 03 with external potentiometer or resistor. |    |   |                                   | <b>Operating Voltage (+10%, -15%)</b><br>A = 120VAC, 50/60 Hz. / 120VDC<br>B = 240VAC, 50/60 Hz. / 24VDC<br>E = 24VAC, 50/60 Hz. / 24VDC<br>F = 48VAC, 50/60 Hz. / 48VDC<br>Q = 12VDC |  |  |

Authorized distributors are likely to stock the following:

None at present.

BELDEN is a trademark of Belden Technologies, Inc.

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9