


# Type 704M

## Metallized Polypropylene Film Capacitors

### Type 704M Axial Lead Round Profile Metallized Polypropylene Film Capacitors

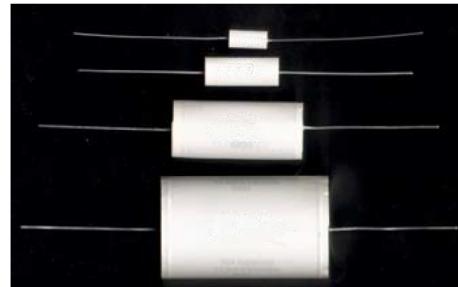

### Specifications

#### Capacitance Range:

1.0 to 20.0  $\mu$ F  
(additional values available upon request)

#### Capacitance Tolerance:

$\pm 5\%$  and  $\pm 10\%$ , standard  
(tighter tolerances available upon request)

#### Voltage Rating:

200 VDC/140 VAC

#### Operating Temperature

Units may be operated at full rated voltage from  $-55^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ .

#### Voltage De-rating above $+85^{\circ}\text{C}$ :

Units may be operated up to a maximum of  $+105^{\circ}\text{C}$  provided the voltage is de-rated linearly to 50% of the  $+85^{\circ}\text{C}$  rating.

#### Lead Wire (d):

Tinned Copper.  
0.032 (0.8) diameter (#20 AWG)

#### Dissipation Factor:

0.1% Maximum @ 1 KHz,  $+25^{\circ}\text{C}$ .

#### Insulation Resistance (measured at 100 VDC):

At  $+25^{\circ}\text{C}$ : 200,000  $\text{M}\Omega\text{-}\mu\text{F}$

At  $+85^{\circ}\text{C}$ : 10,000  $\text{M}\Omega\text{-}\mu\text{F}$

(These are minimum ratings, call us if you have a more demanding requirement)

#### Encapsulation:

Wrapped with flame retardant polyester tape (meets UL510 specifications) and potted with flame retardant epoxy (meets UL94V-0 specifications).

#### Dielectric/Construction:

Metallized Polypropylene film, single section design. Non-Inductively wound.

#### High End Audio Applications:

Amplifiers, Preamps, Crossover Networks. Polypropylene's low dissipation factor, ESR and dielectric absorption, along with long term capacitance stability over time make the 704M series ideal for high quality audio applications.


In addition to the information provided here CDE also offers complete design and manufacturing of specific capacitance values, custom form factors, special lead terminations, etc.

Dimensions are in inches, millimeters in parentheses

# Type 704M

## Metallized Polypropylene Film Capacitors


### Ordering/Part Number Information

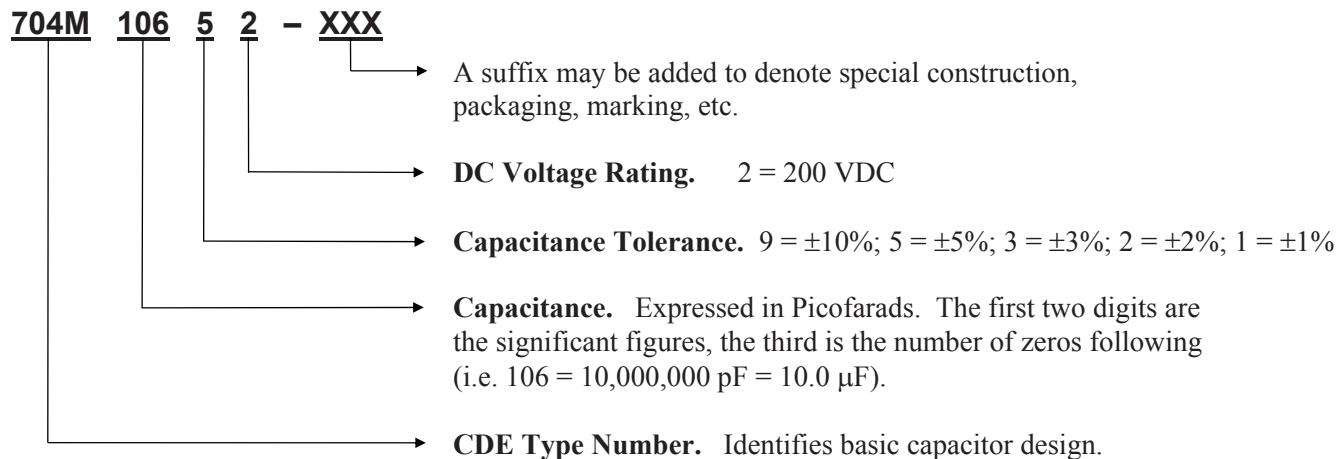

### Standard Marking Format

| Sample Marking on unit | Description |  | Tolerance codes per EIA standards |            |
|------------------------|-------------|--|-----------------------------------|------------|
| CDE 704M               | CDE         | - CDE Identification                           | F                                 | $\pm 1\%$  |
| 106J 200V              | 704M        | - Type Number.                                 | G                                 | $\pm 2\%$  |
| 0510                   | 200V        | - DC Voltage Rating                            | H                                 | $\pm 3\%$  |
|                        | 106J        | - Capacitance and Tolerance Code               | J                                 | $\pm 5\%$  |
|                        | 0510        | - Weekly Date Code<br>(i.e. 10th week of 2005) | K                                 | $\pm 10\%$ |

### Dimension Outline

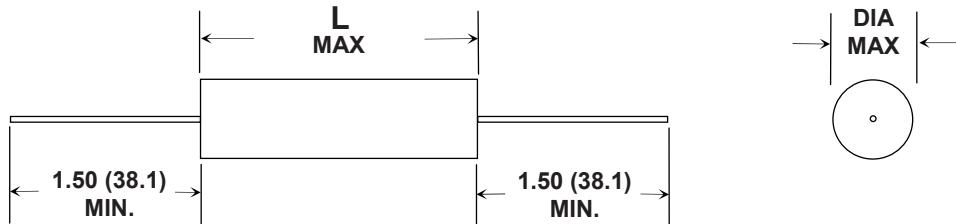

### Lead Wire Size and Additional Termination Options

Standard lead wire size is 0.032 (0.8) diameter (#20 AWG), Solid tinned copper wire. We can also provide a variety of other wire sizes and material (i.e. heavier gauges, insulated wire, tinned copper-clad steel, smaller gauges, etc.). If the wire size or material doesn't meet your requirements please contact us. We can accommodate your needs.

Dimensions are in inches, millimeters in parentheses  
CDE reserves the right to amend design data

# Type 704M

## Metallized Polypropylene Film Capacitors

### Type 704M Sizes and Ratings – 200 VDC/140 VAC

| Cap<br>( $\mu$ F) | Base Part # <sup>1</sup> | L MAX       | DIA MAX     | dV/dt <sup>2</sup><br>V/ $\mu$ sec | *ESR-m $\Omega$<br>@100KHz |
|-------------------|--------------------------|-------------|-------------|------------------------------------|----------------------------|
| 1.0               | 704M10552                | 1.50 (38.1) | 0.37 (9.4)  | 7                                  | 30.9                       |
| 1.2               | 704M12552                | 1.50 (38.1) | 0.40 (10.2) | 8                                  | 25.9                       |
| 1.5               | 704M15552                | 1.50 (38.1) | 0.44 (11.2) | 11                                 | 20.9                       |
| 1.8               | 704M18552                | 1.50 (38.1) | 0.48 (12.2) | 11                                 | 17.5                       |
| 2.0               | 704M20552                | 1.50 (38.1) | 0.50 (12.7) | 11                                 | 15.9                       |
| 2.2               | 704M22552                | 1.50 (38.1) | 0.52 (13.2) | 11                                 | 14.5                       |
| 2.5               | 704M25552                | 1.50 (38.1) | 0.55 (14.0) | 11                                 | 12.9                       |
| 2.7               | 704M27552                | 1.50 (38.1) | 0.57 (14.5) | 11                                 | 12.1                       |
| 3.0               | 704M30552                | 1.50 (38.1) | 0.60 (15.2) | 11                                 | 11.0                       |
| 3.3               | 704M33552                | 1.50 (38.1) | 0.63 (16.0) | 11                                 | 10.1                       |
| 3.6               | 704M36552                | 1.50 (38.1) | 0.65 (16.5) | 11                                 | 9.4                        |
| 3.9               | 704M39552                | 1.50 (38.1) | 0.68 (17.3) | 11                                 | 8.8                        |
| 4.0               | 704M40552                | 1.50 (38.1) | 0.69 (17.5) | 11                                 | 8.6                        |
| 4.7               | 704M47552                | 1.50 (38.1) | 0.74 (18.8) | 11                                 | 7.5                        |
| 5.0               | 704M50552                | 1.50 (38.1) | 0.76 (19.3) | 11                                 | 7.2                        |
| 5.6               | 704M56552                | 1.50 (38.1) | 0.80 (20.3) | 12                                 | 6.6                        |
| 6.0               | 704M60552                | 1.50 (38.1) | 0.83 (21.1) | 12                                 | 6.3                        |
| 6.8               | 704M68552                | 1.50 (38.1) | 0.88 (22.4) | 12                                 | 5.7                        |
| 7.0               | 704M70552                | 1.50 (38.1) | 0.89 (22.6) | 12                                 | 5.6                        |
| 7.5               | 704M75552                | 1.50 (38.1) | 0.92 (23.4) | 12                                 | 5.4                        |
| 8.0               | 704M80552                | 1.50 (38.1) | 0.95 (24.1) | 12                                 | 5.2                        |
| 9.0               | 704M90552                | 1.50 (38.1) | 1.01 (25.7) | 12                                 | 4.8                        |
| 10.0              | 704M10652                | 1.50 (38.1) | 1.06 (26.9) | 12                                 | 4.6                        |
| 11.0              | 704M11652                | 1.50 (38.1) | 1.11 (28.2) | 12                                 | 4.4                        |
| 12.0              | 704M12652                | 1.50 (38.1) | 1.16 (29.5) | 12                                 | 4.2                        |
| 13.0              | 704M13652                | 1.50 (38.1) | 1.20 (30.5) | 12                                 | 4.1                        |
| 14.0              | 704M14652                | 1.50 (38.1) | 1.24 (31.5) | 12                                 | 4.0                        |
| 15.0              | 704M15652                | 1.50 (38.1) | 1.29 (32.8) | 12                                 | 3.9                        |
| 16.0              | 704M16652                | 1.50 (38.1) | 1.33 (33.8) | 12                                 | 3.8                        |
| 17.0              | 704M17652                | 1.50 (38.1) | 1.37 (34.8) | 12                                 | 3.8                        |
| 18.0              | 704M18652                | 1.50 (38.1) | 1.41 (35.8) | 12                                 | 3.7                        |
| 19.0              | 704M19652                | 1.50 (38.1) | 1.44 (36.6) | 12                                 | 3.7                        |
| 20.0              | 704M20652                | 1.50 (38.1) | 1.48 (37.6) | 12                                 | 3.7                        |

<sup>1</sup> Please refer to Ordering/Part Number page for specific part numbering details.

<sup>2</sup> Please contact us for additional details regarding current carrying capability.

\* ESR ratings listed are Maximum. Please contact us for additional ESR data.

Dimensions are in inches, millimeters in  
parentheses *CDE reserves the right to amend design  
data*

# Type 704M

## Metallized Polypropylene Film Capacitors

### General Specifications

The 704M series is designed and manufactured for use in demanding audio applications where the highest quality, most reliable film capacitor is required. They are non-inductively wound using the most reliable metallized polypropylene film available.

#### Operating Temperature Range:

Standard operating temperature range is  $-55^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ . Units may be operated at the full rated voltage within this temperature range.

The 704M series may be operated up to a maximum temperature of  $+105^{\circ}\text{C}$ , however the voltage must be linearly de-rated to 50% of the full rated voltage at  $+105^{\circ}\text{C}$ .

#### Dielectric Withstanding Voltage:

Units shall withstand a DC potential of 200% of rated voltage applied between terminals for not more than 2 minutes.

#### Lead Bend Test:

After 3 consecutive  $180^{\circ}$  bends. No damage.

#### Lead Pull Test:

5 pounds (2.3 Kg) for one minute on lead axis. No damage.

#### Humidity Testing:

Units subjected to 95% relative humidity for 250 hours with no voltage applied at  $+40^{\circ}\text{C}$ . After 4 hours of drying, minimum product of insulation resistance and capacitance shall be  $40,000 \text{ M}\Omega\text{-}\mu\text{F}$ , but need not exceed  $80,000 \text{ M}\Omega$  at  $+25^{\circ}\text{C}$ .

#### DC Voltage Life Test:

1000 hours at  $+85^{\circ}\text{C}$  at 150% of rated voltage. After test; capacitance shall not have changed by more than  $\pm 2\%$  of initial value, insulation resistance shall not have decreased by more than 50% of initial value and dissipation factor shall not have increased to more than 0.1%. In addition, there shall be no open or short circuits, and no sign of visible damage.

#### AC Voltage Life Test:

Minimum of 1000 hours at  $+85^{\circ}\text{C}$  at 60 Hz. AC test voltage applied at 110% of rated AC voltage. After test; capacitance shall not have changed by more than  $\pm 5\%$  of initial value, insulation resistance shall not have decreased by more than 50% of initial value and dissipation factor shall not have changed by more than 0.03%. In addition, there shall be no open or short circuits, and no sign of visible damage. All measurements made at 1 KHz.

#### Dielectric Material/Construction:

The 704M series is manufactured using metallized polypropylene film as the dielectric. The capacitor element is non-inductively wound in a single section design.

Metallized polypropylene film utilizes a base film of polypropylene with a thin layer of aluminum vacuum deposited directly on the film as the electrode.

Metallized film exhibits a characteristic called "self-healing" or "self-clearing", which is the ability to remove a fault or short circuit in the dielectric film by vaporizing (from high current density) the metallization near the defect. The metallization is so thin that negligible film damage occurs during the clearing process. The vaporized metal oxidizes over time, aiding in the isolation of a fault area.

#### Additional Testing Notes:

Since it is not possible to list every detail of testing we perform we strongly encourage you to contact us with any specific question or requirement you may have. Thank you.

Dimensions are in inches, millimeters in parentheses

**Данный компонент на территории Российской Федерации****Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибуторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ Р В 0015-002 и ЭС РД 009

**Офис по работе с юридическими лицами:**

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9