

NOTES:

1. MATERIALS AND FINISHES:

- BODY & NUT - STAINLESS STEEL, PASSIVATED
- CONTACT - BeCu, GOLD PLATING
- INSULATOR - PTFE, NATURAL
- GASKET - SILICONE RUBBER, RED
- RETAINER RING - SUS303, NATURAL

2. ELECTRICAL:

- A. IMPEDANCE: 50 OHM
- B. FREQUENCY RANGE: DC - 6 GHz
- C. AVERAGE INPUT POWER: 2W MAX AT +25°C
(DERATED LINEARLY TO 0.5W MAX AT +125°C)
- D. ATTENUATION: XX dB ±(SEE TABLE 2D)
[FOR ADDITIONAL VALUES, CONSULT FACTORY]
- E. VSWR: (SEE TABLE 2E)

3. MECHANICAL:

- A. MATING ENGAGEMENT: MIL-STD-348A, SERIES: TYPE N
- B. MATING TORQUE: 6-10 IN-LBS MAX.
- C. COUPLING PROOF TORQUE: 15 IN-LBS MIN.
- D. COUPLING NUT RETENTION: 100 LBS MIN.
- E. DURABILITY: 500 CYCLES MIN.

4. ENVIRONMENTAL:

- A. OPERATING TEMPERATURE: -55°C TO +125°C
- B. THERMAL SHOCK: MIL-STD-202, METHOD 107, CONDITION B
(EXCEPT HIGH TEMP +100°C)
- C. SHOCK: MIL-STD-202, METHOD 213, CONDITION 1
- D. VIBRATION: MIL-STD-202, METHOD 204, CONDITION B


5. PACKAGING:

- A. QUANTITY: SINGLE PACK
- B. BAG TO BE MARKED: AMPHENOL RF
PART NUMBER (SEE TABLE 5B)
DATE CODE

THIRD ANGLE PROJ.

REVISIONS

| REV | DESCRIPTION | DATE | ECO | APPR |
|-----|-----------------|---------|-------|--------|
| A | RELEASE TO MFG. | 6/30/15 | 50593 | JN/BCG |

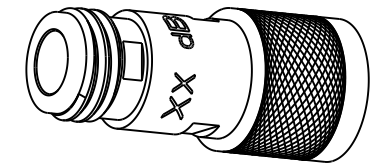

SCALE 1.000

| dB | DC-18 GHz |
|-------|-----------|
| 1-6 | ±0.3 |
| 7-20 | ±0.5 |
| 21-40 | ±1.0 |
| 41-60 | ±1.5 |

TABLE 2D
ATTENUATION
ACCURACY


| dB | DC-2.5 GHz | 2.5-4 GHz | 4-6 GHz |
|------|------------|-----------|---------|
| 1-3 | 1.15:1 | 1.20:1 | 1.25:1 |
| 4-6 | 1.15:1 | 1.20:1 | 1.25:1 |
| 7-10 | 1.15:1 | 1.25:1 | 1.30:1 |

TABLE 2E
VSWR MAX.

| PART NUMBER | ATTENUATION VALUE [dB] | "A" DIM. |
|-----------------|------------------------|-------------------|
| ATS-IMIF-03DB2W | 3 | 45.0 [1.77"] REF. |
| ATS-IMIF-06DB2W | 6 | 45.0 [1.77"] REF. |
| ATS-IMIF-10DB2W | 10 | 45.0 [1.77"] REF. |
| ATS-IMIF-15DB2W | 15 | 45.0 [1.77"] REF. |
| ATS-IMIF-20DB2W | 20 | 45.0 [1.77"] REF. |
| ATS-IMIF-30DB2W | 30 | 53.1 [2.09"] REF. |

TABLE 5B
PART NUMBER
IDENTIFICATION

INTERFACE PER
MIL-STD-348
TYPE N FEMALE

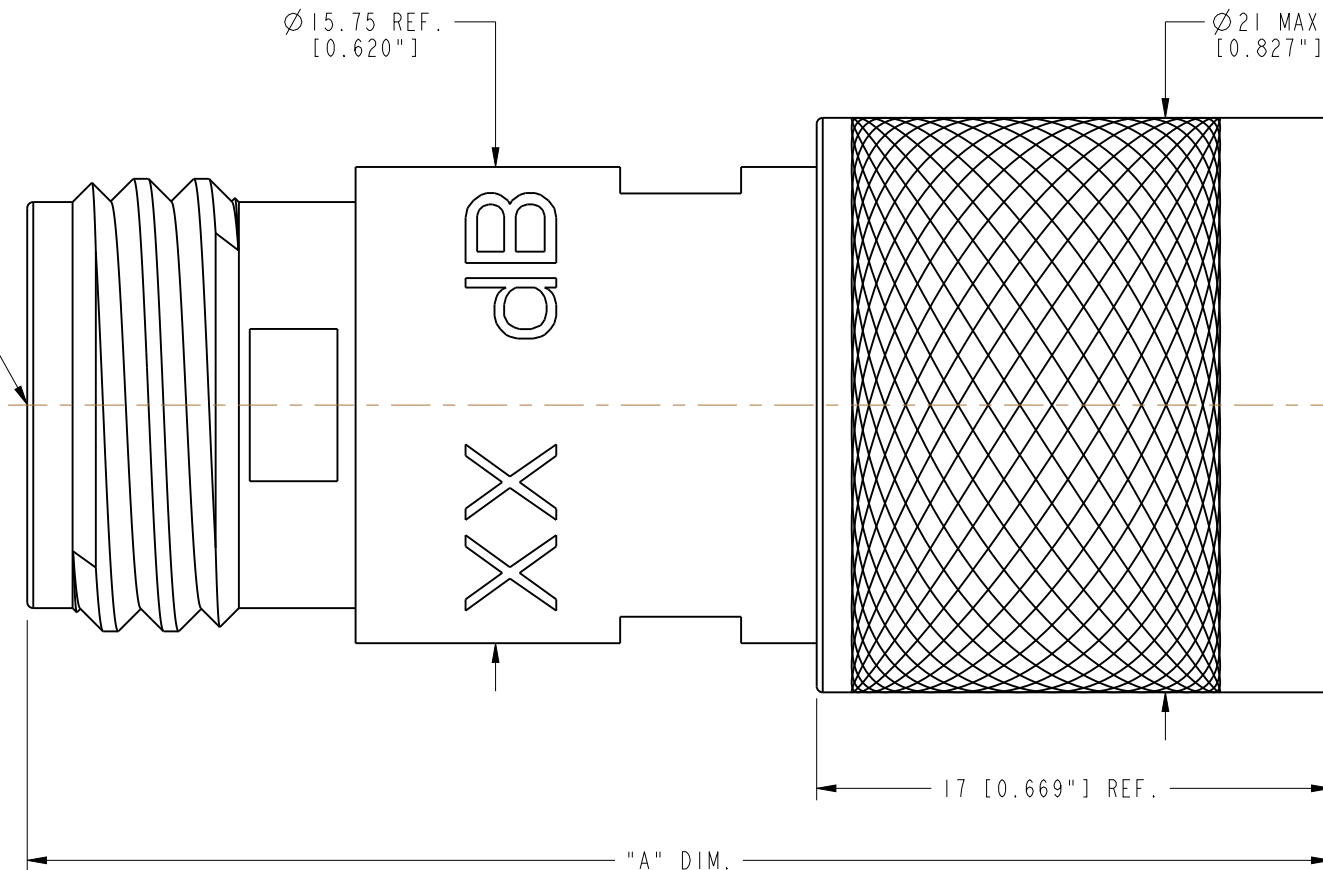

INTERFACE PER
MIL-STD-348
TYPE N MALE

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:
 <0.5mm ±0.05mm 0.5 - 6mm ±0.1mm 6 - 30mm ±0.2mm 30 - 120mm ±0.3mm ANGLES ±1°

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

| | |
|----------------------|-----------|
| MATERIAL | SEE NOTES |
| REFERENCE | EAR #6507 |
| CONFIGURATION LEVEL: | In Work |
| FINISH | |

| | | | |
|----------|--------------|------|-----------|
| DRAWN | J. NERI | DATE | 05-Mar-15 |
| ENGINEER | B. GLEISSNER | DATE | 05-Mar-15 |
| APPROVED | K. CAPOZZI | DATE | 6/30/15 |
| CAD FILE | | | |

| | |
|------------------------------------------------------|--------------|
| TITLE | |
| TYPE N, PLUG TO JACK FIXED ATTENUATOR (2 WATT) | |
| SCALE: 8.0:1.0 | SHEET 2 OF 2 |
| DWG SIZE | REV |
| B | A |

| | |
|--------------------|-----------------|
| Amphenol RF | |
| www.amphenolrf.com | |
| DRAWING NO. | ATS-2M2F-XXDB2W |
| ITEM NO. | ATS-2M2F-XXDB2W |
| PART NO. | ATS-2M2F-XXDB2W |

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9