


# Nickel Thin Film Temperature Sensor

## Temperature range -60 °C to +200 °C

Nickel thin film elements are characterized by a relatively high temperature coefficient. Typical applications include bearing temperature monitoring, HVAC temperature monitoring, and stator winding temperature monitoring.

Nominal Resistance R <sub>0</sub>	Tolerance	Order number
500 Ohms @ 0 °C	As per DIN 43760	100 488-1

<b>Specification</b>	DIN 43760
<b>Temperature Range</b>	-60 °C to +200 °C
<b>Temperature Coefficient</b>	6180 ppm/K
<b>Lead wire material</b>	Nickel
<b>Protective coating</b>	high-temperature epoxy
<b>Self-heating</b>	0,3K/mW in air
<b>Response time</b>	Water (v = 0,2m/sec.) t <sub>0,9</sub> = 0,3 sec. Air (v = 1m/sec.) t <sub>0,9</sub> = 9 sec.
<b>Operating Current, Maximum</b>	5 mA

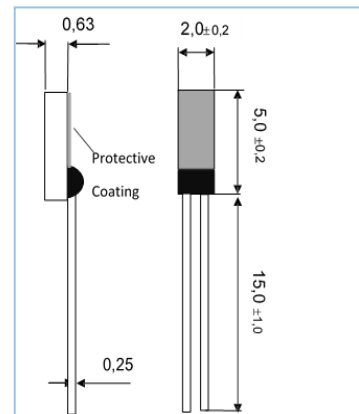

### Polynomial of a nickel resistor in accordance with DIN 43760:

$$R(\vartheta) = R_0 \times (1 + 5,481 \times 10^{-3} \times \vartheta + 6,650 \times 10^{-6} \times \vartheta^2 + 2,805 \times 10^{-11} \times \vartheta^4 + 2,000 \times 10^{-17} \times \vartheta^6)$$

### Maximum permissible tolerance as a function of temperature (DIN 43760):

$$\vartheta < 0^\circ\text{C}: F = (0,4 + 0,028 \times \vartheta) \text{ }^\circ\text{C}$$

$$\vartheta > 0^\circ\text{C}: F = (0,4 + 0,007 \times \vartheta) \text{ }^\circ\text{C}$$

### California Proposition 65

**WARNING:** This product can expose you to chemicals including lead oxide, which is known to the State of California to cause cancer and birth defects or other reproductive harm, and including cobalt oxide, nickel and cobalt, which are known to the State of California to cause cancer. For more information go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov).



The information provided in this data sheet describes certain technical characteristics of the product, but shall not be qualified or construed as quality guarantees whatsoever. Furthermore, the information provided in this data sheet does not constitute a warranty, implied or express, whatsoever, including but not limited to warranties of merchantability, fitness for a particular purpose, or use.


The information provided in this data sheet regarding measurement values (including, but not limited to, response time, long-term stability, vibration and shock resistance, insulation resistance and self-heating) are average values that have been obtained under laboratory conditions in tests of large numbers of the product. Product results or measurements achieved by customer or any other person in any production, test, or other environment may vary depending on the specific conditions of use.

The customer is solely responsible to determine whether the product is suited for customer's intended use; in this respect Heraeus cannot assume any liability. The sale of any products of Heraeus is exclusively subject to the Terms and Conditions of Sale of Heraeus in their current version at the time of purchase, which is available under [www.heraeus.com/gtc](http://www.heraeus.com/gtc) or may be furnished upon request. This data sheet is subject to changes without prior notice.

**Heraeus Nexensos USA, a division of Heraeus Epurio LLC, 770 Township Line Road, Suite 300, Yardley, Pennsylvania, USA 19067**

**Web:** [www.heraeus-nexensos.com](http://www.heraeus-nexensos.com)

Status: 07/2019

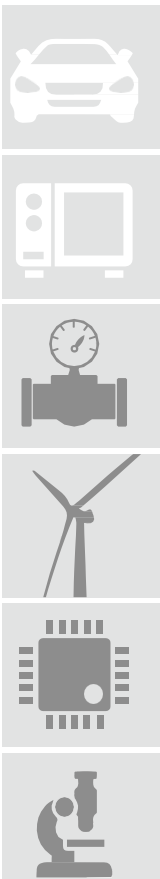

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9