






LOC	DIST	REVISIONS				
AD	00	P	LTR	DESCRIPTION	DATE	APVD
		F1		REVISED PER ECO-10-005254	18MAR10	HMR NE

PANEL CUT OUT



5.00-6.30	28.6-0.1	25.4+0.1
3.00-5.00	28.0-0.1	25.4+0.1
0.75-3.00	27.6-0.1	25.4+0.1
PANEL THICKNESS	X	Y

SWITCH FUNCTION A1
CIRCUIT DIAGRAM

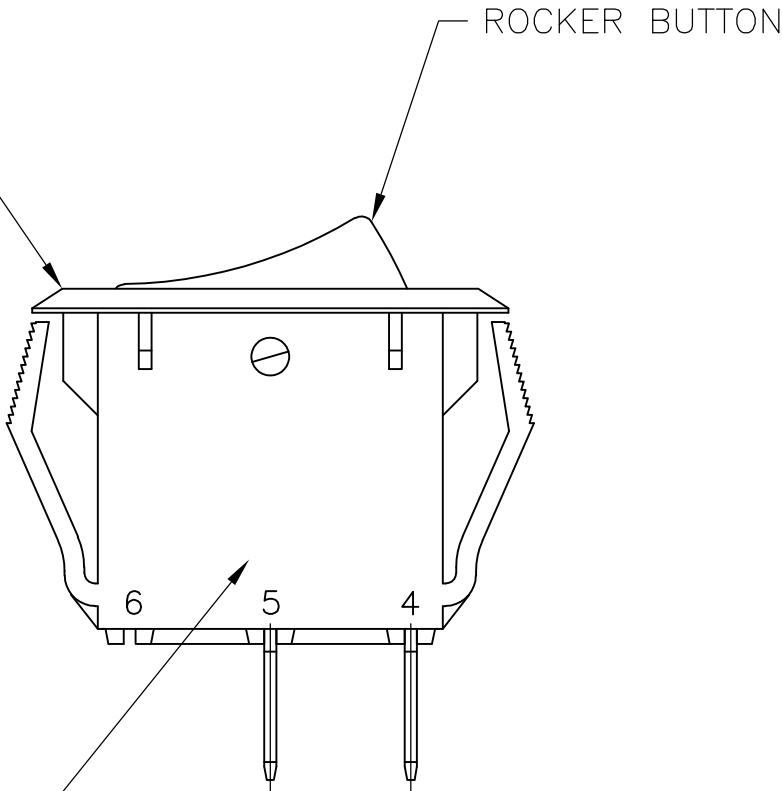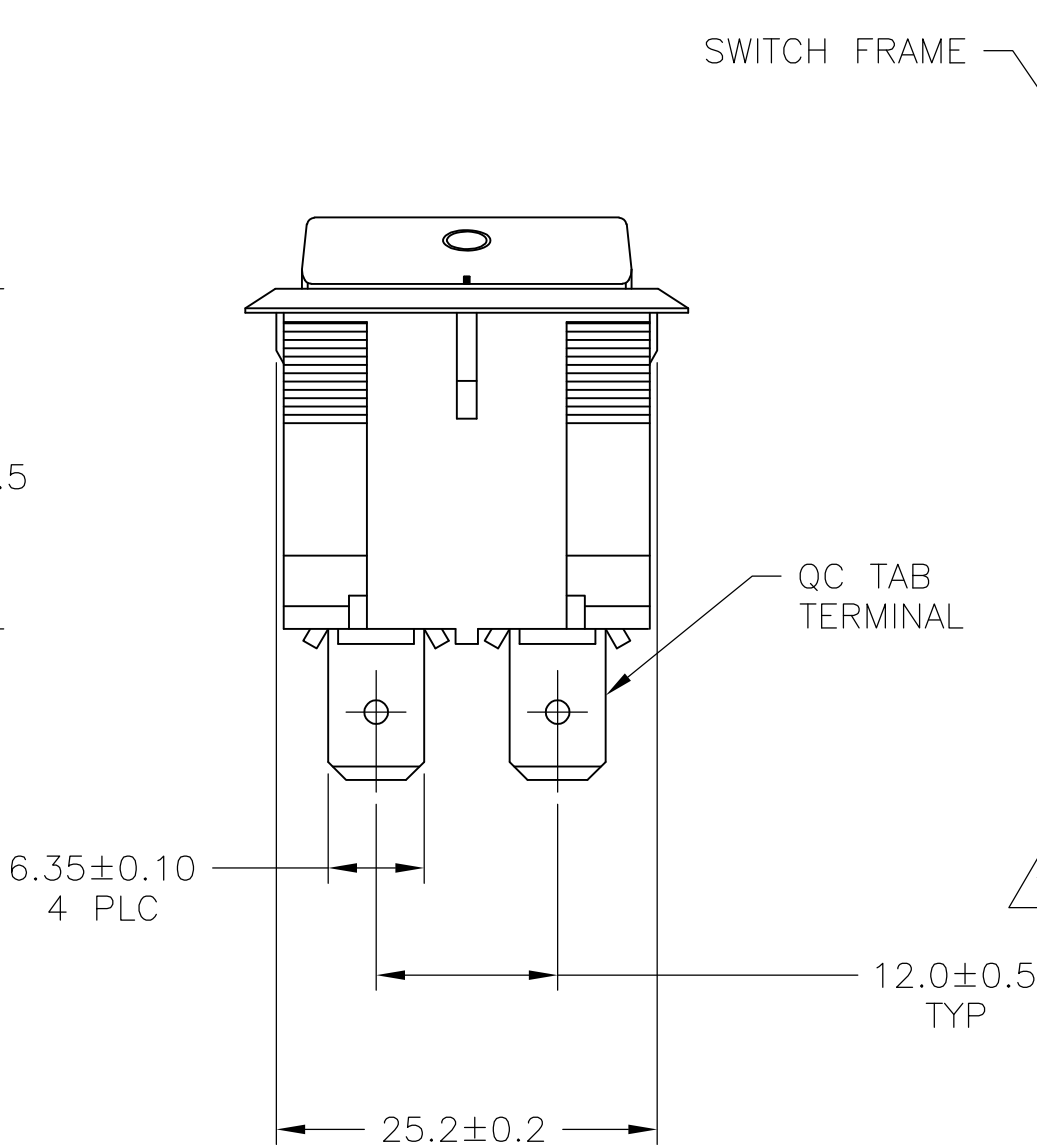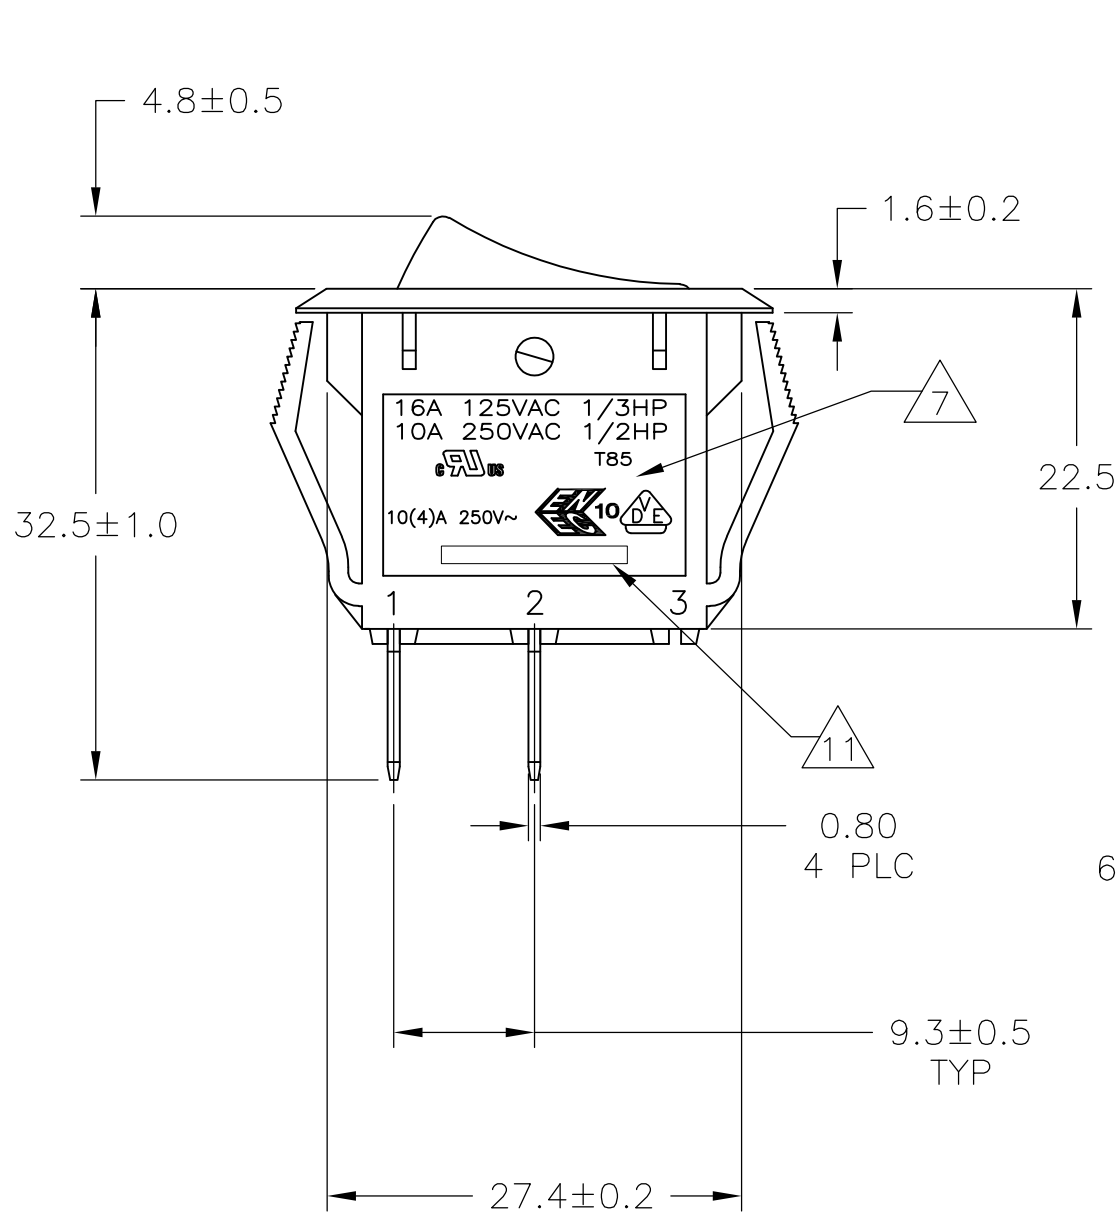

1571103-2 SHOWN

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN BSV	07APR04	Tyco Electronics Corporation Harrisburg, PA 17057	
DIMENSIONS: MM		CHK J.MOSIER	-		
		APVD JP	-	NAME POWER ROCKER SWITCH, 25.4mm X 27.6mm PANEL CUT-OUT SIZE, DOUBLE POLE, SINGLE THROW FOUR TERMINALS, NON-ILLUMINATED	
		PRODUCT SPEC NOT APPLICABLE	-	SIZE A2	
MATERIAL 1		APPLICATION SPEC NOT APPLICABLE	-	CAGE CODE 00779	
FINISH 2		WEIGHT -	-	DRAWING NO C=1571103	
CUSTOMER DRAWING			SCALE 2:1	SHEET 1 OF 2	REV F1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

AD00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	—	SEE SHEET 1	—	—	—

LEGACY PART NUMBER

X₁X₂

X₃

X₄

X₅X₆

—

X₇X₈

X₉

—

X₁₀

X₁₁

X₁₂

X₁₃

X₁₄

SWITCH TYPE: X₁X₂ = PR — POWER ROCKER

SECONDARY ROCKER COLOR: X₁₂ = Ø — NOT APPLICABLE

NOMINAL PANEL CUT OUT SIZE: X₃ = D — 25.4x27.6

NUMBER OF POLES: X₄ = D — DOUBLE

SWITCH FUNCTION: X₅X₆ = A1 — ON–OFF, WITH OPAQUE, SINGLE–COLOR ROCKER BUTTON.

LEGEND TEXT PATTERN: X₁₃ =

CURRENT RATING: X₇X₈ = 16 —

TERMINAL TYPE: X₉ = E — QC TAB

FRAME COLOR: X₁₀ = B — BLACK
W — WHITE

ROCKER COLOR: X₁₁ = B — BLACK
G — GREEN
R — RED
W — WHITE

LEGEND TEXT COLOR: X₁₄ = Ø —NOT APPLICABLE
G — GREEN
R — RED
B — BLACK
W — WHITE

1

MATERIALS:

ROCKER BUTTON & HOUSING: NYLON 66, UL 94 V–2.

TERMINAL, ACTIVE CONTACTOR: COPPER ALLOY PER ASTM B152/B152M

PLUNGER: COPPER ALLOY PER ASTM B036

SPRING: STEEL WIRE PER ASTM A228/A228M

CONTACT: SILVER–TIN OXIDE

2

FINISH:

TERMINAL, ACTIVE CONTACTOR: 1.0µm MIN SILVER

PLUNGER: 3.0µm MIN NICKEL

3

ELECTRICAL SPECIFICATIONS:

CURRENT & VOLTAGE

CONTACT RESISTANCE (INITIAL): <50mΩ

DIELECTRIC STRENGTH (INITIAL): >1000 VAC, 1 MINUTE

INSULATION RESISTANCE (INITIAL): >100MΩ MIN (500VDC BETWEEN OPEN CONTACTS)

INRUSH CURRENT: 50A / 3msec (CAPACITIVE LOAD)

ELECTRICAL LIFE ENDURANCE: >6000 OPERATIONS,

TEMPERATURE RISE AT TERMINALS: <30°C, 6000 OPERATIONS

(AMBIENT CONDITIONS: 25±2°C AND 65±5%R.H)

4

MECHANICAL SPECIFICATIONS:

ACTUATING FORCE: 850g MIN, 1250g MAX

OPERATING LIFE ENDURANCE: >100,000 OPERATIONS

TERMINAL STRENGTH : >10.0kg– QC TAB

5

ENVIRONMENTAL SPECIFICATIONS:

AMBIENT TEMPERATURE: –20°C TO +85°C

HUMIDITY: MAX 85%

SALT SPRAY: NO REMAKABLE RUST IN METAL PARTS (5%SALT / 35°C 24HRS)

SHOCK: NO MECHANICAL DEFECT OR DAMAGE (100g / 10MSEC/ X,Y,Z 3 TIMES)

VIBRATION: NO MECHANICAL DEFECT OR DAMAGE (10–55Hz /1.5mm/ X,Y,Z 2HRS)

6

UL: 16A@125VAC 1/3HP / 10A@250VAC 1/2HP

ENEC: 10(4)A 250V~

7

ELECTRICAL RATINGS, APPROVED AGENCY LOGOS, TERMINAL IDENTIFICATION NUMBERS, AND THE TYCO/ELECTRONICS LOGO MOLDED APPROXIMATELY AS SHOWN ON THE SIDES OF THE SWITCH HOUSING.

8

COMPONENT RECOGNIZED TO US & CANDIAN STANDARDS.

UL FILE NO. E46765

9

COMPONENT–RECOGNIZED TO EUROPEAN STANDARDS

(ENEC & VDE) MARKS LICENSE NO 40020317

10

ROHS 2002/95/EC COMPLIANT

11

TYCO ELECTRONICS LOGO LOCATED APPROXIMATELY AS SHOWN

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

MM

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± –

1 PLC ± 0.30

2 PLC ± 0.05

3 PLC ± –

4 PLC ± –

ANGLES ± –

FINISH

MATERIAL

DWN

BSV

07APR04

CHK

J.MOSIER

APVD

JP

PRODUCT SPEC

NOT APPLICABLE

APPLICATION SPEC

NOT APPLICABLE

WEIGHT

–

CUSTOMER DRAWING

Tyco Electronics

Tyco Electronics Corporation

Harrisburg, PA 17057

NAME

POWER ROCKER SWITCH, 25.4mm X 27.6mm

PANEL CUT–OUT SIZE, DOUBLE POLE, SINGLE THROW

FOUR TERMINALS, NON–ILLUMINATED

SIZE

A2

CAGE CODE

00779

DRAWING NO

C=1571103

RESTRICTED TO

–

SCALE

1:1

SHEET

2

OF

2

REV

F1

AMP 1471–9 REV 31MAR2000

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9