

POWER RELAY

1 POLE - 10A High sensitivity

FTR-K1 Series

■ FEATURES

- Low profile (height: 15.7mm)
 - HIGH INSULATION
Insulation distance (between coil and contacts): 10mm min.
Dielectric strength: 5KV
Surge strength: 10KV
 - Low coil power (400mW)
 - Cadmium free contacts
 - SAFETY STANDARDS
UL, CSA, VDE, SEMKO approved
UL, CSA TV-5 rating approved (1 form A type)
 - UL F class wire insulation
 - Flux proof, RTII
 - RoHS compliant
- Please see page 6 for more information



■ PARTNUMBER INFORMATION

[Example] FTR-K1 A L 012 W - LA - BG
 (a) (b) (c) (d) (e) (f) (g)

(a)	Relay type	FTR-K1 : FTR-K1 Series
(b)	Contact configuration	A : 1 form A (SPST-NO) C : 1 form C (SPDT)
(c)	Coil type	L : High sensitivity (200mW) / flux proof
(d)	Coil rated voltage	012 : 5...48VDC Coil rating table at page 3
(e)	Contact material / TV type	W : AgSnO ₂
(f)	Terminal pitch	LA : 10A High sensitive (250mW) 3.5mm pitch LB : 10A High sensitive (250mW) 5.0mm pitch (only 1 form A type)
(g)	Special type	Nil : Standard type (without gold plate) BG : Gold plated 3 μm

Actual marking does not carry the type name : "FTR"
 E.g.: Ordering code: FTR-K1AL012W-LA Actual marking: K1AL012W-LA

FTR-K1 SERIES

■ SPECIFICATION

Item	FTR-K1 (A, C) L () W - (LA, LB)		
Contact Data	Configuration		1 form A, 1 form C
	Construction		Single
	Material		AgSnO ₂
	Resistance (initial)		Max. 100mOhm at 1A, 6VDC
	Contact rating (resistive)		10A, 250VAC
	Max. carrying current *1		14A
	Max. switching voltage		440VAC
	Max. switching power		2,500VA
	Min. switching load *2		100mA, 5VDC
Life	Mechanical		Min. 20 x 10 ⁶ operations
	Electrical	AC contact rating	Min. 100 x 10 ³ operations (-LA) Min. 150 x 10 ³ operations (-LB)
Coil Data	Rated power (20 °C)		250mW
	Operate power (20 °C)		141mW
	Operating temperature range		-40 °C to +85 °C (no frost), (LB: -40 °C to +105 °C)
Timing Data	Operate (at nominal voltage)		Max. 15ms (without bounce, no diode)
	Release (at nominal voltage)		Max. 5ms (without bounce, no diode)
Insulation	Resistance (initial)		Min. 1,000MOhm at 500VDC
	Dielectric strength	Open contacts	1,000VAC (50/60Hz) 1min
		Contacts to coil	5,000VAC (50/60Hz) 1min
	Surge strength	Coil to contacts	10,000V / 1.2 x 50μs standard wave
	Clearance		10mm
	Creepage		10mm
	EN61810-1, VDE0435	Voltage	250V
		Pollution degree	3
		Material group	III a
	Category	C / 250V (Reference voltage) (VDE0110b)	
Other	Vibration resistance	Misoperation≥1us	10 to 55Hz double amplitude 0.7mm
		Endurance	10 to 55Hz double amplitude 1.5mm
	Shock	Misoperation≥1us	100m/s ² (11 ± 1ms)
		Endurance	1,000m/s ² (6 ± 1ms)
	Weight		Approximately 13g
	Sealing		Flux proof, RTII

* 1: Need to consider the heat from PCB when max. current is more than 10A.

* 2: Minimum switching loads mentioned above are reference values. Please perform the confirmation test with actual load before production since reference values may vary according to switching frequencies, environmental conditions

FTR-K1 SERIES

■ COIL RATING

Coil Code	Rated Coil Voltage (VDC)	Coil Resistance +/- 10% (Ohm)	Must Operate Voltage (VDC) *	Must Release-Voltage (VDC) *	Max. Coil Voltage (VDC)	Rated Power (mW)
005	5	100	3.75	0.5	15	250
006	6	145	4.5	0.6	18	
009	9	325	6.75	0.9	27	
012	12	575	9	1.2	36	
018	18	1,300	13.5	1.8	54	
024	24	2,310	18	2.4	72	
048	48	9,216	36	4.8	144	

Note: All values in the table are valid for 20°C and zero contact current.

* Specified operate values are valid for pulse wave voltage.







■ SAFETY STANDARDS

Type	Compliance	Contact rating	
		FTR-K1AL()W-LA, -LB	FTR-K1CL()W-LA
UL	UL 508	Flammability: UL 94-V0 (plastics)	
	E63614	10A, 277VAC (resistive) 1/3HP, 125VAC	10A, 277VAC (resistive)
CSA	C22.2 No. 14 LR 40304	1/2HP, 277VAC Pilot duty: B300	
VDE	0435, 0631, 0700, 0860	10A, 250VAC, 150,000 cycles -LA: 85 °C, -LB: 105 °C 3A, 250VAC, (cosφ=0.4) 100,000 cycles -LA: 85 °C, -LB: 105 °C	10A, 250VAC, 100,000 cycles, 85 °C
SEMKO	EN 61058-1:1992 and A1 EN 61095:1993 and A1+A11	250VAC, 10(3)A 40T85 (-LA) 250VAC, 10(3)A 40T105 (-LB)	250VAC, 10(3)A, 40T85, (-LA)

Complies with NEMKO, DEMKO, FIMKO

FTR-K1 SERIES

CHARACTERISTIC DATA

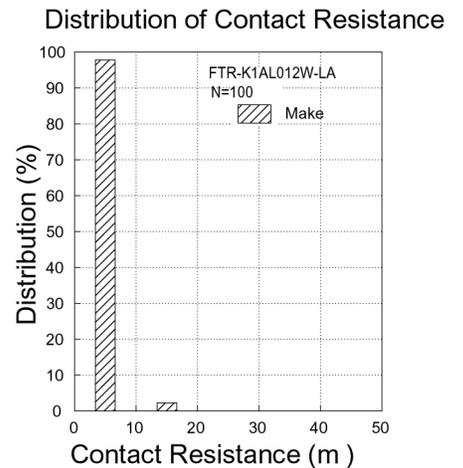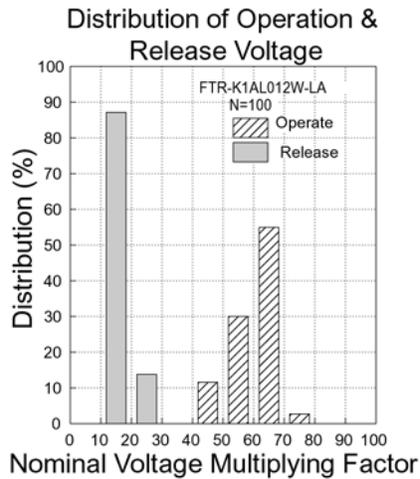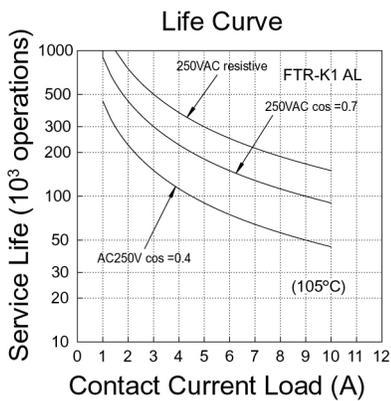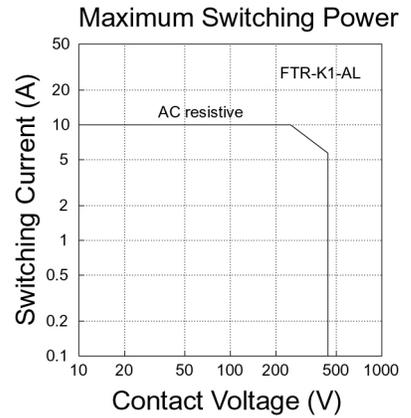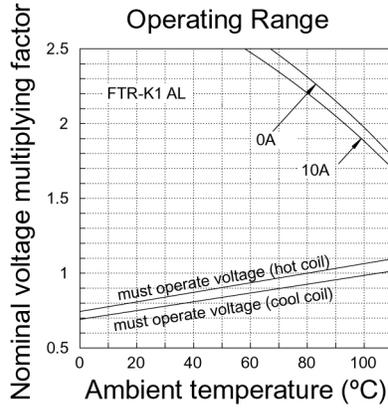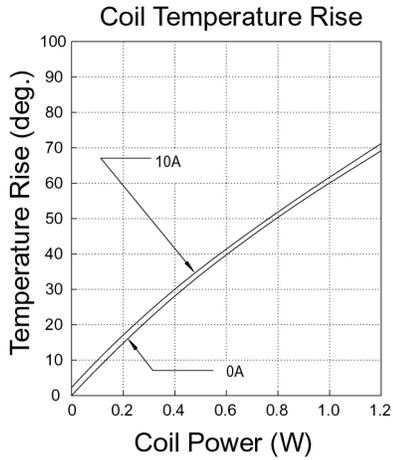


FTR-K1 SERIES


■ DIMENSIONS

• Dimensions

FTR-K1 (A, C) L () W-LA

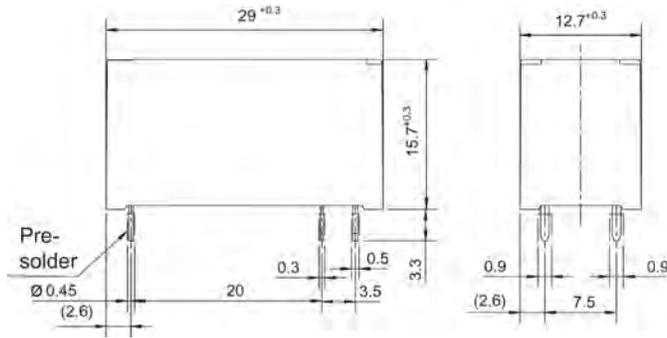


• Schematics (BOTTOM VIEW)




* Pin omitted in case of 1 form A type

• PC board mounting hole layout (BOTTOM VIEW)

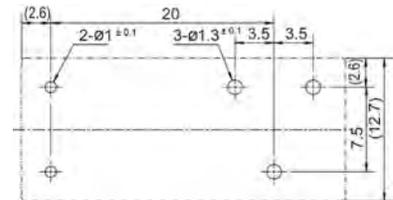


• Dimensions


FTR-K1AL () W-LB

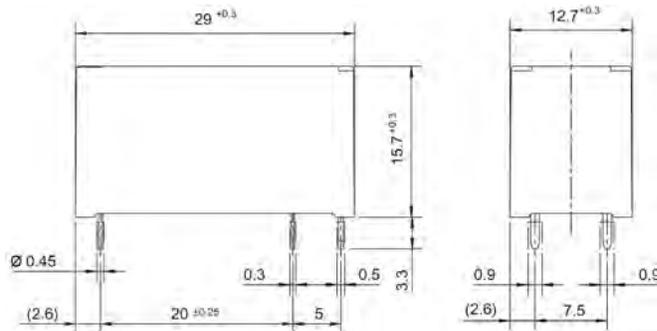

• Schematics (BOTTOM VIEW)

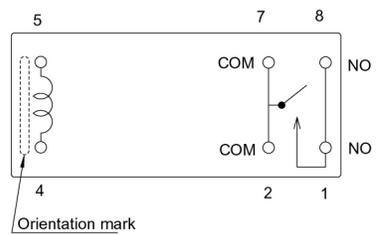

• PC board mounting hole layout (BOTTOM VIEW)

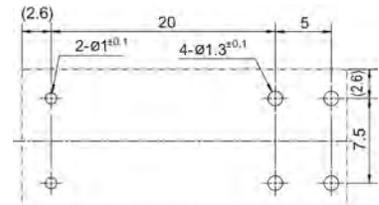

Unit: mm

RoHS Compliance and Lead Free Information

1. General Information

- All signal and power relays produced by Fujitsu Components are compliant with RoHS directive 2002/95EC including amendments.
- Cadmium as used in electrical contacts is exempted from the RoHS directives on October 21st, 2005. (Amendment to Directive 2002/95/EC)
- All of our signal and power relays are lead-free. Please refer to Lead-Free Status Info for older date codes at: <http://www.fujitsu.com/us/downloads/MICRO/fcai/relays/lead-free-letter.pdf>
- Lead free solder plating on relay terminals is Sn-3.0Ag-0.5Cu, unless otherwise specified. This material has been verified to be compatible with PbSn assembly process.

2. Recommended Lead Free Solder Profile

- Recommended solder Sn-3.0Ag-0.5Cu.

Flow Solder condition:

Pre-heating: maximum 120°C
Soldering: dip within 5 sec. at
260°C solder bath

Solder by Soldering Iron:

Soldering Iron
Temperature: maximum 360°C
Duration: maximum 3 sec.

We highly recommend that you confirm your actual solder conditions

3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays, unless otherwise indicated.

4. Tin Whiskers

- Dipped SnAgCu solder is known as presenting a low risk to tin whisker development. No considerable length whisker was found by our in house test.

Fujitsu Components International Headquarter Offices

Japan

Fujitsu Component Limited
Gotanda-Chuo Building
3-5, Higashigotanda 2-chome, Shinagawa-ku
Tokyo 141, Japan
Tel: (81-3) 5449-7010
Fax: (81-3) 5449-2626
Email: promothq@ft.ed.fujitsu.com
Web: www.fcl.fujitsu.com

North and South America

Fujitsu Components America, Inc.
250 E. Caribbean Drive
Sunnyvale, CA 94089 U.S.A.
Tel: (1-408) 745-4900
Fax: (1-408) 745-4970
Email: components@us.fujitsu.com
Web: <http://us.fujitsu.com/components>

Europe

Fujitsu Components Europe B.V.
Diamantlaan 25
2132 WV Hoofddorp
Netherlands
Tel: (31-23) 5560910
Fax: (31-23) 5560950
Email: info@fceu.fujitsu.com
Web: emea.fujitsu.com/components/

Asia Pacific

Fujitsu Components Asia Ltd.
102E Pasir Panjang Road
#01-01 Citilink Warehouse Complex
Singapore 118529
Tel: (65) 6375-8560
Fax: (65) 6273-3021
Email: fcal@fcal.fujitsu.com
Web: <http://www.fujitsu.com/sg/services/micro/components/>

©2010 Fujitsu Components Europe B.V. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

The contents, data and information in this datasheet are provided by Fujitsu Component Ltd. as a service only to its user and only for general information purposes.

The use of the contents, data and information provided in this datasheet is at the users' own risk.

Fujitsu has assembled this datasheet with care and will endeavor to keep the contents, data and information correct, accurate, comprehensive, complete and up to date.

Fujitsu Components Europe B.V. and affiliated companies do however not accept any responsibility or liability on their behalf, nor on behalf of its employees, for any loss or damage, direct, indirect or consequential, with respect to this datasheet, its contents, data, and information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof.

Nor do Fujitsu Components Europe B.V. and affiliated companies accept on their behalf, nor on behalf of its employees, any responsibility or liability for any representation or warrant of any kind, express or implied, including warranties of any kind for merchantability or fitness for particular use, with respect to these datasheets, its contents, data, information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Rev. August 16, 2010

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9