

## IEC Appliance Inlet C14 with Filter, Fuseholder 1-pole



Screw-on from front side  
Type 5200, Fuseholder 1-pole with spare compartment  
Screw-On Version



Snap-in mounting from front side  
Type 5200, Fuseholder 1-pole with spare compartment  
Snap-In Version



See below:  
[Approvals and Compliances](#)

### Description

- Panel mount :  
Snap-in or screw-on mounting from front side
- 3 Functions :  
Appliance Inlet Protection class I , Fuseholder for fuse-links 5 x 20 mm 1-pole , Line filter in standard and medical version
- V-Lock notch standard
- Quick connect terminals 6.3 x 0.8 mm

### Unique Selling Proposition

- Ultra-compact design
- Recessed faston connectors
- High quality filter case made of stainless steel
- Highly resistant since potted filter

### Characteristics

- All single elements are already wired
- Plug removal necessary for fuse-link replacement
- For applications according IEC/UL 62368-1 we recommend variants with bleed resistor  
Standard and Medical Version, IEC 60939-2, UL 60939-3

### Other versions on request

- Medical Version (M80)

### References

Alternative: version without line filter [6200](#)  
Alternative: Standard version

### Weblinks

[pdf data sheet](#), [html datasheet](#), [General Product Information](#), [Approvals](#), [Distributor-Stock-Check](#), [Accessories](#), [Detailed request for product](#)

### Technical Data

|                                 |                                                                            |
|---------------------------------|----------------------------------------------------------------------------|
| Ratings IEC                     | 1 - 10A @ Ta 40 °C / 250VAC; 50Hz                                          |
| Ratings UL/CSA                  | 1 - 10A @ Ta 40 °C / 250VAC; 60Hz                                          |
| Leakage Current                 | standard < 0.5mA (250 V / 60Hz)<br>medical < 5 µA (250 V / 60 Hz)          |
| Dielectric Strength             | > 1.7kVDC between L-N<br>> 2.7kVDC between L/N-PE<br>Test voltage (2 sec)  |
| Allowable Operation Temperature | -25 °C to 85 °C                                                            |
| Climatic Category               | 25/085/21 acc. to IEC 60068-1                                              |
| IP-Protection                   | from front side IP40 acc. to IEC 60529                                     |
| Protection Class                | Suitable for appliances with protection class I acc. to IEC 61140          |
| Terminal                        | Quick connect terminals 6.3 x 0.8 mm                                       |
| Panel Thickness S               | Screw: max 8mm<br>Mounting screw torque max 0.5Nm<br>Snap-in: 0.8mm to 3mm |
| Material: Housing               | Thermoplastic, black, UL 94V-0                                             |

|                                   |                                                                                                                                 |
|-----------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Appliance inlet/-outlet           | C14 acc. to IEC 60320-1, UL 60320-1, CSA C22.2 no. 60320-1 (for cold conditions) pin-temperature 70 °C, 10A, Protection Class I |
| Fuseholder                        | 1-pole, Shocksafe category PC2 acc. to IEC 60127-6, for fuse-links 5 x 20mm                                                     |
| Rated Power Acceptance @ Ta 23 °C | 5 x 20: 2W (1 pole)                                                                                                             |
| Power Acceptance @ Ta > 23°C      | Admissible power acceptance at higher ambient temperature see derating curves                                                   |
| Line Filter                       | Standard and Medical Version, IEC 60939-2, UL 60939-3, CSA C22.2 no. 8<br><a href="#">Technical Details</a>                     |
| MTBF                              | > 2'300'000h acc. to MIL-HB-217 F                                                                                               |

### Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

## Approvals

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products.

Approval Reference Type: 5200

| Approval Logo                                                                    | Certificates                  | Certification Body | Description                            |
|----------------------------------------------------------------------------------|-------------------------------|--------------------|----------------------------------------|
|  | <a href="#">VDE Approvals</a> | VDE                | Certificate Number: 101307             |
|  | <a href="#">UL Approvals</a>  | UL                 | UL File Number: E495089                |
|  | <a href="#">CQC Approvals</a> | CQC                | CQC Certificate Number: CQC18001210262 |

## Product standards

Product standards that are referenced

| Organization                                                                     | Design                | Standard              | Description                                                           |
|----------------------------------------------------------------------------------|-----------------------|-----------------------|-----------------------------------------------------------------------|
|  | Designed according to | IEC 60320-1           | Appliance couplers for household and similar general purposes         |
|  | Designed according to | IEC 60939-2           | Passive filters for suppressing electromagnetic interference          |
|  | Designed according to | IEC 60127-6           | Miniature fuses. Part 6. Fuse-holders for miniature fuse-links        |
|  | Designed according to | UL 60320-1            | Standard for Attachment Plugs and Receptacles                         |
|  | Designed according to | UL 60939-3            | Electromagnetic interference filters                                  |
|  | Designed according to | CSA C22.2 no. 60320-1 | General Use Receptacles, Attachment Plugs, and Similar Wiring Devices |
|  | Designed according to | CSA C22.2 no. 8       | Electromagnetic interference (EMI) filters                            |

## Application standards

Application standards where the product can be used

| Organization                                                                       | Design                         | Standard       | Description                                                                                                                                                                                                                  |
|------------------------------------------------------------------------------------|--------------------------------|----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | Designed for applications acc. | IEC/UL 62368-1 | IEC 62368-1 includes the basic requirements for safety of audio, video, information technology and office equipment.                                                                                                         |
|  | Designed for applications acc. | IEC 60601-1    | Medical electrical equipment - Part 1: General requirements for basic safety and essential performance                                                                                                                       |
|  | Designed for applications acc. | IEC 60335-1    | Safety of electrical appliances for household and similar purposes. Meets the requirements for appliances in unattended use. This includes the enhanced requirements of glow wire tests acc. to IEC 60695-2-11 or -12 & -13. |


## Compliances

The product complies with following Guide Lines

| Identification                                                                     | Details                                      | Initiator   | Description                                                                                                                                                                                                                  |
|------------------------------------------------------------------------------------|----------------------------------------------|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <a href="#">CE declaration of conformity</a> | SCHURTER AG | The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008.                        |
|  | <a href="#">RoHS</a>                         | SCHURTER AG | Directive RoHS 2011/65/EU, Amendment (EU) 2015/863                                                                                                                                                                           |
|  | <a href="#">China RoHS</a>                   | SCHURTER AG | The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.                                                                                                         |
|  | <a href="#">REACH</a>                        | SCHURTER AG | On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.                                                      |
|  |                                              | SCHURTER AG | V-Lock system are based on a matching plug-dose combination. The connector is equipped with a notch intended for use with the latching cordset. The cord latching system prevents against accidental removal of the cordset. |
|  | <a href="#">White Paper Glow wire test</a>   | SCHURTER AG | Meets the requirements of IEC 60335-1 for appliances in unattended use. This includes the enhanced requirements of glow wire tests acc. to IEC 60695-2-11 or -12 & -13.                                                      |
|  | <a href="#">Medical Equipment</a>            | SCHURTER AG | Suitable for use in medical equipment according to IEC/UL 60601-1                                                                                                                                                            |

## Dimensions [mm]

Screw-on mounting type 5200

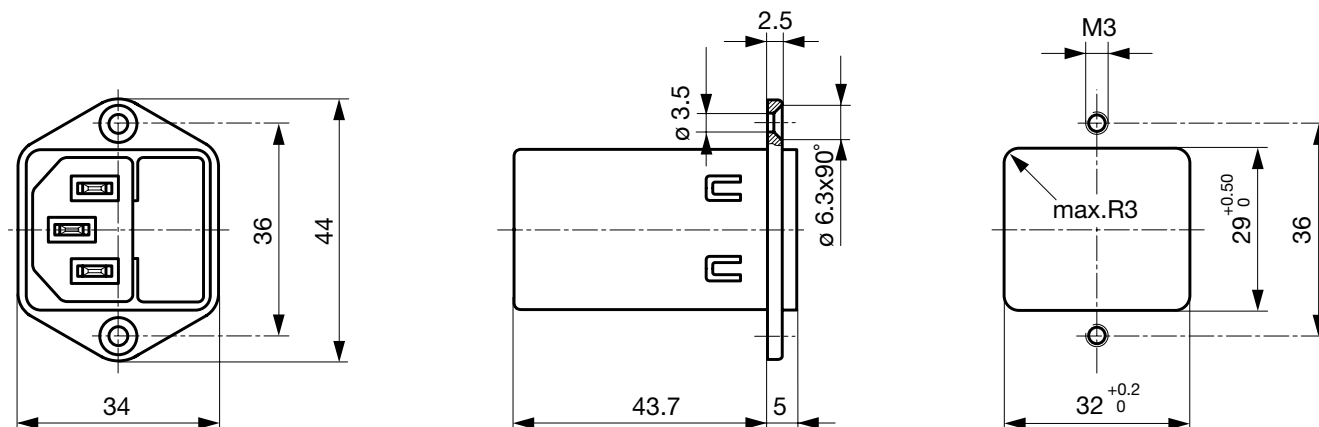

Snap-in mounting type 5200




## Technical Data of Filter-Components

| Rated Current<br>[A] | Filter-Type                  | Inductances<br>L [mH] | Capacitance<br>CX [nF] | Capacitance<br>CY [nF] | R [MΩ] |
|----------------------|------------------------------|-----------------------|------------------------|------------------------|--------|
| 1                    | Standard version             | 2 x 11                | 47                     | 2.2                    | -      |
| 2                    | Standard version             | 2 x 4                 | 47                     | 2.2                    | -      |
| 4                    | Standard version             | 2 x 1.6               | 47                     | 2.2                    | -      |
| 6                    | Standard version             | 2 x 0.7               | 47                     | 2.2                    | -      |
| 8                    | Standard version             | 2 x 0.6               | 47                     | 2.2                    | -      |
| 10                   | Standard version             | 2 x 0.4               | 47                     | 2.2                    | -      |
| 1                    | Medical Version (M5)         | 2 x 11                | 47                     | -                      | 1      |
| 2                    | Medical Version (M5)         | 2 x 4                 | 47                     | -                      | 1      |
| 4                    | Medical Version (M5)         | 2 x 1.6               | 47                     | -                      | 1      |
| 6                    | Medical Version (M5)         | 2 x 0.7               | 47                     | -                      | 1      |
| 8                    | Medical Version (M5)         | 2 x 0.6               | 47                     | -                      | 1      |
| 10                   | Medical Version (M5)         | 2 x 0.4               | 47                     | -                      | 1      |
| 10                   | Standard and Medical Version | 2 x 11                | 47                     | 2.2                    | 1      |


Diagrams

5200 Standard Version

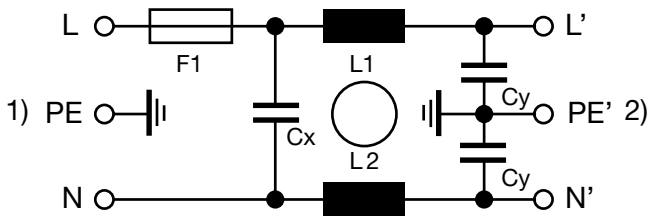

1) Line  
2) Load


5200 Medical Version (M5)

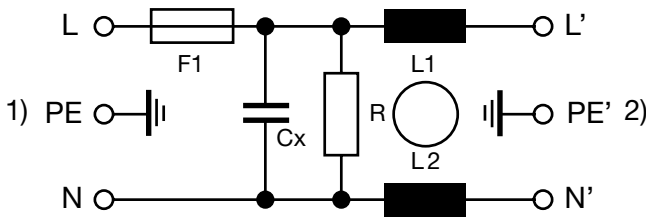

1) Line  
2) Load

Derating Curves


1-pole




Attenuation Loss

Standard version


1 A




2 A




4 A




6 A



8 A




10 A



## Medical version (M5)

1 A




2 A




4 A




6 A



8 A



10 A



## All Variants

| Rated Current [A] | Filter-Type          | Panel mounting | Fuseholder | Order Number |  |
|-------------------|----------------------|----------------|------------|--------------|--|
| 1                 | Standard version     | Snap-in        | 1-pole     | 5200.0143.1  |  |
| 2                 | Standard version     | Snap-in        | 1-pole     | 5200.0243.1  |  |
| 4                 | Standard version     | Snap-in        | 1-pole     | 5200.0443.1  |  |
| 6                 | Standard version     | Snap-in        | 1-pole     | 5200.0643.1  |  |
| 8                 | Standard version     | Snap-in        | 1-pole     | 5200.0843.1  |  |
| 10                | Standard version     | Snap-in        | 1-pole     | 5200.1043.1  |  |
| 1                 | Standard version     | Screw          | 1-pole     | 5200.0123.1  |  |
| 2                 | Standard version     | Screw          | 1-pole     | 5200.0223.1  |  |
| 4                 | Standard version     | Screw          | 1-pole     | 5200.0423.1  |  |
| 6                 | Standard version     | Screw          | 1-pole     | 5200.0623.1  |  |
| 8                 | Standard version     | Screw          | 1-pole     | 5200.0823.1  |  |
| 10                | Standard version     | Screw          | 1-pole     | 5200.1023.1  |  |
| 1                 | Medical Version (M5) | Snap-in        | 1-pole     | 5200.0143.3  |  |
| 2                 | Medical Version (M5) | Snap-in        | 1-pole     | 5200.0243.3  |  |
| 4                 | Medical Version (M5) | Snap-in        | 1-pole     | 5200.0443.3  |  |
| 6                 | Medical Version (M5) | Snap-in        | 1-pole     | 5200.0643.3  |  |
| 8                 | Medical Version (M5) | Snap-in        | 1-pole     | 5200.0843.3  |  |
| 10                | Medical Version (M5) | Snap-in        | 1-pole     | 5200.1043.3  |  |
| 1                 | Medical Version (M5) | Screw          | 1-pole     | 5200.0123.3  |  |
| 2                 | Medical Version (M5) | Screw          | 1-pole     | 5200.0223.3  |  |
| 4                 | Medical Version (M5) | Screw          | 1-pole     | 5200.0423.3  |  |
| 6                 | Medical Version (M5) | Screw          | 1-pole     | 5200.0623.3  |  |
| 8                 | Medical Version (M5) | Screw          | 1-pole     | 5200.0823.3  |  |
| 10                | Medical Version (M5) | Screw          | 1-pole     | 5200.1023.3  |  |

Most Popular.

Availability for all products can be searched real-time: <https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

## Packaging unit

10 Pcs

Accessories

Description



Assorted Covers  
Rear Cover

0859.0047



Cord retaining kits  
Cord retaining strain relief

Countersunk, B

4700.0002

Mating Outlets/Connectors

Category / Description

Appliance Outlet Overview complete



4787, Mounting: Screw-on mounting, Appliance Outlet: IEC Solder terminals, 10 A, Suitable for appliances with protection class I

4787

4788, Mounting: Snap-in version, Appliance Outlet: IEC Solder terminals or quick connect terminals, 10 A, Suitable for appliances with protection class I

4788

IEC Appliance Outlet F or H, Screw-on Mounting, Front Side, Solder, PCB or Quick-connect Terminal

5091

Appliance Outlet further types to 5200

Connector Overview complete



4782 Mounting: Power Cord, 3 x 1 mm<sup>2</sup> / 3 x 18 AWG, Cable, Connector: IEC C13

4782

4785 Mounting: Power Cord, 3 x 1 mm<sup>2</sup> / 3 x 18 AWG, Cable, Connector: IEC C13

4785

4012 Mounting: Power Supply Cord, 3 x 1 mm<sup>2</sup>, Screw clamps, Connector: IEC C13

4012

4300-06 Mounting: Power Cord, 3 x 1 mm<sup>2</sup> / 3 x 18 AWG, Cable, Connector: IEC C13

4300-06

4781 Mounting: Power Cord, 3 x 1 mm<sup>2</sup> / 3 x 18 AWG, Cable, Connector: IEC C15

4781

Connector further types to 5200

...

Mating Outlets/Connectors shuttered



Connector Overview complete

4783 Mounting: Power Cord, 3 x 1 mm<sup>2</sup> / 3 x 18 AWG, Cable, Connector: IEC C13

4783

Connector further types to 5200

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9