

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0424109130](#)
Status: **Active**
Overview: [modular_plugs_jacks](#)
Description: Modular Jack, Vertical, 8/4, Keyed

Documents:
[3D Model](#) [Product Specification PS-42410 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR19980
UL E107635

General

Product Family Modular Jacks/Plugs
Series [42410](#)
Component Type PCB Jack
Magnetic No
Overview [modular_plugs_jacks](#)
Performance Category 3
Power over Ethernet (PoE) N/A
Product Name RJ45

Physical

Boot Color N/A
Color - Resin Black
Durability (mating cycles max) 500
Flammability 94V-0
Inverted / Top Latch N/A
Keying to Mating Part Yes
Lightpipes/LEDs None
Material - Metal Phosphor Bronze
Material - Plating Mating Gold
Material - Plating Termination Tin
Material - Resin Polyester
Orientation Vertical (Top Entry)
PCB Locator Yes
PCB Retention Yes
PCB Thickness Recommended (in) 0.125 In
PCB Thickness Recommended (mm) 3.18 mm
Packaging Type Tray
Panel Mount With Flange
Pitch - Mating Interface (in) 0.040 In
Pitch - Mating Interface (mm) 1.02 mm
Pitch - Term. Interface (in) 0.050 In
Pitch - Term. Interface (mm) 1.27 mm
Ports 1
Positions / Loaded Contacts 8/4
Surface Mount Compatible (SMC) No
Temperature Range - Operating -40°C to +85°C
Termination Interface: Style Through Hole
Waterproof / Dustproof No
Wire/Cable Type N/A

Electrical

Current - Maximum per Contact 1.5A




image - Reference only

Series

EU RoHS

**ELV and RoHS
Compliant**
REACH SVHC
Not Reviewed
**Halogen-Free
Status**

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series
[42410Series](#)

Grounding to PCB	No
Grounding to Panel	None
Shielded	No
Voltage - Maximum	150V AC (RMS)
Solder Process Data	
Duration at Max. Process Temperature (seconds)	5
Lead-free Process Capability	Wave Capable (TH only)
Max. Cycles at Max. Process Temperature	1
Process Temperature max. C	235
Material Info	
Reference - Drawing Numbers	
Packaging Specification	PK-42410-492
Product Specification	PS-42410
Sales Drawing	SDA-42410-****
Test Summary	TS-42878-001

This document was generated on 06/07/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

20

19

18

17

16

15

14

13

12

11

42410

9

8

7

6

5

4


3

2


1

NOTES:

- MATERIALS: HOUSING PARTS ARE MADE OF POLYESTER, RATED UL 94 V-0, COLOR IS BLACK; TERMINALS ARE .015/(0.38) THICK PHOSPHOR BRONZE.
- TERMINAL PLATING OPTIONS PER ES-88-***:
 - SELECT GOLD IN CONTACT AREA; 50 MICROINCHES MIN.,
 - SELECT TIN IN PC TAIL AREA; 100 MICROINCHES MIN.,WITH OVERALL NICKEL UNDERPLATE; 50 MICROINCHES MIN.
*THE PRIMARY SHIPPING CARTON WILL BE LABELED "COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC". CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH TIN-LEAD IN THE PC TAIL.
- THESE MODULAR JACKS MEET THE PERFORMANCE REQUIREMENTS OF MOLEX PRODUCT SPECIFICATION PS-42410.
- CONNECTORS ARE TO BE PACKED IN THERMOFORMED TRAYS, PER PACKAGING SPECIFICATION PK-42410-492.
- ALL JACKS ARE DESIGNED TO BE USED WITH .062/(1.57) OR .125/(3.18) THICK P.C. BOARDS.
- ALL JACKS CONFORM TO AND ACCEPT PLUGS WHICH CONFORM TO FCC RULES AND REGULATIONS PART 68, SUBPART F, WHEN PLATED WITH 50 MICROINCHES GOLD.
- ALL JACKS MUST BE CAPABLE OF FITTING INTO MOLEX GAGE G-42410 (CONNECTOR SIZE 4).
- SEE SHEETS 1 & 4 FOR CONNECTOR SIZE 4.
- SEE SHEETS 2 & 4 FOR CONNECTOR SIZE 6.
- SEE SHEET 4 FOR ASSEMBLY ITEM NUMBERS.
- THIS MODULAR JACK ASSEMBLY IS ALSO AVAILABLE IN A UL 94V-0 RATED, GLASS-FILLED NYLON. (SEE MOLEX DRAWING SDA-43576)
- ENGRAVED NUMBERS ON HOUSING BODY ARE FOR HOLDING IDENTIFICATION ONLY. THEY ARE NOT INTENDED FOR ASSEMBLY IDENTIFICATION PURPOSES.
- ALL UNTOLERANCED DIMENSIONS ARE SHOWN FOR REFERENCE ONLY.

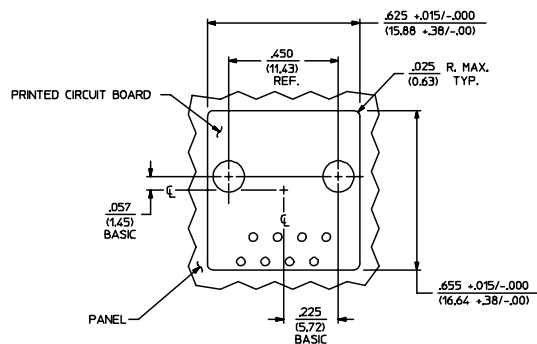





PANEL CUT-OUT FOR CONNECTOR SIZE 8

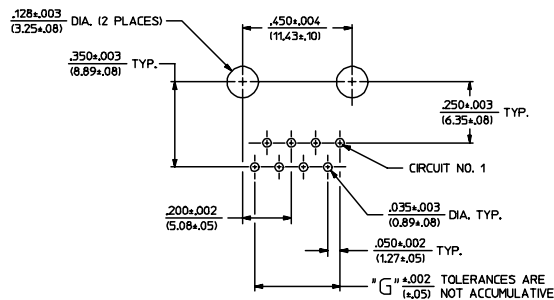

P.C. BOARD LAYOUT FOR CONNECTOR SIZE 8

P.C. BOARD THICKNESS	DIM. "D" (MTG. PEGS)	DIM. "F" (P.C. TAILS)
.062/(1.57)	.128 (3.25)	.120 +.015/-0.025 (3.05 +.38/-0.63)
.125/(3.18)	.191 (4.85)	.205 +.015/-0.025 (5.21 +.38/-0.63)

CONNECTOR SIZE	CIRCUIT SIZE	DIM. "G"
8	8	.350 (8.89)
8	6	.250 (6.35)
8	4	.150 (3.81)
8	2	.050 (1.27)

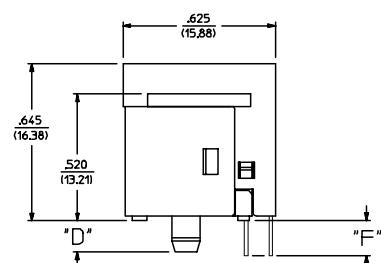

SIZE 8 MODULAR JACK LOADED WITH 8 TERMINALS SHOWN ABOVE

(SEE SHEET 4 FOR PART NUMBER AVAILABILITY)

SEE SHEET ONE EC NO. UFP2004-667 DRAWN: SCHMIDT 2004/03/03 CHKD: SCHMIDT 2004/03/03 APPR: F. SMITH 2004/03/03 REV	QUALITY SYMBOLS 0 0	GENERAL TOLERANCES (UNLESS SPECIFIED) 4 PLACES ± .0005 3 PLACES ± .0005 2 PLACES ± .0005 1 PLACE ± .0005 ANGULAR ± 1/2° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SCALE 4:1 DESIGN UNITS INCH DIMENSION STYLE IN/MM	THIRD ANGLE PROJECTION REVISE ON CAD ONLY	TITLE ASSEMBLY, VERTICAL MODULAR JACKS (CONNECTOR SIZE 8) MOLEX MOLEX INCORPORATED MATERIAL NO. (DOCUMENT NO.) SEE SHEET 4 SDA-42410-****	SHEET NO. 3 OF 4

	20	19	18	17	16	15	14	13	12	11	42410	9	8	7	6	5	4	3	2	1	
	SIZE 4 VERTICAL MODJACK ASSEMBLIES																				
	PART CHARACTERISTICS																				
	ASSEMBLY ITEM NUMBER	EXTERNAL CONNECTOR SIZE	NUMBER OF POSITIONS	P.C. BOARD THICKNESS	MOUNTING EARS OPTION	TERMINAL PLATING OPTION															
	42410-4168	4 POS. BODY	4	.062/(1.57)	YES	A															
	42410-4170	↑	↑	.062/(1.57)	NO	A															
	42410-4264	↓	↓	.125/(3.18)	YES	A															
	42410-4266	4 POS. BODY	4	.125/(3.18)	NO	A															
	42410-4312	4 POS. BODY	2	.062/(1.57)	YES	A															
	42410-4314	↑	↑	.062/(1.57)	NO	A															
	42410-4408	↓	↓	.125/(3.18)	YES	A															
	42410-4410	4 POS. BODY	2	.125/(3.18)	NO	A															
	SIZE 6 VERTICAL MODJACK ASSEMBLIES																				
	PART CHARACTERISTICS																				
	ASSEMBLY ITEM NUMBER	EXTERNAL CONNECTOR SIZE	NUMBER OF POSITIONS	P.C. BOARD THICKNESS	MOUNTING EARS OPTION	TERMINAL PLATING OPTION															
	42410-6168	6 POS. BODY	6	.062/(1.57)	YES	A															
	42410-6170	↑	↑	.062/(1.57)	NO	A															
	42410-6264	↓	↓	.125/(3.18)	YES	A															
	42410-6266	6 POS. BODY	6	.125/(3.18)	NO	A															
	42410-6312	6 POS. BODY	4	.062/(1.57)	YES	A															
	42410-6314	↑	↑	.062/(1.57)	NO	A															
	42410-6320			.062/(1.57)	YES	B															
	42410-6408	↓	↓	.125/(3.18)	YES	A															
	42410-6410	6 POS. BODY	4	.125/(3.18)	NO	A															
	42410-6456	6 POS. BODY	2	.062/(1.57)	YES	A															
	42410-6458	↑	↑	.062/(1.57)	NO	A															
	42410-6552	↓	↓	.125/(3.18)	YES	A															
	42410-6554	6 POS. BODY	2	.125/(3.18)	NO	A															
	SIZE 8 VERTICAL MODJACK ASSEMBLIES																				
	PART CHARACTERISTICS																				
	ASSEMBLY ITEM NUMBER	EXTERNAL CONNECTOR SIZE	NUMBER OF POSITIONS	P.C. BOARD THICKNESS	KEYING OPTION	MOUNTING EARS OPTION	TERMINAL PLATING OPTION														
	42410-8312	8 POS. BODY	8	.062/(1.57)	NO	YES	A														
	42410-8314	↑	↑	.062/(1.57)	NO	NO	A														
	42410-8360			.062/(1.57)	YES	YES	A														
	42410-8362			.062/(1.57)	YES	NO	A														
	42410-8504			.125/(3.18)	NO	YES	A														
	42410-8506			.125/(3.18)	NO	NO	A														
	42410-8552	↓	↓	.125/(3.18)	YES	YES	A														
	42410-8554	8 POS. BODY	8	.125/(3.18)	YES	NO	A														
	42410-8600	8 POS. BODY	6	.062/(1.57)	NO	YES	A														
	42410-8602	↑	↑	.062/(1.57)	NO	NO	A														
	42410-8648			.062/(1.57)	YES	YES	A														
	42410-8650			.062/(1.57)	YES	NO	A														
	42410-8792			.125/(3.18)	NO	YES	A														
	42410-8794			.125/(3.18)	NO	NO	A														
	42410-8840	↓	↓	.125/(3.18)	YES	YES	A														
	42410-8842	8 POS. BODY	6	.125/(3.18)	YES	NO	A														
	42410-8888	8 POS. BODY	4	.062/(1.57)	NO	YES	A														
	42410-8890	↑	↑	.062/(1.57)	NO	NO	A														
	42410-8936			.062/(1.57)	YES	YES	A														
	42410-8938			.062/(1.57)	YES	NO	A														
	42410-9080			.125/(3.18)	NO	YES	A														
	42410-9082			.125/(3.18)	NO	NO	A														
	42410-9128	↓	↓	.125/(3.18)	YES	YES	A														
	42410-9130	8 POS. BODY	4	.125/(3.18)	YES	NO	A														
	42410-9176	8 POS. BODY	2	.062/(1.57)	NO	YES	A														
	42410-9178	↑	↑	.062/(1.57)	NO	NO	A														
	42410-9224			.062/(1.57)	YES	YES	A														
	42410-9226			.062/(1.57)	YES	NO	A														
	42410-9368			.125/(3.18)	NO	YES	A														
	42410-9370			.125/(3.18)	NO	NO	A														
	42410-9416	↓	↓	.125/(3.18)	YES	YES	A														
	42410-9418	8 POS. BODY	2	.125/(3.18)	YES	NO	A														

SEE SHEET ONE
EC NO: UFP2004-1617
DRAWN:LSCHMDT 2004/03/03
CHKD:LSCHMDT 2004/03/03
APPR:FSMITH 2004/03/03
N

QUALITY SYMBOLS
▽ 0
▽ 0

GENERAL TOLERANCES (UNLESS SPECIFIED)
4 PLACES ± --- ± ---
3 PLACES ± --- ± ---
2 PLACES ± --- ± ---
1 PLACE ± --- ± ---
ANGULAR ±1/2°
DRAFT WHERE APPLICABLE
MUST REMAIN WITHIN DIMENSIONS

SCALE --- INCH
DIMENSION STYLE IN/MM
DRAWN BY DATE 1990/10/12
GLT
CHECKED BY DATE 1990/10/12
BAP
APPROVED BY DATE 1990/10/12
RAS

THIRD ANGLE PROJECTION
REVISE ON CAD ONLY
TITLE ASSEMBLY, VERTICAL MODULAR JACKS
MATERIAL NO. MOLEX INCORPORATED
DOCUMENT NO. SDA-42410-****
SHEET NO. 4 OF 4

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9