

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:


62202-0206

Status:

Active

Description:

Insertion Module for Advanced Mate Signal Header, 6-Row by 25-Wide, 50.00mm

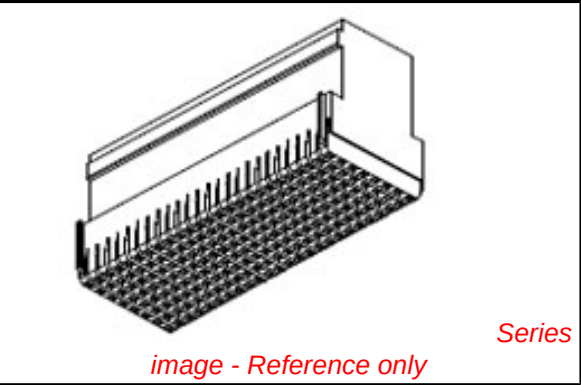

Documents:

RoHS Certificate of Compliance (PDF)

General	
Product Family	Application Tooling
Series	T9999
Comments	See Tooling Specification (PDF) Above
Function	Insertion
Geographic Area	Global
Level of Automation	Manual
More Detailed Tech Information	applicationtooling@molex.com
Product Name	PremiumGrade™
Survey	www.molex.com//review/apptool_survey.html
Tool Type	Handtool
UPC	756054005118
Material Info	
Reference - Drawing Numbers	
Application Tooling Documents	ATS-622020206, TM-622010999, TM-622022099

EU RoHS

Compliance Status

Not Reviewed

REACH SVHC

Not Reviewed

Low-Halogen Status

Not Reviewed

China RoHS

Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

T9999Series

Use With

VHDM® Board-to-Board Backplane Header
74060 , 74061 , 74062

Application Tooling Description	FAQ Product #
2.00mm Pitch 8-Row VHDM-HSD™ Backplane Header, Open Module, 150 Circuits, Pin Length 4.75mm. Series:74659 Enables designers to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm	0746492501
2.00mm Pitch 8-Row VHDM-HSD™ Backplane Header,	0746492502

	Open Module, 150 Circuits, Pin Length 6.25mm. Series:74659 Enables designers to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm 2.00mm Pitch 8- Row VHDM-HSD™ Backplane Header, Open Module, 150 Circuits, Pin Length 4.25mm. Series:74659 Enables designers to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm 2.00mm Pitch 8- Row VHDM-HSD™ Backplane Header, Open Module, 150 Circuits, Pin Length 5.15mm. Series:74659 Enables designers to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm 2.00mm Pitch 8- Row VHDM-HSD™ Backplane Header, Open Module, 150 Circuits, Pin Length 4.75mm. Series:74659 Enables designers to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm 2.00mm Pitch 8- Row VHDM-HSD™ Backplane Header, Open Module, 150 Circuits, Pin Length 6.25mm. Series:74659 Enables designers to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm 2.00mm Pitch 8- Row VHDM-HSD™ Backplane Header,	0746492503
		0746492504
		0746492506
		0746492507
		0746492508

	Open Module, Lead-Free, 150 Circuits, Pin Length 4.25mm. Series:74659 Enables designers to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm 2.00mm Pitch 0746492601 8-Row VHDM-HSD™ Backplane Header, Guide Pin Signal Module, Open End Version, Advanced Mate Shield, 150 Circuits, Pin Length 4.75mm. Series:74659 Enables designers to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm 2.00mm Pitch 8-Row VHDM-HSD™ Backplane Header, Guide Pin Signal Module, Open End Version, Advanced Mate Shield, 150 Circuits, , Pin Length 6.25mm. Series:74659 Enables designers to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm 2.00mm Pitch 8-Row VHDM-HSD™ Backplane Header, Open Module, 150 Circuits, Pin Length 4.75mm, Lead-Free. Series:74659 Enables designers to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm 2.00mm Pitch 8-Row VHDM-HSD™ Backplane Header, Open Module, 150 Circuits, Pin Length 6.25mm, Lead-Free. Series:74659 Enables designers to create custom loaded connectors	
--	---	--

	utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm 2.00mm Pitch 8-Row VHDM-HSD™ Backplane Header, Open Module, Advanced Mate Shield, 150 Circuits, Pin Length 6.25mm, Lead-Free. Series:74659 Enables designers to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm 2.00mm Pitch 8-Row VHDM-HSD™ Backplane Header, Guide Pin Signal Module, Pin End Version, 150 Circuits, Pin Length 4.75mm. Series:74659 Enables designers to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm 2.00mm Pitch 8-Row VHDM-HSD™ Backplane Header, Guide Pin Signal Module, Pin End Version, 150 Circuits, Pin Length 6.25mm. Series:74659 Enables designers to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm 2.00mm Pitch 8-Row VHDM-HSD™ Backplane Header, Guide Pin Signal Module, Pin End Version, 150 Circuits, Pin Length 4.25mm. Series:74659 Enables designers to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm 2.00mm Pitch 8-Row VHDM-HSD™ Backplane Header, Guide Pin Signal Module, Pin End	0746498602
		0746502501
		0746502502
		0746502503
		0746502504

	Version, 150 Circuits, Pin Length 5.15mm. Series:74659 Enables designers to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm 2.00mm Pitch 8- 0746502511 Row VHDM-HSD™ Backplane Header, Guide Pin Signal Module, Pin End Version, 150 Circuits, Pin Length 4.75mm. Series:74659 Enables designers to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm 2.00mm Pitch 8- 0746502512 Row VHDM-HSD™ Backplane Header, Guide Pin Signal Module, Pin End Version, 150 Circuits, Pin Length 6.25mm. Series:74659 Enables designers to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm 2.00mm Pitch 8- 0746502514 Row VHDM-HSD™ Backplane Header, Guide Pin Signal Module, Pin End Version, 150 Circuits, Pin Length 5.15mm. Series:74659 Enables designers to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm 2.00mm Pitch 8- 0746502602 Row VHDM-HSD™ Backplane Header, Guide Pin Signal Module, Signal Pin End Version, Advanced Mate Shield, 150 Circuits, Pin Length 6.25mm. Series:74659 Enables designers to create custom loaded connectors utilizing standard pin	
--	---	--

			lengths 4.25, 4.75, 5.15 and 6.25mm 2.00mm Pitch 8- Row VHDM-HSD™ Backplane Header, Guide Pin Signal Module, Signal Pin End Version, Advanced Mate Shield, 150 Circuits, Pin Length 6.25mm. Series:74659 Enables designers to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm 2.00mm Pitch	0746502612
			8-Row VHDM- HSD™ Backplane Header, Guide Pin Signal Module, Pin End Version, 150 Circuits, Pin Length 5.15mm, Lead- Free. Series:74659 Enables designers to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm 2.00mm Pitch	0746508504
			8-Row VHDM- HSD™ Backplane Header, Guide Pin Signal Module, Pin End Version, 150 Circuits, Pin Length 4.75mm, Lead- Free, Keying Option A. Series:74659 Enables designers to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm 2.00mm Pitch	0746508511
			8-Row VHDM- HSD™ Backplane Header, Guide Pin Signal Module, Signal Pin End Version, Advanced Mate Shield, 150 Circuits, Pin Length 6.25mm, Lead- Free. Series:74659 Enables designers to create custom loaded connectors utilizing standard pin	0746508602

	lengths 4.25, 4.75, 5.15 and 6.25mm 2.00mm Pitch 8-Row VHDM-HSD™ Backplane Header, Guide Pin Signal Module, Shield End Version, 150 Circuits, Pin Length 4.75mm. Series:74659 Enables designers to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm	0746512501
	2.00mm Pitch 8-Row VHDM-HSD™ Backplane Header, Guide Pin Signal Module, Shield End Version, 150 Circuits, Pin Length 6.25mm. Series:74659 Enables designers to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm	0746512502
	2.00mm Pitch 8-Row VHDM-HSD™ Backplane Header, Guide Pin Signal Module, Shield End Version, 150 Circuits, Pin Length 4.25mm. Series:74659 Enables designers to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm	0746512503
	2.00mm Pitch 8-Row VHDM-HSD™ Backplane Header, Guide Pin Signal Module, Shield End Version, 150 Circuits, Pin Length 5.15mm. Series:74659 Enables designers to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm	0746512504
	2.00mm Pitch 8-Row VHDM-HSD™ Backplane Header, Guide Pin Signal Module, Shield End Version, 150 Circuits, Pin Length 4.75mm,	0746512511

	Keying Option A. Series:74659 Enables designers to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm 2.00mm Pitch 8- 0746512512 Row VHDM-HSD™ Backplane Header, Guide Pin Signal Module, Shield End Version, 150 Circuits, Pin Length 6.25mm, Keying Option A. Series:74659 Enables designers to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm 2.00mm Pitch 8- 0746512514 Row VHDM-HSD™ Backplane Header, Guide Pin Signal Module, Shield End Version, 150 Circuits, Pin Length 5.15mm, Keying Option A. Series:74659 Enables designers to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm 2.00mm Pitch 8- 0746512612 Row VHDM-HSD™ Backplane Header, Guide Pin Signal Module, Shield Pin End Version, Advanced Mate Shield, 150 Circuits, Pin Length 6.25mm, Keying Option A. Series:74659 Enables designers to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm 2.00mm Pitch 8- 0746518501 Row VHDM-HSD™ Backplane Header, Guide Pin Signal Module, Shield End Version, 150 Circuits, Pin Length 4.75mm, Lead- Free. Series:74659 Enables designers
--	--

	to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm 2.00mm Pitch 8-Row VHDM-HSD™ Backplane Header, Guide Pin Signal Module, Shield End Version, 150 Circuits, Pin Length 6.25mm, Lead-Free. Series:74659 Enables designers to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm 2.00mm Pitch 8-Row VHDM-HSD™ Backplane Header, Guide Pin Signal Module, Shield End Version, 150 Circuits, Pin Length 5.15mm, Lead-Free. Series:74659 Enables designers to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm 2.00mm Pitch 8-Row VHDM-HSD™ Backplane Header, Guide Pin Signal Module, Shield End Version, 150 Circuits, Pin Length 4.75mm, Keying Option A, Lead-Free. Series:74659 Enables designers to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm 2.00mm Pitch 8-Row VHDM-HSD™ Backplane Header, Guide Pin Signal Module, Shield End Version, 150 Circuits, Pin Length 6.25mm, Keying Option A, Lead-Free. Series:74659 Enables designers to create custom loaded connectors utilizing standard pin	0746518502	
		0746518504	
		0746518511	
		0746518512	

	lengths 4.25, 4.75, 5.15 and 6.25mm 2.00mm Pitch VHDM® Single- Ended Board-to- Board Backplane Header, Vertical, 8- Row, Open Signal Module, 200 Circuits, Pin Length 4.75mm. Series:74075 Enables designers to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm 2.00mm Pitch VHDM® Single- Ended Board-to- Board Backplane Header, Vertical, 8- Row, Open Signal Module, 200 Circuits, Pin Length 4.25mm. Series:74075 Enables designers to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm 2.00mm Pitch VHDM® Single- Ended Board-to- Board Backplane Header, Vertical, 8- Row, Open Signal Module, 200 Circuits, Pin Length 5.15mm. Series:74075 Enables designers to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm 2.00mm Pitch VHDM® Single- Ended Board-to- Board Backplane Header, Vertical, 8- Row, Open Signal Module, 200 Circuits, Pin Length 4.75mm. Series:74075 Enables designers to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm 2.00mm Pitch VHDM® Single- Ended Board-to-	0740602501	
		0740602503	
		0740602504	
		0740602506	
		0740602509	

	Board Backplane Header, Vertical, 8-Row, Open Signal Module, 200 Circuits, Pin Length 5.15mm. Series:74075 Enables designers to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm 2.00mm Pitch 0740608501 VHDM® Single-Ended Board-to-Board Backplane Header, Vertical, 8-Row, Open Signal Module, 200 Circuits, Pin Length 4.75mm, Lead-Free. Series:74075 Enables designers to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm 2.00mm Pitch 0740608509 VHDM® Single-Ended Board-to-Board Backplane Header, Vertical, 8-Row, Open Signal Module, 200 Circuits, Pin Length 5.15mm, Lead-Free. Series:74075 Enables designers to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm 2.00mm Pitch 0740608604 VHDM® Single-Ended Board-to-Board Backplane Header, Vertical, 8-Row, Open Signal Module, 200 Circuits, Advance Mate Shield, Pin Length 5.15mm, Lead-Free. Series:74075 Enables designers to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm 2.00mm Pitch 0740628504 VHDM® Single-Ended Board-to-Board Backplane	
--	---	--

	Header, Vertical, 8-Row, Guide Pin Signal Module, Shield End Version, Lead-Free, 200 Circuits, Pin Length 5.15mm. Series:74075 Enables designers to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm 2.00mm Pitch	0740612501
	VHDM® Single- Ended Board-to- Board Backplane Header, Vertical, 8-Row, Guide Pin Signal Module, Pin End Version, 200 Circuits, Pin Length 4.75mm. Series:74075 Enables designers to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm 2.00mm Pitch	0740612502
	VHDM® Single- Ended Board-to- Board Backplane Header, Vertical, 8-Row, Guide Pin Signal Module, Pin End Version, 200 Circuits, Pin Length 6.25mm. Series:74075 Enables designers to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm 2.00mm Pitch	0740612511
	VHDM® Single- Ended Board-to- Board Backplane Header, Vertical, 8-Row, Guide Pin Signal Module, Pin End Version, 200 Circuits, Pin Length 4.75mm. Series:74075 Enables designers to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm	

	2.00mm Pitch VHDM® Single- Ended Board-to- Board Backplane Header, Vertical, 8-Row, Guide Pin Signal Module, Pin End Version, 200 Circuits, Pin Length 6.25mm. Series:74075 Enables designers to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm	0740612512
--	---	------------

This document was generated on 05/20/2013
PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9