

## NEW SUBMINIATURE SWITCHES WITH HIGH PRECISION

## AV (FS•FS-T) SWITCHES



FS



FS-T

RoHS compliant


### FEATURES

- Consistent quality and high precision through sophisticated automatic fabrication system —O.P.:  $8.4 \pm 0.3$  mm (O.P. of conventional subminiature switches:  $8.4 \pm 0.5$ )
- Flux-resistant construction with integrally molded terminals
- Solder terminal; Self-standing, internationally common pitch, right angle, left angle terminals for PC board; Quick connect .110 terminals for easy mounting
- Insulation guard available for safety mounting

- 2 lever pivot positions available for applications where low operating force is required


### TYPICAL APPLICATIONS

- Communication equipment
- Vending machines
- Security systems
- Data systems
- Medical equipment
- VCR

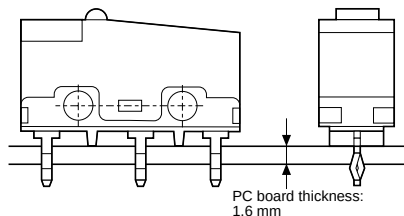


### CONSTRUCTION (Example: AV3/AVM3 type)


Standard version

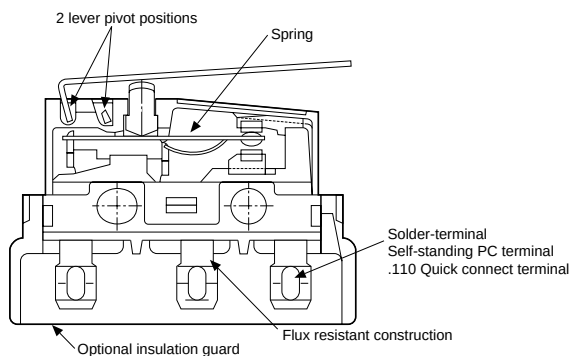

Long life version



### CONTACT ARRANGEMENT



Remark: As for FS-T switches, the terminals are the different shape.

## ORDERING INFORMATION

### 1.FS switches

Ex. AV 3 2 0 2   3

| Type of switch | Version     | Terminals                                                                                                                                                                                                                                                                              | Actuators                                                                                                                       | Operating force by pin plunger, max.                         | Lever position              | Contacts                                       | International standard |
|----------------|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------|-----------------------------|------------------------------------------------|------------------------|
| AV3(FS) switch | 3: Standard | 1: Solder terminal with guard<br>2: Solder terminal without guard<br>3: Solder terminal with opposite side guard<br>4: Self-standing PC terminal<br>5: Internationally common pitch PC terminal<br>6: Right angle terminal<br>7: Left angle terminal<br>8: .110 Quick-connect terminal | 0: Pin plunger<br>1: Short hinge lever<br>2: Hinge lever<br>3: Long hinge lever<br>4: Simulated roller lever<br>5: Roller lever | 0: 0.25 N (Gold-clad contact only)<br>2: 0.49 N<br>4: 0.98 N | Nil: Standard [11: forward] | Nil: AgNi alloy<br>61: Gold-clad triple layer* | 3: UL/CSA/VDE/SEMKO    |

Ex. AV M3 2 0 2   3

| Type of switch                 | Version       | Terminals                                                                                                                                                                                                                                                                              | Actuators                                                                                                                       | Operating force by pin plunger, max. | Lever position              | Contacts                                       | International standard |
|--------------------------------|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|-----------------------------|------------------------------------------------|------------------------|
| AV3 (FS long life ver.) switch | M3: Long life | 1: Solder terminal with guard<br>2: Solder terminal without guard<br>3: Solder terminal with opposite side guard<br>4: Self-standing PC terminal<br>5: Internationally common pitch PC terminal<br>6: Right angle terminal<br>7: Left angle terminal<br>8: .110 Quick-connect terminal | 0: Pin plunger<br>1: Short hinge lever<br>2: Hinge lever<br>3: Long hinge lever<br>4: Simulated roller lever<br>5: Roller lever | 5: 1.47 N                            | Nil: Standard [11: forward] | Nil: AgNi alloy<br>61: Gold-clad triple layer* | 3: UL/CSA/VDE/SEMKO    |

### 2.FS-T switches


Ex. AV T3 2 0 2   3

| Type of switch     | Version      | Terminals                                                              | Actuators                                                                                                                       | Operating force by pin plunger, max.                         | Lever position              | Contacts                                                                       | Agency standard     |
|--------------------|--------------|------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------|-----------------------------|--------------------------------------------------------------------------------|---------------------|
| AVT3 (FS-T) switch | T3: Standard | 2: Solder terminal<br>4: PC terminal<br>8: .110 Quick-connect terminal | 0: Pin plunger<br>1: Short hinge lever<br>2: Hinge lever<br>3: Long hinge lever<br>4: Simulated roller lever<br>5: Roller lever | 0: 0.25 N (Gold-clad contact only)<br>2: 0.49 N<br>4: 0.98 N | Nil: Standard [11: forward] | Nil: AgNi alloy (Not applicable to 0.25 N type)<br>61: Gold-clad triple layer* | 3: UL/CSA/VDE/SEMKO |

Ex. AV L3 2 0 2   3

| Type of switch                    | Version       | Terminals                                                              | Actuators                                                                                                                       | Operating force by pin plunger, max. | Lever position              | Contacts                                                                       | Agency standard     |
|-----------------------------------|---------------|------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|-----------------------------|--------------------------------------------------------------------------------|---------------------|
| AVL3 (FS-T long life ver.) switch | L3: Long life | 2: Solder terminal<br>4: PC terminal<br>8: .110 Quick-connect terminal | 0: Pin plunger<br>1: Short hinge lever<br>2: Hinge lever<br>3: Long hinge lever<br>4: Simulated roller lever<br>5: Roller lever | 5: 1.47 N                            | Nil: Standard [11: forward] | Nil: AgNi alloy (Not applicable to 0.25 N type)<br>61: Gold-clad triple layer* | 3: UL/CSA/VDE/SEMKO |

\* Gold-clad triple layer contact



APPLICABLE CURRENT RANGE

| Type              | Contact                             | Rating |       |    |    | O.F.   |        |        |        |
|-------------------|-------------------------------------|--------|-------|----|----|--------|--------|--------|--------|
|                   |                                     | 1mA    | 100mA | 3A | 5A | 0.25 N | 0.49 N | 0.98 N | 1.47 N |
| Standard version  | Silver alloy contact                |        |       |    |    |        | ●      | ●      |        |
|                   | Gold-clad triple layer contact type |        |       |    |    | ●      | ●      | ●      |        |
| Long life version | Silver alloy contact                |        |       |    |    |        |        |        | ●      |
|                   | Gold-clad triple layer contact type |        |       |    |    |        |        |        | ●      |

Remark: For high capacity contact rating up to 10.1 A, please refer to PS (AVM3□□□P) switches catalog.

PRODUCT TYPES

1. FS switches (In-line terminal type)

Standard type

|                                     | Actuator               | Operating force, Max. | Part No.                      |            |                          |                           |                                          |
|-------------------------------------|------------------------|-----------------------|-------------------------------|------------|--------------------------|---------------------------|------------------------------------------|
|                                     |                        |                       | Self-standing solder terminal |            |                          | Self-standing PC terminal | Internationally common pitch PC terminal |
|                                     |                        |                       | Without guard                 | With guard | With opposite side guard |                           |                                          |
| AgNi alloy contact type             | Pin plunger            | 0.49N                 | AV32023                       | AV31023    | AV33023                  | AV34023                   | AV35023                                  |
|                                     |                        | 0.98N                 | AV32043                       | AV31043    | AV33043                  | AV34043                   | AV35043                                  |
|                                     | Short hinge lever      | 0.20N                 | AV32123                       | AV31123    | AV33123                  | AV34123                   | AV35123                                  |
|                                     |                        | 0.39N                 | AV32143                       | AV31143    | AV33143                  | AV34143                   | AV35143                                  |
|                                     | Hinge lever            | 0.16N                 | AV32223                       | AV31223    | AV33223                  | AV34223                   | AV35223                                  |
|                                     |                        | 0.34N                 | AV32243                       | AV31243    | AV33243                  | AV34243                   | AV35243                                  |
|                                     | Long hinge lever       | 0.12N                 | AV32323                       | AV31323    | AV33323                  | AV34323                   | AV35323                                  |
|                                     |                        | 0.25N                 | AV32343                       | AV31343    | AV33343                  | AV34343                   | AV35343                                  |
|                                     | Simulated roller lever | 0.16N                 | AV32423                       | AV31423    | AV33423                  | AV34423                   | AV35423                                  |
|                                     |                        | 0.34N                 | AV32443                       | AV31443    | AV33443                  | AV34443                   | AV35443                                  |
| Gold-clad triple layer contact type | Pin plunger            | 0.20N                 | AV32523                       | AV31523    | AV33523                  | AV34523                   | AV35523                                  |
|                                     |                        | 0.39N                 | AV32543                       | AV31543    | AV33543                  | AV34543                   | AV35543                                  |
|                                     |                        | 0.25N                 | AV3200613                     | AV3100613  | AV3300613                | AV3400613                 | AV3500613                                |
|                                     | Short hinge lever      | 0.49N                 | AV3202613                     | AV3102613  | AV3302613                | AV3402613                 | AV3502613                                |
|                                     |                        | 0.98N                 | AV3204613                     | AV3104613  | AV3304613                | AV3404613                 | AV3504613                                |
|                                     |                        | 0.098N                | AV3210613                     | AV3110613  | AV3310613                | AV3410613                 | AV3510613                                |
|                                     | Hinge lever            | 0.20N                 | AV3212613                     | AV3112613  | AV3312613                | AV3412613                 | AV3512613                                |
|                                     |                        | 0.39N                 | AV3214613                     | AV3114613  | AV3314613                | AV3414613                 | AV3514613                                |
|                                     |                        | 0.078N                | AV3220613                     | AV3120613  | AV3320613                | AV3420613                 | AV3520613                                |
|                                     | Long hinge lever       | 0.16N                 | AV3222613                     | AV3122613  | AV3322613                | AV3422613                 | AV3522613                                |
|                                     |                        | 0.34N                 | AV3224613                     | AV3124613  | AV3324613                | AV3424613                 | AV3524613                                |
|                                     |                        | 0.12N                 | AV3232613                     | AV3132613  | AV3332613                | AV3432613                 | AV3532613                                |
|                                     | Simulated roller lever | 0.25N                 | AV3234613                     | AV3134613  | AV3334613                | AV3434613                 | AV3534613                                |
|                                     |                        | 0.16N                 | AV3242613                     | AV3142613  | AV3342613                | AV3442613                 | AV3542613                                |
|                                     |                        | 0.34N                 | AV3244613                     | AV3144613  | AV3344613                | AV3444613                 | AV3544613                                |
|                                     | Roller lever           | 0.20N                 | AV3252613                     | AV3152613  | AV3352613                | AV3452613                 | AV3552613                                |
|                                     |                        | 0.39N                 | AV3254613                     | AV3154613  | AV3354613                | AV3454613                 | AV3554613                                |

|                                     | Actuator               | Operating force,<br>Max. | Part No.             |                     |                    |
|-------------------------------------|------------------------|--------------------------|----------------------|---------------------|--------------------|
|                                     |                        |                          | Right angle terminal | Left angle terminal | .110 Quick-connect |
| AgNi alloy contact type             | Pin plunger            | 0.49N                    | AV36023              | AV37023             | AV38023            |
|                                     |                        | 0.98N                    | AV36043              | AV37043             | AV38043            |
|                                     | Short hinge lever      | 0.20N                    | AV36123              | AV37123             | AV38123            |
|                                     |                        | 0.39N                    | AV36143              | AV37143             | AV38143            |
|                                     | Hinge lever            | 0.16N                    | AV36223              | AV37223             | AV38223            |
|                                     |                        | 0.34N                    | AV36243              | AV37243             | AV38243            |
|                                     | Long hinge lever       | 0.12N                    | AV36323              | AV37323             | AV38323            |
|                                     |                        | 0.25N                    | AV36343              | AV37343             | AV38343            |
|                                     | Simulated roller lever | 0.16N                    | AV36423              | AV37423             | AV38423            |
|                                     |                        | 0.34N                    | AV36443              | AV37443             | AV38443            |
|                                     | Roller lever           | 0.20N                    | AV36523              | AV37523             | AV38523            |
|                                     |                        | 0.39N                    | AV36543              | AV37543             | AV38543            |
| Gold-clad triple layer contact type | Pin plunger            | 0.25N                    | AV3600613            | AV3700613           | AV3800613          |
|                                     |                        | 0.49N                    | AV3602613            | AV3702613           | AV3802613          |
|                                     |                        | 0.98N                    | AV3604613            | AV3704613           | AV3804613          |
|                                     | Short hinge lever      | 0.098N                   | AV3610613            | AV3710613           | AV3810613          |
|                                     |                        | 0.20N                    | AV3612613            | AV3712613           | AV3812613          |
|                                     |                        | 0.39N                    | AV3614613            | AV3714613           | AV3814613          |
|                                     | Hinge lever            | 0.078N                   | AV3620613            | AV3720613           | AV3820613          |
|                                     |                        | 0.16N                    | AV3622613            | AV3722613           | AV3822613          |
|                                     |                        | 0.34N                    | AV3624613            | AV3724613           | AV3824613          |
|                                     | Long hinge lever       | 0.12N                    | AV3632613            | AV3732613           | AV3832613          |
|                                     |                        | 0.25N                    | AV3634613            | AV3734613           | AV3834613          |
|                                     | Simulated roller lever | 0.16N                    | AV3642613            | AV3742613           | AV3842613          |
|                                     |                        | 0.34N                    | AV3644613            | AV3744613           | AV3844613          |
|                                     | Roller lever           | 0.20N                    | AV3652613            | AV3752613           | AV3852613          |
|                                     |                        | 0.39N                    | AV3654613            | AV3754613           | AV3854613          |

Remark: When ordering, please refer to "Remarks" of ordering information.

# AV3,AVM3/AVT3,AVL3

## 2. FS-T switches (Cross-line terminal type)

Standard type

|                                        | Actuator               | Operating force,<br>Max. | Part No.                         |             |                                |
|----------------------------------------|------------------------|--------------------------|----------------------------------|-------------|--------------------------------|
|                                        |                        |                          | Solder terminal without<br>guard | PC terminal | .110 Quick-connect<br>terminal |
| AgNi alloy contact<br>type             | Pin plunger            | 0.49N                    | AVT32023                         | AVT34023    | AVT38023                       |
|                                        |                        | 0.98N                    | AVT32043                         | AVT34043    | AVT38043                       |
|                                        | Short hinge lever      | 0.20N                    | AVT32123                         | AVT34123    | AVT38123                       |
|                                        |                        | 0.39N                    | AVT32143                         | AVT34143    | AVT38143                       |
|                                        | Hinge lever            | 0.16N                    | AVT32223                         | AVT34223    | AVT38223                       |
|                                        |                        | 0.34N                    | AVT32243                         | AVT34243    | AVT38243                       |
|                                        | Long hinge lever       | 0.12N                    | AVT32323                         | AVT34323    | AVT38323                       |
|                                        |                        | 0.25N                    | AVT32343                         | AVT34343    | AVT38343                       |
|                                        | Simulated roller lever | 0.16N                    | AVT32423                         | AVT34423    | AVT38423                       |
|                                        |                        | 0.34N                    | AVT32443                         | AVT34443    | AVT38443                       |
| Gold-clad triple layer<br>contact type | Pin plunger            | 0.25N                    | AVT3200613                       | AVT3400613  | AVT3800613                     |
|                                        |                        | 0.49N                    | AVT3202613                       | AVT3402613  | AVT3802613                     |
|                                        |                        | 0.98N                    | AVT3204613                       | AVT3404613  | AVT3804613                     |
|                                        | Short hinge lever      | 0.098N                   | AVT3210613                       | AVT3410613  | AVT3810613                     |
|                                        |                        | 0.20N                    | AVT3212613                       | AVT3412613  | AVT3812613                     |
|                                        |                        | 0.39N                    | AVT3214613                       | AVT3414613  | AVT3814613                     |
|                                        | Hinge lever            | 0.078N                   | AVT3220613                       | AVT3420613  | AVT3820613                     |
|                                        |                        | 0.16N                    | AVT3222613                       | AVT3422613  | AVT3822613                     |
|                                        |                        | 0.34N                    | AVT3224613                       | AVT3424613  | AVT3824613                     |
|                                        | Long hinge lever       | 0.12N                    | AVT3232613                       | AVT3432613  | AVT3832613                     |
|                                        |                        | 0.25N                    | AVT3234613                       | AVT3434613  | AVT3834613                     |
|                                        | Simulated roller lever | 0.16N                    | AVT3242613                       | AVT3442613  | AVT3842613                     |
|                                        |                        | 0.34N                    | AVT3244613                       | AVT3444613  | AVT3844613                     |
|                                        | Roller lever           | 0.20N                    | AVT3252613                       | AVT3452613  | AVT3852613                     |
|                                        |                        | 0.39N                    | AVT3254613                       | AVT3454613  | AVT3854613                     |

### 3. FS switches (In-line terminal type)

Long life version

|                                        | Actuator               | Operating force,<br>Max. | Part No.                      |            |                             |                              |                                                |
|----------------------------------------|------------------------|--------------------------|-------------------------------|------------|-----------------------------|------------------------------|------------------------------------------------|
|                                        |                        |                          | Self-standing solder terminal |            |                             | Self-standing<br>PC terminal | Internationally<br>common pitch<br>PC terminal |
|                                        |                        |                          | Without guard                 | With guard | With opposite<br>side guard |                              |                                                |
| AgNi alloy contact<br>type             | Pin plunger            | 1.47N                    | AVM32053                      | AVM31053   | AVM33053                    | AVM34053                     | AVM35053                                       |
|                                        | Short hinge lever      | 0.59N                    | AVM32153                      | AVM31153   | AVM33153                    | AVM34153                     | AVM35153                                       |
|                                        | Hinge lever            | 0.54N                    | AVM32253                      | AVM31253   | AVM33253                    | AVM34253                     | AVM35253                                       |
|                                        | Long hinge lever       | 0.44N                    | AVM32353                      | AVM31353   | AVM33353                    | AVM34353                     | AVM35353                                       |
|                                        | Simulated roller lever | 0.54N                    | AVM32453                      | AVM31453   | AVM33453                    | AVM34453                     | AVM35453                                       |
|                                        | Roller lever           | 0.59N                    | AVM32553                      | AVM31553   | AVM33553                    | AVM34553                     | AVM35553                                       |
| Gold-clad triple layer<br>contact type | Pin plunger            | 1.47N                    | AVM3205613                    | AVM3105613 | AVM3305613                  | AVM3405613                   | AVM3505613                                     |
|                                        | Short hinge lever      | 0.59N                    | AVM3215613                    | AVM3115613 | AVM3315613                  | AVM3415613                   | AVM3515613                                     |
|                                        | Hinge lever            | 0.54N                    | AVM3225613                    | AVM3125613 | AVM3325613                  | AVM3425613                   | AVM3525613                                     |
|                                        | Long hinge lever       | 0.44N                    | AVM3235613                    | AVM3135613 | AVM3335613                  | AVM3435613                   | AVM3535613                                     |
|                                        | Simulated roller lever | 0.54N                    | AVM3245613                    | AVM3145613 | AVM3345613                  | AVM3445613                   | AVM3545613                                     |
|                                        | Roller lever           | 0.59N                    | AVM3255613                    | AVM3155613 | AVM3355613                  | AVM3455613                   | AVM3555613                                     |

|                                        | Actuator               | Operating force,<br>Max. | Part No.             |                     |                          |
|----------------------------------------|------------------------|--------------------------|----------------------|---------------------|--------------------------|
|                                        |                        |                          | Right angle terminal | Left angle terminal | .110 Quick-connect       |
|                                        |                        |                          | Without guard        | With guard          | With opposite side guard |
| AgNi alloy contact<br>type             | Pin plunger            | 1.47N                    | AVM36053             | AVM37053            | AVM38053                 |
|                                        | Short hinge lever      | 0.59N                    | AVM36153             | AVM37153            | AVM38153                 |
|                                        | Hinge lever            | 0.54N                    | AVM36253             | AVM37253            | AVM38253                 |
|                                        | Long hinge lever       | 0.44N                    | AVM36353             | AVM37353            | AVM38353                 |
|                                        | Simulated roller lever | 0.54N                    | AVM36453             | AVM37453            | AVM38453                 |
|                                        | Roller lever           | 0.59N                    | AVM36553             | AVM37553            | AVM38553                 |
| Gold-clad triple layer<br>contact type | Pin plunger            | 1.47N                    | AVM3605613           | AVM3705613          | AVM3805613               |
|                                        | Short hinge lever      | 0.59N                    | AVM3615613           | AVM3715613          | AVM3815613               |
|                                        | Hinge lever            | 0.54N                    | AVM3625613           | AVM3725613          | AVM3825613               |
|                                        | Long hinge lever       | 0.44N                    | AVM3635613           | AVM3735613          | AVM3835613               |
|                                        | Simulated roller lever | 0.54N                    | AVM3645613           | AVM3745613          | AVM3845613               |
|                                        | Roller lever           | 0.59N                    | AVM3655613           | AVM3755613          | AVM3855613               |

Remark: When ordering, please refer to "Remarks" of ordering information.

### 4. FS-T switches (Cross-line terminal type)

Long life version

|                                        | Actuator               | Operating force,<br>Max. | Part No.                         |             |                                |
|----------------------------------------|------------------------|--------------------------|----------------------------------|-------------|--------------------------------|
|                                        |                        |                          | Solder terminal Without<br>guard | PC terminal | .110 Quick-connect<br>terminal |
|                                        |                        |                          |                                  |             |                                |
| AgNi alloy contact<br>type             | Pin plunger            | 1.47N                    | AVL32053                         | AVL34053    | AVL38053                       |
|                                        | Short hinge lever      | 0.59N                    | AVL32153                         | AVL34153    | AVL38153                       |
|                                        | Hinge lever            | 0.54N                    | AVL32253                         | AVL34253    | AVL38253                       |
|                                        | Long hinge lever       | 0.44N                    | AVL32353                         | AVL34353    | AVL38353                       |
|                                        | Simulated roller lever | 0.54N                    | AVL32453                         | AVL34453    | AVL38453                       |
|                                        | Roller lever           | 0.59N                    | AVL32553                         | AVL34553    | AVL38553                       |
| Gold-clad triple layer<br>contact type | Pin plunger            | 1.47N                    | AVL3205613                       | AVL3405613  | AVL3805613                     |
|                                        | Short hinge lever      | 0.59N                    | AVL3215613                       | AVL3415613  | AVL3815613                     |
|                                        | Hinge lever            | 0.54N                    | AVL3225613                       | AVL3425613  | AVL3825613                     |
|                                        | Long hinge lever       | 0.44N                    | AVL3235613                       | AVL3435613  | AVL3835613                     |
|                                        | Simulated roller lever | 0.54N                    | AVL3245613                       | AVL3445613  | AVL3845613                     |
|                                        | Roller lever           | 0.59N                    | AVL3255613                       | AVL3455613  | AVL3855613                     |

Remark: When ordering, please refer to "Remarks" of ordering information.

## SPECIFICATIONS

## 1.Contact rating

| Voltage | Standard version                           |                                                  |                                            | Long life version                          |                                                  |                                            |
|---------|--------------------------------------------|--------------------------------------------------|--------------------------------------------|--------------------------------------------|--------------------------------------------------|--------------------------------------------|
|         | AgNi alloy contact type                    |                                                  | Gold-clad contact type                     | AgNi alloy contact type                    |                                                  | Gold-clad contact type                     |
|         |                                            |                                                  | Triple layer                               |                                            |                                                  | Triple layer                               |
|         | Resistive load<br>( $\cos\phi \approx 1$ ) | Inductive load<br>( $\cos\phi \approx 0.6-0.7$ ) | Resistive load<br>( $\cos\phi \approx 1$ ) | Resistive load<br>( $\cos\phi \approx 1$ ) | Inductive load<br>( $\cos\phi \approx 0.6-0.7$ ) | Resistive load<br>( $\cos\phi \approx 1$ ) |
| 125V AC | 3A                                         | 2A                                               | 0.1A                                       | 5A                                         | 3A                                               | 0.1A                                       |
| 250V AC | 3A                                         | 2A                                               | 0.1A                                       | 5A                                         | 3A                                               | 0.1A                                       |
| 30V DC  | 3A                                         | 2A                                               | 0.1A                                       | 5A                                         | 3A                                               | 0.1A                                       |
| 125V DC | 0.4A                                       | 0.05A                                            | —                                          | 0.4A                                       | 0.05A                                            | —                                          |

Remark: Time constant shall be less than 7 msec. for DC inductive loads.

## 2.Characteristics

|                                                                             | Standard version                                                                         |                                                                                                                                       | Long life version                                                                                    |                               |
|-----------------------------------------------------------------------------|------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|-------------------------------|
|                                                                             | AgNi alloy contact type                                                                  | Gold-clad contact type                                                                                                                | AgNi alloy contact type                                                                              | Gold-clad contact type        |
| Electrical life at rated load (O.T.max.)                                    | 5 × 10 <sup>4</sup> at 20 cpm                                                            | 2 × 10 <sup>5</sup> at 20 cpm                                                                                                         | 5 × 10 <sup>4</sup> at 20 cpm                                                                        | 2 × 10 <sup>5</sup> at 20 cpm |
| Mechanical life                                                             | 5 × 10 <sup>5</sup> at 60 cpm (O.T.max.)                                                 |                                                                                                                                       | 3 × 10 <sup>7</sup> (O.T.: Specified value)<br>10 <sup>7</sup> (O.T.max.) at 60 cpm                  |                               |
| Insulation resistance                                                       | Min.100MΩ at 500V DC                                                                     |                                                                                                                                       |                                                                                                      |                               |
| Dielectric strength                                                         |                                                                                          |                                                                                                                                       |                                                                                                      |                               |
| Between non-continuous terminals                                            | 1,000 Vrms                                                                               |                                                                                                                                       |                                                                                                      |                               |
| Between each terminal and other exposed metal parts                         | 1,500 Vrms                                                                               |                                                                                                                                       |                                                                                                      |                               |
| Between each terminal and ground                                            | 1,500 Vrms                                                                               |                                                                                                                                       |                                                                                                      |                               |
| Vibration resistance (Pin plunger type)                                     | 10 to 55 Hz at single amplitude of 1.5mm (Contact opening: max.1 msec.)                  |                                                                                                                                       |                                                                                                      |                               |
| Shock resistance (Pin plunger type)<br>(Contact opening: less than 1 msec.) | 294 m/s <sup>2</sup> min.<br>(O.F. 0.98 N)<br>147 m/s <sup>2</sup> min.<br>(O.F. 0.49 N) | 294 m/s <sup>2</sup> min.<br>(O.F. 0.98 N)<br>147 m/s <sup>2</sup> min.<br>(O.F. 0.49 N)<br>49 m/s <sup>2</sup> min.<br>(O.F. 0.25 N) | 294 m/s <sup>2</sup> min.                                                                            |                               |
| Contact resistance (Initial)                                                | 50 mΩ max.<br>(by voltage drop 1 A<br>6 to 8V DC)                                        | 100 mΩ max.<br>(by voltage drop 0.1 A<br>6 to 8V DC)                                                                                  | Au: 50 mΩ max. (by voltage drop 0.1 A 6 to 8V DC)<br>Ag: 50 mΩ max. (by voltage drop 1 A 6 to 8V DC) |                               |
| Allowable operating speed                                                   | 0.1 to 1,000 mm/sec.                                                                     |                                                                                                                                       |                                                                                                      |                               |
| Max.operating cycle rate                                                    | 300 cpm                                                                                  |                                                                                                                                       |                                                                                                      |                               |
| Ambient temepature                                                          | -25°C to +85°C (no freezing below 0°C)                                                   |                                                                                                                                       |                                                                                                      |                               |
| Unit weight                                                                 | Approx.2g                                                                                |                                                                                                                                       |                                                                                                      |                               |

## 3.Operating characteristics

## 1) Pin plunger

| 4th digit number of Part No. | O.F.max. | R.F.min. | P.T.max. | M.D.max. | O.T.max. | O.P.                                                                                                    |
|------------------------------|----------|----------|----------|----------|----------|---------------------------------------------------------------------------------------------------------|
| 0                            | 0.25N    | 0.020N   | 0.6mm    | 0.1mm    | 0.4mm    | Distance from mounting holes: 8.4±0.3mm<br>Distance from stand-off:<br>FS 11.8±0.4mm<br>FS-T 11.7±0.4mm |
| 2                            | 0.49N    | 0.074N   |          |          |          |                                                                                                         |
| 4                            | 0.98N    | 0.15N    |          |          |          |                                                                                                         |
| 5                            | 1.47N    | 0.20N    |          |          |          |                                                                                                         |

## 2) Short hinge lever

| 4th digit number of Part No. | O.F.max. | R.F.min. | P.T.max. | M.D.max. | O.T.max. | O.P.                                                                                                    |
|------------------------------|----------|----------|----------|----------|----------|---------------------------------------------------------------------------------------------------------|
| 0                            | 0.098N   | 0.004N   | 2.5mm    | 0.5mm    | 0.8mm    | Distance from mounting holes: 8.8±0.8mm<br>Distance from stand-off:<br>FS 12.2±0.9mm<br>FS-T 12.1±0.9mm |
| 2                            | 0.20N    | 0.017N   |          |          |          |                                                                                                         |
| 4                            | 0.39N    | 0.034N   |          |          |          |                                                                                                         |
| 5                            | 0.59N    | 0.039N   |          |          |          |                                                                                                         |

3) Hinge lever

| 4th digit number of Part No. | O.F.max. | R.F.min. | P.T.max. | M.D.max. | O.T.max. | O.P.                                                                                                    |
|------------------------------|----------|----------|----------|----------|----------|---------------------------------------------------------------------------------------------------------|
| 0                            | 0.078N   | 0.003N   | 2.8mm    | 0.8mm    | 1.2mm    | Distance from mounting holes: 8.8±0.8mm<br>Distance from stand-off:<br>FS 12.2±0.9mm<br>FS-T 12.1±0.9mm |
| 2                            | 0.16N    | 0.015N   |          |          |          |                                                                                                         |
| 4                            | 0.34N    | 0.029N   |          |          |          |                                                                                                         |
| 5                            | 0.54N    | 0.034N   |          |          |          |                                                                                                         |

4) Long hinge lever

| 4th digit number of Part No. | O.F.max. | R.F.min. | P.T.max. | M.D.max. | O.T.max. | O.P.                                                                                                    |
|------------------------------|----------|----------|----------|----------|----------|---------------------------------------------------------------------------------------------------------|
| 0                            | —        | —        | 3.5mm    | 1.0mm    | 1.6mm    | Distance from mounting holes: 8.8±1.2mm<br>Distance from stand-off:<br>FS 12.2±1.3mm<br>FS-T 12.1±1.3mm |
| 2                            | 0.12N    | 0.012N   |          |          |          |                                                                                                         |
| 4                            | 0.25N    | 0.025N   |          |          |          |                                                                                                         |
| 5                            | 0.44N    | 0.029N   |          |          |          |                                                                                                         |

5) Simulated roller lever

| 4th digit number of Part No. | O.F.max. | R.F.min. | P.T.max. | M.D.max. | O.T.max. | O.P.                                                                                                        |
|------------------------------|----------|----------|----------|----------|----------|-------------------------------------------------------------------------------------------------------------|
| 0                            | —        | —        | 2.8mm    | 0.8mm    | 1.2mm    | Distance from mounting holes: 11.65±0.8mm<br>Distance from stand-off:<br>FS 15.05±0.9mm<br>FS-T 14.95±0.9mm |
| 2                            | 0.16N    | 0.015N   |          |          |          |                                                                                                             |
| 4                            | 0.34N    | 0.029N   |          |          |          |                                                                                                             |
| 5                            | 0.54N    | 0.034N   |          |          |          |                                                                                                             |

6) Roller lever

| 4th digit number of Part No. | O.F.max. | R.F.min. | P.T.max. | M.D.max. | O.T.max. | O.P.                                                                                                     |
|------------------------------|----------|----------|----------|----------|----------|----------------------------------------------------------------------------------------------------------|
| 0                            | —        | —        | 2.5mm    | 0.5mm    | 0.8mm    | Distance from mounting holes: 14.5±0.8mm<br>Distance from stand-off:<br>FS 17.9±0.9mm<br>FS-T 17.8±0.9mm |
| 2                            | 0.20N    | 0.017N   |          |          |          |                                                                                                          |
| 4                            | 0.39N    | 0.034N   |          |          |          |                                                                                                          |
| 5                            | 0.59N    | 0.039N   |          |          |          |                                                                                                          |

## DIMENSIONS


The CAD data of the products with a **CAD Data** mark can be downloaded from: <http://industrial.panasonic.com/ac/e>

### 1. FS switches (In-line terminal type)

mm General tolerance: ±0.25

#### 1-(1) Solder terminal (without guard)

##### CAD Data

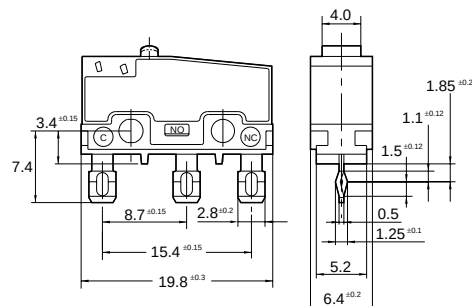


Dimensions other than drawn above is same as self-standing PC board terminal.

# AV3,AVM3/AVT3,AVL3

1-(2) Solder terminal (with guard)

mm General tolerance: ±0.25


CAD Data

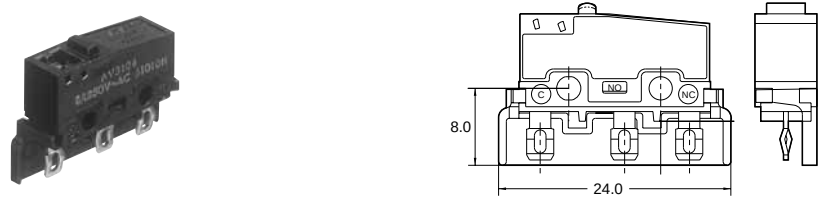

Dimensions other than drawn above is same as guardless type.

1-(3) Solder terminal (with opposite side guard)


CAD Data

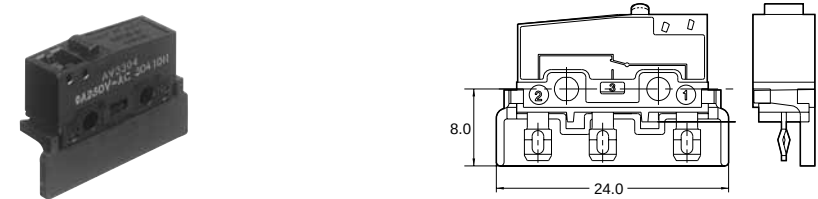


Dimensions other than drawn above is same as guardless type.

1-(4) Self-standing PC terminal  
Pin plunger

CAD Data

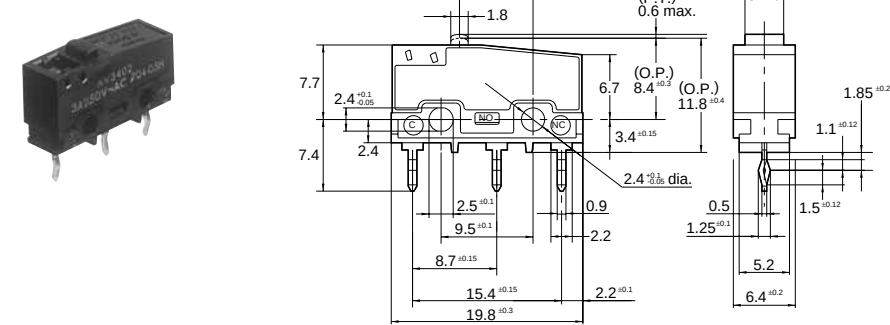


PC board pattern



|                                |                                 |          |
|--------------------------------|---------------------------------|----------|
| Pretravel, Max. mm             |                                 | 0.6      |
| Movement differential, Max. mm |                                 | 0.1      |
| Overtravel, Min. mm            |                                 | 0.4      |
| Operating position             | Distance from mounting hole, mm | 8.4±0.3  |
|                                | Distance from standoff, mm      | 11.8±0.4 |

Short hinge lever


CAD Data

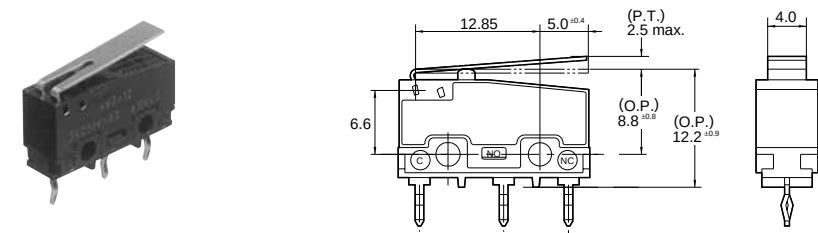

|                                |                                 |          |
|--------------------------------|---------------------------------|----------|
| Pretravel, Max. mm             |                                 | 2.5      |
| Movement differential, Max. mm |                                 | 0.5      |
| Overtravel, Min. mm            |                                 | 0.8      |
| Operating position             | Distance from mounting hole, mm | 8.8±0.8  |
|                                | Distance from standoff, mm      | 12.2±0.9 |

Hinge lever

CAD Data

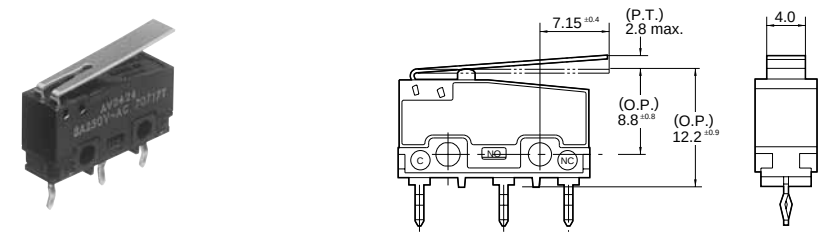


|                                |                                 |          |
|--------------------------------|---------------------------------|----------|
| Pretravel, Max. mm             |                                 | 2.8      |
| Movement differential, Max. mm |                                 | 0.8      |
| Overtravel, Min. mm            |                                 | 1.2      |
| Operating position             | Distance from mounting hole, mm | 8.8±0.8  |
|                                | Distance from standoff, mm      | 12.2±0.9 |

## Long hinge lever

mm General tolerance:  $\pm 0.25$


### CAD Data

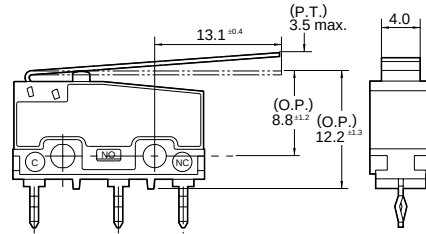

|                                |                                 |          |
|--------------------------------|---------------------------------|----------|
| Pretravel, Max. mm             |                                 | 3.5      |
| Movement differential, Max. mm |                                 | 1.0      |
| Overtravel, Min. mm            |                                 | 1.6      |
| Operating position             | Distance from mounting hole, mm | 8.8±1.2  |
|                                | Distance from standoff, mm      | 12.2±1.3 |

## Simulated roller lever


### CAD Data

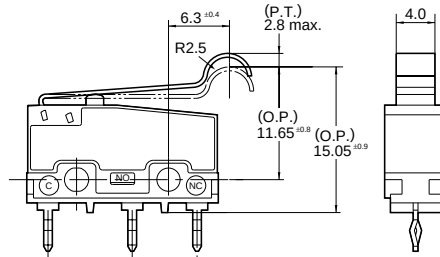

|                                |                                 |           |
|--------------------------------|---------------------------------|-----------|
| Pretravel, Max. mm             |                                 | 2.8       |
| Movement differential, Max. mm |                                 | 0.8       |
| Overtravel, Min. mm            |                                 | 1.2       |
| Operating position             | Distance from mounting hole, mm | 11.65±0.8 |
|                                | Distance from standoff, mm      | 15.05±0.9 |

## Roller lever


### CAD Data

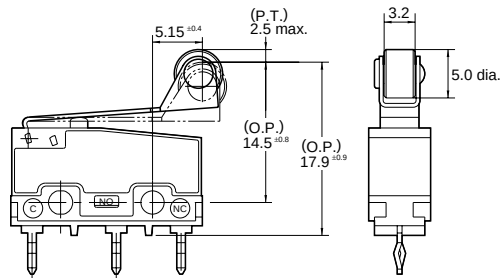


|                                |                                 |          |
|--------------------------------|---------------------------------|----------|
| Pretravel, Max. mm             |                                 | 2.5      |
| Movement differential, Max. mm |                                 | 0.5      |
| Overtravel, Min. mm            |                                 | 0.8      |
| Operating position             | Distance from mounting hole, mm | 14.5±0.8 |
|                                | Distance from standoff, mm      | 17.9±0.9 |

## 1-(5) Internationally common pitch PC terminal

### CAD Data

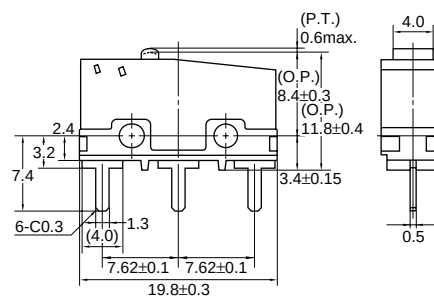


### PC board pattern




## 1-(6) Right angle terminal



### CAD Data

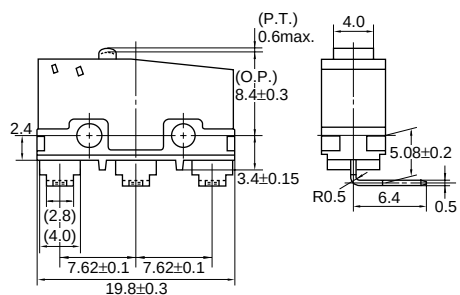


### PC board pattern



mm General tolerance:  $\pm 0.25$

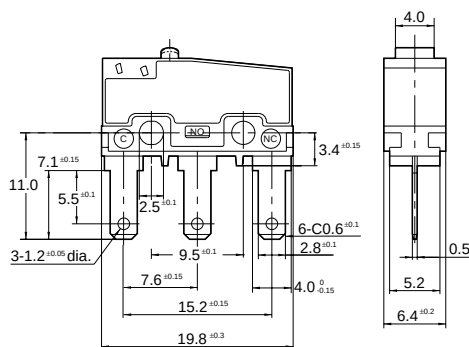

Dimensions other than drawn above is same as self-standing PC board terminal.

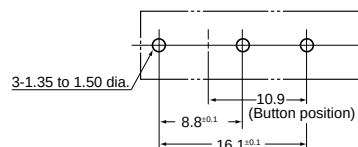


|                                |                                 |          |
|--------------------------------|---------------------------------|----------|
| Pretravel, Max. mm             |                                 | 0.6      |
| Movement differential, Max. mm |                                 | 0.1      |
| Overtravel, Min. mm            |                                 | 0.4      |
| Operating position             | Distance from mounting hole, mm | 8.4±0.3  |
|                                | Distance from standoff, mm      | 11.7±0.4 |

|                                |                                 |          |
|--------------------------------|---------------------------------|----------|
| Pretravel, Max. mm             |                                 | 2.5      |
| Movement differential, Max. mm |                                 | 0.5      |
| Overtravel, Min. mm            |                                 | 0.8      |
| Operating position             | Distance from mounting hole, mm | 8.8±0.8  |
|                                | Distance from standoff, mm      | 12.1±0.9 |

## Hinge lever

mm General tolerance:  $\pm 0.25$


### CAD Data

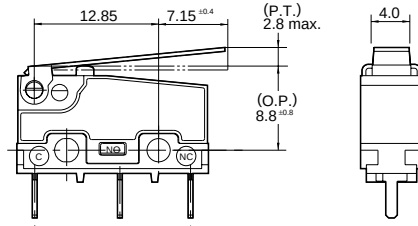

|                                |                                 |          |
|--------------------------------|---------------------------------|----------|
| Pretravel, Max. mm             |                                 | 2.8      |
| Movement differential, Max. mm |                                 | 0.8      |
| Overtravel, Min. mm            |                                 | 1.2      |
| Operating position             | Distance from mounting hole, mm | 8.8±0.8  |
|                                | Distance from standoff, mm      | 12.1±0.9 |

## Long hinge lever


### CAD Data

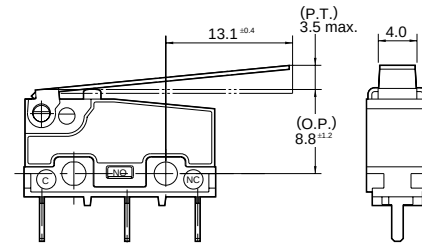

|                                |                                 |          |
|--------------------------------|---------------------------------|----------|
| Pretravel, Max. mm             |                                 | 3.5      |
| Movement differential, Max. mm |                                 | 1.0      |
| Overtravel, Min. mm            |                                 | 1.6      |
| Operating position             | Distance from mounting hole, mm | 8.8±1.2  |
|                                | Distance from standoff, mm      | 12.1±1.3 |

## Simulated roller lever


### CAD Data

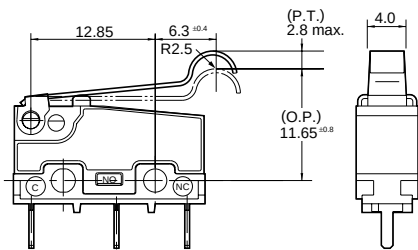

|                                |                                 |           |
|--------------------------------|---------------------------------|-----------|
| Pretravel, Max. mm             |                                 | 2.8       |
| Movement differential, Max. mm |                                 | 0.8       |
| Overtravel, Min. mm            |                                 | 1.2       |
| Operating position             | Distance from mounting hole, mm | 11.65±0.8 |
|                                | Distance from standoff, mm      | 14.95±0.9 |

## Roller lever


### CAD Data

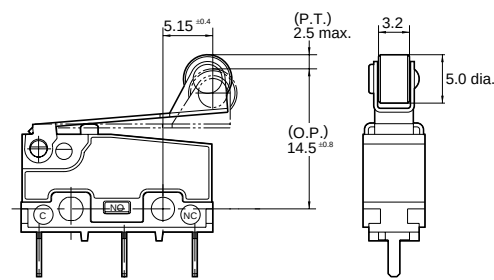

|                                |                                 |          |
|--------------------------------|---------------------------------|----------|
| Pretravel, Max. mm             |                                 | 2.5      |
| Movement differential, Max. mm |                                 | 0.5      |
| Overtravel, Min. mm            |                                 | 0.8      |
| Operating position             | Distance from mounting hole, mm | 14.5±0.8 |
|                                | Distance from standoff, mm      | 17.8±0.9 |

## 2-(2) Solder terminal

### CAD Data

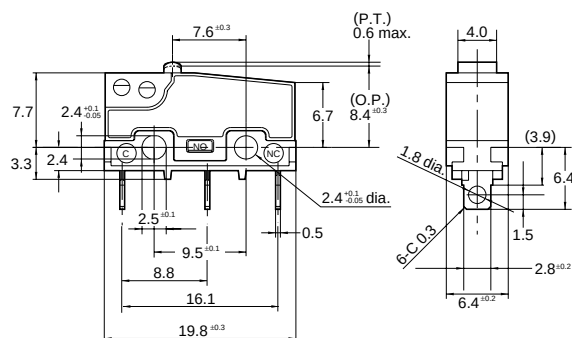


As for the dimensions of lever types, dimensions other than terminals are same as self-standing solder terminal.

# AV3,AVM3/AVT3,AVL3

### 2-(3) .110 Quick-connect terminal

mm General tolerance:  $\pm 0.25$

**CAD Data**

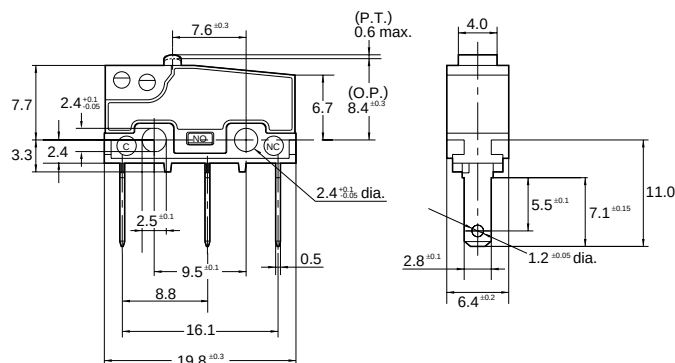

As for the dimensions of lever types, dimensions other than terminals are same as self-standing solder terminal.

## NOTES


### 1.Regarding fastening of switch body

In fastening the switch body, use flat filister head M2.3 screws, with tightening torque of not more than 0.29N·m. To prevent loosening of the screws, it is recommended that spring washers be used with the screws and adhesive be applied to lock the screws.

After mounting the switch and making wiring connections, the insulation distance between ground and each terminal should be confirmed as sufficient.

The positioning of the switch should be such that the pushbutton or actuator for the switch should not directly apply force to the operating section in the free condition. For a pushbutton, the force from the pushbutton should be applied in a perpendicular direction.

In setting the movement after operation, the over-travel should be set not less than 70% as a standard. Setting the movement at less than 70% of O.T. may cause troubles such as mis-contact and welding due to small contact force of the switch.

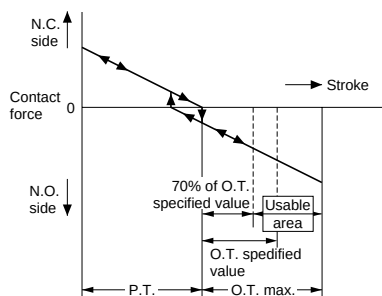

## 2.Soldering operation

Manual soldering should be accomplished within 3 seconds with max. 350°C iron.

Care should be taken not to apply force to the terminals during soldering.

Terminal portions must not be moved in min.1 minute after soldering. Also no tensile strength of lead wires should be applied to terminals.

### 3.Regarding connector connections (.110 quick connect terminals)

For making connections, a dedicated receptacle for .110 quick connect terminals should be used, and the terminals should be inserted parallel to the receptacle. Consideration should be given to mounting so that no tensile load is applied to the lead wires.

**4. In making the switch selection**

Consideration should be given to provide for no interference up to +20% variation of the standard characteristics values.


## 5.Environment

Locations where corrosive gases having a bad influence on contacts are present, and locations where there is an excessive amount of siliceous or other abrasive dust should be avoided.

## 6.Cautions regarding use

This subminiature switch has been designed as a dedicated switch for AC use, but it can be used for low capacity DC circuits.

Please select gold-clad contact types when loads are in the low-level area of 1mA up to 100mA and 5V up to 30V.

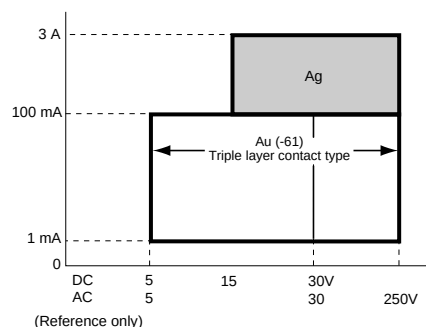

For switching of inductive loads (relays, solenoids, buzzers, etc.), in order to prevent damage to contacts due to the occurrence of arcing, an arc absorbing circuit should be applied

### 7. Quality check under Actual Loading Condition

To assure reliability, check the switch under actual loading conditions. Avoid any situation that may adversely affect switching performance.

**8. When using lever type switch, care should be taken not to apply undue force on the body from the opposite side or side ways to its operating direction.**

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9