


N-Channel FREDFET

POWER MOS 8® is a high speed, high voltage N-channel switch-mode power MOSFET. This 'FREDFET' version has a drain-source (body) diode that has been optimized for high reliability in ZVS phase shifted bridge and other circuits through reduced t_{rr} , soft recovery, and high recovery dv/dt capability. Low gate charge, high gain, and a greatly reduced ratio of C_{rss}/C_{iss} result in excellent noise immunity and low switching loss. The intrinsic gate resistance and capacitance of the poly-silicon gate structure help control di/dt during switching, resulting in low EMI and reliable paralleling, even when switching at very high frequency.



Single die FREDFET



FEATURES

- Fast switching with low EMI
- Low t_{rr} for high reliability
- Ultra low C_{rss} for improved noise immunity
- Low gate charge
- Avalanche energy rated
- RoHS compliant 

TYPICAL APPLICATIONS

- ZVS phase shifted and other full full bridge
- Half bridge
- PFC and other boost converter
- Buck converter
- Single and two switch forward
- Flyback

Absolute Maximum Ratings

Symbol	Parameter	Ratings	Unit
I_D	Continuous Drain Current @ $T_C = 25^\circ\text{C}$	18	A
	Continuous Drain Current @ $T_C = 100^\circ\text{C}$	12	
I_{DM}	Pulsed Drain Current ^①	104	
V_{GS}	Gate-Source Voltage	± 30	V
E_{AS}	Single Pulse Avalanche Energy ^②	2165	mJ
I_{AR}	Avalanche Current, Repetitive or Non-Repetitive	14	A

Thermal and Mechanical Characteristics

Symbol	Characteristic	Min	Typ	Max	Unit
P_D	Total Power Dissipation @ $T_C = 25^\circ\text{C}$			545	W
$R_{\theta JC}$	Junction to Case Thermal Resistance			0.23	$^\circ\text{C}/\text{W}$
$R_{\theta CS}$	Case to Sink Thermal Resistance, Flat, Greased Surface		0.15		
T_J, T_{STG}	Operating and Storage Junction Temperature Range	-55		150	$^\circ\text{C}$
$V_{Isolation}$	RMS Voltage (50-60Hz Sinusoidal Waveform from Terminals to Mounting Base for 1 Min.)	2500			V
W_T	Package Weight		1.03		oz
			29.2		g
Torque	Terminals and Mounting Screws.			10	in-lbf
				1.1	N·m

Static Characteristics

$T_J = 25^\circ\text{C}$ unless otherwise specified

APT17F120J

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
$V_{BR(DSS)}$	Drain-Source Breakdown Voltage	$V_{GS} = 0\text{V}$, $I_D = 250\mu\text{A}$	1200			V
$\Delta V_{BR(DSS)}/\Delta T_J$	Breakdown Voltage Temperature Coefficient	Reference to 25°C , $I_D = 250\mu\text{A}$		1.41		$\text{V}/^\circ\text{C}$
$R_{DS(on)}$	Drain-Source On Resistance ^③	$V_{GS} = 10\text{V}$, $I_D = 14\text{A}$		0.55	0.58	Ω
$V_{GS(th)}$	Gate-Source Threshold Voltage	$V_{GS} = V_{DS}$, $I_D = 2.5\text{mA}$	2.5	4	5	V
$\Delta V_{GS(th)}/\Delta T_J$	Threshold Voltage Temperature Coefficient			-10		$\text{mV}/^\circ\text{C}$
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS} = 1200\text{V}$, $T_J = 25^\circ\text{C}$			250	μA
		$V_{GS} = 0\text{V}$, $T_J = 125^\circ\text{C}$			1000	
I_{GSS}	Gate-Source Leakage Current	$V_{GS} = \pm 30\text{V}$			± 100	nA

Dynamic Characteristics

$T_J = 25^\circ\text{C}$ unless otherwise specified

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
g_{fs}	Forward Transconductance	$V_{DS} = 50\text{V}$, $I_D = 14\text{A}$		31		S
C_{iss}	Input Capacitance	$V_{GS} = 0\text{V}$, $V_{DS} = 25\text{V}$ $f = 1\text{MHz}$		9670		pF
C_{rss}	Reverse Transfer Capacitance			115		
C_{oss}	Output Capacitance			715		
$C_{o(cr)}^{\text{④}}$	Effective Output Capacitance, Charge Related	$V_{GS} = 0\text{V}$, $V_{DS} = 0\text{V}$ to 800V		275		pF
$C_{o(er)}^{\text{⑤}}$	Effective Output Capacitance, Energy Related			140		
Q_g	Total Gate Charge	$V_{GS} = 0$ to 10V , $I_D = 14\text{A}$, $V_{DS} = 600\text{V}$		300		nC
Q_{gs}	Gate-Source Charge			50		
Q_{gd}	Gate-Drain Charge			140		
$t_{d(on)}$	Turn-On Delay Time	Resistive Switching $V_{DD} = 800\text{V}$, $I_D = 14\text{A}$ $R_G = 2.2\Omega^{\text{⑥}}$, $V_{GG} = 15\text{V}$		50		ns
t_r	Current Rise Time			31		
$t_{d(off)}$	Turn-Off Delay Time			170		
t_f	Current Fall Time			48		

Source-Drain Diode Characteristics

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
I_s	Continuous Source Current (Body Diode)	MOSFET symbol showing the integral reverse p-n junction diode (body diode)			18	A
I_{SM}	Pulsed Source Current (Body Diode) ^①				104	
V_{SD}	Diode Forward Voltage	$I_{SD} = 14\text{A}$, $T_J = 25^\circ\text{C}$, $V_{GS} = 0\text{V}$			1.2	V
t_{rr}	Reverse Recovery Time	$I_{SD} = 14\text{A}^{\text{③}}$ $di_{SD}/dt = 100\text{A}/\mu\text{s}$	$T_J = 25^\circ\text{C}$		330	ns
Q_{rr}	Reverse Recovery Charge		$T_J = 125^\circ\text{C}$		660	
I_{rrm}	Reverse Recovery Current	$I_{SD} \leq 14\text{A}$, $di/dt \leq 1000\text{A}/\mu\text{s}$, $V_{DD} = 100\text{V}$, $T_J = 125^\circ\text{C}$	$T_J = 25^\circ\text{C}$	1.72		μC
dv/dt	Peak Recovery dv/dt		$T_J = 125^\circ\text{C}$	4.67		
			$T_J = 25^\circ\text{C}$	11		A
			$T_J = 125^\circ\text{C}$	16		
					25	V/ns

① Repetitive Rating: Pulse width and case temperature limited by maximum junction temperature.

② Starting at $T_J = 25^\circ\text{C}$, $L = 22.1\text{mH}$, $R_G = 25\Omega$, $I_{AS} = 14\text{A}$.

③ Pulse test: Pulse Width < 380μs, duty cycle < 2%.

④ $C_{o(cr)}$ is defined as a fixed capacitance with the same stored charge as C_{oss} with $V_{DS} = 67\%$ of $V_{(BR)DSS}$.

⑤ $C_{o(er)}$ is defined as a fixed capacitance with the same stored energy as C_{oss} with $V_{DS} = 67\%$ of $V_{(BR)DSS}$. To calculate $C_{o(er)}$ for any value of V_{DS} less than $V_{(BR)DSS}$, use this equation: $C_{o(er)} = -8.27E-7/V_{DS}^2 + 1.01E-7/V_{DS} + 1.43E-10$.

⑥ R_G is external gate resistance, not including internal gate resistance or gate driver impedance. (MIC4452)

Microsemi reserves the right to change, without notice, the specifications and information contained herein.

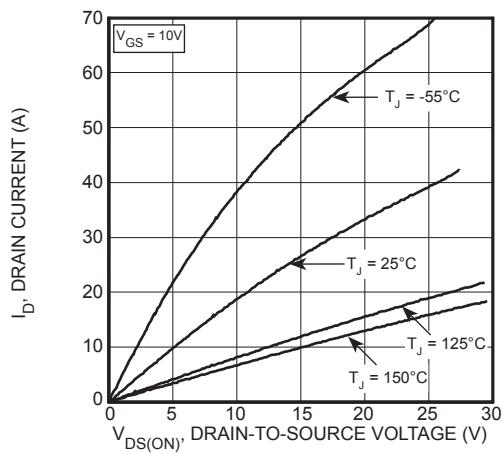


Figure 1, Output Characteristics

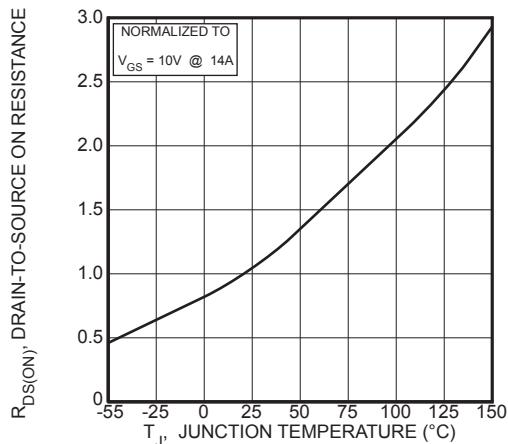
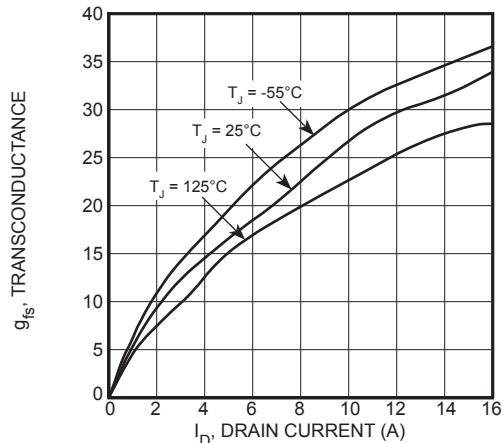
Figure 3, $R_{DS(ON)}$ vs Junction Temperature

Figure 5, Gain vs Drain Current

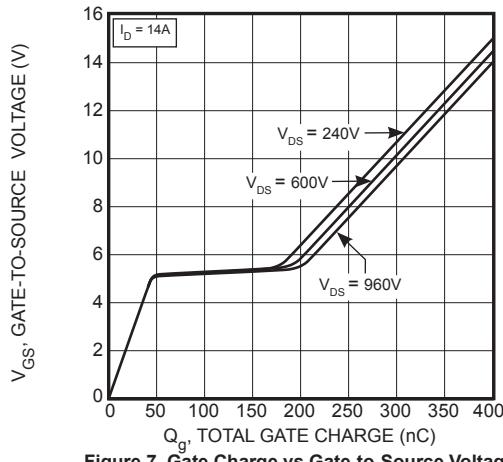


Figure 7, Gate Charge vs Gate-to-Source Voltage

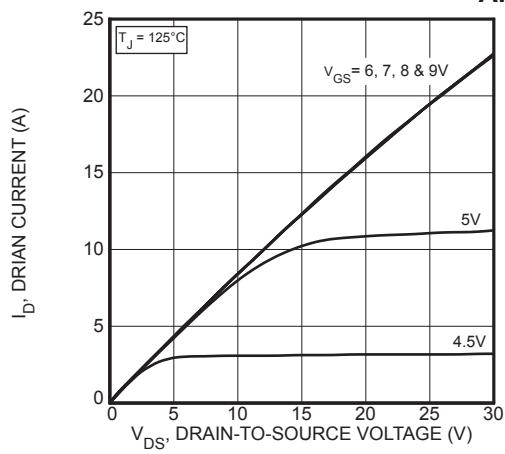


Figure 2, Output Characteristics

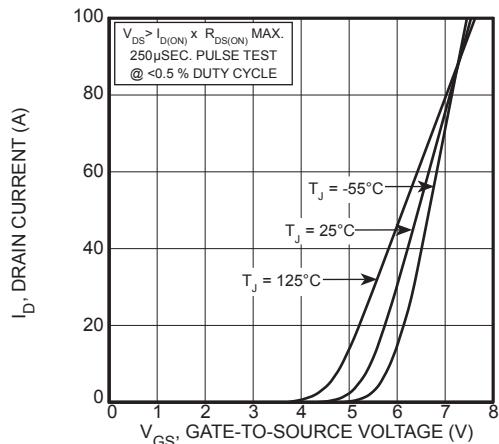


Figure 4, Transfer Characteristics

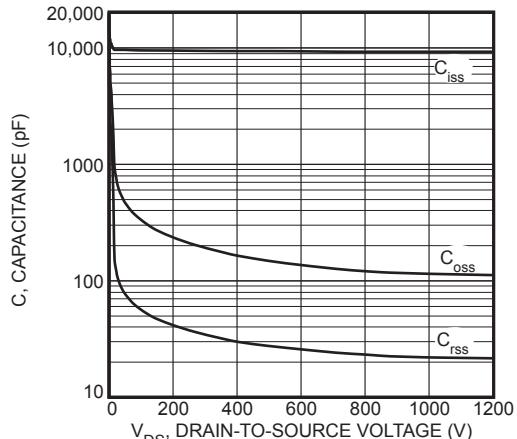


Figure 6, Capacitance vs Drain-to-Source Voltage

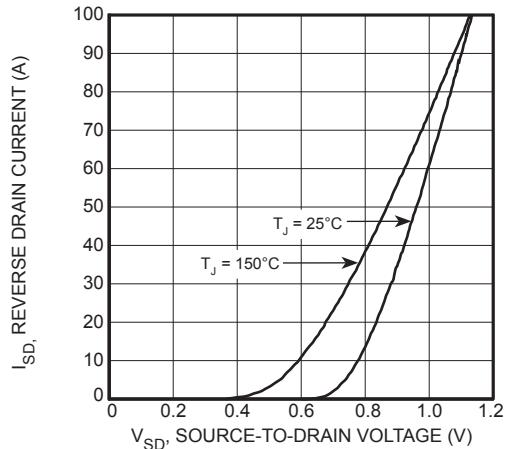


Figure 8, Reverse Drain Current vs Source-to-Drain Voltage

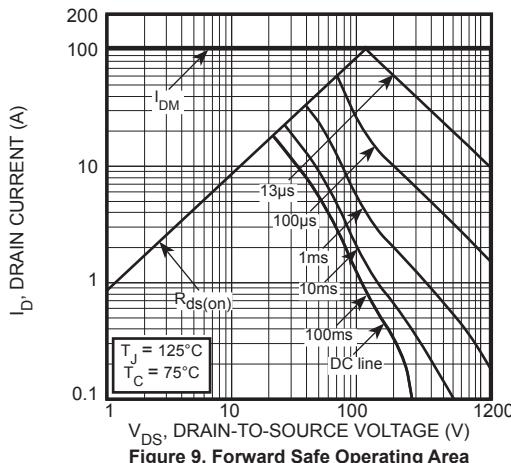


Figure 9, Forward Safe Operating Area

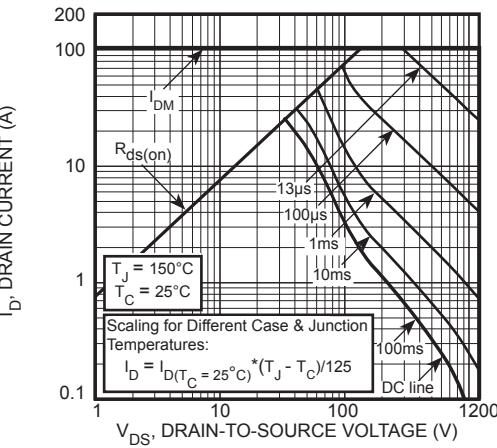


Figure 10, Maximum Forward Safe Operating Area


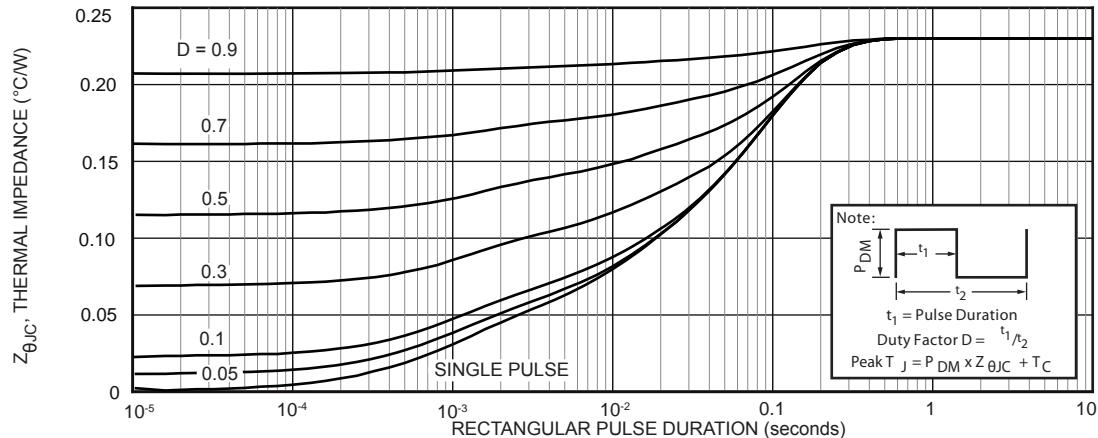


Figure 11. Maximum Effective Transient Thermal Impedance Junction-to-Case vs Pulse Duration

SOT-227 (ISOTOP®) Package Outline

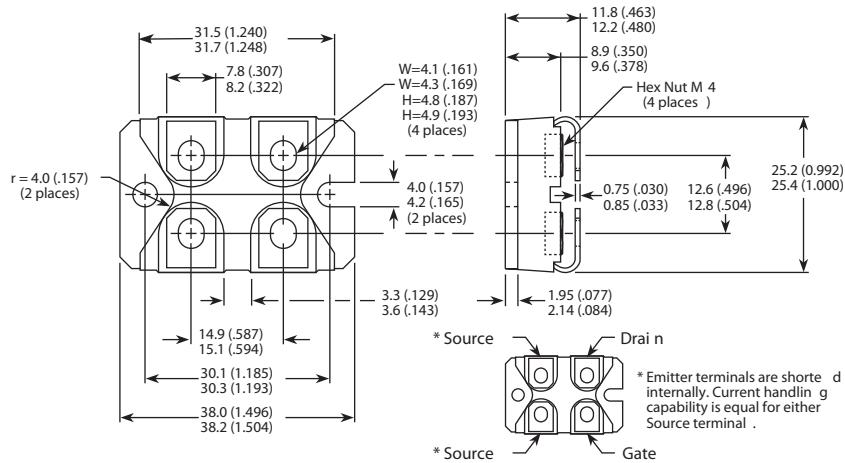

Dimensions in Millimeters and (Inches)

Данный компонент на территории Российской Федерации**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибуторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ Р В 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru
moschip.ru_4

moschip.ru_6
moschip.ru_9