


THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION






ALL RIGHTS RESERVED.

© COPYRIGHT 2013 BY TE CONNECTIVITY.

| LOC | DIST | REVISIONS |     |               |  | DATE    | DWN | APVD |
|-----|------|-----------|-----|---------------|--|---------|-----|------|
| DW  | —    | P         | LTR | DESCRIPTION   |  |         |     |      |
|     |      | A2        |     | ECR-12-012115 |  | 23OCT12 | EL  | WK   |




DETAIL W

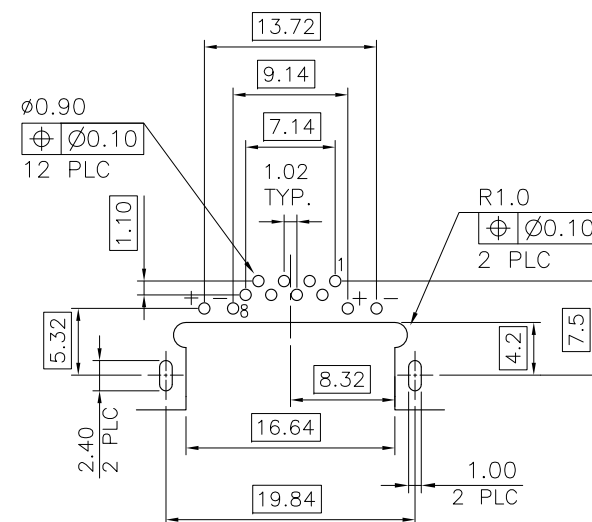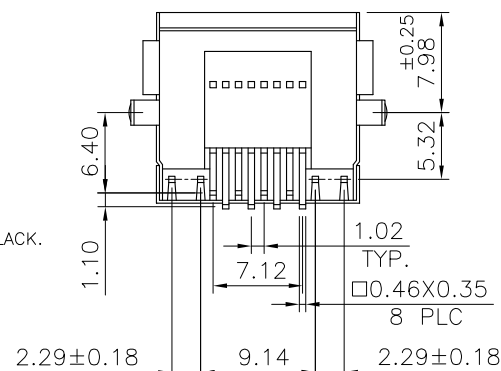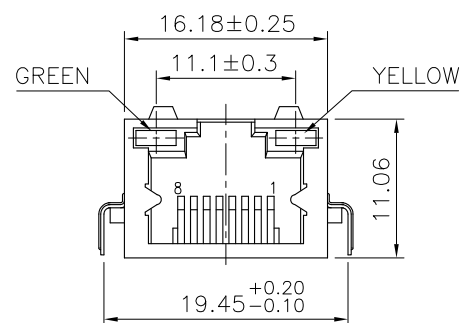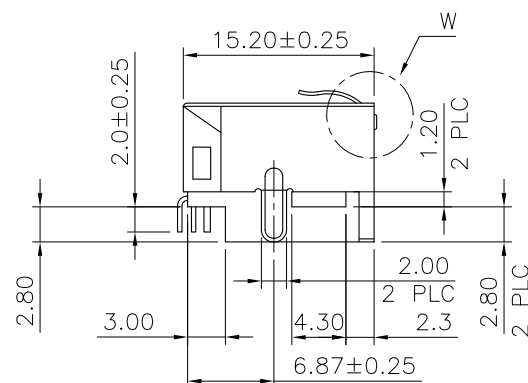TE LOGO &  
DATE CODE

RECOMMENDED PCB LAYOUT (THICKNESS: 1.6mm)

(DIMENSION TOLERANCE: 1 PLC: ±0.1 2PLC: ±0.05)



W/O LED LIGHT

NOTE:

- MATERIAL:  
HOUSING: THERMOPLASTIC HIGH TEMP., UL94 V-0, COLOR: BLACK.  
CONTACT: PHOSPHOR BRONZE, THICKNESS: 0.35mm.  
SHELL: BRASS, THICKNESS: 0.20mm.  
LED LIGHT: EPOXY RESIN, THICKNESS: 0.50mm.
- FINISH:  
CONTACT: GOLD PLATED (SEE TABLE) IN CONTACT AREA,  
GOLD FLASH ON SOLDER TAILS,  
50u" MIN. NICKEL UNDER PLATED ALL OVER.  
SHELL: 20u" MIN. NICKEL PLATED.  
LED LIGHT: 65u" MIN Ag PLATED  
85u" MIN TIN PLATED.
- LED MUST BE REFLOW COMPATIBLE TO FOLLOWING  
TEMPERATURE PROFILE (FOR 1 CYCLE): ABOVE 160°C FOR  
120 SECONDS, PEAKING AT 245°C FOR 20~40 SECONDS.
- LED DEFECT RATE IS 6000 PPM MAX. AFTER IR REFLOW  
PROCESS AS NOTE 3.
- WAVE SOLDER CAPABLE TO 265°C PER 109-202, CONDITION B.

△ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

|                                            |                                            |                                            |         |             |                     |             |
|--------------------------------------------|--------------------------------------------|--------------------------------------------|---------|-------------|---------------------|-------------|
| OBSOLETE                                   | REEL                                       | W/O                                        | 50μ"    | 3-1734719-8 |                     |             |
|                                            |                                            |                                            | 30μ"    | 3-1734719-7 |                     |             |
|                                            |                                            |                                            | 15μ"    | 3-1734719-6 |                     |             |
|                                            |                                            |                                            | 6μ"     | 3-1734719-5 |                     |             |
|                                            |                                            | W/                                         | 50μ"    | 3-1734719-4 |                     |             |
|                                            |                                            |                                            | 30μ"    | 3-1734719-3 |                     |             |
|                                            |                                            |                                            | 15μ"    | 3-1734719-2 |                     |             |
|                                            |                                            |                                            | 6μ"     | 3-1734719-1 |                     |             |
| <div><div>△</div><div>OBSOLETE</div></div> | TRAY                                       | W/O                                        | 50μ"    | 1734719-8   |                     |             |
|                                            |                                            |                                            | 30μ"    | 1734719-7   |                     |             |
|                                            |                                            |                                            | 15μ"    | 1734719-6   |                     |             |
|                                            |                                            |                                            | 6μ"     | 1734719-5   |                     |             |
|                                            |                                            | W/                                         | 50μ"    | 1734719-4   |                     |             |
|                                            |                                            |                                            | 30μ"    | 1734719-3   |                     |             |
|                                            |                                            |                                            | 15μ"    | 1734719-2   |                     |             |
|                                            |                                            |                                            | 6μ"     | 1734719-1   |                     |             |
| <div><div>△</div><div>OBSOLETE</div></div> | <div><div>△</div><div>OBSOLETE</div></div> | <div><div>△</div><div>OBSOLETE</div></div> | PACKAGE | LED LIGHT   | MIN. GOLD THICKNESS | PART NUMBER |
|                                            |                                            |                                            |         |             |                     |             |

THIS DRAWING IS A CONTROLLED DOCUMENT.

|      |         |           |
|------|---------|-----------|
| DWN  | O. HU   | 13DEC2005 |
| CHK  | S. HOU  | 13DEC2005 |
| APVD | W.J. KE | 13DEC2005 |

PRODUCT SPEC

108-57535

APPLICATION SPEC

—

WEIGHT 3 GRAMS

CUSTOMER DRAWING

NAME

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

TE

TE Connectivity

MODULAR JACK, RJ45, SINGLE  
ENTRY, DIP TYPE

A3

00779

C=1734719

SCALE

SHEET


1 OF 4

REV

A2

DIMENSIONS:

MM



MATERIAL


SEE NOTE

TOLERANCES UNLESS  
OTHERWISE SPECIFIED:

|        |       |
|--------|-------|
| 0 PLC  | ± 0.5 |
| 1 PLC  | ± 0.3 |
| 2 PLC  | ± 0.2 |
| 3 PLC  | ± 0.1 |
| 4 PLC  | ± 0.1 |
| ANGLES | ± 3°  |






FINISH

SEE NOTE




DETAIL W

TE LOGO &  
DATE CODE

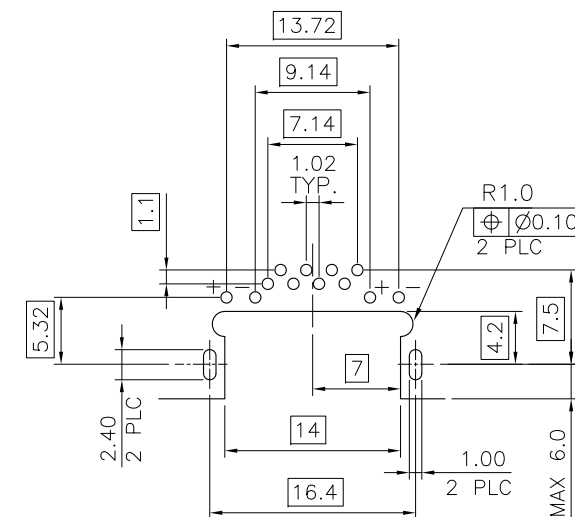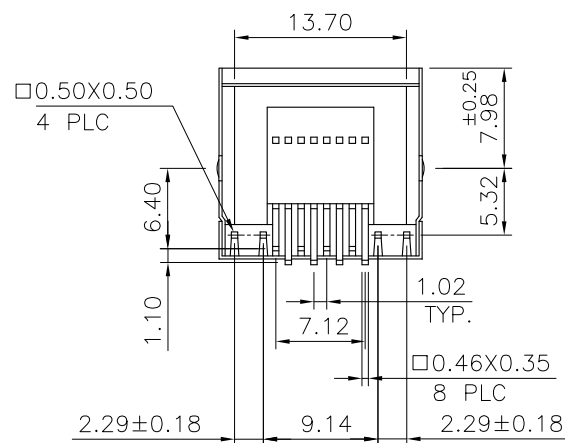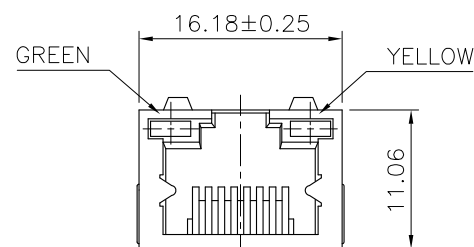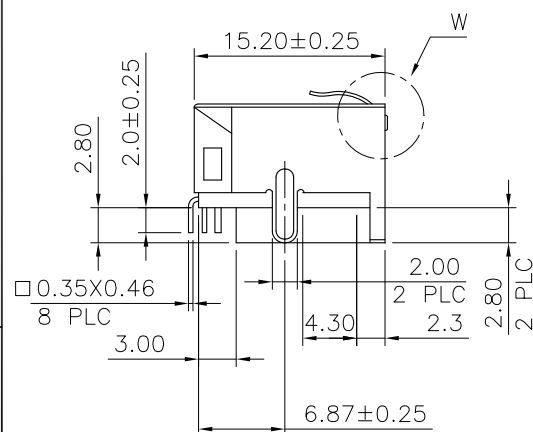

RECOMMENDED PCB LAYOUT (THICKNESS: 1.6mm)  
(DIMENSION TOLERANCE: 1 PLC: ±0.1 2PLC: ±0.05)



W/O LED LIGHT

NOTE:

- MATERIAL:  
HOUSING: THERMOPLASTIC HIGH TEMP., UL94V-0, COLOR: BLACK.  
CONTACT: PHOSPHOR BRONZE, THICKNESS: 0.35mm.  
SHELL: BRASS, THICKNESS: 0.20mm.
- FINISH:  
CONTACT: GOLD PLATED (SEE TABLE) IN CONTACT AREA,  
GOLD FLASH ON SOLDER TAILS,  
50u" MIN. NICKEL UNDER PLATED ALL OVER.  
SHELL: 20u" MIN. NICKEL PLATED.
- WAVE SOLDER CAPABLE TO 265°C PER TYCO SPEC 109-202,  
CONDITION B.

|                                                                                       |  |                                                                                      |  |                                                                                                       |  |              |  |
|---------------------------------------------------------------------------------------|--|--------------------------------------------------------------------------------------|--|-------------------------------------------------------------------------------------------------------|--|--------------|--|
| THIS DRAWING IS A CONTROLLED DOCUMENT.                                                |  | DWN<br>—                                                                             |  |  TE Connectivity |  | THICKNESS    |  |
|                                                                                       |  | CHK<br>—                                                                             |  |                                                                                                       |  |              |  |
|                                                                                       |  | APVD<br>—                                                                            |  | NAME                                                                                                  |  |              |  |
| DIMENSIONS:<br>MM                                                                     |  | TOLERANCES UNLESS<br>OTHERWISE SPECIFIED:                                            |  | MODULAR JACK, RJ45, SINGLE<br>ENTRY, DIP TYPE                                                         |  |              |  |
|                                                                                       |  |                                                                                      |  |                                                                                                       |  |              |  |
|  |  | 0 PLC ± 0.5<br>1 PLC ± 0.3<br>2 PLC ± 0.2<br>3 PLC ± 0.1<br>4 PLC ± —<br>ANGLES ± 3° |  | PRODUCT SPEC<br>—                                                                                     |  | SIZE         |  |
|                                                                                       |  |                                                                                      |  | APPLICATION SPEC<br>—                                                                                 |  | CAGE CODE    |  |
| MATERIAL                                                                              |  | FINISH                                                                               |  | WEIGHT —                                                                                              |  | DRAWING NO   |  |
| SEE NOTE                                                                              |  | SEE NOTE                                                                             |  | A3 00779                                                                                              |  | C=1734719    |  |
| CUSTOMER DRAWING                                                                      |  |                                                                                      |  | SCALE —                                                                                               |  | SHEET 2 OF 4 |  |
|                                                                                       |  |                                                                                      |  |                                                                                                       |  | REV A2       |  |

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-,-



COPYRIGHT 2013

BY TE CONNECTIVITY.

ALL RIGHTS RESERVED.

LOC  
DWDIST  
—

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD

SEE SHEET 1

TOP TRAY

CLAPBOARD

INNER BOX

BOX

370mm(L)X255mm(W)X220mm(H)  
11 TRAY/CARTON  
TOTAL: 880 PCS  
GROSS WEIGHT: 5Kg Ref.

TRAY

330mm(L)X225mm(W)X15mm(H)  
80 PCS/TRAY

H

W

L

W

L

H

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

—

CHK

—

APVD

—

PRODUCT SPEC

—

APPLICATION SPEC

—


WEIGHT

—

CUSTOMER DRAWING

DIMENSIONS:

MM



MATERIAL

TOLERANCES UNLESS  
OTHERWISE SPECIFIED:

0 PLC ±  
1 PLC ±  
2 PLC ±  
3 PLC ±  
4 PLC ±  
ANGLES ±

FINISH



TE Connectivity

NAME

MODULAR JACK, RJ45, SINGLE  
ENTRY, DIP TYPE

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C=1734719

—

SCALE

—

SHEET

3 of 4

REV A2

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-,-

ALL RIGHTS RESERVED.

© COPYRIGHT 2013 BY TE CONNECTIVITY.

LOC  
DWDIST  
—

REVISIONS

P

LTR





DESCRIPTION

DATE

DWN

APVD

SEE SHEET 1

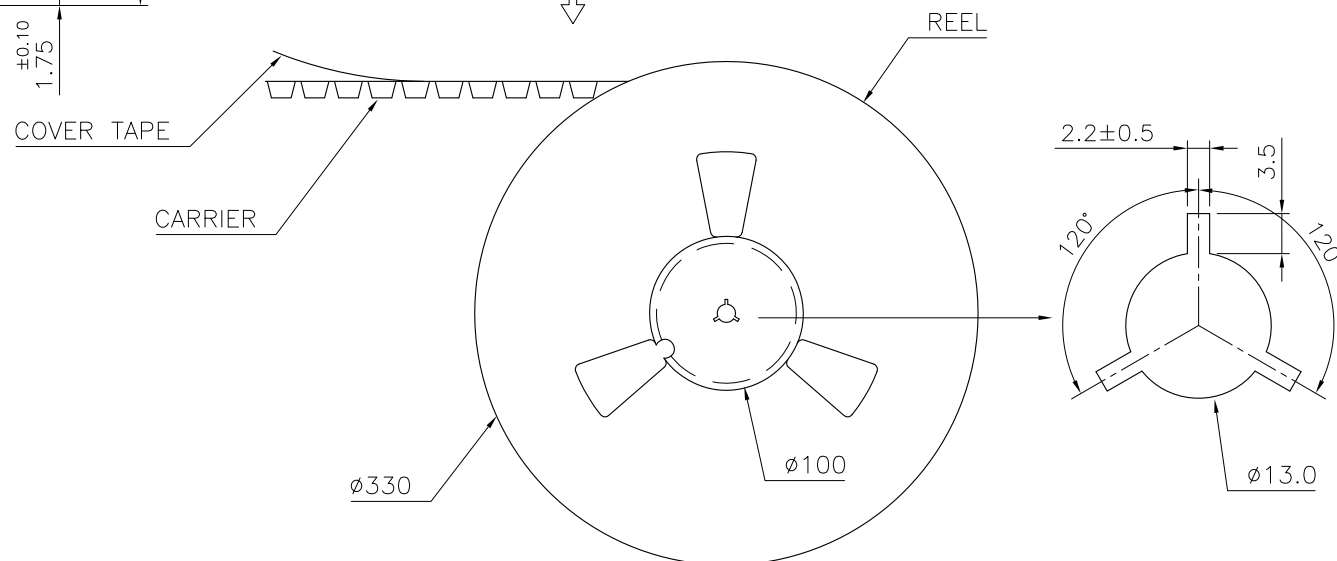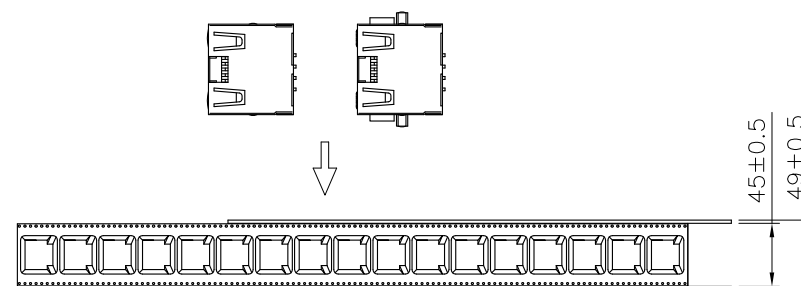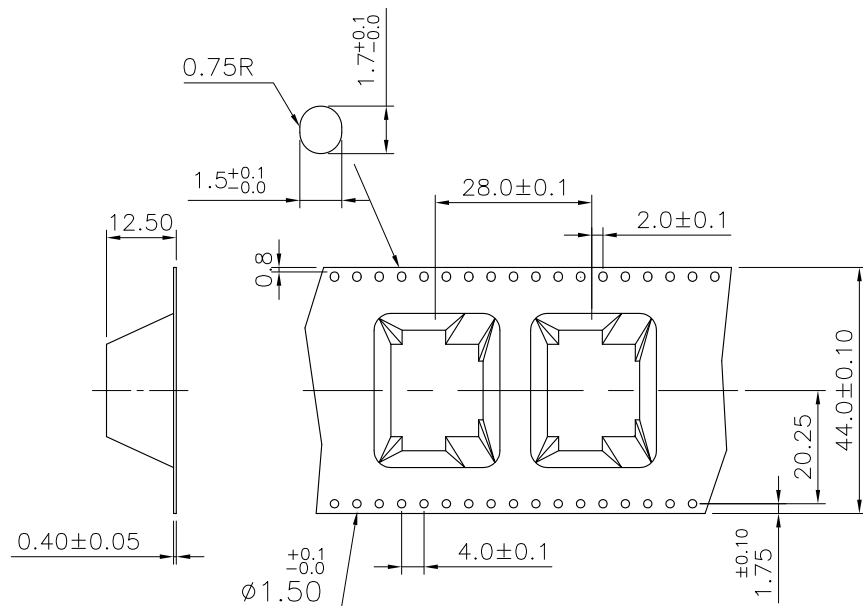

## NOTES:

- THE DIRECTION OF JACKS PUT INTO CARRIER.
- 10 EMPTY CAVITIES FOR BOTH OF TOP AND BOTTOM OF THE CARRIER.
- 200 PCS PRODUCTS BE PACKAGED ONE REEL.
- BOX SIZE: 345(L)X345(W)X315(H)  
6 REEL/BOX  
TOTAL: 1200 PCS

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

—

CHK

—

APVD

—

PRODUCT SPEC

—

APPLICATION SPEC

—

WEIGHT

—

NAME

TE

TE Connectivity

MODULAR JACK, RJ45, SINGLE ENTRY, DIP TYPE

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C=1734719

—

CUSTOMER DRAWING

SCALE

—

SHEET

4 of 4

REV

A2

DIMENSIONS:

MM

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC

1 PLC

2 PLC

3 PLC

4 PLC

ANGLES

FINISH

—

—



MATERIAL

—

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9