

# Features

# Switching Regulator

- Efficiency up to 94%, no need for heatsinks
- Pin compatible with LM78XX linears
- Low profile (L/W/H=11.5 x 7.55 x 10.2mm)
- Wide input range
- Short circuit protection, thermal shutdown
- Low ripple and noise
- IEC/EN60950-1 certified



## R-78-1.0

1.0 Amp  
SIP3  
Single Output



### Description


The R-78xx-1.0 series switching regulators are ideally suited to replace 1 Amp 78xx linear regulators and are pin compatible. Efficiencies of up to 94% mean that very little energy is wasted as heat so there is no need for any heat sinks with their additional space and mounting costs.

### Selection Guide

Part Number	Input Voltage Range [VDC]	Output Voltage [VDC]	Output Current [A]	Efficiency	
				@ min Vin [%]	@ max. Vin [%]
R-781.8-1.0	4.75 - 18	1.8	1.0	82	76
R-782.5-1.0	4.75 - 18	2.5	1.0	87	81
R-783.3-1.0	4.75 - 18	3.3	1.0	90	84
R-785.0-1.0	6.5 - 18	5.0	1.0	94	89



### Model Numbering




IEC/EN60950-1 certified  
EN55032 compliant

### Specifications (measured @ Ta= 25°C, 10% minimum load, unless otherwise stated)


BASIC CHARACTERISTICS				
Parameter	Condition	Min.	Typ.	Max.
Quiescent Current	Vin = min. to max. at 0% load		5mA	7mA
Internal Power Dissipation				0.4W
Minimum Load <sup>(1)</sup>		0%		
Internal Operating Frequency		280kHz	350kHz	430kHz
Output Ripple and Noise	measured at 20MHz BW		20mVp-p	30mVp-p
Absolute Maximum Capacitive Load	1 second start up, no external components			220µF
	<1 second start up + diode protection circuit			6800µF
<b>Notes:</b> Note1: Operation under no load will not harm the converter, but specifications may not be met A minimum load of 10mA is recommended				
continued on next page				

Specifications (measured @ Ta= 25°C, 10% minimum load, unless otherwise stated)


Efficiency vs. Vin (full load)

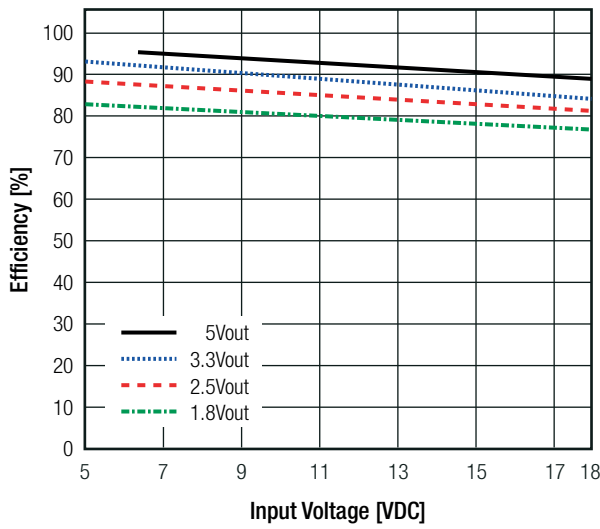


Ripple vs. Vin (full load)

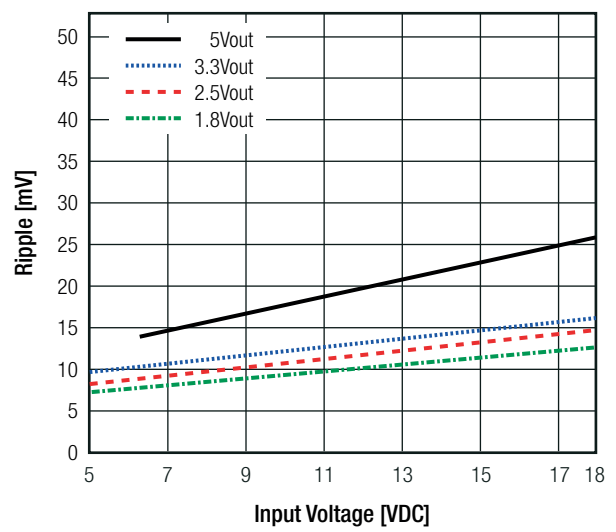


Efficiency vs. Load (max. Vin)

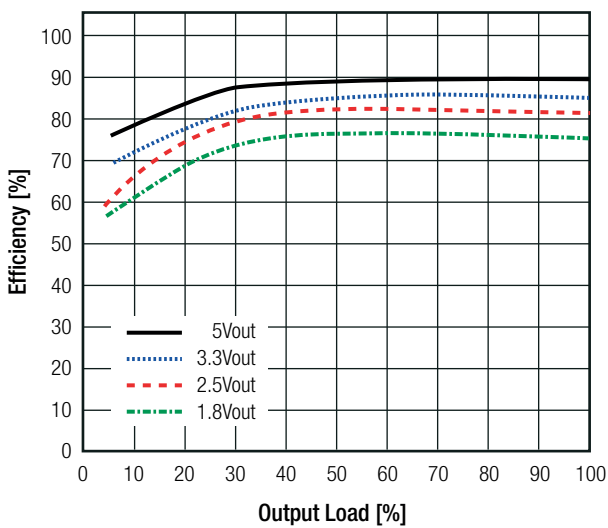


Ripple vs. Load (max. Vin)

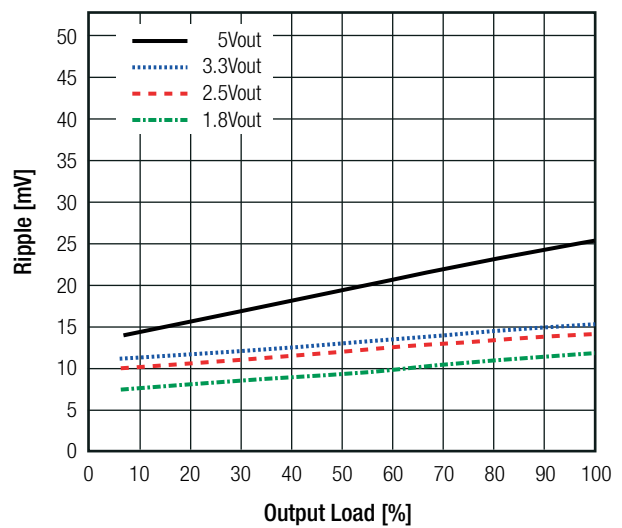

Efficiency vs. Load (min. Vin)

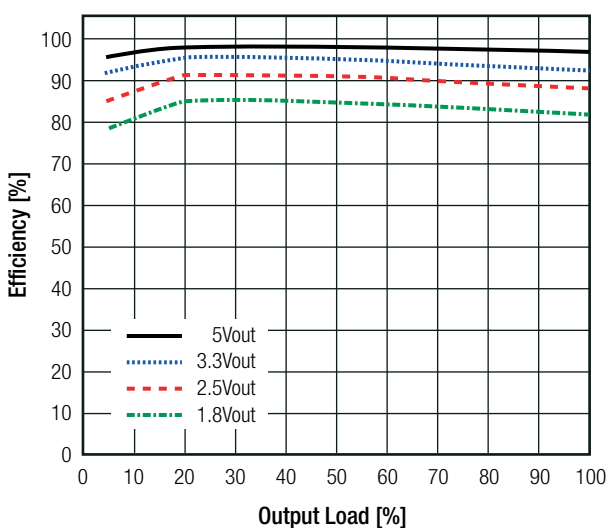

Ripple vs. Load (min. Vin)

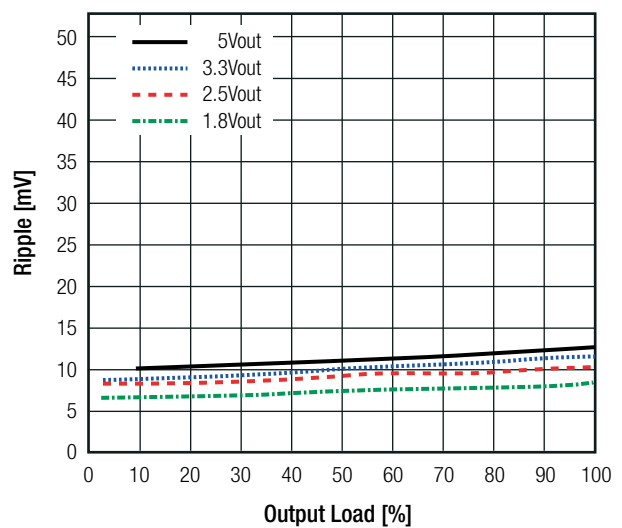

**Specifications** (measured @ Ta= 25°C, 10% minimum load, unless otherwise stated)

**REGULATIONS**

Parameter	Condition	Value
Output Accuracy	100% load	±2.0% typ / ±3.0% max.
Line Regulation	low line to high line, 100% load	±0.2% typ. / ±0.4% max.
Load Regulation	10% to 100% load	±0.4% typ. / ±0.6% max.
Transient Response	100% <-> 50% load	±85mV typ. / ±100mV max.

**PROTECTIONS**


Parameter	Condition	Value
Short Circuit Protection (SCP)		continuous, automatic recovery
Short Circuit Input Current	nom. Vin= 12VDC	100mA max.

**Optional Diode Protection Circuit**


Add a blocking diode to Vout if current can flow backwards into the output, as this can damage the converter when it is powered down.

The diode can either be fitted across the device if the source is low impedance or fitted in series with the output (recommended).

**Optional Protection 1:**

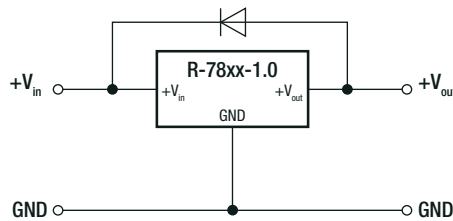


**Optional Protection 2:**

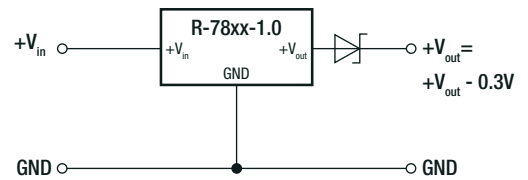

**ENVIRONMENTAL**

Parameter	Condition	Value
Operating Temperature Range	with derating (see graph)	-40°C to +85°C
Maximum Case Temperature		+100°C
Temperature Coefficient		±0.015%/K
Thermal Impedance	0.1 m/s, vertical	70K/W
Operating Altitude		2000m
Operating Humidity	non-condensing	95% RH max.
Pollution Degree		PD2
MTBF	according to MIL-HDBK-217F, G.B.	+25°C +71°C 13338 x 10 <sup>3</sup> hours 3880 x 10 <sup>3</sup> hours

**Derating Graph**

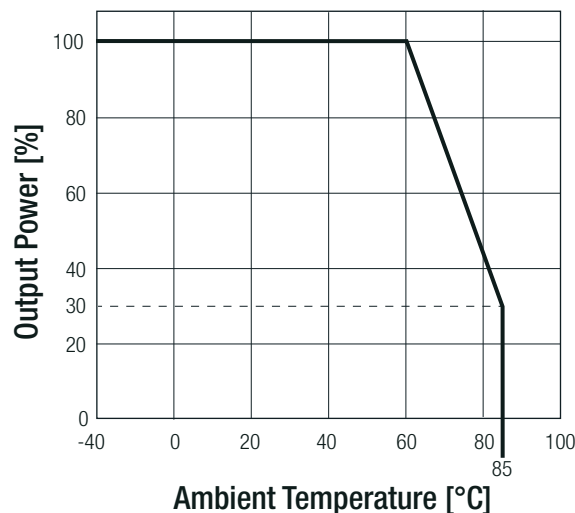


**Specifications** (measured @ Ta= 25°C, 10% minimum load, unless otherwise stated)

**SAFETY AND CERTIFICATIONS**

Certificate Type (Safety)	Report / File Number	Standard
Information Technology Equipment, General Requirements for Safety	1603123	IEC60950-1:2005, 2nd Edition + AM 2:2013 EN60950-1:2006 + AM 2:2013
EAC	RU-AT.49.09571	TP TC 004/2011
RoHs 2+		RoHS 2011/65/EU + AM2015/863

EMC Compliance	Condition	Standard / Criterion
Electromagnetic compatibility of multimedia equipment - Emission requirements	with external filter (see filter suggestion below)	EN55032, Class A and B
ESD Electrostatic discharge immunity test	Contact $\pm 6kV$	EN61000-4-2, Criteria A
Radiated, radio-frequency, electromagnetic field immunity test	3V/m	EN61000-4-3, Criteria A
Fast Transient and Burst Immunity	$\pm 1.0kV$	EN61000-4-4, Criteria A
Immunity to conducted disturbances, induced by radio-frequency fields	3V	EN61000-4-6, Criteria A
Power Magnetic Field Immunity	50Hz, 3A/m	EN61000-4-8, Criteria A

**EMC Filter Suggestion according to EN55032**

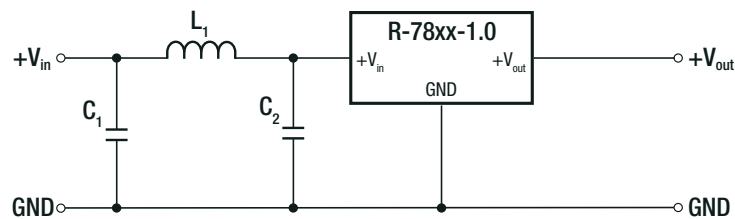

**Component List Class A**

MODEL	C1	L1
R-783.3-1.0	10 $\mu$ F	3.9 $\mu$ H choke
R-785.0-1.0	100V MLCC	RLS-397

**Component List Class B**

MODEL	C1	C2	L1
R-783.3-1.0	10 $\mu$ F	2.2 $\mu$ F	5.6 $\mu$ H choke
R-785.0-1.0	100V MLCC	100V MLCC	RLS-567

**Notes:**


Note2: Filter suggestions are valid for indicated part numbers only. For other part numbers, please contact RECOM tech support for advice

**DIMENSION AND PHYSICAL CHARACTERISTICS**

Parameter	Type	Value
Material	case potting PCB	non-conductive black plastic, (UL94 V-0) silicone, (UL94 V-0) FR4, (UL94 V-0)
Package Dimension (LxWxH)		11.5 x 7.55 x 10.2mm
Package Weight		1.9g typ.


continued on next page

Specifications (measured @ Ta= 25°C, 10% minimum load, unless otherwise stated)

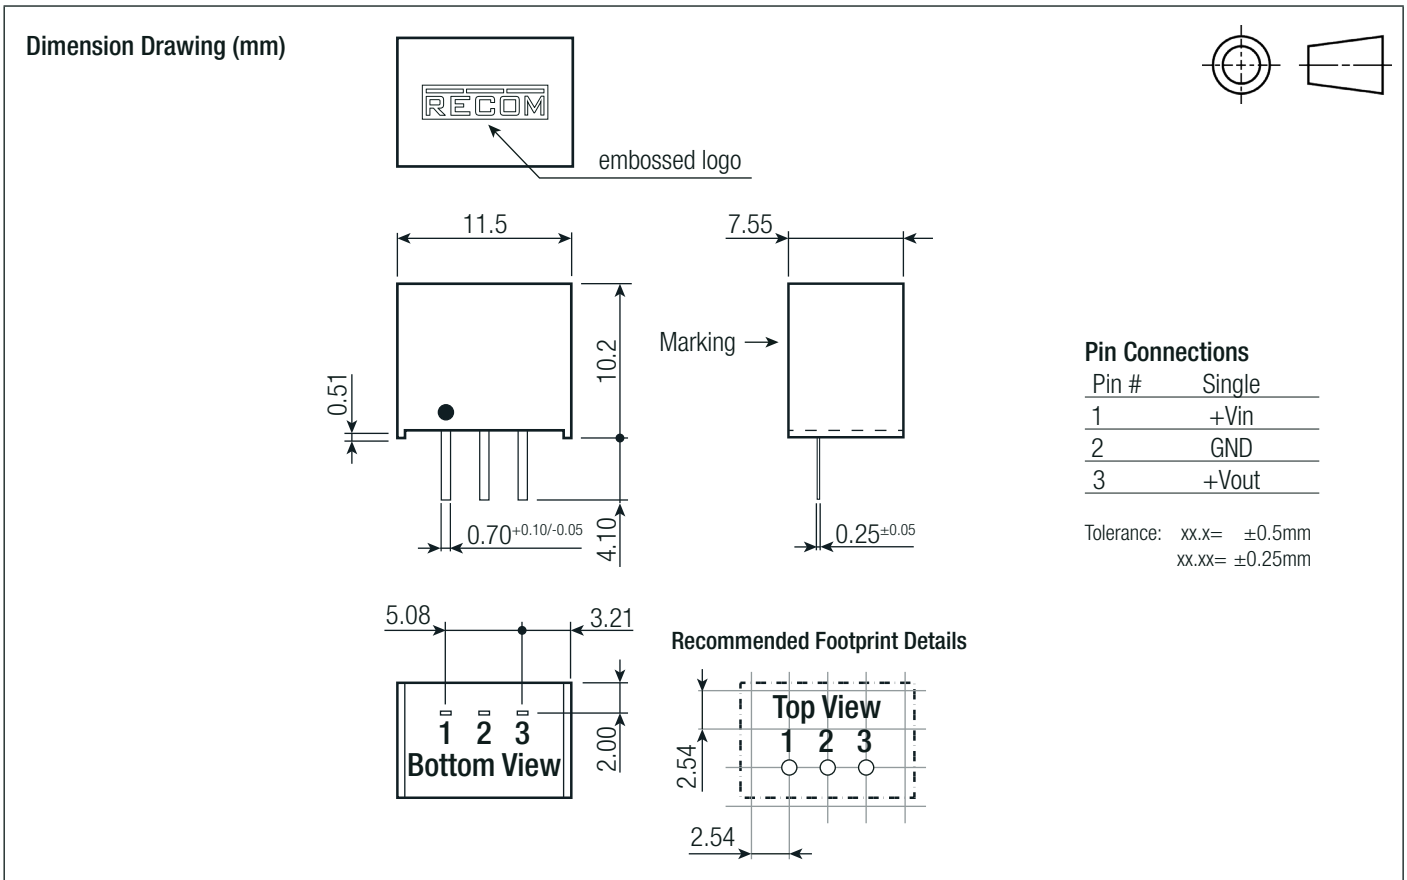

## INSTALLATION AND APPLICATION

### High Efficiency, Isolated, Dual Unregulated Output

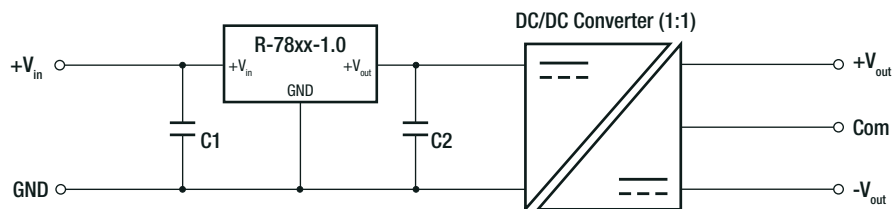


C1: optional

C2: required (further decoupling filtering may be necessary between the two converters)

- Medical grade isolated dual outputs
- Wide input range 6.5V to 18V
- High efficiency, suitable for 12V battery powered devices

### Isolated (up to 6kVDC), Wide Input Range Regulated Output

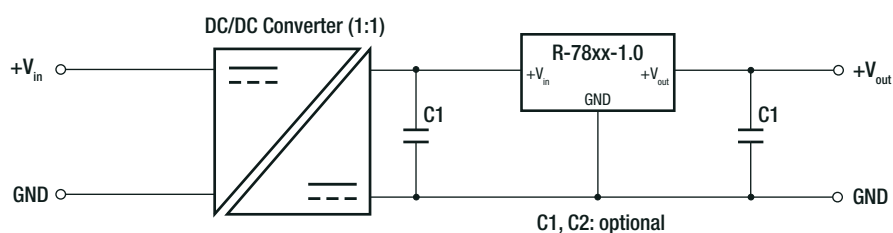

C1, C2: optional

- High isolation voltage
- Improved load / line Regulation
- Wide input voltage
- Point-of-load architecture

**Specifications** (measured @ Ta= 25°C, 10% minimum load, unless otherwise stated)

PACKAGING INFORMATION		
Parameter	Type	Value
Packaging Dimension (LxWxH)	tube	520.0 x 9.3 x 16.5mm
Packaging Quantity	tube	42pcs
Storage Temperature Range		-55°C to +125°C
Storage Humidity		95% RH max.

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9