


THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	20
© COPYRIGHT 20 BY TYCO ELECTRONICS CORPORATION ALL RIGHTS RESERVED.		




REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	E	REVISED PER ECO-14-016912	07NOV2014	DD	JS
	E1	REVISED PER ECO-16-002322	18FEB2016	DD	JS

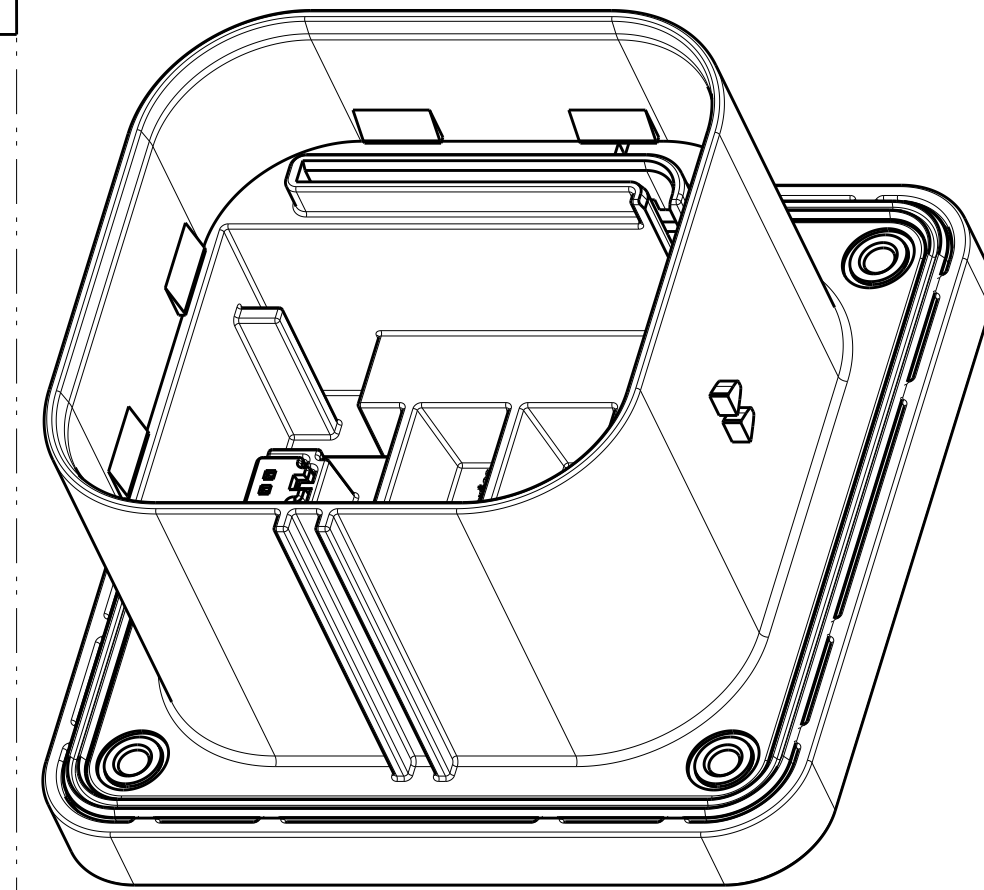

ISOMETRIC VIEW
SCALE 1:1


- ① M6-1 THREADED STUD
TORQUE LIMITS: 10Nm±0.5Nm
- ② M6-1 THREADED INSERT
TORQUE LIMITS: 9Nm - 11Nm

THREADED BUSHINGS (4X) HEAT STAKED FLUSH TO MAX 0.40mm DEEP
FROM THIS SURFACE.
- ③ HVIL CONNECTOR RETAINING LOCATIONS
HVIL CONNECTOR:
1534112-1 (RETAINER; MQS; 2P)
1-1534113-1 (RECEPTACLE HOUSING; MQS; 2P)
HVIL CONTACT:
928999-6 (SOCKET CONTACT; MQS; Ag)
- ④ MOUNTING SURFACE THICKNESS (MAX): 6.2mm
- ⑤ SURFACE FINISH AND FLATNESS APPLY WITHIN BOUNDARY SHOWN.
6. INNER HOUSING MAY BE ASSEMBLED ROTATED 180° FROM AS SHOWN.
- ⑦ ASSEMBLY / WORK INSTRUCTIONS: 408-10377
- ⑧ NOTE DELETED
- ⑨ SEE SHEET 2 FOR FUSE RATING MARKINGS AND KEYING CONFIGURATIONS.
- ⑩ SURFACE FINISH IN MICRONS (μm)

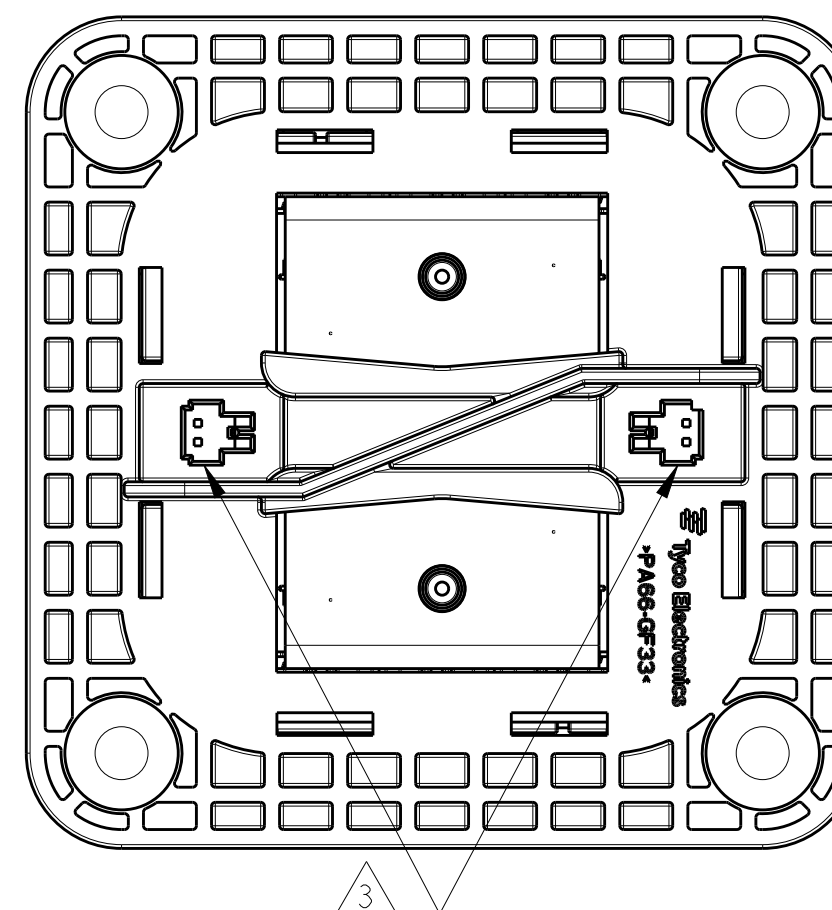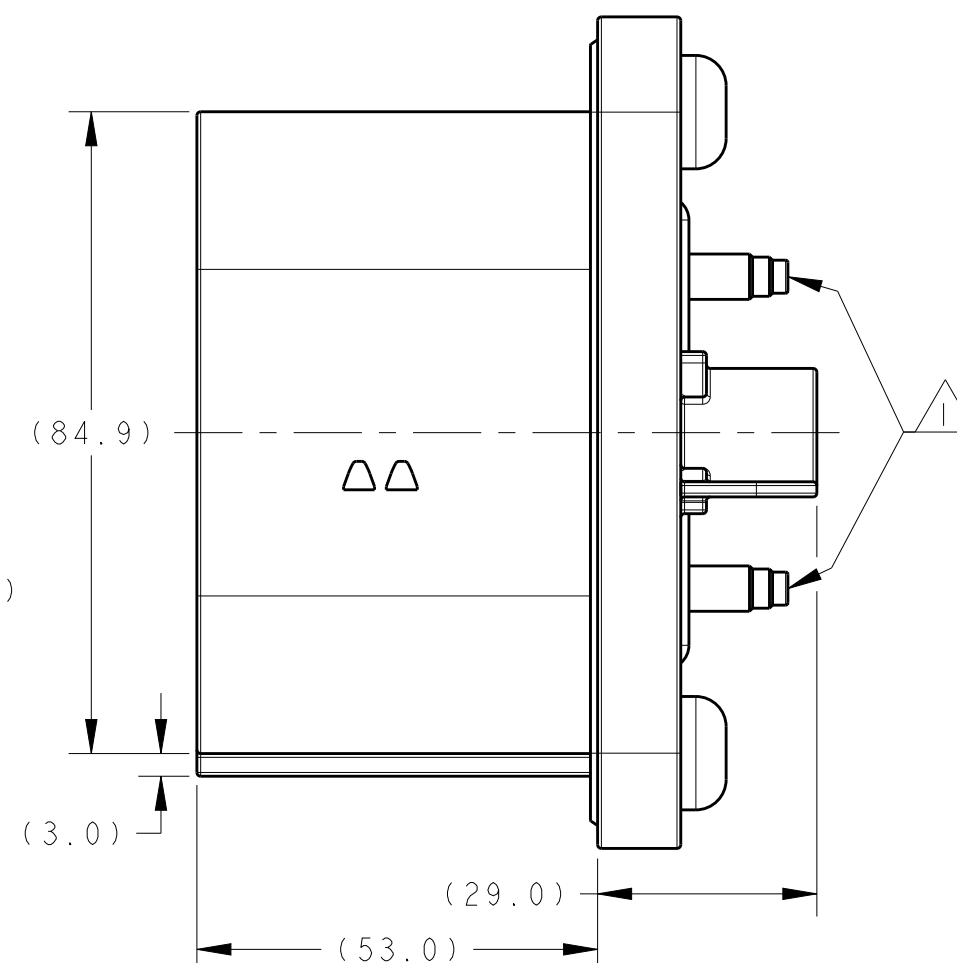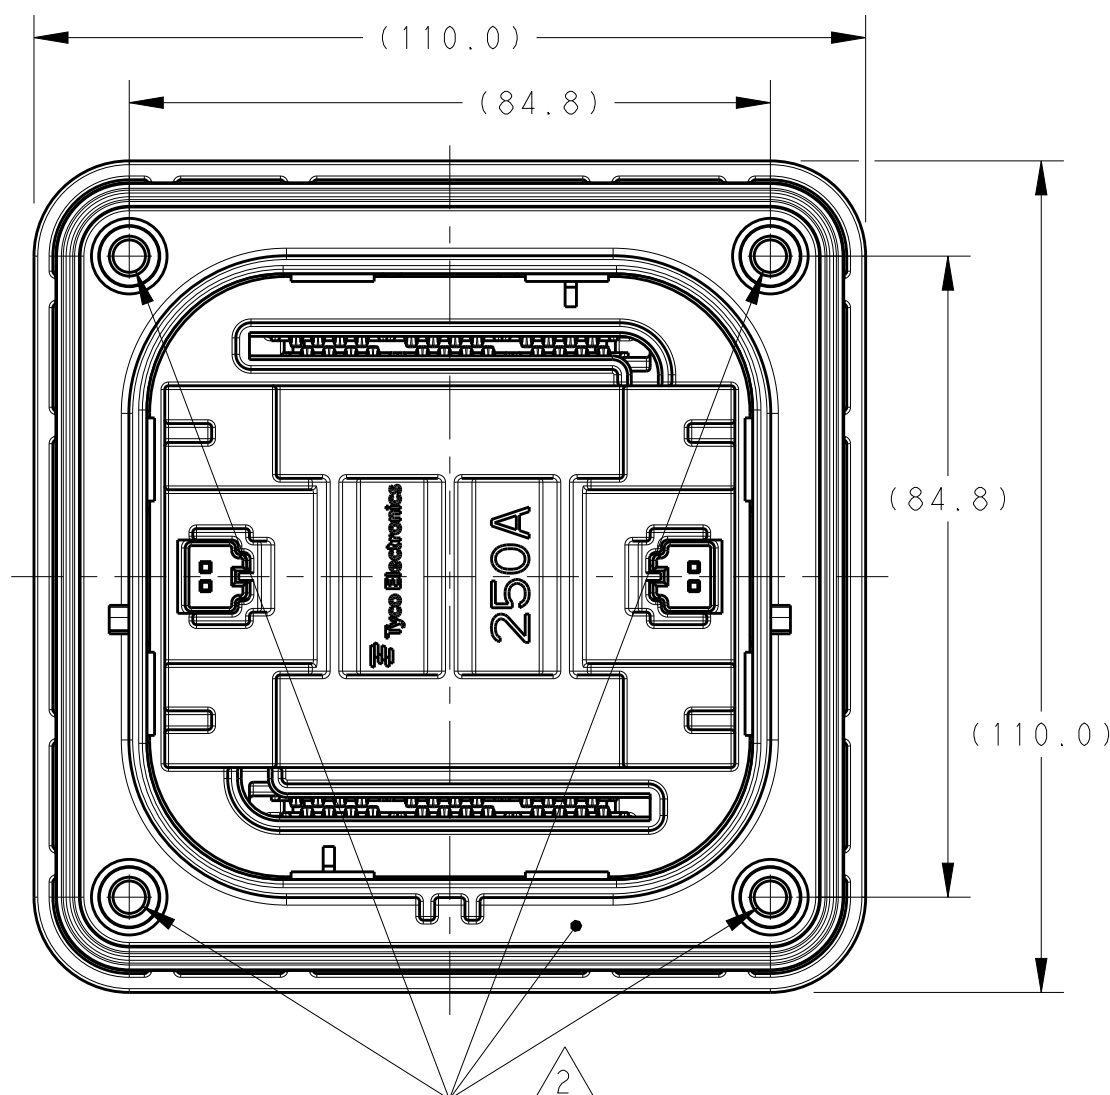


E1	M6 THREADED INSERT	1-1587987-7
	M6 THREADED INSERT (350A WITH DIVIDER NOTCH)	1-1587987-5
	M6 THREADED INSERT	1-1587987-4
E1	M6 THREADED INSERT (250A WITH DIVIDER NOTCH)	1-1587987-3
	M6 THREADED INSERT	1-1587987-1
	M6 THREADED INSERT	1587987-9
	M6 THREADED INSERT	1587987-8
	DESCRIPTION	PART NUMBER


THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2009		DWN G. COTTER 10MAR2010		 TE Connectivity			
		CHK A. BOYER 10MAR2010					
DIMENSIONS: mm		APVD J. BOLEWITZ 10MAR2010		NAME			
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		RECEPTACLE ASSEMBLY MANUAL SERVICE DISCONNECT -			
		0 PLC ±. 1 PLC ±. 2 PLC ±. 3 PLC ±. 4 PLC ±. ANGLES ±.					
MATERIAL		WEIGHT		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
- - -		320.34g		A2	00779	C-1587987	-
CUSTOMER DRAWING				SCALE	SHEET	REV	
				1:1	1 of 3	F 1	

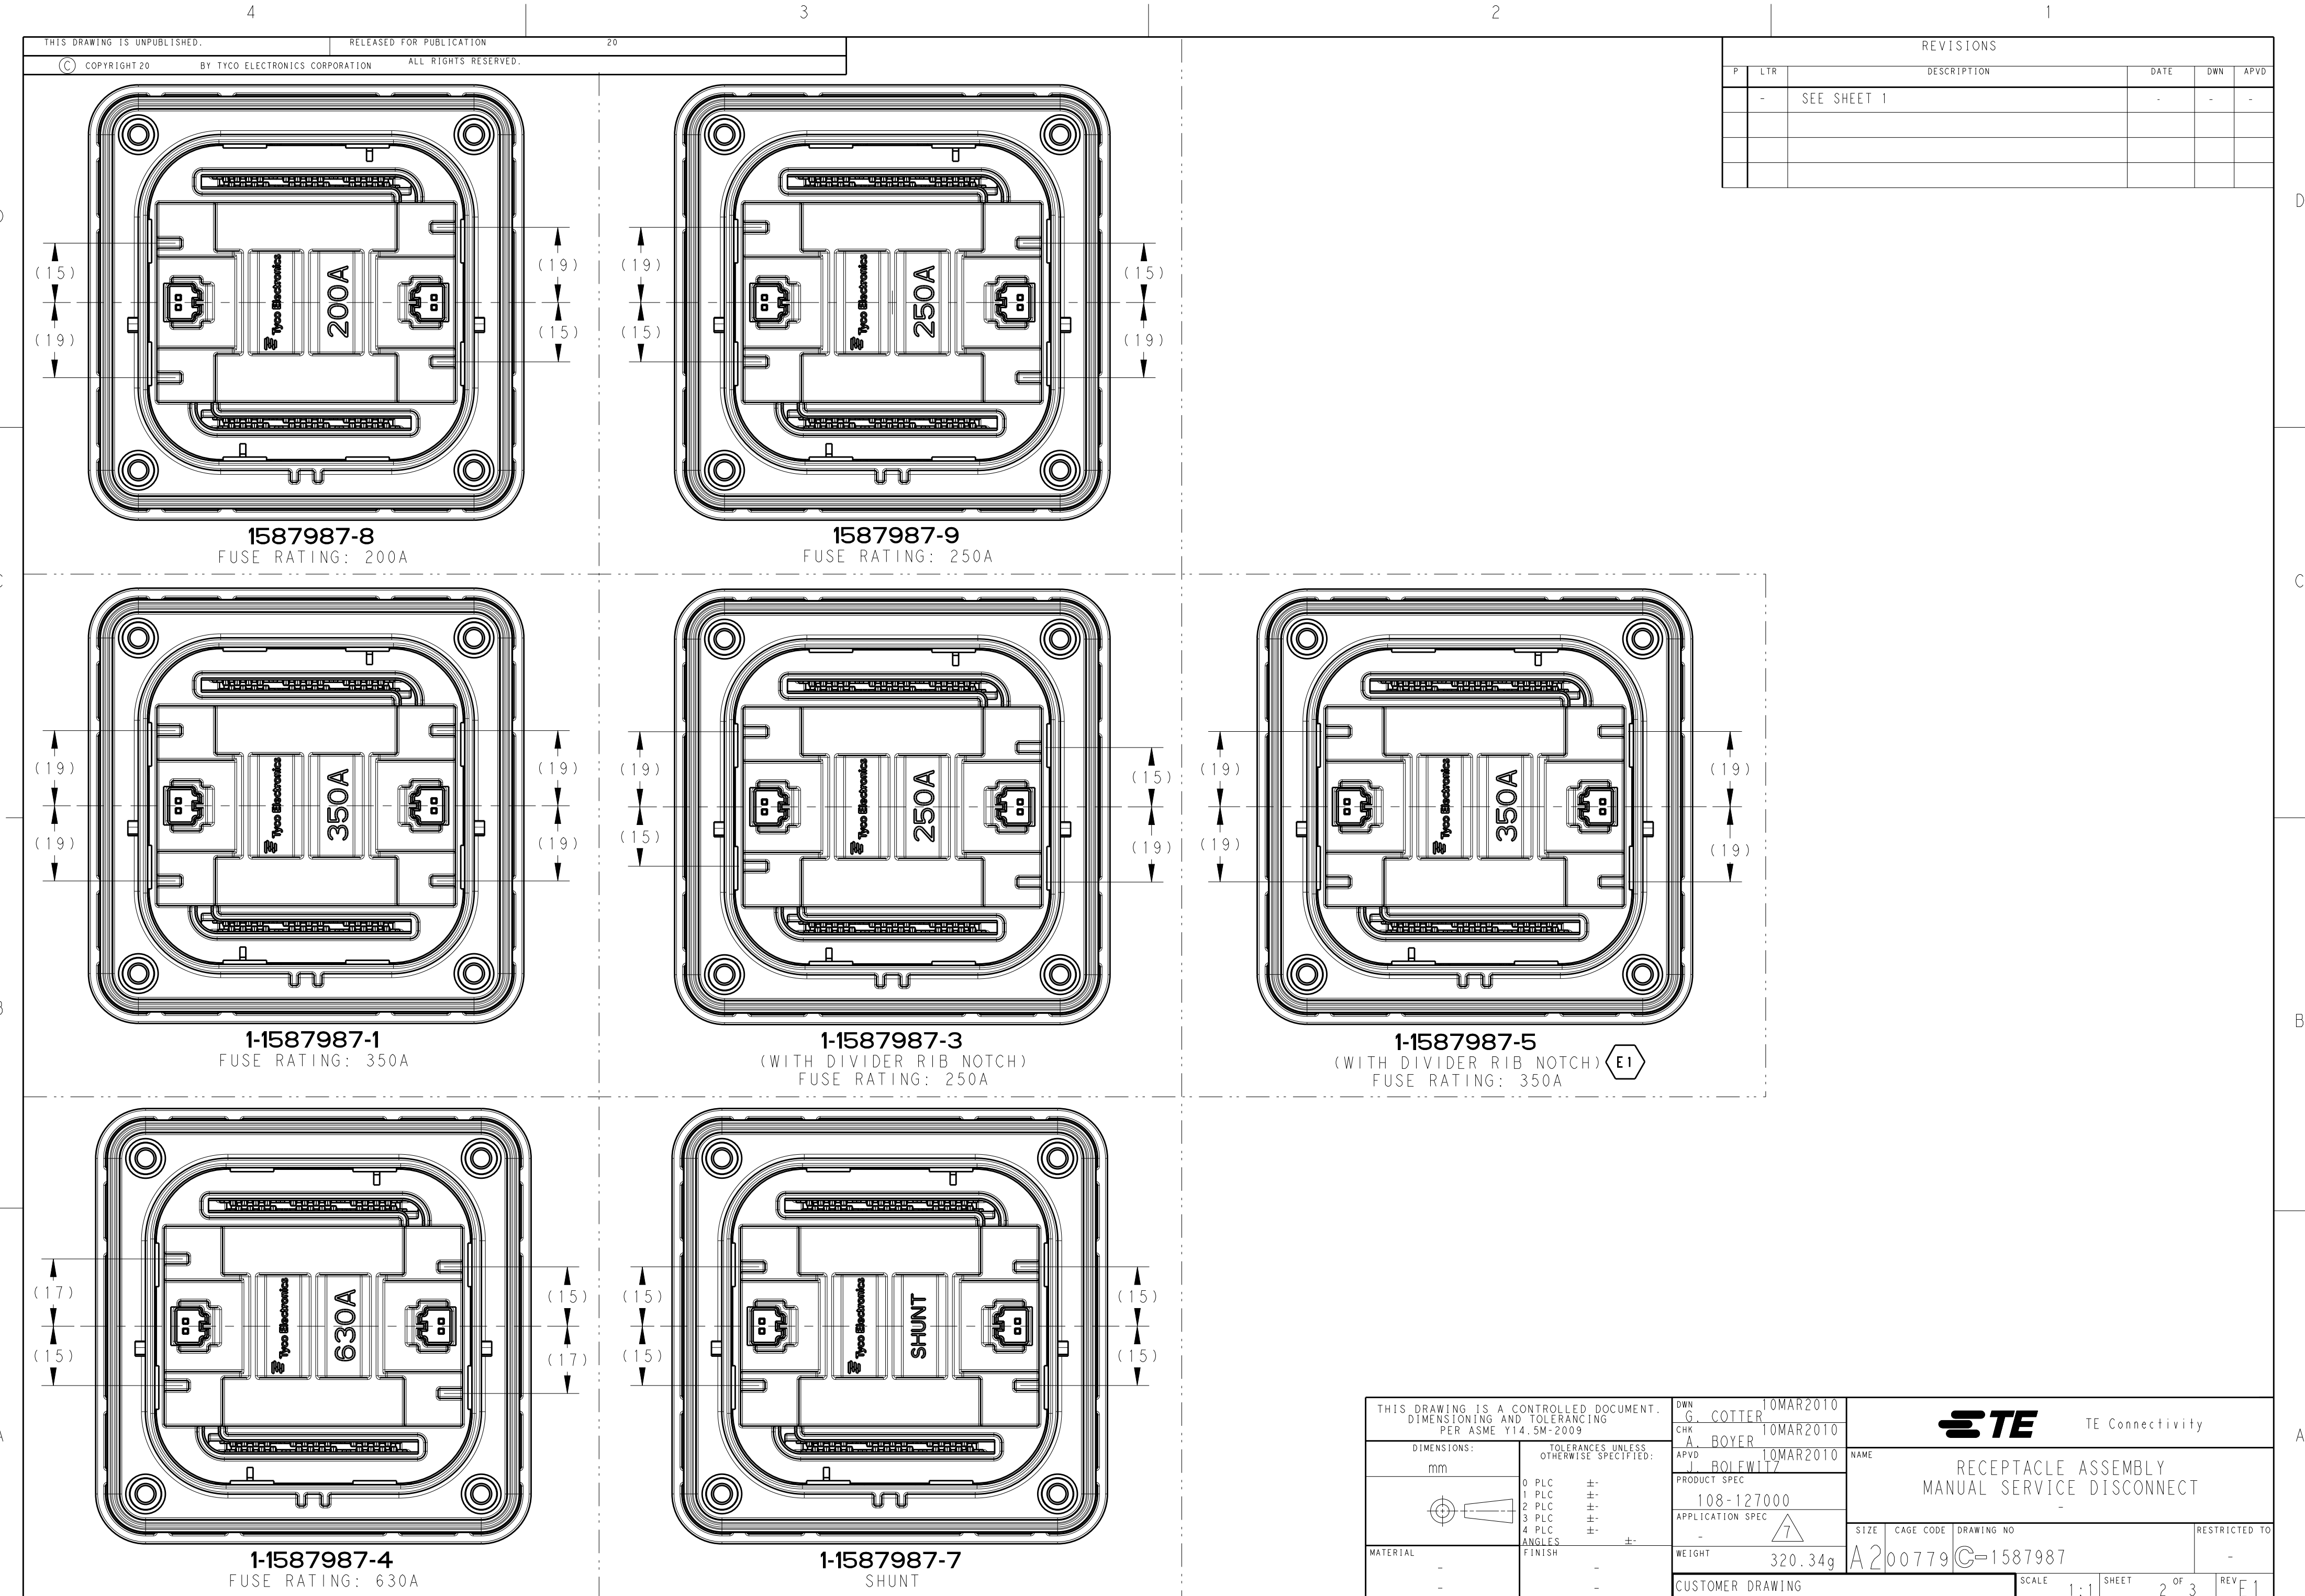

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2009		DWN G. COTTER 10MAR2010	 TE Connectivity							
		CHK A. BOYER 10MAR2010								
DIMENSIONS: mm		APVD J. BOLEWITZ 10MAR2010	NAME RECEPTACLE ASSEMBLY MANUAL SERVICE DISCONNECT							
		PRODUCT SPEC 108-127000								
		APPLICATION SPEC -	SIZE A2		CAGE CODE 00779		DRAWING NO C-1587987		RESTRICTED TO -	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		WEIGHT 320.34g								
MATERIAL - - -		FINISH - - -	CUSTOMER DRAWING			SCALE 1:1		SHEET 2 OF 3		REV E1

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

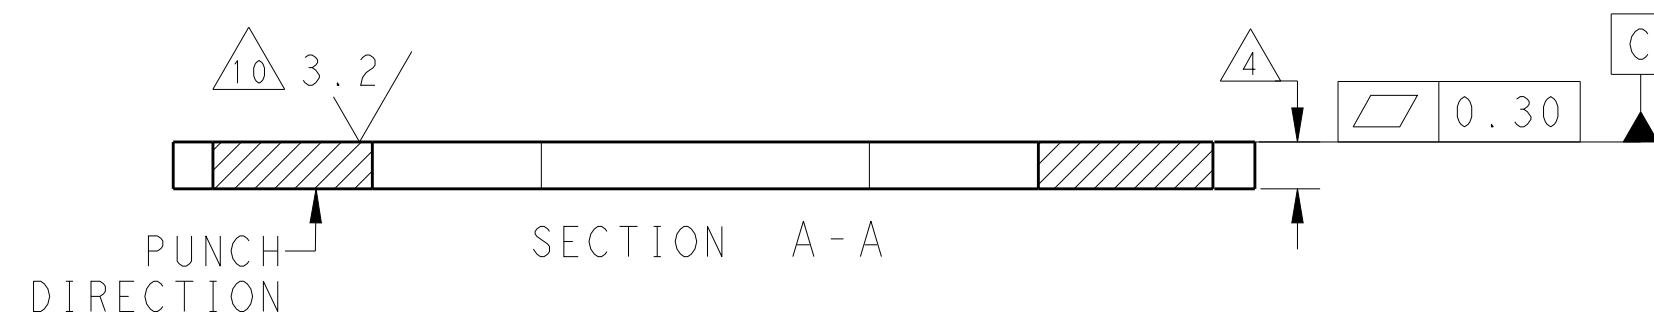

THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2009		DWN G. COTTER CHK A. BOYER APVD J. BOLEWITZ		TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		RECEPTACLE ASSEMBLY MANUAL SERVICE DISCONNECT	
		0 PLC ±. 1 PLC ±. 2 PLC ±. 3 PLC ±. 4 PLC ±. ANGLES ±. FINISH		NAME	
MATERIAL		PRODUCT SPEC 108-127000		RESTRICTED TO	
-		APPLICATION SPEC -		SIZE CAGE CODE DRAWING NO	
-		WEIGHT 320.34g		A2 00779 C-1587987	
-		CUSTOMER DRAWING		SCALE 1:1 SHEET 3 of 3 REV F1	

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9