

ARK-1120L

Intel® Atom™ N455 4 USB 2.0, Audio and Competitive Pricing Fanless Box PC



susIAccess



CE FCC




Features

- Intel® Atom™ processor N455 1.66 GHz + ICH8M
- Low power consumption, < 10W
- Palm-size design: 133.8(W) x 43.1(H) x 94.2(D) mm
- DDR3 memory support, up to 2GB
- Supports 2.5" SATA HDD Bay
- One half-size mini-PCIe slot. Ex: Wi-Fi add-on card
- 2 x RS-232, 4 x USB ports and Audio line-in, line out
- Optional VESA/DIN-rail/Wall mount
- Lockable DC jack design
- Supports SUSIAccess and Embedded Software APIs

Specifications


ARK-1120L-N5A1E		
Processor System	CPU	Intel Atom processor N455
	Frequency	1.66 GHz
	L2 Cache	512KB
	System Chipset	Intel ICH8-M
	BIOS	AMI 16 Mbit Flash BIOS
Memory	Technology	DDR3 up to 667 MHz
	Max. Capacity	2 GB
	Socket	1 x 204 pin SO-DIMM
Graphics	Chipset	Intel ICH8-M
	Interface	CRT interface, up to 1600 x 1200 (SXGA)
Ethernet	LAN	1 x 10/100/1000 Mbps Intel 82567V GbE, Support Wake on LAN
Audio	Interface	Realtek ALC892, Line-out, Line-in
I/O Interface	Serial Ports	2 x RS-232
	USB Interface	4 x USB ports, USB 2.0 Compliant
Other	Watchdog timer	255-level timer interval, setup by software
Expansion	Mini PCIe	1 x half-size Mini PCIe
Storage	HDD	Support one SATA 2.5" HDD Bay (support 9.5mm height only)
	SSD	Supports CompactFlash socket for type I/II CompactFlash disk (only available for T-Parts and CTOS service)
Software Support	Microsoft Windows	Windows 7, XP Professional, XP Embedded, WinCE 6.0
	Linux	Ubuntu v10.04.1
Power Requirement	Power Type	ATX
	Power Input Voltage	12 V _{DC}
	Minimum Power Input	12 V, 1.5 A
	Power Adaptor	AC to DC, DC12 V/3 A, 36 W (Support DC Locker Design)
Power Consumption	Typical	9.12 W
	Max	10.80 W
Mechanical	Construction	Aluminum housing
	Mounting	Support DIN Rail / VESA / Wall mounts (Optional)
	Dimensions (W x H x D)	133.8 x 43.1 x 94.2 mm (5.27" x 1.70" x 3.71")
	Weight	0.7 kg (1.55 lb)
Environmental and Certifications	Operating Temperature	0 ~ 40° C (32 ~ 104° F) with 0.7m/s air flow and extend temperature HDD
	Storage Temperature	-40 ~ 85° C (-40 ~ 185° F)
	Relative Humidity	95% @ 40° C (non-condensing)
	Vibration During Operation	With CompactFlash disk: 3Grms, IEC 60068-2-64, random, 5 ~ 500 Hz, 1hr/axis.
	Shock During Operation	With CompactFlash disk: 30Grms, IEC 60068-2-27, half sine, 11 ms duration
	EMC	CE/FCC Class A, CCC, BSMI
	Safety Certifications	UL, CCC, BSMI, CB

Dimensions

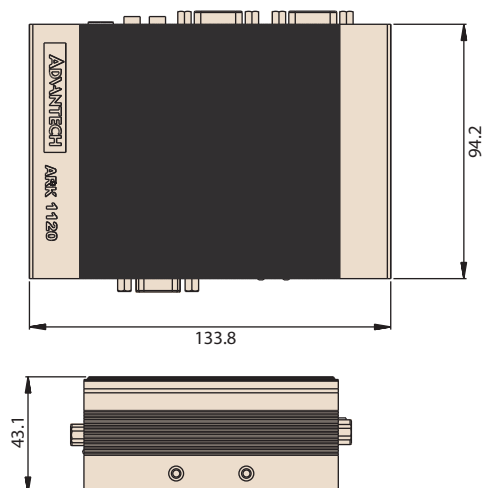


DIN Rail


Unit: mm




VESA mount




Wall mount



Front Panel External I/O Mechanical Layout/Drawing

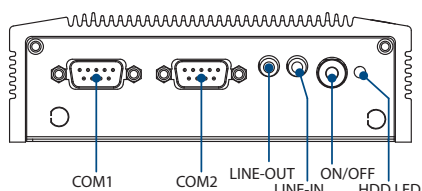

Rear Panel External I/O Mechanical Layout/Drawing

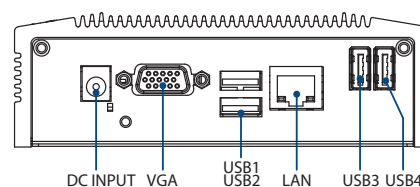

Ordering Information

Part Number	Intel CPU	RAM	VGA	GbE	Audio	2.5" HDD bay	CF	USB 2.0	RS-232	RS-232/422/485	MiniPCIe	Operating Temp.	OS
ARK-1120L-N5A1E	Atom N455 1.66GHz	Up to 2GB	1	1	Line in Line out	1	1	4	2	N/A	1 Half size	0 ~ 40° C	-
ARK-1120LX-N5A1E	Atom N455 1.66GHz	2GB Built-In	1	1	Line in Line out	320GB Built-in	1	4	2	N/A	1 Half size	0 ~ 40° C	Win XPE Built-in

Note: Memory, storage and operating system bundled by request.

Packing List

Part Number	Description
-	1 x ARK-1120 unit
-	1 x Driver/Utility CD/manual
-	1 x Traditional Chinese user manual for CCC
-	1 x China RoHS
1960047289T001	DC power adapter locker
1757003553	AC-to-DC Adapter DC12 V/3 A 36 W, with DC-Jack, 0 ~ 40° C for Home and Office Use

Optional Items

Part Number	Description
1700001524	Power Cable 3-pin 180 cm, USA type
170203183C	Power Cable 3-pin 180 cm, Europe Type
170203180A	Power Cable 3-pin 180 cm, UK Type
1700008921	Power Cable 3-pin PSE Mark 183cm
AMK-V003E	ARK-112X series VESA mount kits
AMK-R001E	ARK-112X series DIN Rail mount kits
AMK-W001E	ARK-112X series wall mount kits

Embedded OS

Part Number	Description
2070012123	XPE WES2009 V4.4 24MUI
2070012267	WES7E 32bit w/ EN/JP/TC/SC

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9