




SF1088A

170.6 MHz SAW Filter

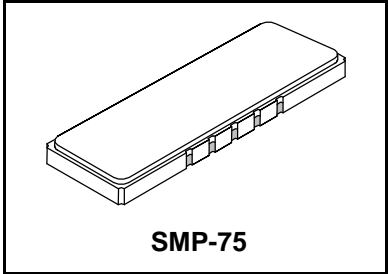

- **Designed for GSM BTS Receiver IF Applications**
- **Low Insertion Loss**
- **Excellent Size-to-Performance Ratio**
- **Hermetic SMP-75 Surface-Mount Case**
- **Unbalanced Input and Output**
- **Complies with Directive 2002/95/EC (RoHS)**



Absolute Maximum Ratings

Rating	Value	Units
Maximum Incident Power in Passband	+10	dBm
Max. DC voltage between any 2 terminals	30	VDC
Storage Temperature Range	-40 to +85	°C
Suitable for lead-free soldering - Max. Soldering Profile	260°C for 30 s	

Electrical Characteristics

Characteristic	Sym	Notes	Min	Typ	Max	Units
Nominal Center Frequency	f_c	1	170.600			MHz
Passband	Insertion Loss at f_c	1, 2	± 90		8.0	dB
					1 dB Passband	
	Amplitude Ripple over $f_c \pm 90$ kHz				1.0	dB _{p-p}
	Group Delay Variation over $f_c \pm 190$ kHz			<500	1000	ns _{p-p}
Rejection	fc-0.6 to fc-0.4 and fc+0.4 to fc+0.6 MHz	1, 2, 3	13	15		dB
			fc-0.8 to fc-0.6 and fc+0.6 to fc+0.8 MHz	27	35	
			fc-1.6 to fc-0.8 and fc+0.8 to fc+1.6 MHz	40	45	
			fc-3.0 to fc-1.6 and fc+1.6 to fc+3.0 MHz	43	55	
			fc-5.8 to fc-3.0 and fc+3.0 to fc+5.8 MHz	47	55	
			fc-35 to fc-5.8 and fc+5.8 to fc+35 MHz	50	55	
			fc-75 to fc-35 and fc+35 to 75 MHz	45	55	
DC to fc-75 and fc+75 to fc+1000 MHz	40					
Operating Temperature Range	T_A	1	-10		+85	°C

Impedance Matching to 50 Ω unbalanced	External L-C
Case Style	SMP-75 19 x 6.5 mm Nominal Footprint
Lid Symbolization (YY = year, WW = week)	RFM SF1088A YYWW



Notes:

1. Unless noted otherwise, all specifications apply over the operating temperature range with filter soldered to the specified demonstration board with impedance matching to 50 Ω and measured with 50 Ω network analyzer.
2. Unless noted otherwise, all frequency specifications are referenced to the nominal center frequency, f_c .
3. Rejection is measured as attenuation below the minimum IL point in the passband. Rejection in final user application is dependent on PCB layout and external impedance matching design. See Application Note No. 42 for details.
4. "LRIP" or "L" after the part number indicates "low rate initial production" and "ENG" or "E" indicates "engineering prototypes."
5. The design, manufacturing process, and specifications of this filter are subject to change.
6. Either Port 1 or Port 2 may be used for either input or output in the design. However, impedances and impedance matching may vary between Port 1 and Port 2, so that the filter must always be installed in one direction per the circuit design.
7. US and international patents may apply.
8. Electrostatic Sensitive Device. Observe precautions for handling.




Electrical Connections

Connection	Terminals
Port 1 Hot	10
Port 1 Gnd Return	1
Port 2 Hot	5
Port 2 Gnd Return	6
Case Ground	All others

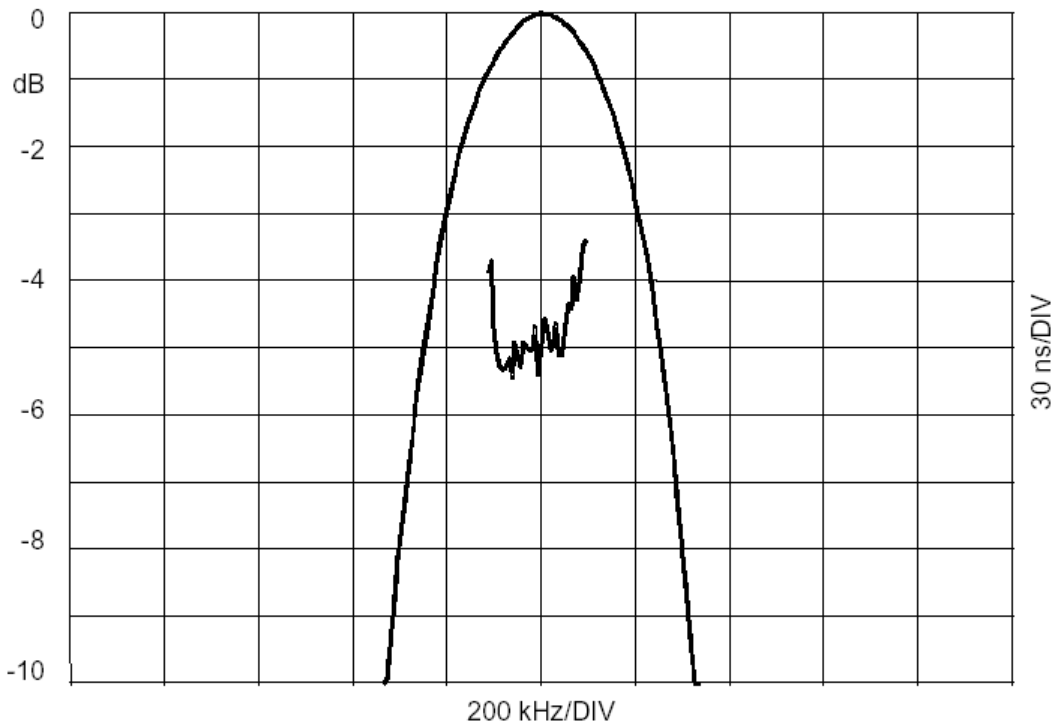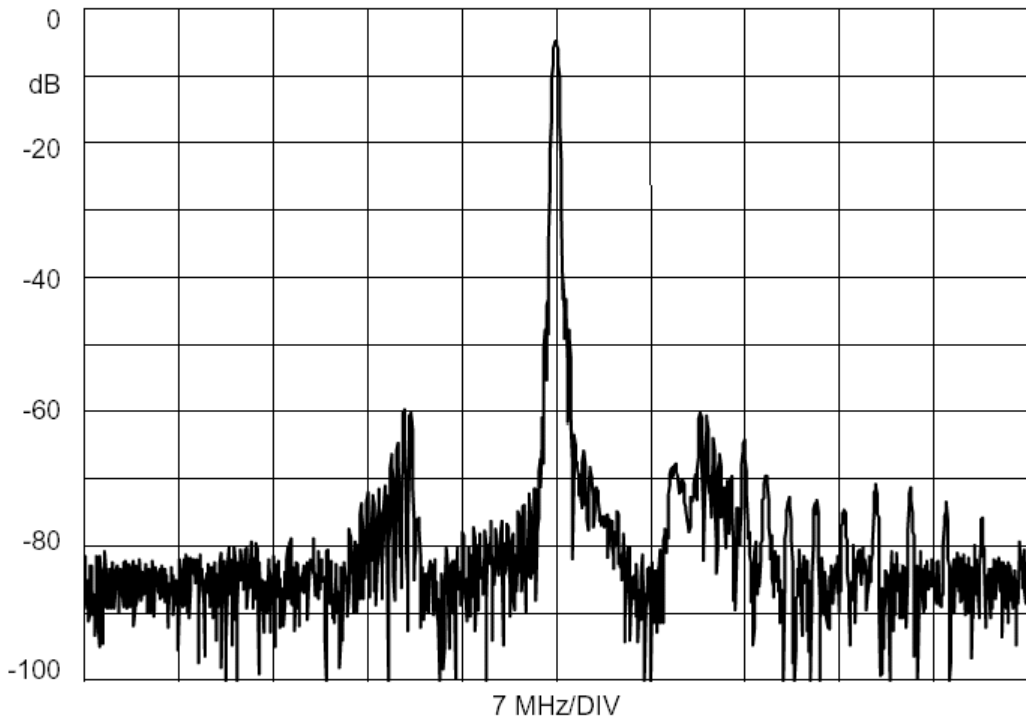

SMP-75 Case


10-Terminal Ceramic Surface-Mount Case
19 x 6.5 mm Nominal Footprint



Case Dimensions						
Dimension	mm			Inches		
	Min	Nom	Max	Min	Nom	Max
A	18.80	19.00	19.30	0.740	0.748	0.760
B	6.30	6.50	6.80	0.248	0.256	0.268
C		1.75	2.00		0.069	0.079
D		2.29			0.090	
E		1.02			0.040	
H		1.0			0.039	
P		1.905			0.075	

Materials	
Solder Pad Termination	Au plating 30 - 60 μinches (76.2-152 μm) over 80-200 μinches (203-508 μm) Ni.
Lid	Fe-Ni-Co Alloy Electroless Nickel Plate (8-11% Phosphorus) 100-200 μinches Thick
Body	Al ₂ O ₃ Ceramic
Pb Free	


Electrical Connections		
Connection		Terminals
Port 1	Input or Return	10
	Return or Input	1
Port 2	Output or Return	5
	Return or Output	6
Ground		All others
Single Ended Operation		Return is ground
Differential Operation		Return is hot

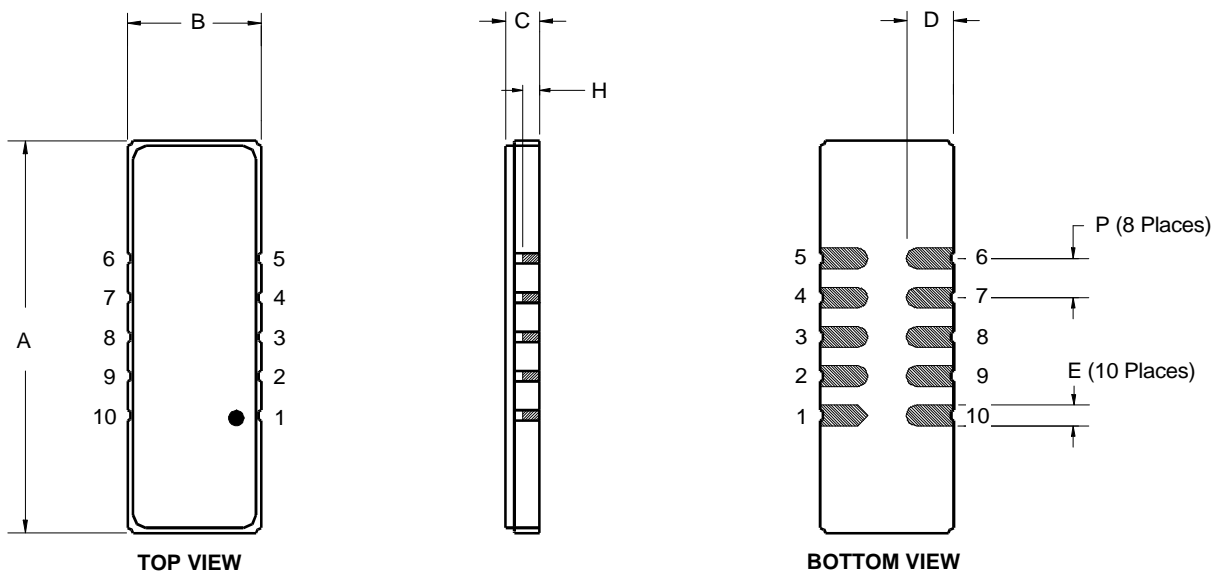

NOTES:

- 1. NOTE PROPER ORIENTATION OF INDUCTORS L1 & L2. THEY ARE TO BE POSITIONED 90° TO EACH OTHER.
- 2. SOLDER SURFACE MOUNT PACKAGE TO TEST SIDE OF PCB. SOLDER 10 PLACES AS SHOWN.
- 3. PACKAGE PIN 10 INDICATOR

REV	ECN NO.	DESCRIPTION	DATE
A	6724	INITIAL RELEASE	5/28/98
B	7000	ROTATE VIEW 180	3SEP98

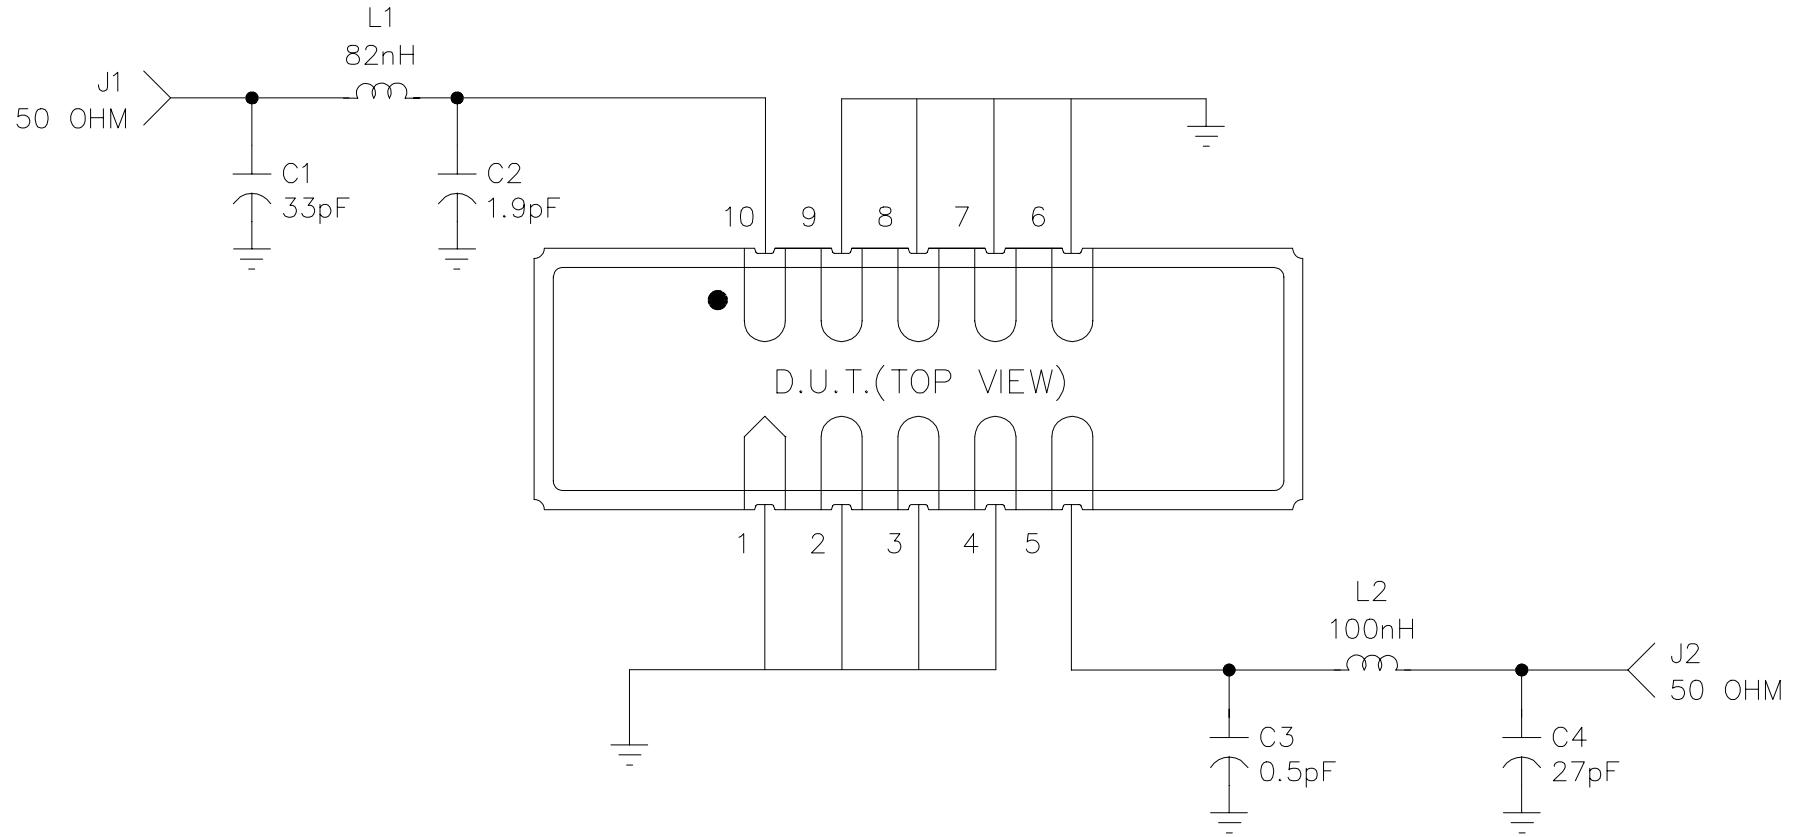

DRAWN BY/DATE: J. LAYTON 05/28/98

TITLE: ASSEMBLY DIAGRAM, SF1088A(DEMO)

RF Monolithics, Inc.
DALLAS, TEXAS 75244

CHECKED/APPROVED




SIZE
A

CODE IDENT
2U874






DWG. NO. SF1088A-000

REV SHEET
B 1/3

TEST SIDE

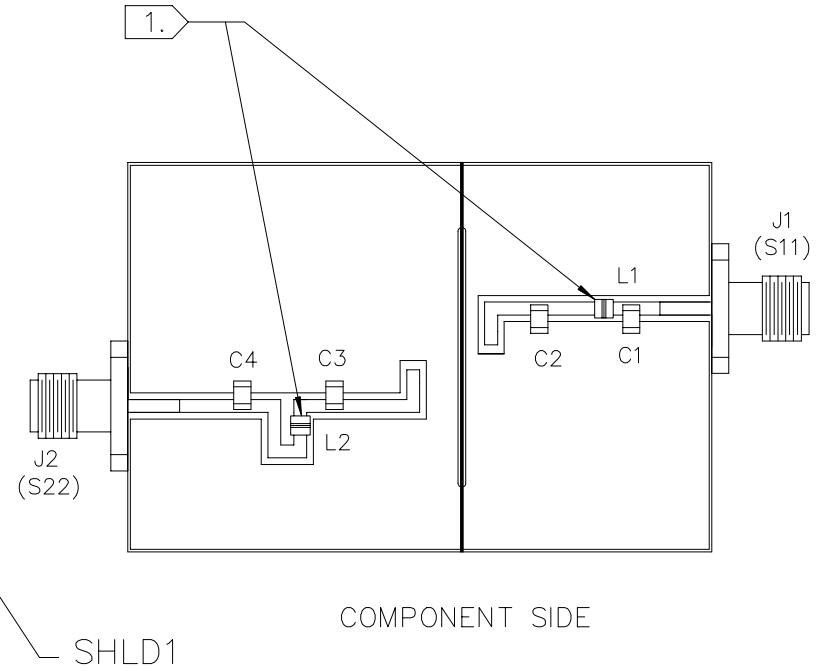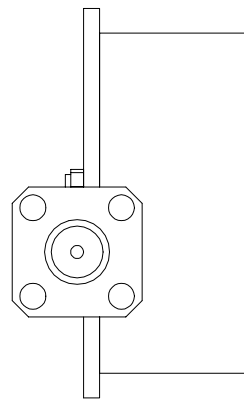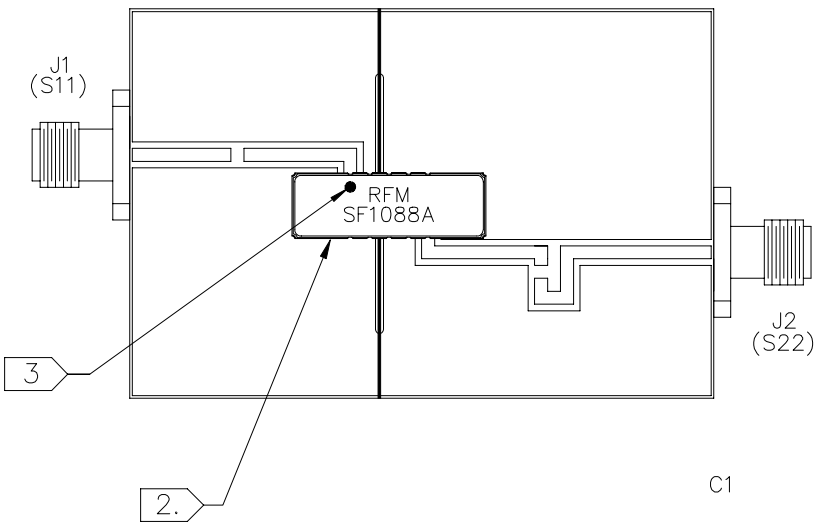

SF1088A
(DEMO)
4-28-98

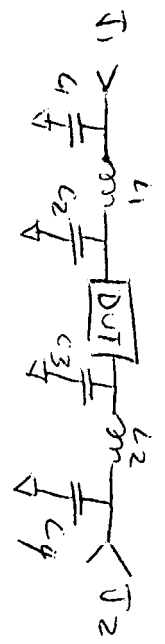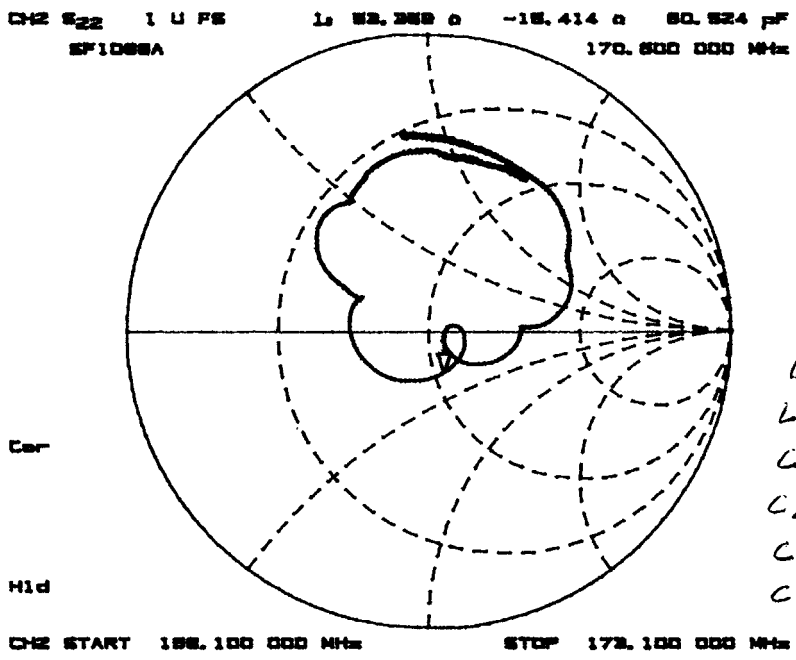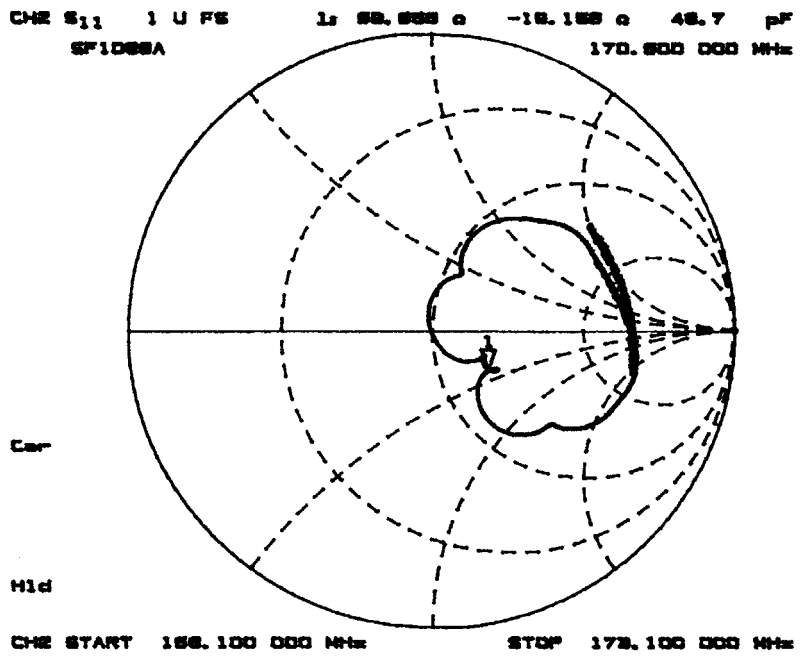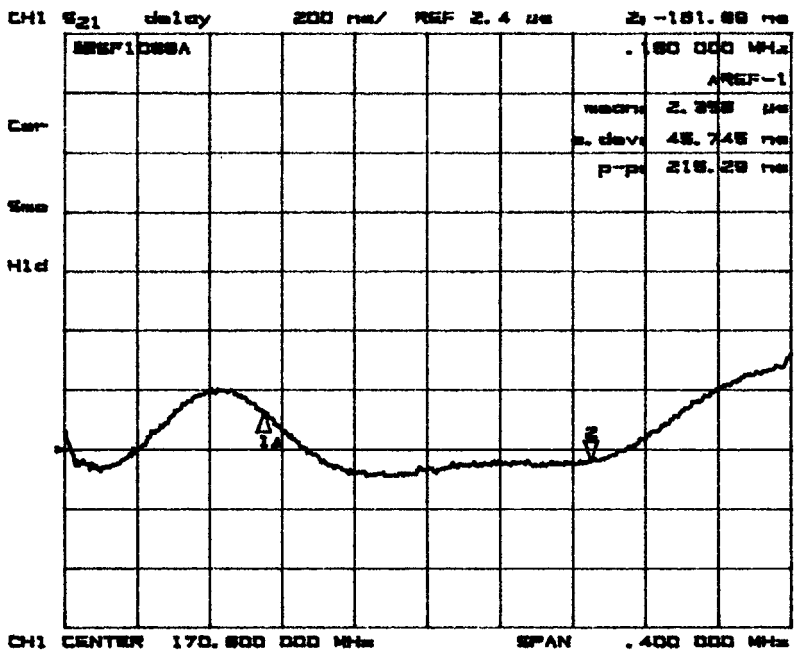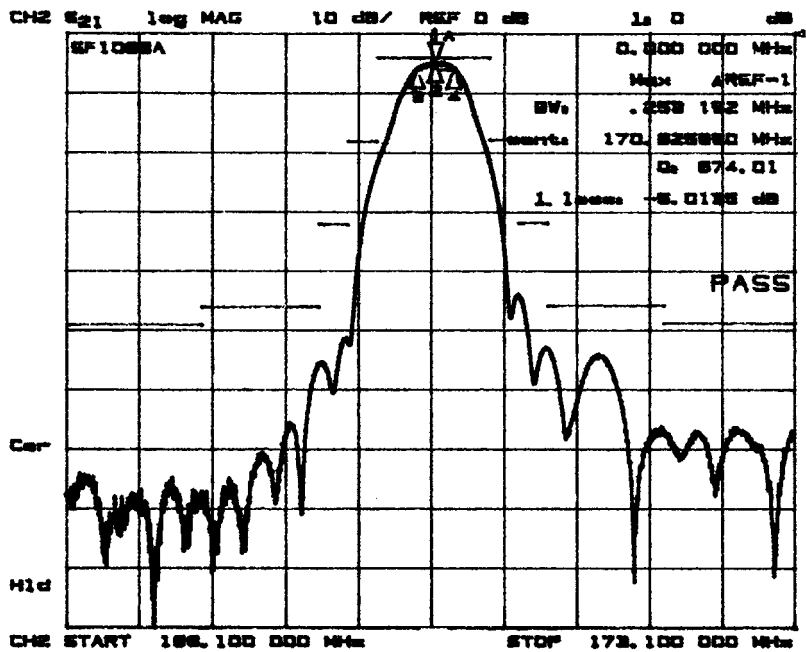

- L1 = 82 nH
- L2 = 100 nH
- C1 = 33 pF
- C2 = 1.9 pF
- C3 = 0.5 pF
- C4 = 27 pF

REV: WBSLT 3/3

BILL OF MATERIALS

<u>PART IDENTIFIER</u>	<u>DESCRIPTION 1</u>	<u>DESCRIPTION 2</u>	<u>QTY/ASSY</u>	<u>REFERENCE DESCRIPTION</u>
SF1088A-DEMO	DEMO BOARD,SF1088A			
400-1387-001	PCB,DEMO BOARD,19MM		1.0000	
400-0533-001	SHIELD,TO-39 TEST FIXTURE		1.0000	
SF1088A-000	ASSY DIAGRAM,DEMO BOARD,	SF1088A	0	
SF1088A-LRIP	FILTER,SM,170.600MHZ		1.0000	
500-0003-330	CAP,CHIP,NPO,33(J),STD		1.0000	C 1
500-0003-019	CAP,CHIP,NPO,1.9(C),STD		1.0000	C 2
500-0003-005	CAP,CHIP,NPO,0.5(C),STD		1.0000	C 3
500-0003-270	CAP,CHIP,NPO,27(J),STD		1.0000	C 4
500-0248-001	CONN,COAX,FLANGE MT.JACK	4 HOLE	2.0000	J 1,2
500-0781-820	IND,CHIP,0805CS,82NH,2%		1.0000	L 1
500-0781-101	IND,CHIP,0805CS,100NH,2%		1.0000	L 2



SIZE

A

FSCM NO.

2U874

DWG NO.

SF1088A-DEMO

SCALE

NONE

W/O or ECN

6724

REV

A

SHEET

1

OF

2

REV HISTORY

REV	ECN	DATE	DESCRIPTION
A	6724	06/01/98	INITIAL RELEASE



		SIZE A	FSCM NO. 2U874	DWG NO. SF1088A-DEMO	
	SCALE NONE	W/O or ECN 6724	REV A	SHEET 2	OF 2

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9