
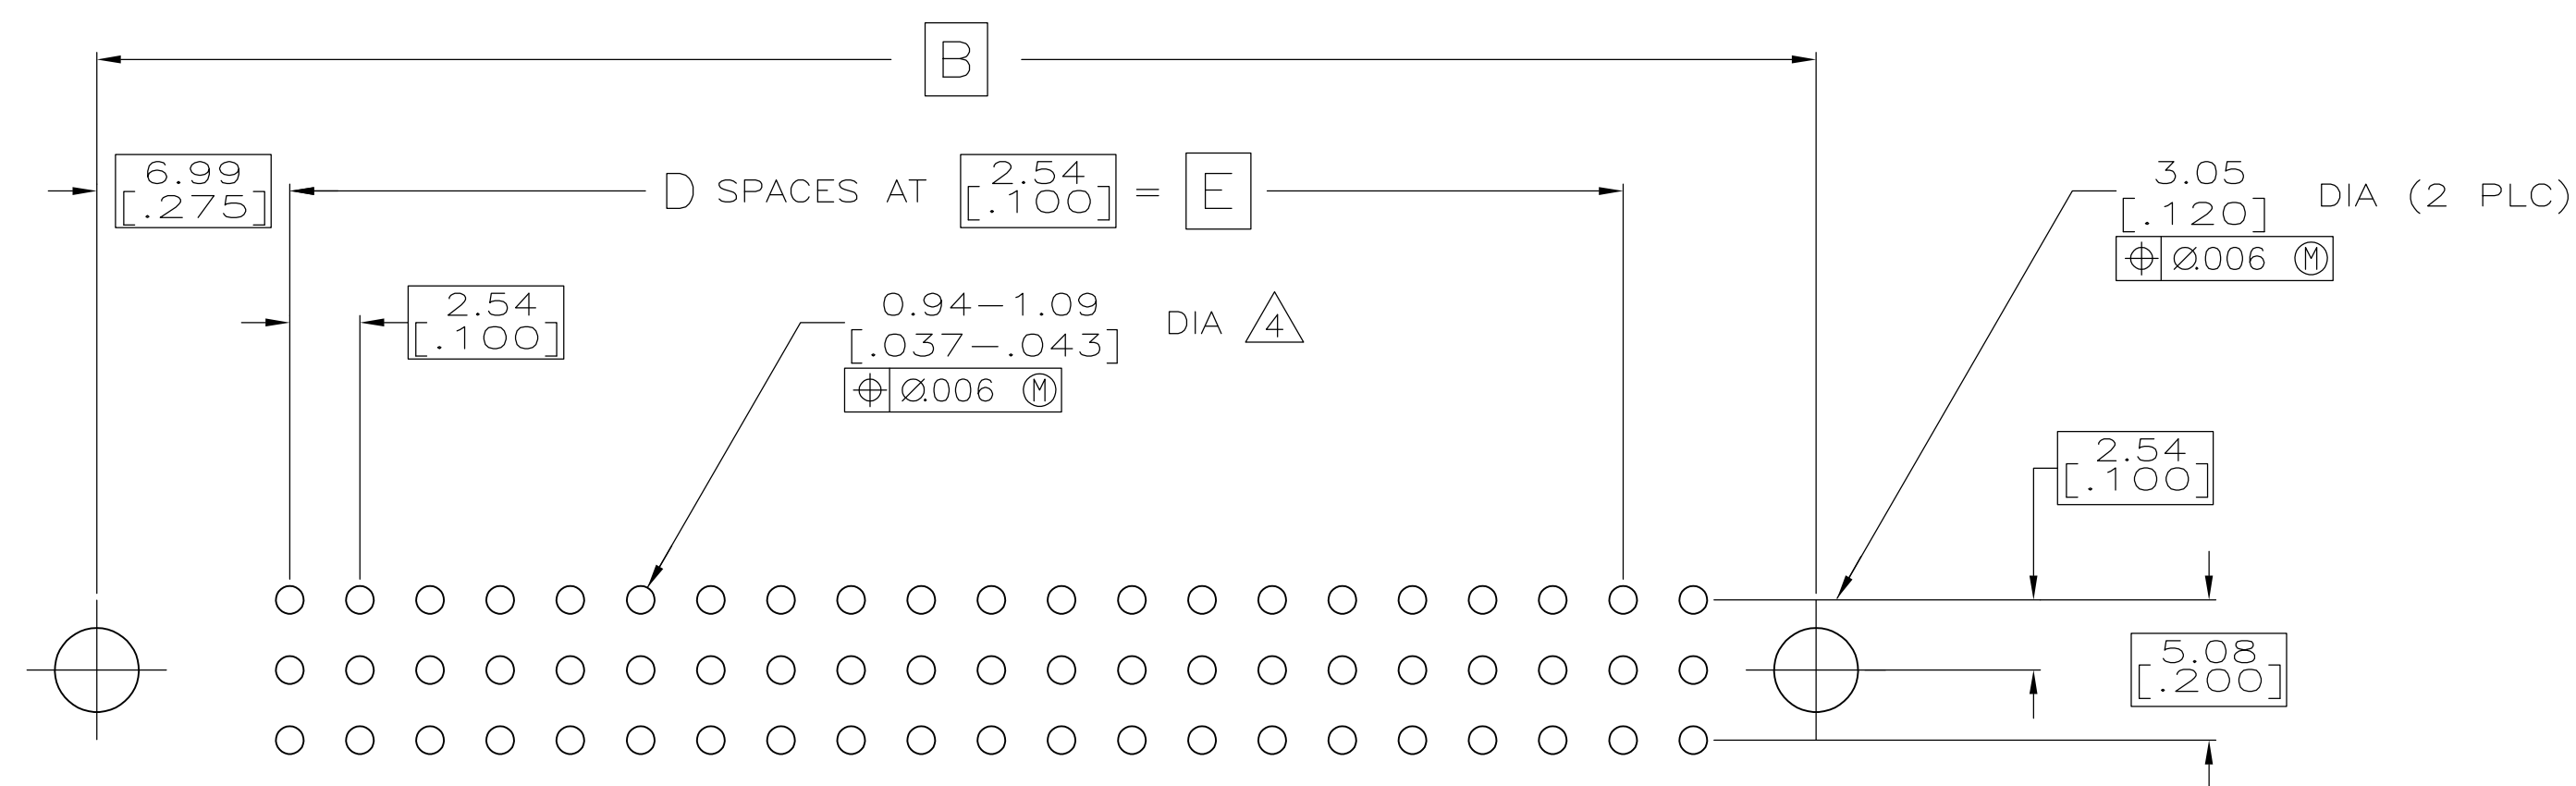




Technical drawing of a three-hole punch assembly. The drawing shows a cross-section of the punch mechanism. The main body is a rectangular block with three vertical holes. The punch rods are shown passing through these holes. The dimensions are as follows:

- Overall width: 12.19 [480]
- Distance between punch rods: 0.64 [.025] SQ
- Overall height: 11.73 [.462]
- Height of the main body: 5.33 [.210]
- Height of the punch rods: 4.83±0.51 [.190±.020]
- Distance from the main body to the punch rods: 5.00 [.197]
- Distance from the punch rods to the bottom: 2.54 [.100]
- Distance from the punch rods to the right: 5.08 [.200]

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: R.K. SEIFRED 04/09/90 CHK: G.SKIPPER 01/21/92		 TE Connectivity	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.13 [.005] 4 PLC ± - ANGLES ± -			
		APVD: — PRODUCT SPEC: — APPLICATION SPEC: —		NAME: HDI, 3 ROW, PIN ASSEMBLY 4.83 [.190] LONG SOLDER PINS	
MATERIAL: 		FINISH: 		SIZE: A1 CASE CODE: 00779 DRAWING NO: C=532433	
		WEIGHT: 0		RESTRICTED TO: —	
		CUSTOMER DRAWING		SCALE: 4:1 SHEET: 1 of 2 REV: AA	

8

7

6

5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - By -

ALL RIGHTS RESERVED.

1

HOUSING MATERIAL: THERMOPLASTIC, COLOR-BLACK.

2

CONTACT MATERIAL: PHOSPHOR BRONZE.

3

FINISH:
MATING AREA: MEETS THE PERFORMANCE REQUIREMENTS OF PRODUCT SPECIFICATION 108-9063; BASED ON TELCORDIA DR-1217-CORE APPLICATIONS IN UNCONTROLLED ENVIRONMENTS.
SOLDER TAILS AREA: TIN-LEAD PLATED.

4

SOLDER PIN POST RECOMMENDED P.C. BOARD HOLE SIZES ARE 0.94-1.09 [.037-.043]; RECOMMENDED PAD DIA IS 1.52 [.060].

5

DIMENSIONS IN BRACKETS ARE IN INCHES.

6

HOUSINGS WITH CENTER MOUNTING IS RECOMMENDED FOR ASSEMBLIES HAVING 75 CONTACTS PER ROW OR MORE.

7

PART NUMBER IS OBSOLETE.

8

NO CONTACT LUBRICANT

9

AMP, PART NUMBER, AND DATE CODE

10

OEFD0-983-9909-106, REV __, 00779 AND DATE CODE, ONLY FOR PART NUMBER 2-532433-3

11

PART NUMBER IS FOR ROCKWELL COLLINS.

12

FINISH:
CONTACT FINISH: .00127-.00254 [.000050-.000100] NICKEL UNDERPLATE ALL OVER; .000762 [.000030] GOLD PLATE IN CONTACT AREA, TIN-LEAD PLATED POSTS.

12

11

10

8

137.16 [5.400]	54	140.97 [5.550]	151.13 [5.950]	158.75 [6.250]	165	3-532433-8
60.96 [2.400]	24	64.77 [2.550]	74.93 [2.950]	82.55 [3.250]	75	3-532433-1
60.96 [2.400]	24	64.77 [2.550]	74.93 [2.950]	82.55 [3.250]	75	2-532433-3
_____	_____	_____	_____	_____	_____	2-532433-2
43.18 [1.700]	17	46.99 [1.850]	57.15 [2.250]	64.77 [2.550]	54	2-532433-1
_____	_____	_____	_____	_____	_____	2-532433-0
210.82 [8.300]	83	214.63 [8.450]	224.79 [8.850]	232.41 [9.150]	252	1-532433-9
_____	_____	_____	_____	_____	_____	1-532433-8
_____	_____	_____	_____	_____	_____	1-532433-7
_____	_____	_____	_____	_____	_____	1-532433-6
_____	_____	_____	_____	_____	_____	1-532433-5
213.36 [8.400]	84	217.17 [8.550]	227.33 [8.950]	234.95 [9.250]	255	1-532433-4
200.66 [7.900]	79	204.47 [8.050]	214.63 [8.450]	222.25 [8.750]	240	1-532433-3
187.96 [7.400]	74	191.77 [7.550]	201.93 [7.950]	209.55 [8.250]	225	1-532433-2
175.26 [6.900]	69	179.07 [7.050]	189.23 [7.450]	196.85 [7.750]	210	1-532433-1
162.56 [6.400]	64	166.37 [6.550]	176.53 [6.950]	184.15 [7.250]	195	1-532433-0
149.86 [5.900]	59	153.67 [6.050]	163.83 [6.450]	171.45 [6.750]	180	532433-9
137.16 [5.400]	54	140.97 [5.550]	151.13 [5.950]	158.75 [6.250]	165	532433-8
124.46 [4.900]	49	128.27 [5.050]	138.43 [5.450]	146.05 [5.750]	150	532433-7
111.76 [4.400]	44	115.57 [4.550]	125.73 [4.950]	133.35 [5.250]	135	532433-6
99.06 [3.900]	39	102.87 [4.050]	113.03 [4.450]	120.65 [4.750]	120	532433-5
86.36 [3.400]	34	90.17 [3.550]	100.33 [3.950]	107.95 [4.250]	105	532433-4
78.74 [3.100]	31	82.55 [3.250]	92.71 [3.650]	100.33 [3.950]	96	532433-3
73.66 [2.900]	29	77.47 [3.050]	87.63 [3.450]	95.25 [3.750]	90	532433-2
60.96 [2.400]	24	64.77 [2.550]	74.93 [2.950]	82.55 [3.250]	75	532433-1
E	D	C	B	A	POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.K. SEIFRIED CHK G.SKIPPER	04/09/90 01/21/92	TE Connectivity		
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		
		0 PLC ± -		PRODUCT SPEC		
		1 PLC ± -		APPLICATION SPEC		
		2 PLC ± -		SIZE		
		3 PLC ± ± 0.13 [.005]		CAGE CODE		
4 PLC ± -		DRAWING NO		RESTRICTED TO		
MATERIAL		FINISH		WEIGHT		
				0		
CUSTOMER DRAWING				SCALE 4:1	SHEET 2 OF 2	REV AA

4805 (1/15)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9