

## DS450-3/DS550-3

450 W - 550 W

Distributed Power System

**Distributed Power Bulk Front-End**  
Total Output Power: 450 - 550 Watts  
+12 Vdc Main Output  
+3.3 Vdc Stand-by Output  
Wide Range Input Voltage: 90 - 264 Vac



### Special Features

- Active Power Factor Correction
- EN61000-3-2 Harmonic Compliance
- Active AC Inrush Control
- 1U X 2U Form Factor
- 10.3 W / in<sup>3</sup> (DS550)  
8.4 W / in<sup>3</sup> (DS450)
- +12 Vdc Output
- +3.3 Vdc Stand-By
- No Minimum Load Required
- Hot Plug Operation
- N + 1 Redundant
- Internal OR'ing Fets
- Active Current Sharing
- Built-in Cooling Fans (40 mm x 28 mm)
- I<sup>2</sup>C Communication Interface Bus
- EERPOM for FRU Data
- Amber LED Status, Fan\_Fail
- Green LED Status, Power Good / AC\_OK Status
- Internal Fan Speed Control
- Fan Fail Tach Output Signal
- One Year Warranty

### Safety

- UL/cUL 60950 (UL Recognized)
- NEMKO+ CB Report EN60950
- EN60950
- CE Mark
- China CCC

## Electrical Specifications

Input	
Input range:	90 - 264 Vac (wide range)
Frequency:	47 - 63 Hz, single phase AC
Inrush current:	15 A maximum
Efficiency:	> 84% typical at full load, high line
Conducted EMI:	FCC Subpart J EN55022 Class A
Radiated EMI:	FCC Subpart J EN55022 Class A
Power factor:	0.99 typical
Leakage current:	1.30 mA @ 240 Vac
Hold up time:	20 ms minimum
Output	
Main DC voltage:	+12 V
Stand-By:	+3.3 Vsb
Adjustment range:	Factory Set, no pot adjustments
Regulation:	+12 Vdc; +5%/-3% +3.3 Vsb; +5%/-4%
Overcurrent:	See Table 1 next page
Overvoltage:	+12 Vdc; 13.5 - 15 Vdc +3.3 Vsb; 3.76 - 4.30 Vdc
Undervoltage:	+12 Vdc; 11.0 - 11.5 Vdc +3.3 Vsb; 2.77 - 3.00 Vdc
Turn-on delay:	1 Second max
+12 V Output Rise Time:	2 - 20 mS, Monotonic



Logic Control	
PS Inhibit:	When supply is inserted into the system the pin is pulled LOW and power supply is ON after all other pins are seated
PS_Status:	I <sup>2</sup> C port P6. When the power supply is on and running normal P6 is low. When the power supply is off, either due to -PS_ON, PS_KILL, or a fault, then P6 is high.
AC_Pfail:	I <sup>2</sup> C port P7. P7 is high except when the power supply turns the main outputs, not +3.3 Vsb, off due to an AC failure (AC missing or too low for power supply operation). If the supply is turned off due to -PS_ON, PS_KILL, or a fault, then P7 remains high.
Fan_Fault:	The PSU will provides an open collector Tach 1 output.
Tach_1:	This signal is generated from the fan. The signal should generate 2 pulses per revolution. The logic in the system will be operating at 3.3 V.

## Environmental Specifications

Operating temperature:	-10 °C to 50 °C
Storage temperature:	-40 °C to +70 °C
Altitude, operating:	10,000 ft.
Electromagnetic susceptibility / Input transients:	-EN61000-3-2, -3-3 -EN61000-4-2, 4.3, 4-4, -4-5, 4-11 Level -EN55024:1998
RoHS & lead-free compliant (no tantalum caps)	
Humidity:	20 to 90% RH, non-condensing
Shock and vibration specifications complies with Emerson Network Power Std. Specification, Q3205	
MTBF (Demonstrated):	400K Hrs at full load, 40 °C


## Ordering Information

Output	Nominal Output Voltage Set Point	Set Point Tolerance	Total Regulation	Minimum Current	Maximum Current	Output Ripple P/P	Overcurrent
DS450-3	12.0 Vdc	± 0.2%	+5 / -3%	0 A	37.0 A	120 mV	39.5 A - 44.4 A
	3.3 Vsb	± 1%	+5 / -4%	0 A	3.0 A	60 mV	4.9 A Avg, 7 A max
DS550-3	12.0 Vdc	± 0.2%	+5 / -3%	0 A	45.0 A	120 mV	48.0 A - 54.0 A
	3.3 Vsb	± 1%	+5 / -4%	0A	3.0 A	60 mV	4.9 A Avg, 7 A max

\*Overcurrent latches off if overcurrent lasts over 1 second, otherwise it is auto recovery.

\*For 5 Vsb, consult marketing.

# Mechanical Drawing

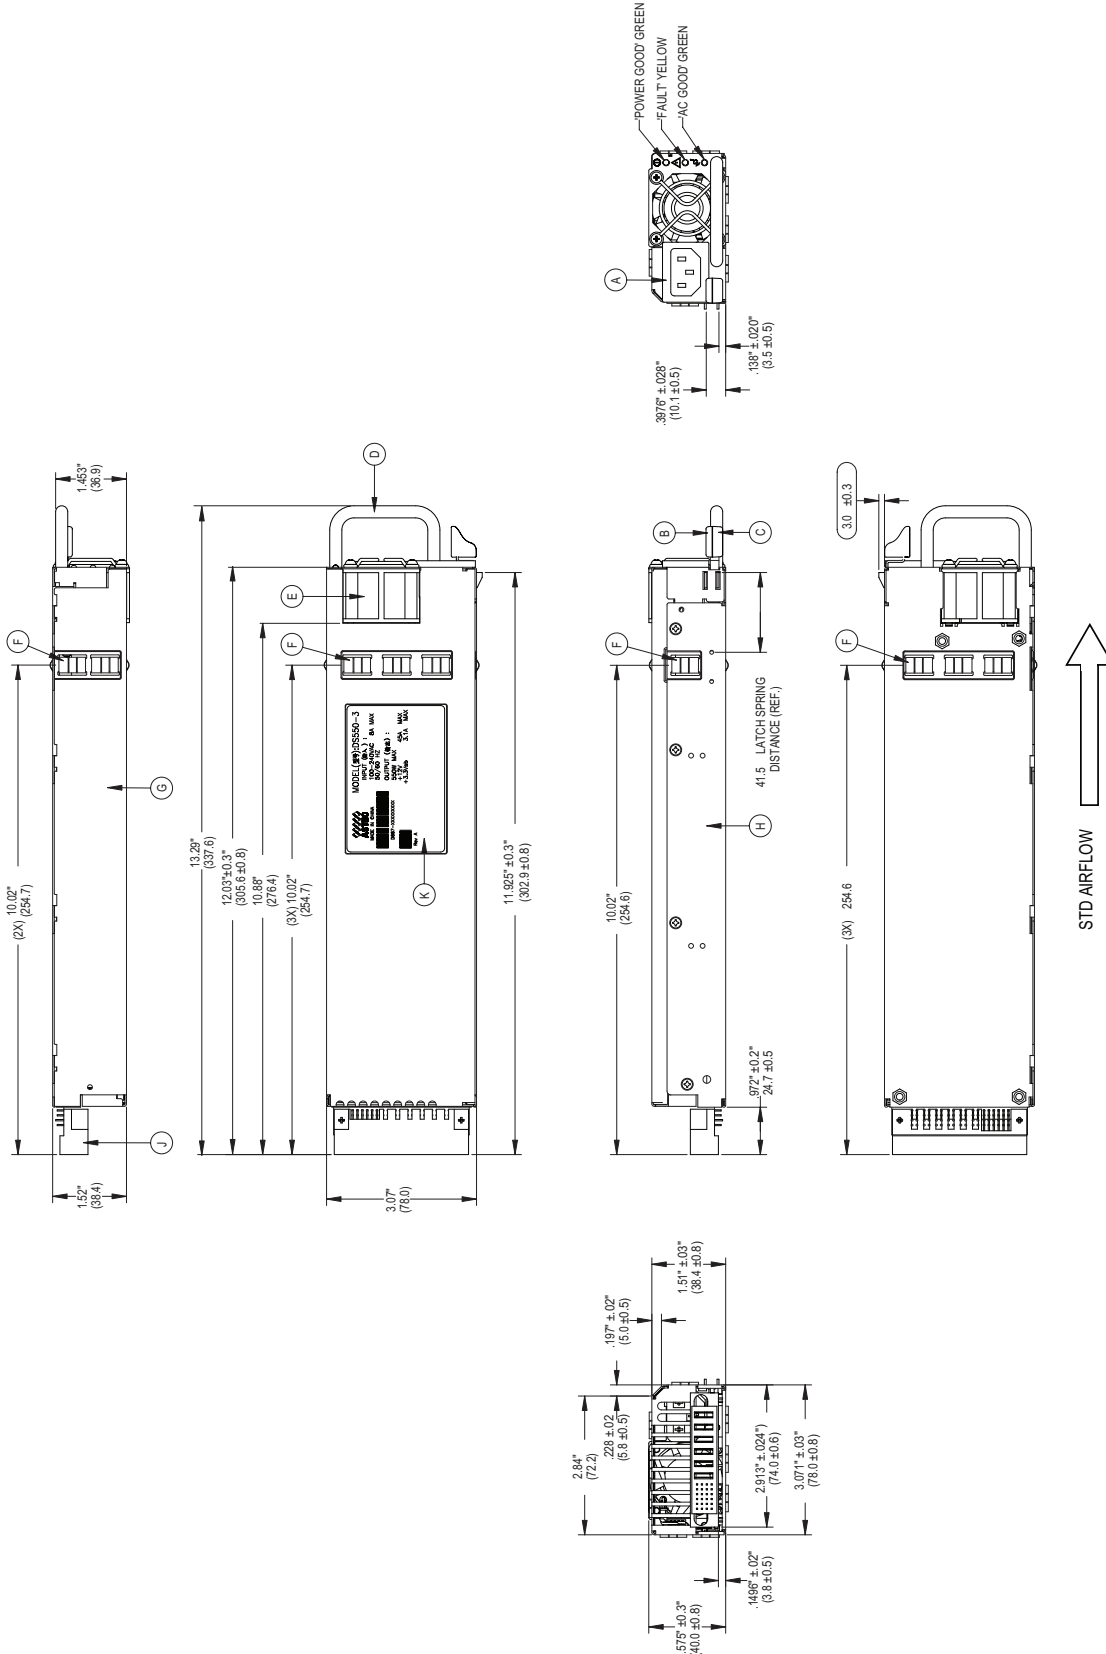

## DC Output Connector Pinout Assignment

Male connector as viewed from the rear of the supply:

D1	D2	D3	D4	D5	D6										
C1	C2	C3	C4	C5	C6	PB1	PB2	PB3	PB4	PB5	PB6				
B1	B2	B3	B4	B5	B6										
A1	A2	A3	A4	A5	A6										

### P1 - Power Supply Side

1. FCI Power Blade 51721 series  
51721-10002406AA
2. Molex Power Connector  
SD-87667 series  
87667-7002

### Mating Connector (System Side)

1. FCI Power Blade  
51741-10002406CC  
Strait Pins
2. FCI Power Blade  
51761-10002406AA  
Right Angle

Pin	Signal Name
PB 1	+12 V Return
PB 2	+12 V Return
PB 3	+12 V Return
PB 4	+12 V
PB 5	+12 V
PB 6	+12 V
A1	PS_KILL
A2	+12 V_Current Share
A3	Logic Return
A4	+3.3 V Stand-By
A5	A0 (I <sup>2</sup> C Address BIT 0 Signal)
A6	+3.3V Stand-By
B1	Logic Return
B2	Spare
B3	Logic Return
B4	+3.3 V Stand-By
B5	SDA (I <sup>2</sup> C Data Signal)
B6	PS_ON (Power Enable Signal)
C1	Logic Return
C2	Tach_1 (Fan Fail Signal)
C3	Logic Return
C4	+3.3 V Stand-By
C5	SCL (I <sup>2</sup> C Clock Signal)*
C6	VIN_GOOD (AC Input present)
D1	-PS_Present (Power Supply Seated)
D2	Spare
D3	Logic Return
D4	+3.3 V Stand-By
D5	S_INT (Alert)
D6	POK (Output Power Ok)

\*Supports I<sup>2</sup>C standard mode (100 kHz) only

### Americas

5810 Van Allen Way  
Carlsbad, CA 92008  
USA  
Telephone: +1 760 930 4600  
Facsimile: +1 760 930 0698

### Europe (UK)

Waterfront Business Park  
Merry Hill, Dudley  
West Midlands, DY5 1LX  
United Kingdom  
Telephone: +44 (0) 1384 842 211  
Facsimile: +44 (0) 1384 843 355

### Asia (HK)

14/F, Lu Plaza  
2 Wing Yip Street  
Kwun Tong, Kowloon  
Hong Kong  
Telephone: +852 2176 3333  
Facsimile: +852 2176 3888

For global contact, visit:

[www.Emerson.com/EmbeddedPower](http://www.Emerson.com/EmbeddedPower)  
[techsupport.embeddedpower@emerson.com](mailto:techsupport.embeddedpower@emerson.com)

While every precaution has been taken to ensure accuracy and completeness in this literature, Emerson Network Power assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

### Emerson Network Power.

The global leader in enabling business-critical continuity.

- AC Power
- Connectivity
- DC Power
- Embedded Computing
- **Embedded Power**
- Monitoring
- Outside Plant
- Power Switching & Controls
- Precision Cooling
- Racks & Integrated Cabinets
- Services
- Surge Protection

### EmersonNetworkPower.com

Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co.  
©2011 Emerson Electric Co.

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9