

# LOW-PEAK®

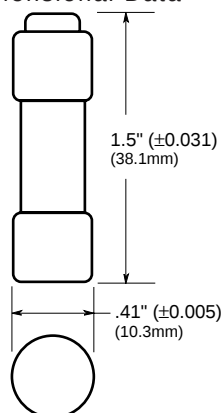
## Time-Delay Fuses

### Class CC – 600 Volt, ½ to 30 Amps

LP-CC



#### Dimensional Data



Catalog Symbol: LP-CC

Time-Delay, Current-Limiting

Ampere Rating: ½ to 30A

AC Voltage Rating: 600V (or less)

Interrupting Rating: 200,000A RMS Sym.

Agency Information:

UL Listed, Std. 248-4, Class CC, Guide JDDZ, File E4273

CSA Certified, C22.2 No. 248.4, Class 1422-02, File 53787

DC Voltage Rating: 300Vdc (or less)

½-2 ¾/10A and 20-30A, 20,000 AIR, UL 198L

150Vdc or less 3-15A, 20,000 AIR, UL 198L

#### Catalog Numbers

|             |             |             |          |          |
|-------------|-------------|-------------|----------|----------|
| LP-CC-½     | LP-CC-1½    | LP-CC-3     | LP-CC-6  | LP-CC-12 |
| LP-CC-¾     | LP-CC-1¾    | LP-CC-3¾    | LP-CC-6¾ | LP-CC-15 |
| LP-CC-8/10  | LP-CC-18/10 | LP-CC-3½    | LP-CC-7  | LP-CC-20 |
| LP-CC-1     | LP-CC-2     | LP-CC-4     | LP-CC-7½ | LP-CC-25 |
| LP-CC-1½    | LP-CC-2¼    | LP-CC-4½    | LP-CC-8  | LP-CC-30 |
| LP-CC-1¾    | LP-CC-2½    | LP-CC-5     | LP-CC-9  | —        |
| LP-CC-18/10 | LP-CC-28/10 | LP-CC-58/10 | LP-CC-10 | —        |

#### Carton Quantity and Weight

| Ampere Ratings | Carton Qty. | Weight* |      |
|----------------|-------------|---------|------|
|                |             | Lbs.    | Kg.  |
| 0-30           | 10          | .193    | .088 |

\*Weight per carton.



Recommended fuseblocks/fuseholders for Class CC 600V fuses

See Data Sheets listed below

- Open fuseblocks - 1105
- Finger-safe fuseholders - 1109, 1102, 1103, 1151
- Panel-mount fuseholders - 2114, 2113
- In-line fuseholders - 2126

#### General Information:

##### LP-CC LOW-PEAK Yellow™ Fuse

- A superior all-purpose, space-saving branch circuit fuse that meets most protection requirements up to 30A.
- Very compact; physical size is only 1 3/32" × 1 1/2" (10.3mm × 38.1mm) with rejection tip.
- The unique yellow color makes it easy to tell that the correct fuse type is installed.
- Faster response to damaging short-circuit currents and higher interrupting rating than mechanical overcurrent protective devices.

##### 200,000A Interrupting Rating

- Maximum interrupting rating for available fault current in today's large capacity systems.
- Helps ensure that future growth will not obsolete the system.

#### Dual Characteristics

- Time-delay to avoid unwanted fuse openings from surge currents.
- Fast speed of response under short-circuit conditions for a high degree of current-limitation.
- **ADVANTAGE:** The LOW-PEAK® fuse can be sized close to full load ratings for maximum overload and short-circuit protection.
- **ADVANTAGE:** Can be used where either a time-delay or a fast-acting fuse is needed, making selection easier and reducing spare fuse inventories for substantial cost reduction.

#### Superior Motor Protection

- For protection of small horsepower motor circuits.
- Proper sizing can provide Type "2" coordinated protection for NEMA and IEC motor controllers.
- Motors receive maximum protection against burnout from overloads and single phasing.

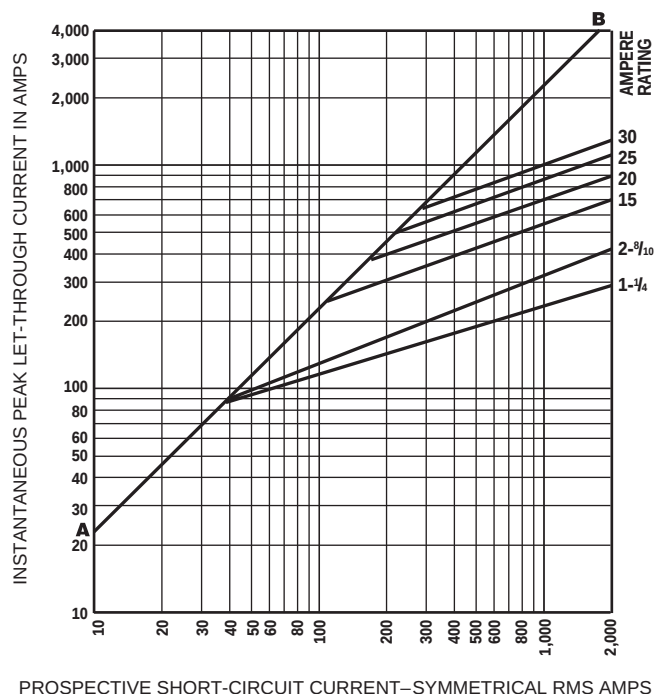
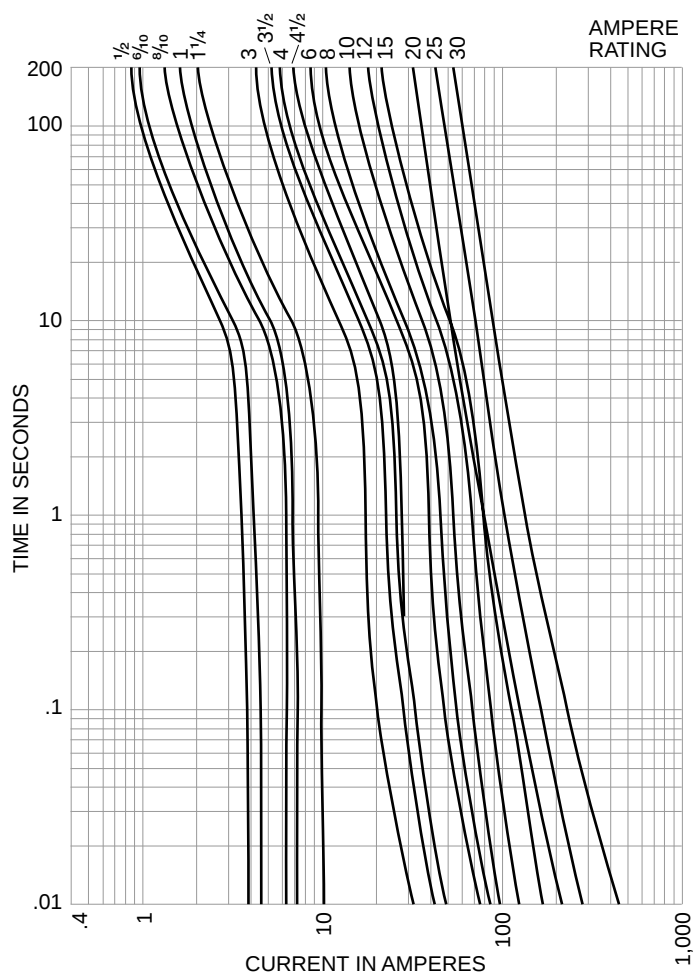
#### Current-Limiting Effects

| Prospective Short-Circuit Current | *Let-Through Current (Apparent RMS Symmetrical) |        |       |       |       |       |
|-----------------------------------|-------------------------------------------------|--------|-------|-------|-------|-------|
|                                   | 1¼A                                             | 28/10A | 15A   | 20A   | 25A   | 30A   |
| 1,000                             | 100                                             | 135    | 240   | 305   | 380   | 435   |
| 3,000                             | 140                                             | 210    | 350   | 440   | 575   | 580   |
| 5,000                             | 165                                             | 255    | 420   | 570   | 690   | 710   |
| 10,000                            | 210                                             | 340    | 540   | 700   | 870   | 1,000 |
| 20,000                            | 260                                             | 435    | 680   | 870   | 1,090 | 1,305 |
| 30,000                            | 290                                             | 525    | 800   | 1,030 | 1,300 | 1,520 |
| 40,000                            | 315                                             | 610    | 870   | 1,150 | 1,390 | 1,700 |
| 50,000                            | 340                                             | 650    | 915   | 1,215 | 1,520 | 1,820 |
| 60,000                            | 350                                             | 735    | 1,050 | 1,300 | 1,650 | 1,980 |
| 80,000                            | 390                                             | 785    | 1,130 | 1,500 | 1,780 | 2,180 |
| 100,000                           | 420                                             | 830    | 1,210 | 1,600 | 2,000 | 2,400 |
| 200,000                           | 525                                             | 1,100  | 1,600 | 2,000 | 2,520 | 3,050 |

\*RMS Symmetrical Amperes Short-Circuit

NOTE: To calculate I<sub>p</sub> (I<sub>peak</sub>) multiply I<sub>RMS</sub> value × 2.3.

CE CE logo denotes compliance with European Union Low Voltage Directive (50-1000Vac, 75-1500Vdc). Refer to Data Sheet: 8002 or contact Bussmann Application Engineering at 314-527-1270 for more information.

**LOW-PEAK®****Time-Delay Fuses****Class CC – 600 Volt, ½ to 30 Amps****LP-CC**

The only controlled copy of this Data Sheet is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9