

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0432550075

Status:


Active

Overview:

mlx

Description:

6.35mm (.250") Pitch MLX™ Power Connector Header, Vertical, with Plastic Polarizing Peg, 4 Circuits, Polyester 94V-0, Tin (Sn) Plating, White

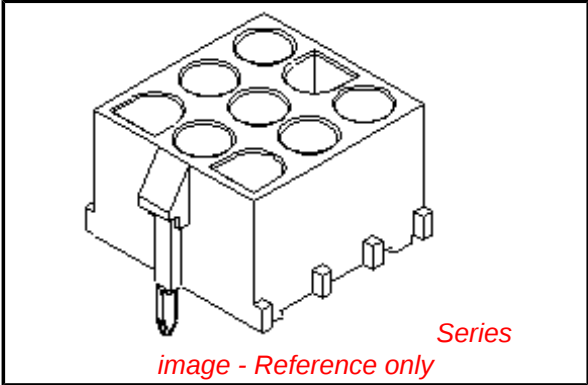

Documents:

3D Model

Drawing (PDF)

Product Specification PSX-42002-0001 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification

CSA

UL

LR19980

E29179

General

Product Family

Series

Application

Comments

Overview

Product Name

PCB Headers

43255

Wire-to-Board

High Vibration Application

mlx

MLX™

Physical

Breakaway

Circuits (Loaded)

Circuits (maximum)

Color - Resin

Durability (mating cycles max)

First Mate / Last Break

Flammability

Glow-Wire Compliant

Guide to Mating Part

Keying to Mating Part

Lock to Mating Part

Mated Height (in)

Mated Height (mm)

Material - Metal

Material - Plating Mating

Material - Plating Termination

Material - Resin

Number of Rows

Orientation

PC Tail Length (in)

PC Tail Length (mm)

PCB Locator

PCB Retention

PCB Thickness Recommended (in)

PCB Thickness Recommended (mm)

Packaging Type

Pitch - Mating Interface (in)

Pitch - Mating Interface (mm)

Pitch - Term. Interface (in)

Pitch - Term. Interface (mm)

Plating min: Mating (µin)

Plating min: Mating (µm)

Polarized to Mating Part

No

4

4

Natural

50

No

94V-2

No

Yes

Yes

Yes

0.400 In

10.16 mm

Phosphor Bronze

Tin

Tin

Polyester

1

Vertical

0.169 In

4.30 mm

Yes

Yes

0.062 In

1.60 mm

Bag

0.250 In

6.35 mm

0.250 In

6.35 mm

140

3.5

Yes

EU RoHS

ELV and RoHS Compliant

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Not Halogen-Free

China RoHS

Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
43255Series

Mates With
[42021](#) MLX™ Power Crimp Housing Plug.
[42023](#) MLX Crimp Terminal. [42024](#) MLX Crimp Terminal

Polarized to PCB	Yes
Shrouded	Fully
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-55°C to +105°C
Termination Interface: Style	Through Hole

Electrical

Current - Maximum per Contact	12A
Voltage - Maximum	600V

Solder Process Data

Duration at Max. Process Temperature (seconds)	10
Lead-free Process Capability	Wave Capable (TH only)
Process Temperature max. C	260


Material Info

Reference - Drawing Numbers

Packaging Specification	PK-43255-001
Product Specification	PSX-42002-0001
Sales Drawing	SDA-43255-00**

This document was generated on 05/24/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

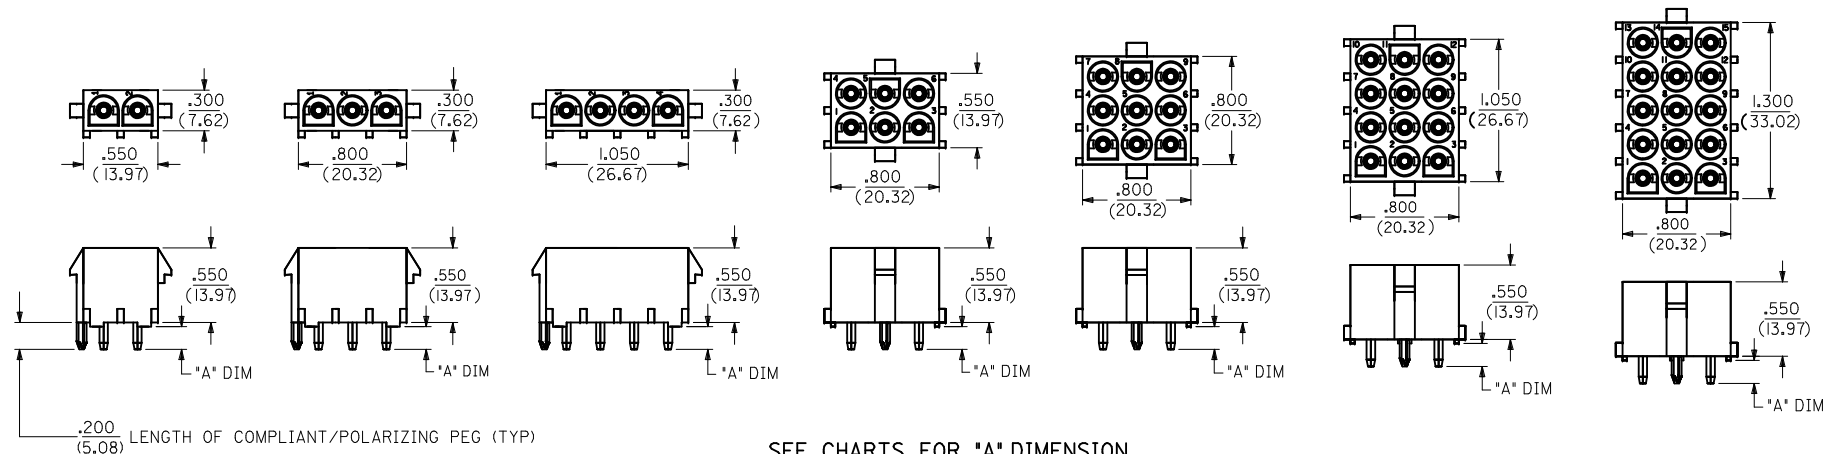


SEE CHARTS FOR 'A' DIMENSION


(THE 'A' DIMENSION APPLIES TO THE LENGTH OF THE TERMINAL ONLY)

P.C. BOARD MOUNTING DIMENSIONS

2, 3, & 4 POSITION HEADER ASSEMBLIES

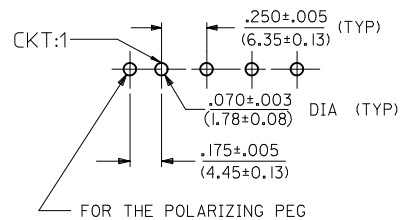

6, 9, 12 & 15 POSITION HEADER ASSEMBLIES

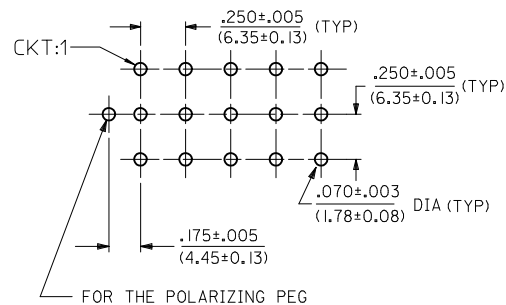

NOTES:

1) MATERIAL CODES:

- 'A' = UNREINFORCED POLYESTER, 94V-0. COLOR: WHITE
- 'C' = NYLON (PA66), UL94V-2. COLOR: NATURAL-TRANSLUCENT
- 'D' = NYLON, V-2, COLOUR: BLACK (ZYTEL 101F)
- 'E' = PA6, SCHULAMID V-2 GRADE, CTI=325V, GLOW WIRE COMPATIBLE COLOUR: NATURAL-WHITE

2) PLATING CODES:

- 'A' = TIN 140 m.l.(3.50 MICRONS) TO 240 m.l (6.00 MICRONS)

3) TERMINAL LENGTH CODES:

- I = TERMINAL FOR .062/(1.57) THICK PC BOARD

4) DIMENSIONS ARE FOR REFERENCE ONLY UNLESS INDICATED OTHERWISE.

5) HEADER ASSEMBLY HOUSINGS MATE WITH :

- PLUG HOUSINGS, .084/(2.13) DIA, SERIES: (4202I-**))

6) CONTACTS ARE ON .250/(6.35) GRID CENTERLINE SPACING.

7) PACKAGING SPECIFICATION:

- 'A' - PK-43255-001, PK-43255-002, PK-43255-003
- 'B' - PK-36518-292

RoHS COMPLIANT

ENTER DESCRIPTION		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
						IN/MM		1:1	INCH		
EC NO: 12010-0191		▼=0		mm INCH		DRAWN BY DATE		TITLE			
2009/12/31				4 PLACES ± --- ± ---		SUDHIR 2004/06/08		HEADER HOUSING ASSEMBLY			
DRW: HMR01		▽=0		3 PLACES ± --- ± 0.005		CHECKED BY DATE		.084/(2.13) SERIES			
2010/01/05				2 PLACES ± 0.13 ± 0.01		GJLOWE 2004/06/08		COMPLIANT-POLARIZING PEG			
CHKD: KPRASAD				1 PLACE ± 0.25 ± ---		APPROVED BY DATE		MOLEX MOLEX INCORPORATED			
2010/01/13				ANGULAR ± 1/2°		GJLOWE 2004/06/08					
APPR: KPRASAD				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO.		DOCUMENT NO.		SHEET NO.	
						SEE CHART		SDA-43255-00**		1 OF 2	
E2		REV				SIZE A2		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9