

### FEATURES

**Ultralow noise (0.1 Hz to 10 Hz)**

**ADR440:** 1  $\mu\text{V p-p}$

**ADR441:** 1.2  $\mu\text{V p-p}$

**ADR443:** 1.4  $\mu\text{V p-p}$

**ADR444:** 1.8  $\mu\text{V p-p}$

**ADR445:** 2.25  $\mu\text{V p-p}$

**Superb temperature coefficient**

**A grade:** 10 ppm/°C

**B grade:** 3 ppm/°C

**Low dropout operation (supply voltage headroom):** 500 mV

**Input range:** ( $V_{\text{OUT}} + 500 \text{ mV}$ ) to 18 V

**High output source and sink current**

+10 mA and –5 mA, respectively

**Wide temperature range:** –40°C to +125°C

### APPLICATIONS

Precision data acquisition systems

High resolution data converters

Battery-powered instrumentation

Portable medical instruments

Industrial process control systems

Precision instruments

Optical control circuits

### GENERAL DESCRIPTION

The [ADR440/ADR441/ADR443/ADR444/ADR445](#)<sup>1</sup> series is a family of XFET® voltage references featuring ultralow noise, high accuracy, and low temperature drift performance. Using Analog Devices, Inc., temperature drift curvature correction and extra implanted junction FET (XFET) technology, voltage change vs. temperature nonlinearity in the [ADR440/ADR441/ADR443/ADR444/ADR445](#) is greatly minimized.

The XFET references offer better noise performance than buried Zener references, and XFET references operate off low supply voltage headroom (500 mV). This combination of features makes the [ADR440/ADR441/ADR443/ADR444/ADR445](#) family ideally suited for precision signal conversion applications in high end data acquisition systems, optical networks, and medical applications.

The [ADR440/ADR441/ADR443/ADR444/ADR445](#) family has the capability to source up to 10 mA of output current and sink up to –5 mA. It also comes with a trim terminal to adjust the output voltage over a 0.5% range without compromising performance.


<sup>1</sup> Protected by U.S. Patent Number 5,838,192.

#### Rev. G

#### Document Feedback

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

### PIN CONFIGURATIONS




#### NOTES

1. NIC = NOT INTERNALLY CONNECTED. THIS PIN IS NOT CONNECTED INTERNALLY.
2. DNC = DO NOT CONNECT. DO NOT CONNECT TO THIS PIN.

05428-001

Figure 1. 8-Lead SOIC\_N (R Suffix)



#### NOTES

1. NIC = NOT INTERNALLY CONNECTED. THIS PIN IS NOT CONNECTED INTERNALLY.
2. DNC = DO NOT CONNECT. DO NOT CONNECT TO THIS PIN.

05428-002

Figure 2. 8-Lead MSOP (RM Suffix)

The [ADR440/ADR441/ADR443/ADR444/ADR445](#) family is available in 8-lead MSOP and narrow SOIC packages and offered in two electrical grades. All versions are specified over the extended industrial temperature range of –40°C to +125°C.

Table 1. Selection Guide

| Model                   | Output Voltage (V) | Initial Accuracy (mV) | Temperature Coefficient (ppm/°C) |
|-------------------------|--------------------|-----------------------|----------------------------------|
| <a href="#">ADR440A</a> | 2.048              | ±3                    | 10                               |
| <a href="#">ADR440B</a> | 2.048              | ±1                    | 3                                |
| <a href="#">ADR441A</a> | 2.500              | ±3                    | 10                               |
| <a href="#">ADR441B</a> | 2.500              | ±1                    | 3                                |
| <a href="#">ADR443A</a> | 3.000              | ±4                    | 10                               |
| <a href="#">ADR443B</a> | 3.000              | ±1.2                  | 3                                |
| <a href="#">ADR444A</a> | 4.096              | ±5                    | 10                               |
| <a href="#">ADR444B</a> | 4.096              | ±1.6                  | 3                                |
| <a href="#">ADR445A</a> | 5.000              | ±6                    | 10                               |
| <a href="#">ADR445B</a> | 5.000              | ±2                    | 3                                |

## TABLE OF CONTENTS

|                                                    |   |
|----------------------------------------------------|---|
| Features .....                                     | 1 |
| Applications .....                                 | 1 |
| Pin Configurations .....                           | 1 |
| General Description .....                          | 1 |
| Revision History .....                             | 2 |
| Specifications .....                               | 3 |
| ADR440 Electrical Characteristics .....            | 3 |
| ADR441 Electrical Characteristics .....            | 4 |
| ADR443 Electrical Characteristics .....            | 5 |
| ADR444 Electrical Characteristics .....            | 6 |
| ADR445 Electrical Characteristics .....            | 7 |
| Absolute Maximum Ratings .....                     | 8 |
| Thermal Resistance .....                           | 8 |
| ESD Caution .....                                  | 8 |
| Pin Configurations and Function Descriptions ..... | 9 |

## REVISION HISTORY

### 4/2018—Rev. F to Rev. G

|                                                                                                                            |            |
|----------------------------------------------------------------------------------------------------------------------------|------------|
| Changed $V_O$ to $V_{OUT}$ and Temperature Drift to Temperature Coefficient .....                                          | Throughout |
| Changes to Features Section, General Description Section, Figure 1, and Figure 2 .....                                     | 1          |
| Added Patent Note, Note 1 .....                                                                                            | 1          |
| Changes to Initial Accuracy Parameter, Table 2 .....                                                                       | 3          |
| Changes to Initial Accuracy Parameter, Table 3 .....                                                                       | 4          |
| Changes to Initial Accuracy Parameter, Table 4 .....                                                                       | 5          |
| Changes to Initial Accuracy Parameter, Table 5 .....                                                                       | 6          |
| Changes to Initial Accuracy Parameter, Table 6 .....                                                                       | 7          |
| Added Pin Configurations and Functions Description Section, Figure 3, Figure 4, and Table 9; Renumbered Sequentially ..... | 9          |
| Changes to Figure 18 and Figure 20 .....                                                                                   | 12         |
| Change to Figure 28 .....                                                                                                  | 13         |
| Changes to Figure 36 and Noise Performance Section .....                                                                   | 15         |
| Change to Table 10 .....                                                                                                   | 16         |
| Changes to Precision Output Regulator (Boosted Reference) Section .....                                                    | 17         |

### 9/2016—Rev. E to Rev. F

|                            |    |
|----------------------------|----|
| Changes to Figure 38 ..... | 16 |
|----------------------------|----|

### 11/2010—Rev. D to Rev. E

|                                                  |    |
|--------------------------------------------------|----|
| Deleted Negative Reference Section .....         | 15 |
| Deleted Figure 37; Renumbered Sequentially ..... | 15 |

### 3/2010—Rev. C to Rev. D

|                                  |    |
|----------------------------------|----|
| Changes to Figure 37 .....       | 15 |
| Updated Outline Dimensions ..... | 18 |

|                                                      |    |
|------------------------------------------------------|----|
| Typical Performance Characteristics .....            | 10 |
| Theory of Operation .....                            | 15 |
| Power Dissipation Considerations .....               | 15 |
| Basic Voltage Reference Connections .....            | 15 |
| Noise Performance .....                              | 15 |
| Turn On Time .....                                   | 15 |
| Applications Information .....                       | 16 |
| Output Adjustment .....                              | 16 |
| Bipolar Outputs .....                                | 16 |
| Programmable Voltage Source .....                    | 16 |
| Programmable Current Source .....                    | 17 |
| High Voltage Floating Current Source .....           | 17 |
| Precision Output Regulator (Boosted Reference) ..... | 17 |
| Outline Dimensions .....                             | 18 |
| Ordering Guide .....                                 | 19 |

### 3/2008—Rev. B to Rev. C

|                                  |    |
|----------------------------------|----|
| Changes to Table 8 .....         | 8  |
| Change to Figure 11 .....        | 10 |
| Changes to Figure 36 .....       | 15 |
| Changes to Figure 39 .....       | 16 |
| Changes to Figure 41 .....       | 17 |
| Updated Outline Dimensions ..... | 18 |

### 8/2007—Rev. A to Rev. B

|                                                               |   |
|---------------------------------------------------------------|---|
| Change to Table 2, Ripple Rejection Ratio Specification ..... | 3 |
| Change to Table 3, Ripple Rejection Ratio Specification ..... | 4 |
| Change to Table 4, Ripple Rejection Ratio Specification ..... | 5 |
| Change to Table 5, Ripple Rejection Ratio Specification ..... | 6 |
| Change to Table 6, Ripple Rejection Ratio Specification ..... | 7 |

### 9/2006—Rev. 0 to Rev. A

|                                                           |           |
|-----------------------------------------------------------|-----------|
| Updated Format .....                                      | Universal |
| Changes to Features .....                                 | 1         |
| Changes to Pin Configurations .....                       | 1         |
| Changes to Specifications Section .....                   | 3         |
| Changes to Figure 4 and Figure 5 .....                    | 9         |
| Inserted Figure 6 and Figure 7 .....                      | 9         |
| Changes to Figure 15 .....                                | 11        |
| Changes to Power Dissipation Considerations Section ..... | 14        |
| Changes to Figure 35 and Figure 36 .....                  | 15        |
| Changes to Figure 38 and Table 9 .....                    | 16        |
| Updated Outline Dimensions .....                          | 18        |
| Changes to Ordering Guide .....                           | 19        |

### 10/2005—Revision 0: Initial Version

## SPECIFICATIONS

### ADR440 ELECTRICAL CHARACTERISTICS

$V_{IN} = 3\text{ V}$  to  $18\text{ V}$ ,  $T_A = 25^\circ\text{C}$ ,  $C_{IN} = C_{OUT} = 0.1\text{ }\mu\text{F}$ , unless otherwise noted.

Table 2.

| Parameter                        | Symbol                           | Test Conditions/Comments                                                                                               | Min   | Typ   | Max     | Unit                   |
|----------------------------------|----------------------------------|------------------------------------------------------------------------------------------------------------------------|-------|-------|---------|------------------------|
| OUTPUT VOLTAGE                   | $V_{OUT}$                        |                                                                                                                        |       |       |         |                        |
| A Grade                          |                                  |                                                                                                                        | 2.045 | 2.048 | 2.051   | V                      |
| B Grade                          |                                  |                                                                                                                        | 2.047 | 2.048 | 2.049   | V                      |
| INITIAL ACCURACY                 | $V_{OERR}$                       |                                                                                                                        |       |       |         |                        |
| A Grade                          |                                  |                                                                                                                        |       |       | $\pm 3$ | mV                     |
|                                  |                                  |                                                                                                                        |       |       | 0.15    | %                      |
| B Grade                          |                                  |                                                                                                                        |       |       | $\pm 1$ | mV                     |
|                                  |                                  |                                                                                                                        |       |       | 0.05    | %                      |
| TEMPERATURE COEFFICIENT          | $TCV_{OUT}$                      |                                                                                                                        |       |       |         |                        |
| A Grade                          |                                  | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$                                                                         |       | 2     | 10      | ppm/ $^\circ\text{C}$  |
| B Grade                          |                                  | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$                                                                         |       | 1     | 3       | ppm/ $^\circ\text{C}$  |
| LINE REGULATION                  | $\Delta V_{OUT}/\Delta V_{IN}$   | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$                                                                         | -20   | +10   | +20     | ppm/V                  |
| LOAD REGULATION                  | $\Delta V_{OUT}/\Delta I_{LOAD}$ | $I_{LOAD} = 0\text{ mA to }10\text{ mA}$ , $V_{IN} = 3.5\text{ V}$ ,<br>$-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | -50   |       | +50     | ppm/mA                 |
|                                  | $\Delta V_{OUT}/\Delta I_{LOAD}$ | $I_{LOAD} = 0\text{ mA to }-5\text{ mA}$ , $V_{IN} = 3.5\text{ V}$ ,<br>$-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | -50   |       | +50     | ppm/mA                 |
| OUTPUT CURRENT CAPACITY          | $I_{LOAD}$                       |                                                                                                                        |       |       |         |                        |
| Sourcing                         |                                  |                                                                                                                        |       | 10    |         | mA                     |
| Sinking                          |                                  |                                                                                                                        |       | -5    |         | mA                     |
| QUIESCENT CURRENT                | $I_{IN}$                         | No load, $-40^\circ\text{C} < T_A < +125^\circ\text{C}$                                                                |       | 3     | 3.75    | mA                     |
| VOLTAGE NOISE                    | $e_N\text{ p-p}$                 | 0.1 Hz to 10 Hz                                                                                                        |       | 1     |         | $\mu\text{V p-p}$      |
| VOLTAGE NOISE DENSITY            | $e_N$                            | 1 kHz                                                                                                                  |       | 45    |         | nV/ $\sqrt{\text{Hz}}$ |
| TURN-ON SETTLING TIME            | $t_R$                            |                                                                                                                        |       | 10    |         | $\mu\text{s}$          |
| LONG-TERM STABILITY <sup>1</sup> | $\Delta V_{OUT}$                 | 1000 hours                                                                                                             |       | 50    |         | ppm                    |
| OUTPUT VOLTAGE HYSTERESIS        | $V_{O\_HYS}$                     |                                                                                                                        |       | 70    |         | ppm                    |
| RIPPLE REJECTION RATIO           | RRR                              | $f_{IN} = 1\text{ kHz}$                                                                                                |       | -80   |         | dB                     |
| SHORT CIRCUIT TO GND             | $I_{SC}$                         |                                                                                                                        |       | 27    |         | mA                     |
| SUPPLY VOLTAGE OPERATING RANGE   | $V_{IN}$                         |                                                                                                                        | 3     |       | 18      | V                      |
| SUPPLY VOLTAGE HEADROOM          | $V_{IN} - V_O$                   |                                                                                                                        | 500   |       |         | mV                     |

<sup>1</sup> The long-term stability specification is noncumulative. The drift in the subsequent 1000 hour period is significantly lower than in the first 1000 hour period.

## ADR441 ELECTRICAL CHARACTERISTICS

$V_{IN} = 3\text{ V to }18\text{ V}$ ,  $T_A = 25^\circ\text{C}$ ,  $C_{IN} = C_{OUT} = 0.1\text{ }\mu\text{F}$ , unless otherwise noted.

Table 3.

| Parameter                        | Symbol                           | Test Conditions/Comments                                                                                             | Min   | Typ   | Max     | Unit                   |
|----------------------------------|----------------------------------|----------------------------------------------------------------------------------------------------------------------|-------|-------|---------|------------------------|
| OUTPUT VOLTAGE                   | $V_{OUT}$                        |                                                                                                                      |       |       |         |                        |
| A Grade                          |                                  |                                                                                                                      | 2.497 | 2.500 | 2.503   | V                      |
| B Grade                          |                                  |                                                                                                                      | 2.499 | 2.500 | 2.501   | V                      |
| INITIAL ACCURACY                 | $V_{OERR}$                       |                                                                                                                      |       |       |         |                        |
| A Grade                          |                                  |                                                                                                                      |       |       | $\pm 3$ | mV                     |
|                                  |                                  |                                                                                                                      |       |       | 0.12    | %                      |
| B Grade                          |                                  |                                                                                                                      |       |       | $\pm 1$ | mV                     |
|                                  |                                  |                                                                                                                      |       |       | 0.04    | %                      |
| TEMPERATURE DRIFT                | $TCV_{OUT}$                      |                                                                                                                      |       |       |         |                        |
| A Grade                          |                                  | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$                                                                       |       | 2     | 10      | ppm/ $^\circ\text{C}$  |
| B Grade                          |                                  | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$                                                                       |       | 1     | 3       | ppm/ $^\circ\text{C}$  |
| LINE REGULATION                  | $\Delta V_{OUT}/\Delta V_{IN}$   | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$                                                                       |       | 10    | 20      | ppm/V                  |
| LOAD REGULATION                  | $\Delta V_{OUT}/\Delta I_{LOAD}$ | $I_{LOAD} = 0\text{ mA to }10\text{ mA}$ , $V_{IN} = 4\text{ V}$ ,<br>$-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | -50   |       | +50     | ppm/mA                 |
|                                  | $\Delta V_{OUT}/\Delta I_{LOAD}$ | $I_{LOAD} = 0\text{ mA to }-5\text{ mA}$ , $V_{IN} = 4\text{ V}$ ,<br>$-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | -50   |       | +50     | ppm/mA                 |
| OUTPUT CURRENT CAPACITY          | $I_{LOAD}$                       |                                                                                                                      |       |       |         |                        |
| Sourcing                         |                                  |                                                                                                                      |       | 10    |         | mA                     |
| Sinking                          |                                  |                                                                                                                      |       | -5    |         | mA                     |
| QUIESCENT CURRENT                | $I_{IN}$                         | No load, $-40^\circ\text{C} < T_A < +125^\circ\text{C}$                                                              |       | 3     | 3.75    | mA                     |
| VOLTAGE NOISE                    | $e_n\text{ p-p}$                 | 0.1 Hz to 10 Hz                                                                                                      |       | 1.2   |         | $\mu\text{V p-p}$      |
| VOLTAGE NOISE DENSITY            | $e_n$                            | 1 kHz                                                                                                                |       | 48    |         | nV/ $\sqrt{\text{Hz}}$ |
| TURN-ON SETTLING TIME            | $t_R$                            |                                                                                                                      |       | 10    |         | $\mu\text{s}$          |
| LONG-TERM STABILITY <sup>1</sup> | $\Delta V_{OUT}$                 | 1000 hours                                                                                                           |       | 50    |         | ppm                    |
| OUTPUT VOLTAGE HYSTERESIS        | $V_{OUT\_HYS}$                   |                                                                                                                      |       | 70    |         | ppm                    |
| RIPPLE REJECTION RATIO           | RRR                              | $f_{IN} = 1\text{ kHz}$                                                                                              |       | -80   |         | dB                     |
| SHORT CIRCUIT TO GND             | $I_{SC}$                         |                                                                                                                      |       | 27    |         | mA                     |
| SUPPLY VOLTAGE OPERATING RANGE   | $V_{IN}$                         |                                                                                                                      | 3     |       | 18      | V                      |
| SUPPLY VOLTAGE HEADROOM          | $V_{IN} - V_{OUT}$               |                                                                                                                      | 500   |       |         | mV                     |

<sup>1</sup> The long-term stability specification is noncumulative. The drift in the subsequent 1000 hour period is significantly lower than in the first 1000 hour period.

**ADR443 ELECTRICAL CHARACTERISTICS**

$V_{IN} = 3.5\text{ V to }18\text{ V}$ ,  $T_A = 25^\circ\text{C}$ ,  $C_{IN} = C_{OUT} = 0.1\text{ }\mu\text{F}$ , unless otherwise noted.

**Table 4.**

| Parameter                        | Symbol                           | Test Conditions/Comments                                                                                             | Min    | Typ   | Max       | Unit                   |
|----------------------------------|----------------------------------|----------------------------------------------------------------------------------------------------------------------|--------|-------|-----------|------------------------|
| OUTPUT VOLTAGE                   | $V_{OUT}$                        |                                                                                                                      |        |       |           |                        |
| A Grade                          |                                  |                                                                                                                      | 2.996  | 3.000 | 3.004     | V                      |
| B Grade                          |                                  |                                                                                                                      | 2.9988 | 3.000 | 3.0012    | V                      |
| INITIAL ACCURACY                 | $V_{OERR}$                       |                                                                                                                      |        |       |           |                        |
| A Grade                          |                                  |                                                                                                                      |        |       | $\pm 4$   | mV                     |
|                                  |                                  |                                                                                                                      |        |       | 0.13      | %                      |
| B Grade                          |                                  |                                                                                                                      |        |       | $\pm 1.2$ | mV                     |
|                                  |                                  |                                                                                                                      |        |       | 0.04      | %                      |
| TEMPERATURE DRIFT                | $TCV_{OUT}$                      |                                                                                                                      |        |       |           |                        |
| A Grade                          |                                  | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$                                                                       |        | 2     | 10        | ppm/ $^\circ\text{C}$  |
| B Grade                          |                                  | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$                                                                       |        | 1     | 3         | ppm/ $^\circ\text{C}$  |
| LINE REGULATION                  | $\Delta V_{OUT}/\Delta V_{IN}$   | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$                                                                       |        | 10    | 20        | ppm/V                  |
| LOAD REGULATION                  | $\Delta V_{OUT}/\Delta I_{LOAD}$ | $I_{LOAD} = 0\text{ mA to }10\text{ mA}$ , $V_{IN} = 5\text{ V}$ ,<br>$-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | -50    |       | +50       | ppm/mA                 |
|                                  | $\Delta V_{OUT}/\Delta I_{LOAD}$ | $I_{LOAD} = 0\text{ mA to }-5\text{ mA}$ , $V_{IN} = 5\text{ V}$ ,<br>$-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | -50    |       | +50       | ppm/mA                 |
| OUTPUT CURRENT CAPACITY          | $I_{LOAD}$                       |                                                                                                                      |        |       |           |                        |
| Sourcing                         |                                  |                                                                                                                      |        | 10    |           | mA                     |
| Sinking                          |                                  |                                                                                                                      |        | -5    |           | mA                     |
| QUIESCENT CURRENT                | $I_{IN}$                         | No load, $-40^\circ\text{C} < T_A < +125^\circ\text{C}$                                                              |        | 3     | 3.75      | mA                     |
| VOLTAGE NOISE                    | $e_N\text{ p-p}$                 | 0.1 Hz to 10 Hz                                                                                                      |        | 1.4   |           | $\mu\text{V p-p}$      |
| VOLTAGE NOISE DENSITY            | $e_N$                            | 1 kHz                                                                                                                |        | 57.6  |           | nV/ $\sqrt{\text{Hz}}$ |
| TURN-ON SETTLING TIME            | $t_R$                            |                                                                                                                      |        | 10    |           | $\mu\text{s}$          |
| LONG-TERM STABILITY <sup>1</sup> | $\Delta V_{OUT}$                 | 1000 hours                                                                                                           |        | 50    |           | ppm                    |
| OUTPUT VOLTAGE HYSTERESIS        | $V_{OUT\_HYS}$                   |                                                                                                                      |        | 70    |           | ppm                    |
| RIPPLE REJECTION RATIO           | RRR                              | $f_{IN} = 1\text{ kHz}$                                                                                              |        | -80   |           | dB                     |
| SHORT CIRCUIT TO GND             | $I_{SC}$                         |                                                                                                                      |        | 27    |           | mA                     |
| SUPPLY VOLTAGE OPERATING RANGE   | $V_{IN}$                         |                                                                                                                      | 3.5    |       | 18        | V                      |
| SUPPLY VOLTAGE HEADROOM          | $V_{IN} - V_{OUT}$               |                                                                                                                      | 500    |       |           | mV                     |

<sup>1</sup> The long-term stability specification is noncumulative. The drift in the subsequent 1000 hour period is significantly lower than in the first 1000 hour period.

# ADR444 ELECTRICAL CHARACTERISTICS

$V_{IN} = 4.6 \text{ V to } 18 \text{ V}$ ,  $T_A = 25^\circ\text{C}$ ,  $C_{IN} = C_{OUT} = 0.1 \mu\text{F}$ , unless otherwise noted.

Table 5.

| Parameter                        | Symbol                           | Test Conditions/Comments                                                                                                   | Min    | Typ   | Max       | Unit                   |
|----------------------------------|----------------------------------|----------------------------------------------------------------------------------------------------------------------------|--------|-------|-----------|------------------------|
| OUTPUT VOLTAGE                   | $V_{OUT}$                        |                                                                                                                            |        |       |           |                        |
| A Grade                          |                                  |                                                                                                                            | 4.091  | 4.096 | 4.101     | V                      |
| B Grade                          |                                  |                                                                                                                            | 4.0944 | 4.096 | 4.0976    | V                      |
| INITIAL ACCURACY                 | $V_{OERR}$                       |                                                                                                                            |        |       |           |                        |
| A Grade                          |                                  |                                                                                                                            |        |       | $\pm 5$   | mV                     |
|                                  |                                  |                                                                                                                            |        |       | 0.13      | %                      |
| B Grade                          |                                  |                                                                                                                            |        |       | $\pm 1.6$ | mV                     |
|                                  |                                  |                                                                                                                            |        |       | 0.04      | %                      |
| TEMPERATURE DRIFT                | $TCV_{OUT}$                      |                                                                                                                            |        |       |           |                        |
| A Grade                          |                                  | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$                                                                             |        | 2     | 10        | ppm/ $^\circ\text{C}$  |
| B Grade                          |                                  | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$                                                                             |        | 1     | 3         | ppm/ $^\circ\text{C}$  |
| LINE REGULATION                  | $\Delta V_{OUT}/\Delta V_{IN}$   | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$                                                                             |        | 10    | 20        | ppm/V                  |
| LOAD REGULATION                  | $\Delta V_{OUT}/\Delta I_{LOAD}$ | $I_{LOAD} = 0 \text{ mA to } 10 \text{ mA}$ , $V_{IN} = 5.5 \text{ V}$ ,<br>$-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | -50    |       | +50       | ppm/mA                 |
|                                  | $\Delta V_{OUT}/\Delta I_{LOAD}$ | $I_{LOAD} = 0 \text{ mA to } -5 \text{ mA}$ , $V_{IN} = 5.5 \text{ V}$ ,<br>$-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | -50    |       | +50       | ppm/mA                 |
| OUTPUT CURRENT CAPACITY          | $I_{LOAD}$                       |                                                                                                                            |        |       |           |                        |
| Sourcing                         |                                  |                                                                                                                            |        | 10    |           | mA                     |
| Sinking                          |                                  |                                                                                                                            |        | -5    |           | mA                     |
| QUIESCENT CURRENT                | $I_{IN}$                         | No load, $-40^\circ\text{C} < T_A < +125^\circ\text{C}$                                                                    |        | 3     | 3.75      | mA                     |
| VOLTAGE NOISE                    | $e_N \text{ p-p}$                | 0.1 Hz to 10 Hz                                                                                                            |        | 1.8   |           | $\mu\text{V p-p}$      |
| VOLTAGE NOISE DENSITY            | $e_N$                            | 1 kHz                                                                                                                      |        | 78.6  |           | nV/ $\sqrt{\text{Hz}}$ |
| TURN-ON SETTLING TIME            | $t_R$                            |                                                                                                                            |        | 10    |           | $\mu\text{s}$          |
| LONG-TERM STABILITY <sup>1</sup> | $\Delta V_{OUT}$                 | 1000 hours                                                                                                                 |        | 50    |           | ppm                    |
| OUTPUT VOLTAGE HYSTERESIS        | $V_{OUT\_HYS}$                   |                                                                                                                            |        | 70    |           | ppm                    |
| RIPPLE REJECTION RATIO           | RRR                              | $f_{IN} = 1 \text{ kHz}$                                                                                                   |        | -80   |           | dB                     |
| SHORT CIRCUIT TO GND             | $I_{SC}$                         |                                                                                                                            |        | 27    |           | mA                     |
| SUPPLY VOLTAGE OPERATING RANGE   | $V_{IN}$                         |                                                                                                                            | 4.6    |       | 18        | V                      |
| SUPPLY VOLTAGE HEADROOM          | $V_{IN} - V_{OUT}$               |                                                                                                                            | 500    |       |           | mV                     |

<sup>1</sup> The long-term stability specification is noncumulative. The drift in the subsequent 1000 hour period is significantly lower than in the first 1000 hour period.

**ADR445 ELECTRICAL CHARACTERISTICS**

$V_{IN} = 5.5 \text{ V to } 18 \text{ V}$ ,  $T_A = 25^\circ\text{C}$ ,  $C_{IN} = C_{OUT} = 0.1 \mu\text{F}$ , unless otherwise noted.

**Table 6.**

| Parameter                        | Symbol                           | Test Conditions/Comments                                                                                                   | Min   | Typ   | Max     | Unit                   |
|----------------------------------|----------------------------------|----------------------------------------------------------------------------------------------------------------------------|-------|-------|---------|------------------------|
| OUTPUT VOLTAGE                   | $V_{OUT}$                        |                                                                                                                            |       |       |         |                        |
| A Grade                          |                                  |                                                                                                                            | 4.994 | 5.000 | 5.006   | V                      |
| B Grade                          |                                  |                                                                                                                            | 4.998 | 5.000 | 5.002   | V                      |
| INITIAL ACCURACY                 | $V_{OERR}$                       |                                                                                                                            |       |       |         |                        |
| A Grade                          |                                  |                                                                                                                            |       |       | $\pm 6$ | mV                     |
|                                  |                                  |                                                                                                                            |       |       | 0.12    | %                      |
| B Grade                          |                                  |                                                                                                                            |       |       | $\pm 2$ | mV                     |
|                                  |                                  |                                                                                                                            |       |       | 0.04    | %                      |
| TEMPERATURE DRIFT                | $TCV_{OUT}$                      |                                                                                                                            |       |       |         |                        |
| A Grade                          |                                  | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$                                                                             |       | 2     | 10      | ppm/ $^\circ\text{C}$  |
| B Grade                          |                                  | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$                                                                             |       | 1     | 3       | ppm/ $^\circ\text{C}$  |
| LINE REGULATION                  | $\Delta V_{OUT}/\Delta V_{IN}$   | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$                                                                             |       | 10    | 20      | ppm/V                  |
| LOAD REGULATION                  | $\Delta V_{OUT}/\Delta I_{LOAD}$ | $I_{LOAD} = 0 \text{ mA to } 10 \text{ mA}$ , $V_{IN} = 6.5 \text{ V}$ ,<br>$-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | -50   |       | +50     | ppm/mA                 |
|                                  | $\Delta V_{OUT}/\Delta I_{LOAD}$ | $I_{LOAD} = 0 \text{ mA to } -5 \text{ mA}$ , $V_{IN} = 6.5 \text{ V}$ ,<br>$-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | -50   |       | +50     | ppm/mA                 |
| OUTPUT CURRENT CAPACITY          | $I_{LOAD}$                       |                                                                                                                            |       |       |         |                        |
| Sourcing                         |                                  |                                                                                                                            |       | 10    |         | mA                     |
| Sinking                          |                                  |                                                                                                                            |       | -5    |         | mA                     |
| QUIESCENT CURRENT                | $I_{IN}$                         | No load, $-40^\circ\text{C} < T_A < +125^\circ\text{C}$                                                                    |       | 3     | 3.75    | mA                     |
| VOLTAGE NOISE                    | $e_N$ p-p                        | 0.1 Hz to 10 Hz                                                                                                            |       | 2.25  |         | $\mu\text{V}$ p-p      |
| VOLTAGE NOISE DENSITY            | $e_N$                            | 1 kHz                                                                                                                      |       | 90    |         | nV/ $\sqrt{\text{Hz}}$ |
| TURN-ON SETTLING TIME            | $t_R$                            |                                                                                                                            |       | 10    |         | $\mu\text{s}$          |
| LONG-TERM STABILITY <sup>1</sup> | $\Delta V_{OUT}$                 | 1000 hours                                                                                                                 |       | 50    |         | ppm                    |
| OUTPUT VOLTAGE HYSTERESIS        | $V_{OUT\_HYS}$                   |                                                                                                                            |       | 70    |         | ppm                    |
| RIPPLE REJECTION RATIO           | RRR                              | $f_{IN} = 1 \text{ kHz}$                                                                                                   |       | -80   |         | dB                     |
| SHORT CIRCUIT TO GND             | $I_{SC}$                         |                                                                                                                            |       | 27    |         | mA                     |
| SUPPLY VOLTAGE OPERATING RANGE   | $V_{IN}$                         |                                                                                                                            | 5.5   |       | 18      | V                      |
| SUPPLY VOLTAGE HEADROOM          | $V_{IN} - V_{OUT}$               |                                                                                                                            | 500   |       |         | mV                     |

<sup>1</sup> The long-term stability specification is noncumulative. The drift in the subsequent 1000 hour period is significantly lower than in the first 1000 hour period.

## ABSOLUTE MAXIMUM RATINGS

$T_A = 25^\circ\text{C}$ , unless otherwise noted.

Table 7.

| Parameter                            | Rating                                      |
|--------------------------------------|---------------------------------------------|
| Supply Voltage                       | 20 V                                        |
| Output Short-Circuit Duration to GND | Indefinite                                  |
| Storage Temperature Range            | $-65^\circ\text{C}$ to $+125^\circ\text{C}$ |
| Operating Temperature Range          | $-40^\circ\text{C}$ to $+125^\circ\text{C}$ |
| Junction Temperature Range           | $-65^\circ\text{C}$ to $+150^\circ\text{C}$ |
| Lead Temperature, Soldering (60 sec) | $300^\circ\text{C}$                         |

Stresses at or above those listed under Absolute Maximum Ratings may cause permanent damage to the product. This is a stress rating only; functional operation of the product at these or any other conditions above those indicated in the operational section of this specification is not implied. Operation beyond the maximum operating conditions for extended periods may affect product reliability.

## THERMAL RESISTANCE

$\theta_{JA}$  is specified for the worst case conditions, that is, a device soldered in a circuit board for surface-mount packages.

Table 8. Thermal Resistance

| Package Type            | $\theta_{JA}$ | $\theta_{JC}$ | Unit                      |
|-------------------------|---------------|---------------|---------------------------|
| 8-Lead SOIC (R Suffix)  | 130           | 43            | $^\circ\text{C}/\text{W}$ |
| 8-Lead MSOP (RM Suffix) | 132.5         | 43.9          | $^\circ\text{C}/\text{W}$ |

## ESD CAUTION




### ESD (electrostatic discharge) sensitive device.

Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.



## PIN CONFIGURATIONS AND FUNCTION DESCRIPTIONS




## NOTES

1. NIC = NOT INTERNALLY CONNECTED. THIS PIN IS NOT CONNECTED INTERNALLY.
2. DNC = DO NOT CONNECT. DO NOT CONNECT TO THIS PIN.

05428-101

Figure 3. 8-Lead SOIC Pin Configuration



## NOTES

1. NIC = NOT INTERNALLY CONNECTED. THIS PIN IS NOT CONNECTED INTERNALLY.
2. DNC = DO NOT CONNECT. DO NOT CONNECT TO THIS PIN.

05428-102

Figure 4. 8-Lead MSOP Pin Configuration

Table 9. Pin Function Descriptions

| Pin No. | Mnemonic         | Description                                                        |
|---------|------------------|--------------------------------------------------------------------|
| 1, 8    | DNC              | Do Not Connect. Do not connect to these pins.                      |
| 2       | V <sub>IN</sub>  | Input Voltage Connection.                                          |
| 3, 7    | NIC              | Not Internally Connected. These pins are not connected internally. |
| 4       | GND              | Ground.                                                            |
| 5       | TRIM             | Output Voltage Trim.                                               |
| 6       | V <sub>OUT</sub> | Output Voltage.                                                    |

# TYPICAL PERFORMANCE CHARACTERISTICS

$V_{IN} = 7\text{ V}$ ,  $T_A = 25^\circ\text{C}$ ,  $C_{IN} = C_{OUT} = 0.1\text{ }\mu\text{F}$ , unless otherwise noted.

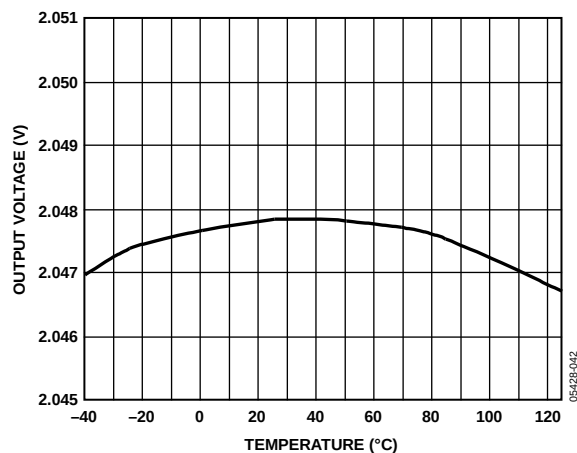


Figure 5. ADR440 Output Voltage vs. Temperature

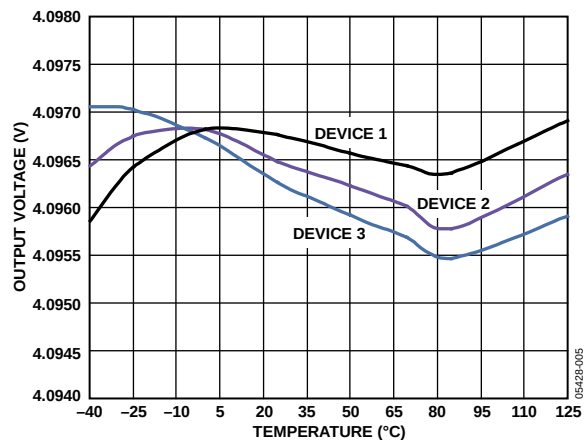


Figure 8. ADR444 Output Voltage vs. Temperature

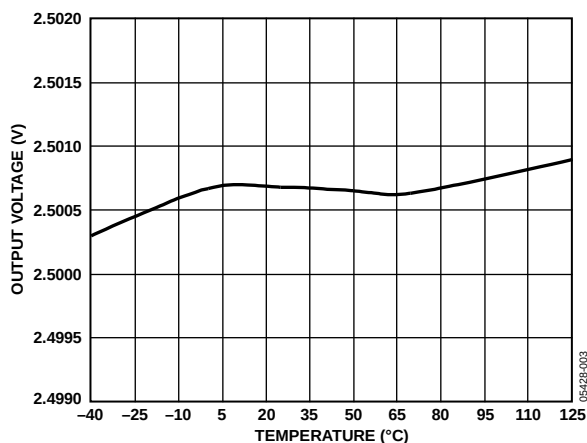


Figure 6. ADR441 Output Voltage vs. Temperature

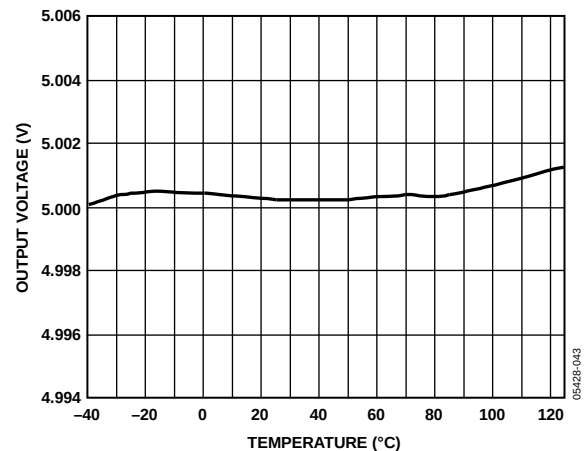


Figure 9. ADR445 Output Voltage vs. Temperature

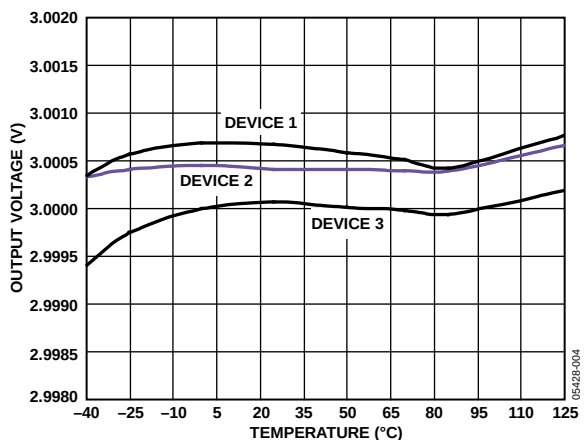


Figure 7. ADR443 Output Voltage vs. Temperature

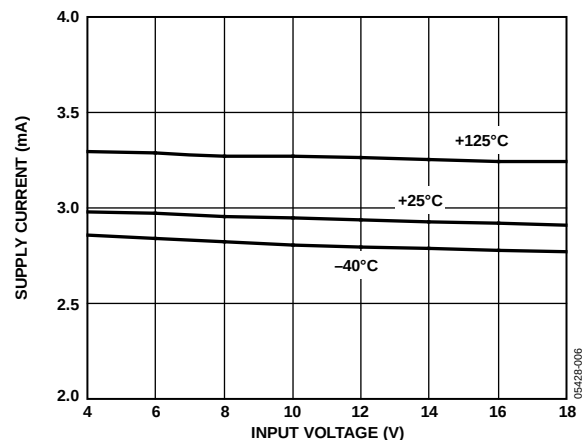


Figure 10. ADR441 Supply Current vs. Input Voltage

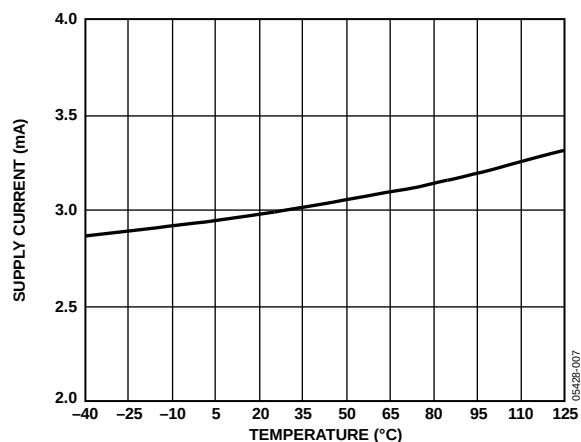


Figure 11. ADR441 Supply Current vs. Temperature

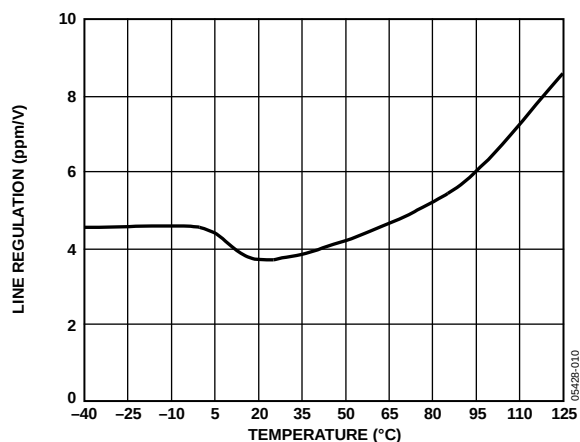


Figure 14. ADR441 Line Regulation vs. Temperature

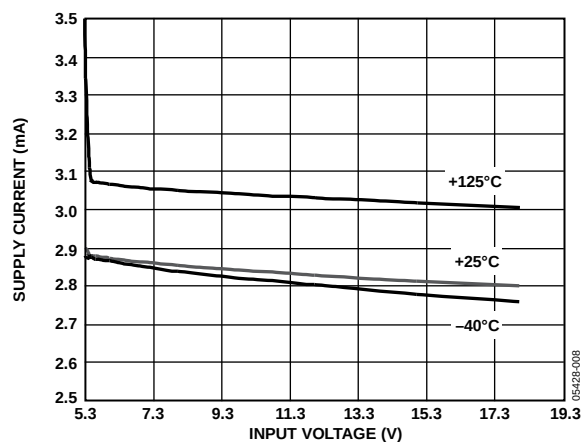


Figure 12. ADR445 Supply Current vs. Input Voltage

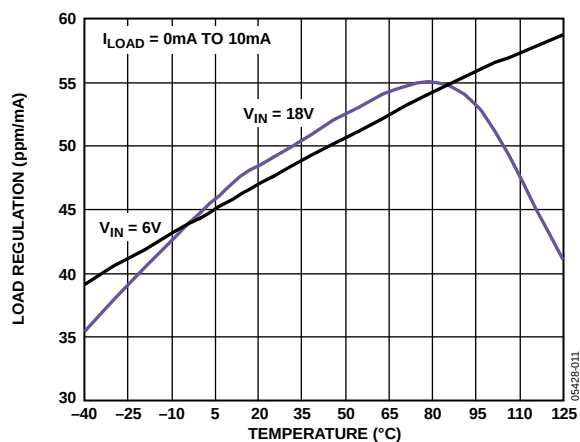


Figure 15. ADR441 Load Regulation vs. Temperature

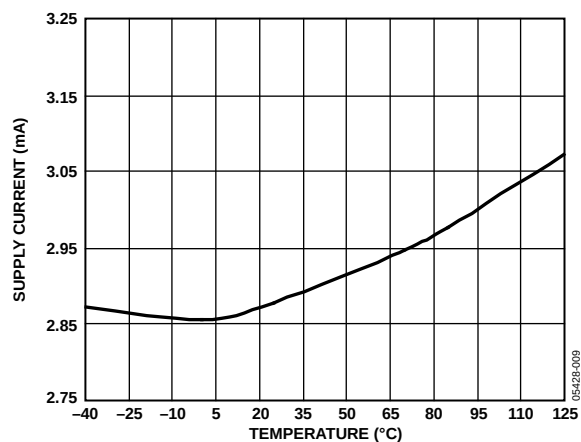


Figure 13. ADR445 Supply Current vs. Temperature

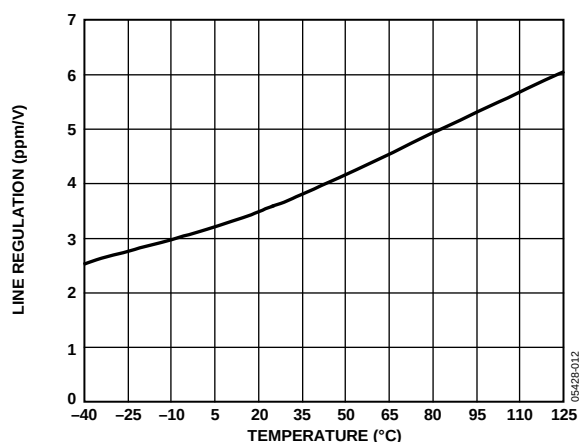


Figure 16. ADR445 Line Regulation vs. Temperature

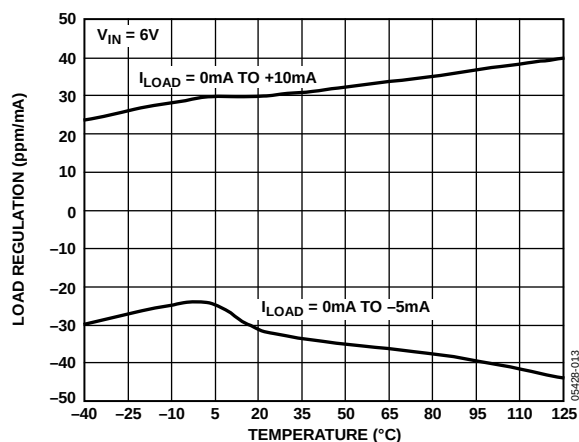


Figure 17. ADR445 Load Regulation vs. Temperature

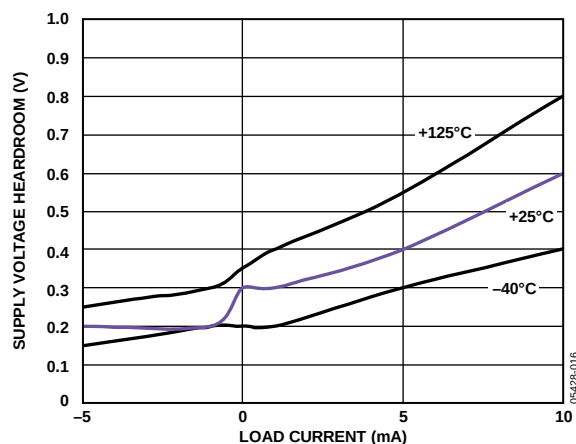


Figure 20. ADR445 Supply Voltage Headroom vs. Load Current

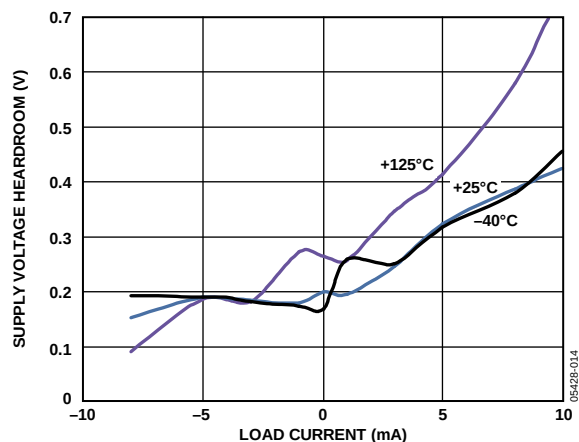


Figure 18. ADR441 Supply Voltage Headroom vs. Load Current

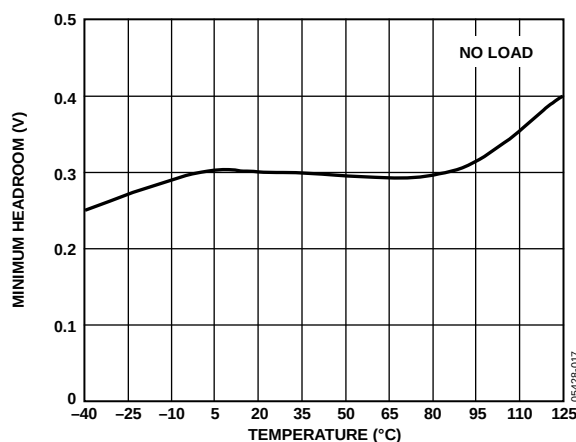


Figure 21. ADR445 Minimum Headroom vs. Temperature

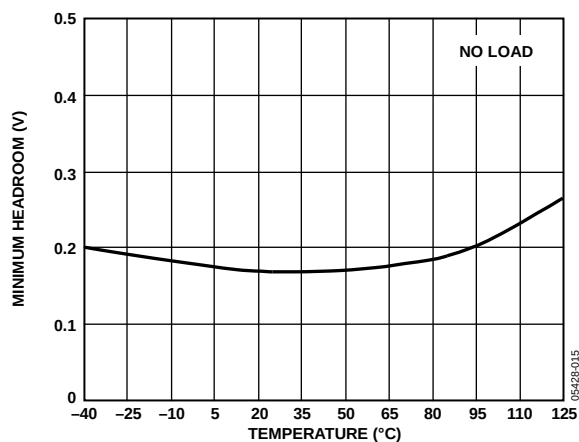


Figure 19. ADR441 Minimum Headroom vs. Temperature

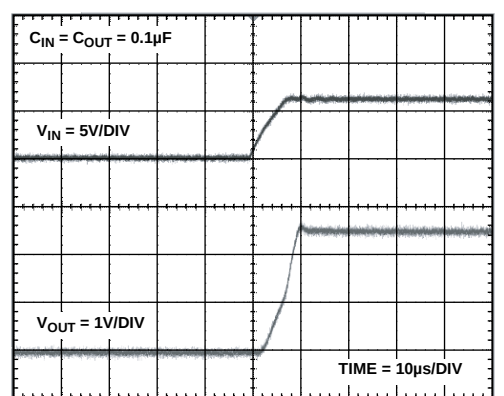


Figure 22. ADR441 Turn On Response

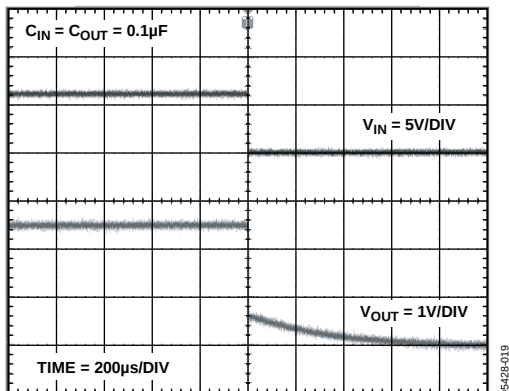


Figure 23. ADR441 Turn Off Response

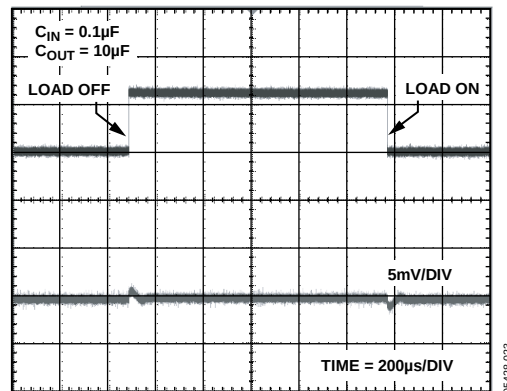


Figure 26. ADR441 Load Transient Response

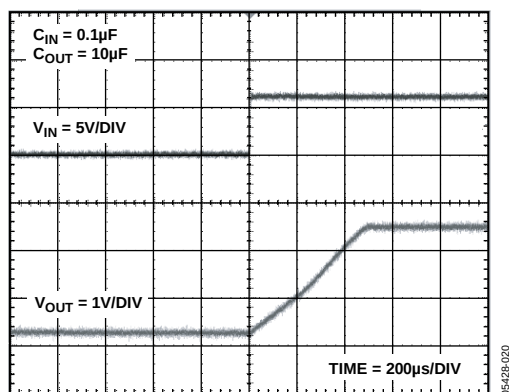


Figure 24. ADR441 Turn On Response

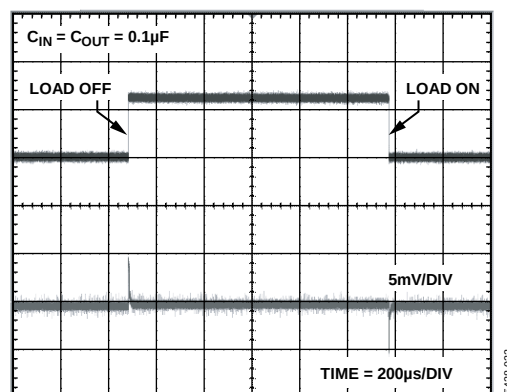


Figure 27. ADR441 Load Transient Response

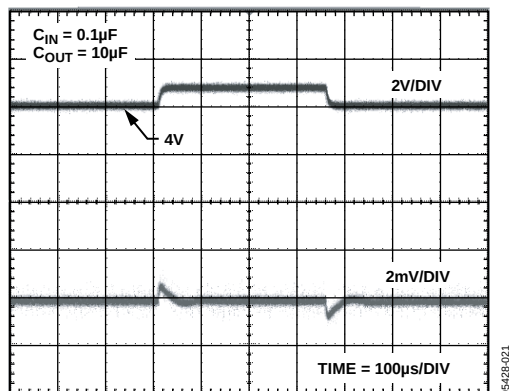


Figure 25. ADR441 Line Transient Response

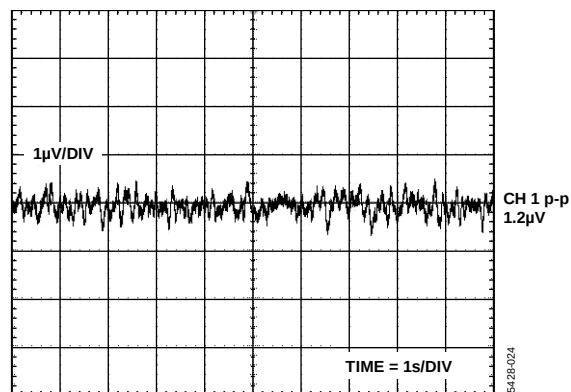


Figure 28. ADR441 0.1 Hz to 10.0 Hz Voltage Noise

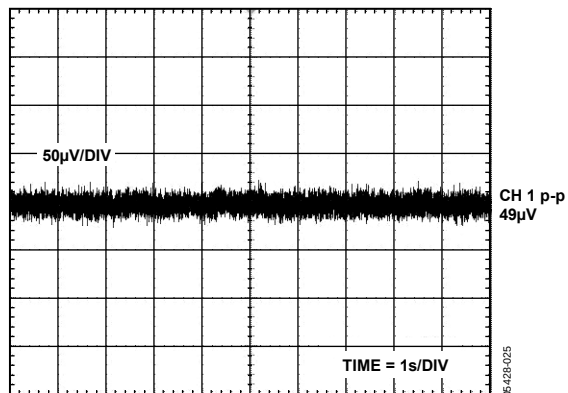


Figure 29. ADR441 10 Hz to 10 kHz Voltage Noise

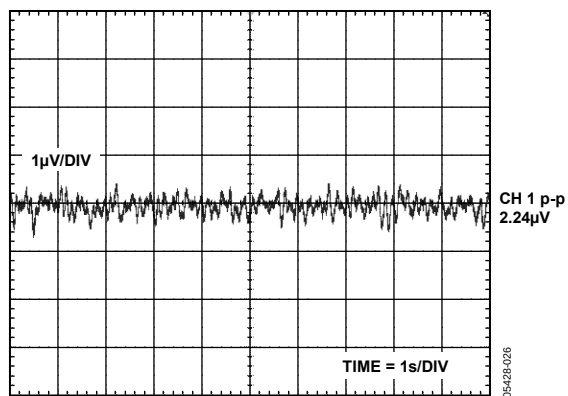


Figure 30. ADR445 0.1 Hz to 10.0 Hz Voltage Noise

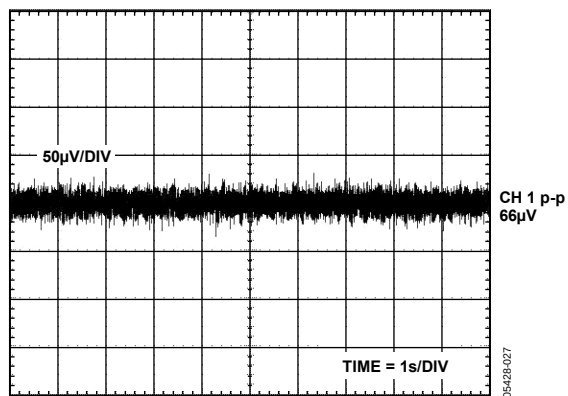


Figure 31. ADR445 10 Hz to 10 kHz Voltage Noise

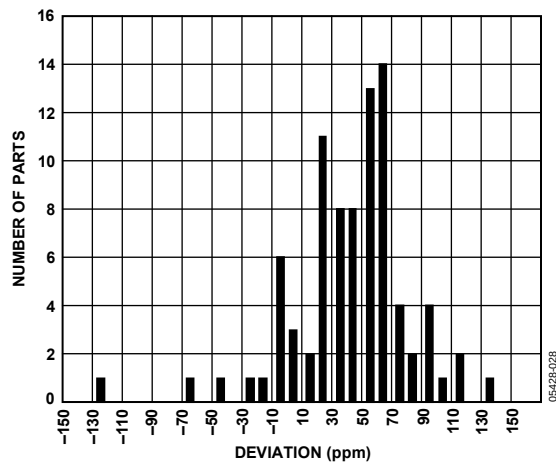


Figure 32. ADR441 Typical Output Voltage Hysteresis

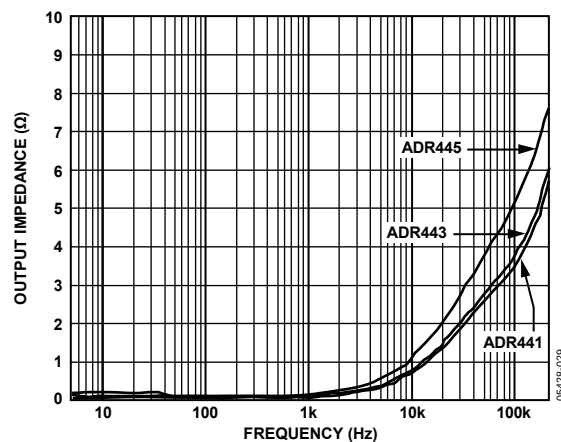


Figure 33. Output Impedance vs. Frequency

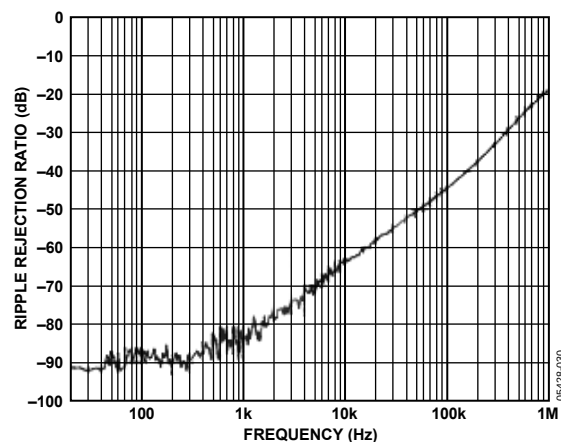


Figure 34. Ripple Rejection Ratio vs. Frequency

## THEORY OF OPERATION

The ADR440/ADR441/ADR443/ADR444/ADR445 series of references uses a new reference generation technique known as XFET. This technique yields a reference with low dropout, optimal thermal hysteresis, and exceptionally low noise. The core of the XFET reference consists of two junction field effect transistors (JFETs), one of which has an extra channel implant to raise its pinch-off voltage. By running the two JFETs at the same drain current, the difference in pinch off voltage can be amplified and used to form a highly stable voltage reference.

The intrinsic reference voltage is around 0.5 V with a negative temperature coefficient of about  $-120 \text{ ppm}/^{\circ}\text{C}$ . This slope is essentially constant to the dielectric constant of silicon, and it can be closely compensated for by adding a correction term generated in the same fashion as the proportional to absolute temperature (PTAT) term used to compensate band gap references. The advantage of an XFET reference is its correction term, which is approximately 20 times lower and requires less correction than that of a band gap reference. Because most of the noise of a band gap reference comes from the temperature compensation circuitry, the XFET results in much lower noise.

Figure 35 shows the basic topology of the ADR440/ADR441/ADR443/ADR444/ADR445 series. The temperature correction term is provided by a current source with a value designed to be proportional to the absolute temperature. The general equation is

$$V_{OUT} = G (\Delta V_P - R1 \times I_{PTAT}) \quad (1)$$

where:

$G$  is the gain of the reciprocal of the divider ratio.

$\Delta V_P$  is the difference in pinch off voltage between the two JFETs.

$I_{PTAT}$  is the positive temperature coefficient correction current.

The ADR440/ADR441/ADR443/ADR444/ADR445 devices are created by on-chip adjustment of  $R2$  and  $R3$  to achieve the different voltage options at the reference output.

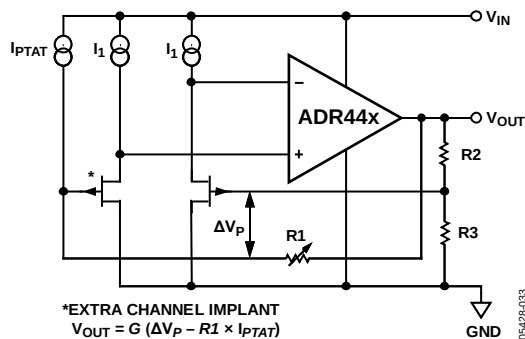


Figure 35. Simplified Schematic Device

## POWER DISSIPATION CONSIDERATIONS

The ADR440/ADR441/ADR443/ADR444/ADR445 family of references is guaranteed to deliver load currents to 10 mA with an input voltage that ranges from 3 V to 18 V. When these devices are used in applications at higher currents, use the following equation to account for the temperature effects of increases in power dissipation:

$$T_J = P_D \times \theta_{JA} + T_A \quad (2)$$

where:

$T_J$  and  $T_A$  are the junction and ambient temperatures, respectively.

$P_D$  is the device power dissipation.

$\theta_{JA}$  is the device package thermal resistance.

## BASIC VOLTAGE REFERENCE CONNECTIONS

The ADR440/ADR441/ADR443/ADR444/ADR445 family requires a  $0.1 \mu\text{F}$  capacitor on the input and the output for stability. Although not required for operation, a  $10 \mu\text{F}$  capacitor at the input can help with line voltage transient performance.

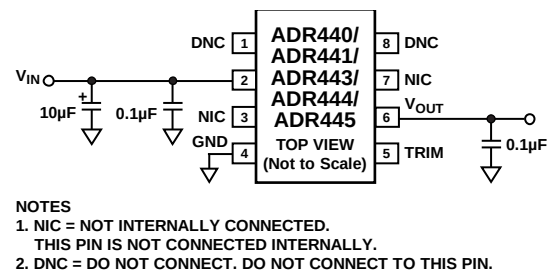


Figure 36. Basic Voltage Reference Configuration

## NOISE PERFORMANCE

The noise generated by the ADR440/ADR441/ADR443/ADR444/ADR445 family of references is typically less than or equal to  $2.25 \mu\text{V p-p}$  over the 0.1 Hz to 10.0 Hz band for the ADR440, ADR441, and ADR443. Figure 28 shows the 0.1 Hz to 10 Hz noise of the ADR441, which is only  $1.2 \mu\text{V p-p}$ . The noise measurement is made with a band-pass filter composed of a two-pole high-pass filter with a corner frequency at 0.1 Hz and a two-pole low-pass filter with a corner frequency at 10.0 Hz.

## TURN ON TIME

Upon application of power (cold start), the time required for the output voltage to reach its final value within a specified error band is defined as the turn on settling time. Two variables normally associated with this settling time are the time for the active circuits to settle and the time for the thermal gradients on the chip to stabilize. Figure 22 and Figure 23 show the turn on and turn off settling times for the ADR441.

## APPLICATIONS INFORMATION

### OUTPUT ADJUSTMENT

The ADR440/ADR441/ADR443/ADR444/ADR445 family features a TRIM pin that allows the user to adjust the output voltage of the device over a limited range. The TRIM pin allows errors from the reference and overall system errors to be trimmed out by connecting a potentiometer between the output and the ground, with the wiper connected to the TRIM pin. Figure 37 shows the optimal trim configuration. R1 allows fine adjustment of the output and is not always required. R<sub>P</sub> must be sufficiently large so that the maximum output current from the ADR440/ADR441/ADR443/ADR444/ADR445 is not exceeded.

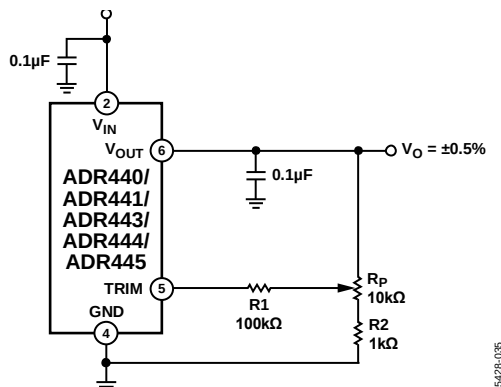


Figure 37. ADR440/ADR441/ADR443/ADR444/ADR445 Trim Function

Using the trim function has a negligible effect on the temperature performance of the ADR440/ADR441/ADR443/ADR444/ADR445. However, all resistors need to be low temperature coefficient resistors, or errors may occur.

### BIPOLAR OUTPUTS

It is possible to obtain both positive and negative reference voltages by connecting the output of the ADR440/ADR441/ADR443/ADR444/ADR445 to the inverting terminal of an operational amplifier. Care must be taken when choosing Resistors R1 and R2 (see Figure 38). These resistors must be matched as closely as possible to ensure minimal differences between the negative and positive outputs. In addition, care must be taken to ensure performance over temperature. Use low temperature coefficient resistors if the circuit is used over temperature; otherwise, differences exist between the two outputs.

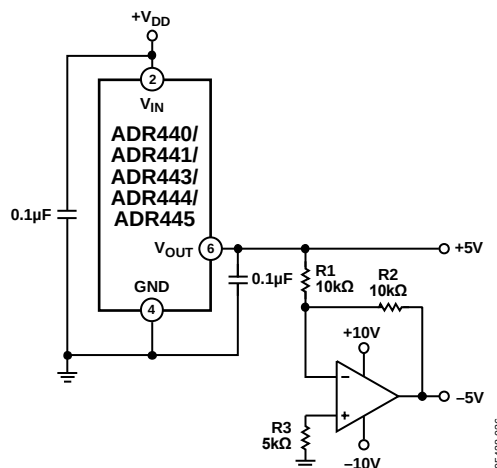


Figure 38. ADR440/ADR441/ADR443/ADR444/ADR445 Bipolar Outputs

### PROGRAMMABLE VOLTAGE SOURCE

Extra components are needed to obtain different voltages than those offered by the ADR440/ADR441/ADR443/ADR444/ADR445. Two potentiometers set the desired voltage and the buffering amplifier, as shown in Figure 39. The potentiometer connected between V<sub>OUT</sub> and GND, with its wiper connected to the noninverting input of the operational amplifier, takes care of coarse trim. The second potentiometer, with its wiper connected to the trim terminal of the ADR440/ADR441/ADR443/ADR444/ADR445, is used for fine adjustment. Resolution depends on the end to end resistance value and the resolution of the selected potentiometer.

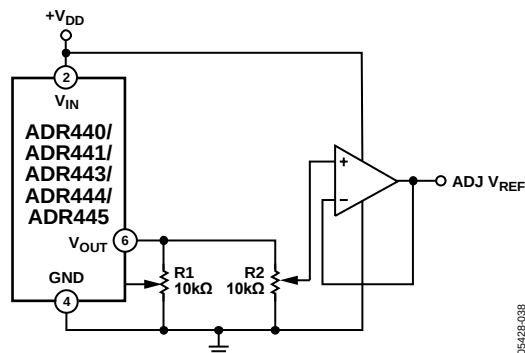


Figure 39. Programmable Voltage Source

For a completely programmable solution, replace the two potentiometers in Figure 39 with one Analog Devices dual digital potentiometer, offered with either a serial peripheral interface (SPI) or an I<sup>2</sup>C interface. These interfaces set the position of the wiper on both potentiometers and allow the output voltage to be set. Table 10 lists compatible Analog Devices digital potentiometers.



Table 10. Digital Potentiometer Devices

| Device No. | No. of Channels | No. of Positions | Interface        | R (kΩ)         | V <sub>DD</sub> <sup>1</sup> (V) |
|------------|-----------------|------------------|------------------|----------------|----------------------------------|
| AD5251     | 2.00            | 64.00            | I <sup>2</sup> C | 1, 10, 50, 100 | 5.5                              |
| AD5207     | 2.00            | 256.00           | SPI              | 10, 50, 100    | 5.5                              |
| AD5242     | 2.00            | 256.00           | I <sup>2</sup> C | 10, 100, 1000  | 5.5                              |
| AD5262     | 2.00            | 256.00           | SPI              | 20, 50, 200    | 15                               |
| AD5282     | 2.00            | 256.00           | I <sup>2</sup> C | 20, 50, 100    | 15                               |
| AD5252     | 2.00            | 256.00           | I <sup>2</sup> C | 1, 10, 50, 100 | 5.5                              |
| AD5232     | 2.00            | 256.00           | SPI              | 10, 50, 100    | 5.5                              |
| AD5235     | 2.00            | 1024.00          | SPI              | 25, 250        | 5.5                              |
| ADN2850    | 2.00            | 1024.00          | SPI              | 25, 250        | 5.5                              |

<sup>1</sup> Can also use a negative supply.

Adding a negative supply to the operational amplifier allows the user to produce a negative programmable reference by connecting the reference output to the inverting terminal of the operational amplifier. Choose feedback resistors to minimize errors over temperature.

### PROGRAMMABLE CURRENT SOURCE

It is possible to build a programmable current source using a setup similar to the programmable voltage source, as shown in Figure 40. The constant voltage on the gate of the transistor sets the current through the load. Varying the voltage on the gate changes the current. This circuit does not require a dual digital potentiometer.

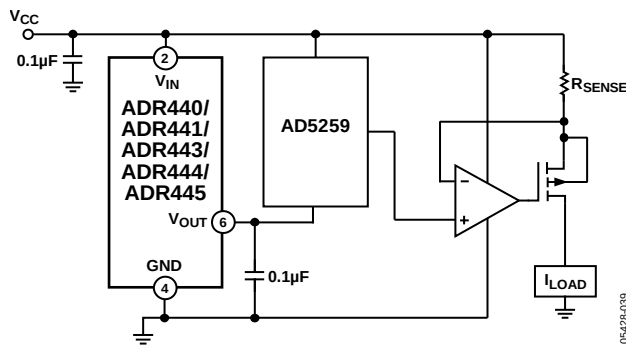


Figure 40. Programmable Current Source

### HIGH VOLTAGE FLOATING CURRENT SOURCE

Use the circuit in Figure 41 to generate a floating current source with minimal self heating. This particular configuration can operate on high supply voltages, determined by the breakdown voltage of the N-channel JFET.

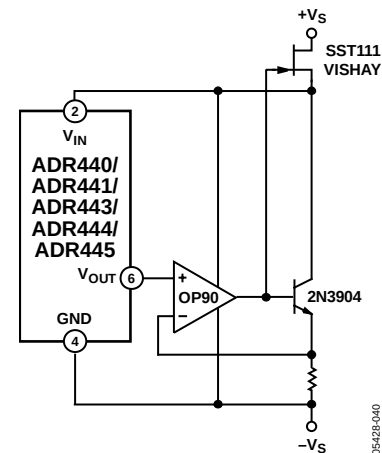


Figure 41. Floating Current Source

### PRECISION OUTPUT REGULATOR (BOOSTED REFERENCE)


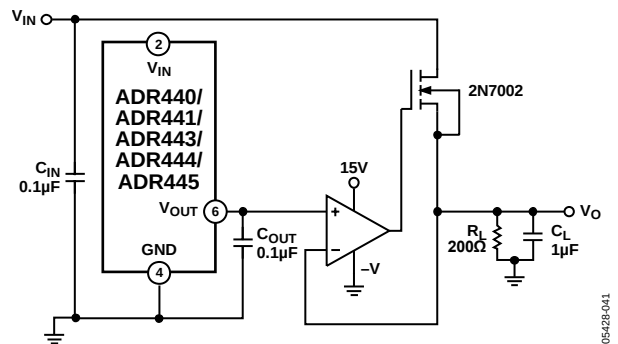


Figure 42. Boosted Output Reference


Higher current drive capability can be obtained without sacrificing accuracy by using the circuit in Figure 42. The operational amplifier regulates the MOSFET turn on, forcing  $V_O$  to equal the  $V_{REF}$ . Current is then drawn from  $V_{IN}$ , allowing increased current drive capability. The circuit allows a 50 mA load; use a larger MOSFET if higher current drive is required.

# OUTLINE DIMENSIONS

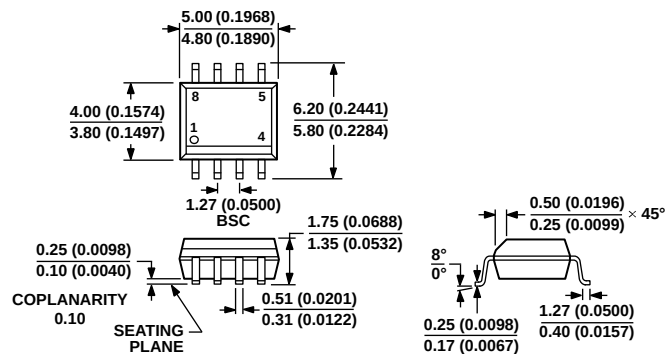

COMPLIANT TO JEDEC STANDARDS MS-012-AA  
CONTROLLING DIMENSIONS ARE IN MILLIMETERS; INCH DIMENSIONS  
(IN PARENTHESES) ARE ROUNDED-OFF MILLIMETER EQUIVALENTS FOR  
REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN.

Figure 43. 8-Lead Standard Small Outline Package [SOIC\_N]  
Narrow Body  
(R-8)  
Dimensions shown in millimeters and (inches)

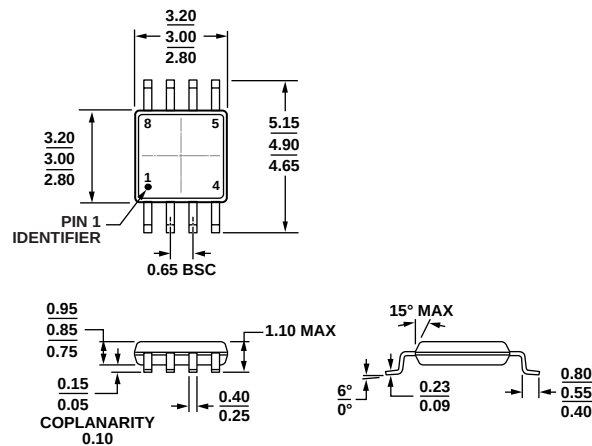

COMPLIANT TO JEDEC STANDARDS MO-187-AA  
Figure 44. 8-Lead Mini Small Outline Package [MSOP]  
(RM-8)  
Dimensions show in millimeters

## ORDERING GUIDE

| Model <sup>1</sup> | Output Voltage (V) | Initial Accuracy |      | Temperature Drift (ppm/°C) | Temperature Range | Package Description | Package Option | Marking Code |
|--------------------|--------------------|------------------|------|----------------------------|-------------------|---------------------|----------------|--------------|
|                    |                    | ±mV              | %    |                            |                   |                     |                |              |
| ADR440ARZ          | 2.048              | 3                | 0.15 | 10                         | –40°C to +125°C   | 8-Lead SOIC_N       | R-8            | R01          |
| ADR440ARZ-REEL7    | 2.048              | 3                | 0.15 | 10                         | –40°C to +125°C   | 8-Lead SOIC_N       | R-8            |              |
| ADR440ARMZ         | 2.048              | 3                | 0.15 | 10                         | –40°C to +125°C   | 8-Lead MSOP         | RM-8           |              |
| ADR440ARMZ-REEL7   | 2.048              | 3                | 0.15 | 10                         | –40°C to +125°C   | 8-Lead MSOP         | RM-8           |              |
| ADR440BRZ          | 2.048              | 1                | 0.05 | 3                          | –40°C to +125°C   | 8-Lead SOIC_N       | R-8            |              |
| ADR440BRZ-REEL7    | 2.048              | 1                | 0.05 | 3                          | –40°C to +125°C   | 8-Lead SOIC_N       | R-8            |              |
| ADR441ARZ          | 2.500              | 3                | 0.12 | 10                         | –40°C to +125°C   | 8-Lead SOIC_N       | R-8            | R02          |
| ADR441ARZ-REEL7    | 2.500              | 3                | 0.12 | 10                         | –40°C to +125°C   | 8-Lead SOIC_N       | R-8            |              |
| ADR441ARMZ         | 2.500              | 3                | 0.12 | 10                         | –40°C to +125°C   | 8-Lead MSOP         | RM-8           |              |
| ADR441ARMZ-REEL7   | 2.500              | 3                | 0.12 | 10                         | –40°C to +125°C   | 8-Lead MSOP         | RM-8           |              |
| ADR441BRZ          | 2.500              | 1                | 0.04 | 3                          | –40°C to +125°C   | 8-Lead SOIC_N       | R-8            |              |
| ADR441BRZ-REEL7    | 2.500              | 1                | 0.04 | 3                          | –40°C to +125°C   | 8-Lead SOIC_N       | R-8            |              |
| ADR443ARZ          | 3.000              | 4                | 0.13 | 10                         | –40°C to +125°C   | 8-Lead SOIC_N       | R-8            | R03          |
| ADR443ARZ-REEL7    | 3.000              | 4                | 0.13 | 10                         | –40°C to +125°C   | 8-Lead SOIC_N       | R-8            |              |
| ADR443ARMZ         | 3.000              | 4                | 0.13 | 10                         | –40°C to +125°C   | 8-Lead MSOP         | RM-8           |              |
| ADR443ARMZ-REEL7   | 3.000              | 4                | 0.13 | 10                         | –40°C to +125°C   | 8-Lead MSOP         | RM-8           |              |
| ADR443BRZ          | 3.000              | 1.2              | 0.04 | 3                          | –40°C to +125°C   | 8-Lead SOIC_N       | R-8            |              |
| ADR443BRZ-REEL7    | 3.000              | 1.2              | 0.04 | 3                          | –40°C to +125°C   | 8-Lead SOIC_N       | R-8            |              |
| ADR444ARZ          | 4.096              | 5                | 0.13 | 10                         | –40°C to +125°C   | 8-Lead SOIC_N       | R-8            | R04          |
| ADR444ARZ-REEL7    | 4.096              | 5                | 0.13 | 10                         | –40°C to +125°C   | 8-Lead SOIC_N       | R-8            |              |
| ADR444ARMZ         | 4.096              | 5                | 0.13 | 10                         | –40°C to +125°C   | 8-Lead MSOP         | RM-8           |              |
| ADR444ARMZ-REEL7   | 4.096              | 5                | 0.13 | 10                         | –40°C to +125°C   | 8-Lead MSOP         | RM-8           |              |
| ADR444BRZ          | 4.096              | 1.6              | 0.04 | 3                          | –40°C to +125°C   | 8-Lead SOIC_N       | R-8            |              |
| ADR444BRZ-REEL7    | 4.096              | 1.6              | 0.04 | 3                          | –40°C to +125°C   | 8-Lead SOIC_N       | R-8            |              |
| ADR445ARZ          | 5.000              | 6                | 0.12 | 10                         | –40°C to +125°C   | 8-Lead SOIC_N       | R-8            | R05          |
| ADR445ARZ-REEL7    | 5.000              | 6                | 0.12 | 10                         | –40°C to +125°C   | 8-Lead SOIC_N       | R-8            |              |
| ADR445ARMZ         | 5.000              | 6                | 0.12 | 10                         | –40°C to +125°C   | 8-Lead MSOP         | RM-8           |              |
| ADR445ARMZ-REEL7   | 5.000              | 6                | 0.12 | 10                         | –40°C to +125°C   | 8-Lead MSOP         | RM-8           |              |
| ADR445BRZ          | 5.000              | 2                | 0.04 | 3                          | –40°C to +125°C   | 8-Lead SOIC_N       | R-8            |              |
| ADR445BRZ-REEL7    | 5.000              | 2                | 0.04 | 3                          | –40°C to +125°C   | 8-Lead SOIC_N       | R-8            |              |

<sup>1</sup> Z = RoHS Compliant Part.I<sup>2</sup>C refers to a communications protocol originally developed by Philips Semiconductors (now NXP Semiconductors).

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9