

# MC74AC00, MC74ACT00

## Quad 2-Input NAND Gate

### High-Performance Silicon-Gate CMOS

#### Features

- Output Drive Capability:  $\pm 24$  mA
- Operating Voltage Range: 2 to 6 V AC00; 4.5 to 5.5 ACT00
- Low Input Current: 1.0  $\mu$ A
- High Noise Immunity Characteristic of CMOS Devices
- In Compliance With the JEDEC Standard No. 7A Requirements
- Chip Complexity: 32 FETs
- Pb-Free Packages are Available

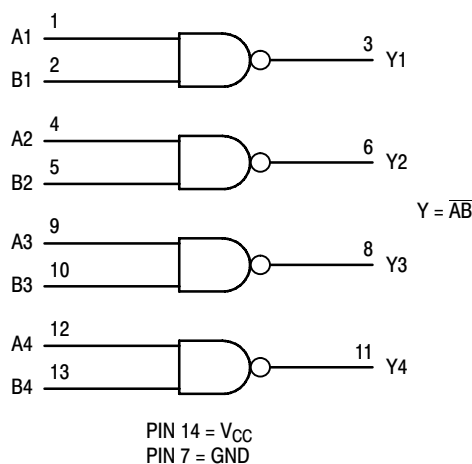


Figure 1. Logic Diagram

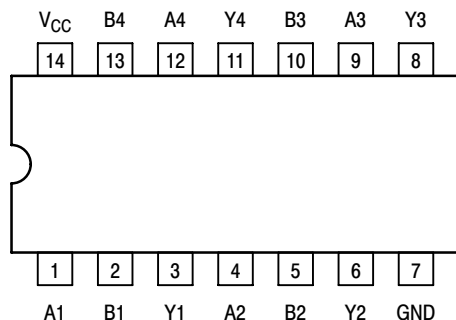



Figure 2. Pinout: 14-Lead Packages (Top View)



ON Semiconductor®

<http://onsemi.com>

#### MARKING DIAGRAMS

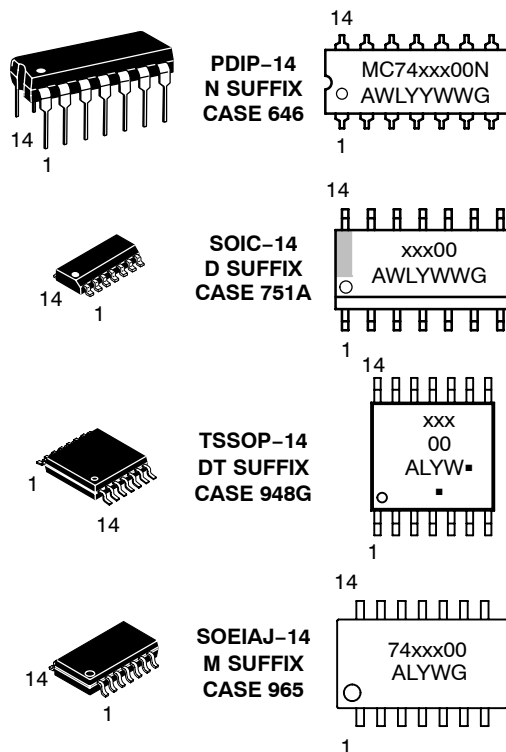

xxx = AC or ACT  
A = Assembly Location  
WL or L = Wafer Lot  
YY or Y = Year  
WW or W = Work Week  
G = Pb-Free Package

#### FUNCTION TABLE

| Inputs |   | Output |
|--------|---|--------|
| A      | B | Y      |
| L      | L | H      |
| L      | H | H      |
| H      | L | H      |
| H      | H | L      |

#### ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 6 of this data sheet.

# MC74AC00, MC74ACT00

## MAXIMUM RATINGS

| Symbol                | Parameter                                                                                                     | Value                                          | Unit |
|-----------------------|---------------------------------------------------------------------------------------------------------------|------------------------------------------------|------|
| V <sub>CC</sub>       | DC Supply Voltage                                                                                             | − 0.5 to + 7.0                                 | V    |
| V <sub>I</sub>        | DC Input Voltage                                                                                              | − 0.5 ≤ V <sub>I</sub> ≤ V <sub>CC</sub> + 0.5 | V    |
| V <sub>O</sub>        | DC Output Voltage (Note 1)                                                                                    | − 0.5 ≤ V <sub>O</sub> ≤ V <sub>CC</sub> + 0.5 | V    |
| I <sub>IK</sub>       | DC Input Diode Current                                                                                        | ± 20                                           | mA   |
| I <sub>OK</sub>       | DC Output Diode Current                                                                                       | ± 50                                           | mA   |
| I <sub>O</sub>        | DC Output Sink/Source Current                                                                                 | ± 50                                           | mA   |
| I <sub>CC</sub>       | DC Supply Current per Output Pin                                                                              | ± 50                                           | mA   |
| I <sub>GND</sub>      | DC Ground Current per Output Pin                                                                              | ± 50                                           | mA   |
| T <sub>STG</sub>      | Storage Temperature Range                                                                                     | − 65 to + 150                                  | °C   |
| T <sub>L</sub>        | Lead temperature, 1 mm from Case for 10 Seconds                                                               | 260                                            | °C   |
| T <sub>J</sub>        | Junction temperature under Bias                                                                               | + 150                                          | °C   |
| θ <sub>JA</sub>       | Thermal resistance<br>PDIP<br>SOIC<br>TSSOP                                                                   | 78<br>125<br>170                               | °C/W |
| P <sub>D</sub>        | Power Dissipation in Still Air at 85°C<br>PDIP<br>SOIC<br>TSSOP                                               | 78<br>125<br>170                               | mW   |
| MSL                   | Moisture Sensitivity                                                                                          | Level 1                                        |      |
| F <sub>R</sub>        | Flammability Rating<br>Oxygen Index: 30% – 35%                                                                | UL 94 V-0 @ 0.125 in                           |      |
| V <sub>ESD</sub>      | ESD Withstand Voltage<br>Human Body Model (Note 2)<br>Machine Model (Note 3)<br>Charged Device Model (Note 4) | > 2000<br>> 200<br>> 1000                      | V    |
| I <sub>Latch-Up</sub> | Latch-Up Performance Above V <sub>CC</sub> and Below GND at 85°C (Note 5)                                     | ± 100                                          | mA   |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

1. I<sub>O</sub> absolute maximum rating must be observed.
2. Tested to EIA/JESD22-A114-A.
3. Tested to EIA/JESD22-A115-A.
4. Tested to JESD22-C101-A.
5. Tested to EIA/JESD78.

## RECOMMENDED OPERATING CONDITIONS

| Symbol                             | Parameter                                                                                                                      | Min         | Typ             | Max             | Unit |
|------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|-------------|-----------------|-----------------|------|
| V <sub>CC</sub>                    | Supply Voltage<br>MC74AC00<br>MC74ACT00                                                                                        | 2.0<br>4.5  | 5.0<br>5.0      | 6.0<br>5.5      | V    |
| V <sub>in</sub> , V <sub>out</sub> | DC Input Voltage, Output Voltage (Ref. to GND)                                                                                 | 0           | –               | V <sub>CC</sub> | V    |
| t <sub>r</sub> , t <sub>f</sub>    | Input Rise and Fall Time (Note 6)<br>MC74AC00<br>V <sub>CC</sub> @ 3.0 V<br>V <sub>CC</sub> @ 4.5 V<br>V <sub>CC</sub> @ 5.5 V | –<br>–<br>– | 150<br>40<br>25 | –<br>–<br>–     | ns/V |
| t <sub>r</sub> , t <sub>f</sub>    | Input Rise and Fall Time (Note 7)<br>MC74ACT00<br>V <sub>CC</sub> @ 4.5 V<br>V <sub>CC</sub> @ 5.5 V                           | –<br>–      | 10<br>8.0       | –<br>–          | ns/V |
| T <sub>J</sub>                     | Junction Temperature                                                                                                           | –           | –               | 150             | °C   |
| T <sub>A</sub>                     | Operating Ambient Temperature Range                                                                                            | –55         | 25              | 125             | °C   |
| I <sub>OH</sub>                    | Output Current – High                                                                                                          | –           | –               | –24             | mA   |
| I <sub>OL</sub>                    | Output Current – Low                                                                                                           | –           | –               | 24              | mA   |

6. V<sub>in</sub> from 30% to 70% V<sub>CC</sub>.
7. V<sub>in</sub> from 0.8 V to 2.0 V.

# MC74AC00, MC74ACT00

## DC CHARACTERISTICS

| Symbol           | Parameter                         | V <sub>CC</sub><br>(V) | MC74AC00               |                   |                                 |                                | Unit | Conditions                                                                                          |
|------------------|-----------------------------------|------------------------|------------------------|-------------------|---------------------------------|--------------------------------|------|-----------------------------------------------------------------------------------------------------|
|                  |                                   |                        | T <sub>A</sub> = +25°C |                   | T <sub>A</sub> = -40°C to +85°C | T <sub>A</sub> = -55°C + 125°C |      |                                                                                                     |
|                  |                                   |                        | Typ                    | Guaranteed Limits |                                 |                                |      |                                                                                                     |
| V <sub>IH</sub>  | Minimum High Level Input Voltage  | 3.0                    | 1.5                    | 2.1               | 2.1                             | 2.1                            | V    | V <sub>OUT</sub> = 0.1 V<br>or V <sub>CC</sub> - 0.1 V                                              |
|                  |                                   | 4.5                    | 2.25                   | 3.15              | 3.15                            | 3.15                           |      |                                                                                                     |
|                  |                                   | 5.5                    | 2.75                   | 3.85              | 3.85                            | 3.85                           |      |                                                                                                     |
| V <sub>IL</sub>  | Maximum Low Level Input Voltage   | 3.0                    | 1.5                    | 0.9               | 0.9                             | 0.9                            | V    | V <sub>OUT</sub> = 0.1 V<br>or V <sub>CC</sub> - 0.1 V                                              |
|                  |                                   | 4.5                    | 2.25                   | 1.35              | 1.35                            | 1.35                           |      |                                                                                                     |
|                  |                                   | 5.5                    | 2.75                   | 1.65              | 1.65                            | 1.65                           |      |                                                                                                     |
| V <sub>OH</sub>  | Minimum High Level Output Voltage | 3.0                    | 2.99                   | 2.9               | 2.9                             | 2.9                            | V    | I <sub>OUT</sub> = -50 μA                                                                           |
|                  |                                   | 4.5                    | 4.49                   | 4.4               | 4.4                             | 4.4                            |      |                                                                                                     |
|                  |                                   | 5.5                    | 5.49                   | 5.4               | 5.4                             | 5.4                            |      |                                                                                                     |
|                  |                                   | 3.0                    | -                      | 2.56              | 2.46                            | 2.4                            | V    | *V <sub>IN</sub> = V <sub>IL</sub> or V <sub>IH</sub><br>-12 mA<br>I <sub>OH</sub> -24 mA<br>-24 mA |
|                  |                                   | 4.5                    | -                      | 3.86              | 3.76                            | 3.7                            |      |                                                                                                     |
|                  |                                   | 5.5                    | -                      | 4.86              | 4.76                            | 4.7                            |      |                                                                                                     |
| V <sub>OL</sub>  | Maximum Low Level Output Voltage  | 3.0                    | 0.002                  | 0.1               | 0.1                             | 0.1                            | V    | I <sub>OUT</sub> = 50 μA                                                                            |
|                  |                                   | 4.5                    | 0.001                  | 0.1               | 0.1                             | 0.1                            |      |                                                                                                     |
|                  |                                   | 5.5                    | 0.001                  | 0.1               | 0.1                             | 0.1                            |      |                                                                                                     |
|                  |                                   | 3.0                    | -                      | 0.36              | 0.44                            | 0.5                            | V    | *V <sub>IN</sub> = V <sub>IL</sub> or V <sub>IH</sub><br>12 mA<br>I <sub>OL</sub> 24 mA<br>24 mA    |
|                  |                                   | 4.5                    | -                      | 0.36              | 0.44                            | 0.5                            |      |                                                                                                     |
|                  |                                   | 5.5                    | -                      | 0.36              | 0.44                            | 0.5                            |      |                                                                                                     |
| I <sub>IN</sub>  | Maximum Input Leakage Current     | 5.5                    | -                      | ±0.1              | ±1.0                            | ±1.0                           | μA   | V <sub>I</sub> = V <sub>CC</sub> , GND                                                              |
| I <sub>OLD</sub> | †Minimum Dynamic Output Current   | 5.5                    | -                      | -                 | 75                              | 50                             | mA   | V <sub>OLD</sub> = 1.65 V Max                                                                       |
| I <sub>OHD</sub> |                                   | 5.5                    | -                      | -                 | -75                             | -50                            | mA   | V <sub>OHD</sub> = 3.85 V Min                                                                       |
| I <sub>CC</sub>  | Maximum Quiescent Supply Current  | 5.5                    | -                      | 4.0               | 40                              | 40                             | μA   | V <sub>IN</sub> = V <sub>CC</sub> or GND                                                            |

\*All outputs loaded; thresholds on input associated with output under test.

†Maximum test duration 2.0 ms, one output loaded at a time.

NOTE: I<sub>IN</sub> and I<sub>CC</sub> @ 3.0 V are guaranteed to be less than or equal to the respective limit @ 5.5 V V<sub>CC</sub>.

## AC CHARACTERISTICS (t<sub>r</sub> = t<sub>f</sub> = 3.0 nS; C<sub>L</sub> = 50 pF; see Figures 3 and 4 for Waveforms)

| Symbol           | Parameter         | V <sub>CC</sub> *<br>(V) | MC74AC00               |            |            |                                 |             |                                   |             | Unit |
|------------------|-------------------|--------------------------|------------------------|------------|------------|---------------------------------|-------------|-----------------------------------|-------------|------|
|                  |                   |                          | T <sub>A</sub> = +25°C |            |            | T <sub>A</sub> = -40°C to +85°C |             | T <sub>A</sub> = -55°C to + 125°C |             |      |
|                  |                   |                          | Min                    | Typ        | Max        | Min                             | Max         | Min                               | Max         |      |
| t <sub>PLH</sub> | Propagation Delay | 3.3<br>5.0               | 2.0<br>1.5             | 7.0<br>6.0 | 9.5<br>8.0 | 2.0<br>1.5                      | 10.0<br>8.5 | 1.0<br>1.0                        | 11.0<br>8.5 | ns   |
| t <sub>PHL</sub> | Propagation Delay | 3.3<br>5.0               | 1.5<br>1.5             | 5.5<br>4.5 | 8.0<br>6.5 | 1.0<br>1.0                      | 8.5<br>7.0  | 1.0<br>1.0                        | 9.0<br>7.0  | ns   |

\*Voltage Range 3.3 V is 3.3 V ± 0.3 V.

Voltage Range 5.0 V is 5.0 V ± 0.5 V.

# MC74AC00, MC74ACT00

## DC CHARACTERISTICS

| Symbol            | Parameter                              | V <sub>CC</sub><br>(V) | MC74ACT00              |                   |                                 |                                   | Unit | Conditions                                                                                |
|-------------------|----------------------------------------|------------------------|------------------------|-------------------|---------------------------------|-----------------------------------|------|-------------------------------------------------------------------------------------------|
|                   |                                        |                        | T <sub>A</sub> = +25°C |                   | T <sub>A</sub> = -40°C to +85°C | T <sub>A</sub> = -55°C to + 125°C |      |                                                                                           |
|                   |                                        |                        | Typ                    | Guaranteed Limits |                                 |                                   |      |                                                                                           |
| V <sub>IH</sub>   | Minimum High Level Input Voltage       | 4.5<br>5.5             | 1.5<br>1.5             | 2.0<br>2.0        | 2.0<br>2.0                      | 2.0<br>2.0                        | V    | V <sub>OUT</sub> = 0.1 V<br>or V <sub>CC</sub> - 0.1 V                                    |
| V <sub>IL</sub>   | Maximum Low Level Input Voltage        | 4.5<br>5.5             | 1.5<br>1.5             | 0.8<br>0.8        | 0.8<br>0.8                      | 0.8<br>0.8                        | V    | V <sub>OUT</sub> = 0.1 V<br>or V <sub>CC</sub> - 0.1 V                                    |
| V <sub>OH</sub>   | Minimum High Level Output Voltage      | 4.5<br>5.5             | 4.49<br>5.49           | 4.4<br>5.4        | 4.4<br>5.4                      | 4.4<br>5.4                        | V    | I <sub>OUT</sub> = -50 μA                                                                 |
|                   |                                        | 4.5<br>5.5             | -<br>-                 | 3.86<br>4.86      | 3.76<br>4.76                    | 3.7<br>4.7                        | V    | *V <sub>IN</sub> = V <sub>IL</sub> or V <sub>IH</sub><br>I <sub>OH</sub> -24 mA<br>-24 mA |
| V <sub>OL</sub>   | Maximum Low Level Output Voltage       | 4.5<br>5.5             | 0.001<br>0.001         | 0.1<br>0.1        | 0.1<br>0.1                      | 0.1<br>0.1                        | V    | I <sub>OUT</sub> = 50 μA                                                                  |
|                   |                                        | 4.5<br>5.5             | -<br>-                 | 0.36<br>0.36      | 0.44<br>0.44                    | 0.5<br>0.5                        | V    | *V <sub>IN</sub> = V <sub>IL</sub> or V <sub>IH</sub><br>I <sub>OL</sub> 24 mA<br>24 mA   |
| I <sub>IN</sub>   | Maximum Input Leakage Current          | 5.5                    | -                      | ± 0.1             | ± 1.0                           | ± 1.0                             | μA   | V <sub>I</sub> = V <sub>CC</sub> , GND                                                    |
| ΔI <sub>CCT</sub> | Additional Max. I <sub>CC</sub> /Input | 5.5                    | 0.6                    | -                 | 1.5                             | 1.6                               | mA   | V <sub>I</sub> = V <sub>CC</sub> - 2.1 V                                                  |
| I <sub>OLD</sub>  | †Minimum Dynamic Output Current        | 5.5                    | -                      | -                 | 75                              | 50                                | mA   | V <sub>OLD</sub> = 1.65 V Max                                                             |
| I <sub>OHD</sub>  |                                        | 5.5                    | -                      | -                 | -75                             | -50                               | mA   | V <sub>OHD</sub> = 3.85 V Min                                                             |
| I <sub>CC</sub>   | Maximum Quiescent Supply Current       | 5.5                    | -                      | 4.0               | 40                              | 40                                | μA   | V <sub>IN</sub> = V <sub>CC</sub> or GND                                                  |

\*All outputs loaded; thresholds on input associated with output under test.

†Maximum test duration 2.0 ms, one output loaded at a time.

## AC CHARACTERISTICS (t<sub>r</sub> = t<sub>f</sub> = 3.0 nS; C<sub>L</sub> = 50 pF; see Figures 3 and 4 for Waveforms)


| Symbol           | Parameter         | V <sub>CC</sub> *<br>(V) | MC74ACT00              |     |     |                                 |     |                                  |     |    | Unit |
|------------------|-------------------|--------------------------|------------------------|-----|-----|---------------------------------|-----|----------------------------------|-----|----|------|
|                  |                   |                          | T <sub>A</sub> = +25°C |     |     | T <sub>A</sub> = -40°C to +85°C |     | T <sub>A</sub> = -55°C to +125°C |     |    |      |
|                  |                   |                          | Min                    | Typ | Max | Min                             | Max | Min                              | Max |    |      |
| t <sub>PLH</sub> | Propagation Delay | 5.0                      | 1.5                    | 5.5 | 9.0 | 1.0                             | 9.5 | 1.0                              | 9.5 | ns |      |
| t <sub>PHL</sub> | Propagation Delay | 5.0                      | 1.5                    | 4.0 | 7.0 | 1.0                             | 8.0 | 1.0                              | 8.0 | ns |      |

\*Voltage Range 5.0 V is 5.0 V ± 0.5 V.


## CAPACITANCE

| Symbol          | Parameter                     | Value<br>Typ | Test Conditions         | Unit |
|-----------------|-------------------------------|--------------|-------------------------|------|
| C <sub>IN</sub> | Input Capacitance             | 4.5          | V <sub>CC</sub> = 5.0 V | pF   |
| C <sub>PD</sub> | Power Dissipation Capacitance | 30           | V <sub>CC</sub> = 5.0 V | pF   |

## MC74AC00, MC74ACT00

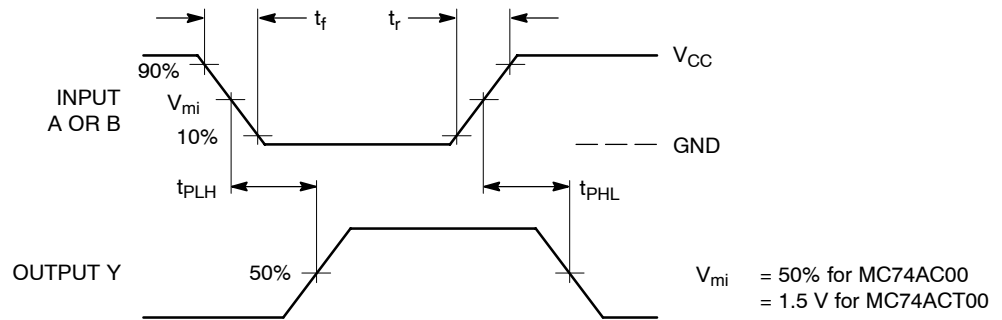

### Figure 3. Switching Waveforms

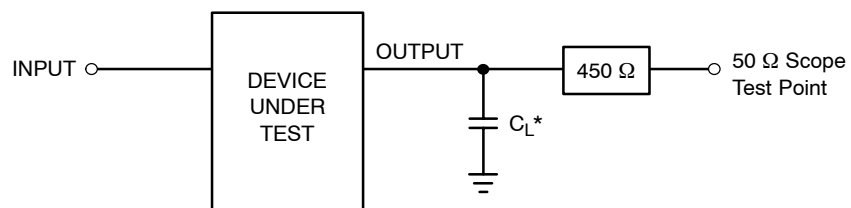

\*Includes all probe and jig capacitance

### Figure 4. Test Circuit

# MC74AC00, MC74ACT00

## ORDER INFORMATION

| Device         | Package                | Shipping†            |
|----------------|------------------------|----------------------|
| MC74AC00D      | SOIC-14                | 55 Units / Rail      |
| MC74AC00DG     | SOIC-14<br>(Pb-Free)   |                      |
| MC74AC00N      | PDIP-14                | 25 Units / Rail      |
| MC74AC00NG     | PDIP-14<br>(Pb-Free)   |                      |
| MC74AC00DR2    | SOIC-14                | 2500 / Tape and Reel |
| MC74AC00DR2G   | SOIC-14<br>(Pb-Free)   |                      |
| MC74AC00DTR2   | TSSOP-14*              |                      |
| MC74AC00DTR2G  | TSSOP-14*              |                      |
| MC74AC00MEL    | SOEIAJ-14              | 2000 / Tape and Reel |
| MC74AC00MELG   | SOEIAJ-14<br>(Pb-Free) |                      |
| MC74ACT00N     | PDIP-14                | 25 Units / Rail      |
| MC74ACT00NG    | PDIP-14<br>(Pb-Free)   |                      |
| MC74ACT00D     | SOIC-14                | 55 Units / Rail      |
| MC74ACT00DG    | SOIC-14<br>(Pb-Free)   |                      |
| MC74ACT00DR2   | SOIC-14                | 2500 / Tape and Reel |
| MC74ACT00DR2G  | SOIC-14<br>(Pb-Free)   |                      |
| MC74ACT00DTR2  | TSSOP-14*              |                      |
| MC74ACT00DTR2G | TSSOP-14*              |                      |
| MC74ACT00MEL   | SOEIAJ-14              | 2000 / Tape and Reel |
| MC74ACT00MELG  | SOEIAJ-14<br>(Pb-Free) |                      |

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

\*This package is inherently Pb-Free.

# MC74AC00, MC74ACT00

## PACKAGE DIMENSIONS

SOIC-14  
CASE 751A-03  
ISSUE H



### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION.
4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.127 (0.005) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION.

| DIM | MILLIMETERS |      | INCHES    |       |
|-----|-------------|------|-----------|-------|
|     | MIN         | MAX  | MIN       | MAX   |
| A   | 8.55        | 8.75 | 0.337     | 0.344 |
| B   | 3.80        | 4.00 | 0.150     | 0.157 |
| C   | 1.35        | 1.75 | 0.054     | 0.068 |
| D   | 0.35        | 0.49 | 0.014     | 0.019 |
| F   | 0.40        | 1.25 | 0.016     | 0.049 |
| G   | 1.27 BSC    |      | 0.050 BSC |       |
| J   | 0.19        | 0.25 | 0.008     | 0.009 |
| K   | 0.10        | 0.25 | 0.004     | 0.009 |
| M   | 0°          | 7°   | 0°        | 7°    |
| P   | 5.80        | 6.20 | 0.228     | 0.244 |
| R   | 0.25        | 0.50 | 0.010     | 0.019 |

### SOLDERING FOOTPRINT\*




DIMENSIONS: MILLIMETERS

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

# MC74AC00, MC74ACT00

**PDIP-14**  
CASE 646-06  
ISSUE P

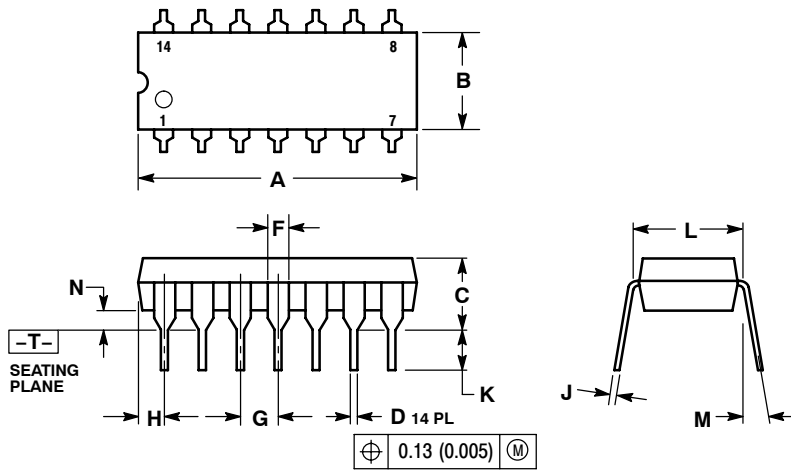

## NOTES:


1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL.
4. DIMENSION B DOES NOT INCLUDE MOLD FLASH.
5. ROUNDED CORNERS OPTIONAL.

| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | 0.715     | 0.770 | 18.16       | 19.56 |
| B   | 0.240     | 0.260 | 6.10        | 6.60  |
| C   | 0.145     | 0.185 | 3.69        | 4.69  |
| D   | 0.015     | 0.021 | 0.38        | 0.53  |
| F   | 0.040     | 0.070 | 1.02        | 1.78  |
| G   | 0.100 BSC |       | 2.54 BSC    |       |
| H   | 0.052     | 0.095 | 1.32        | 2.41  |
| J   | 0.008     | 0.015 | 0.20        | 0.38  |
| K   | 0.115     | 0.135 | 2.92        | 3.43  |
| L   | 0.290     | 0.310 | 7.37        | 7.87  |
| M   | ---       | 10 °  | ---         | 10 °  |
| N   | 0.015     | 0.039 | 0.38        | 1.01  |

# MC74AC00, MC74ACT00

## PACKAGE DIMENSIONS


**TSSOP-14**  
CASE 948G-01  
ISSUE B

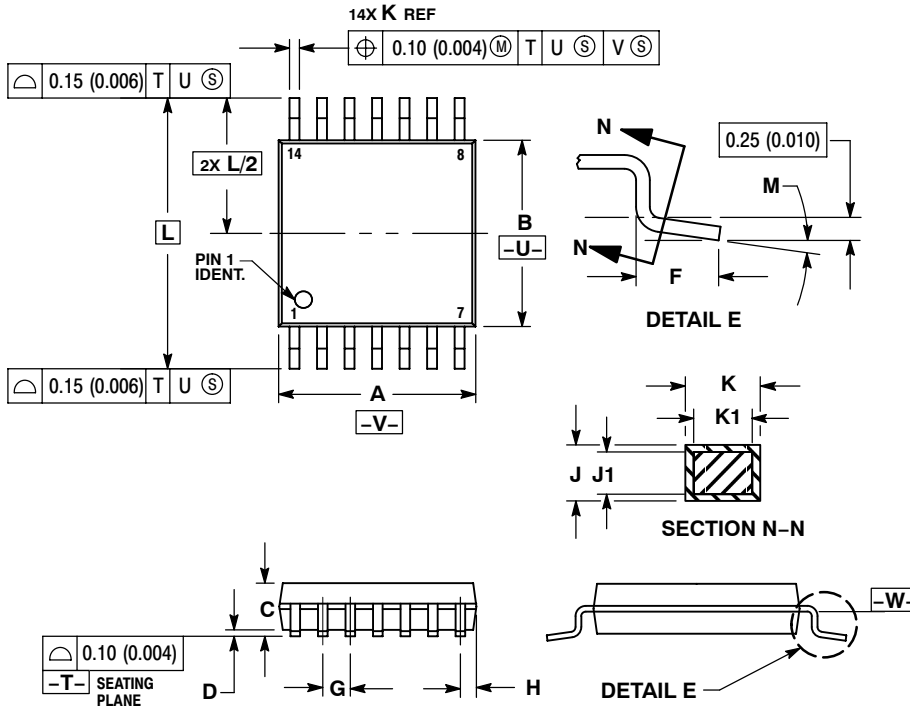

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: MILLIMETER.
  3. DIMENSION A DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH OR GATE BURRS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
  4. DIMENSION B DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.25 (0.010) PER SIDE.
  5. DIMENSION K DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE K DIMENSION AT MAXIMUM MATERIAL CONDITION.
  6. TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
  7. DIMENSION A AND B ARE TO BE DETERMINED AT DATUM PLANE -W-.

| DIM | MILLIMETERS |      | INCHES    |       |
|-----|-------------|------|-----------|-------|
|     | MIN         | MAX  | MIN       | MAX   |
| A   | 4.90        | 5.10 | 0.193     | 0.200 |
| B   | 4.30        | 4.50 | 0.169     | 0.177 |
| C   | ---         | 1.20 | ---       | 0.047 |
| D   | 0.05        | 0.15 | 0.002     | 0.006 |
| F   | 0.50        | 0.75 | 0.020     | 0.030 |
| G   | 0.65 BSC    |      | 0.026 BSC |       |
| H   | 0.50        | 0.60 | 0.020     | 0.024 |
| J   | 0.09        | 0.20 | 0.004     | 0.008 |
| J1  | 0.09        | 0.16 | 0.004     | 0.006 |
| K   | 0.19        | 0.30 | 0.007     | 0.012 |
| K1  | 0.19        | 0.25 | 0.007     | 0.010 |
| L   | 6.40 BSC    |      | 0.252 BSC |       |
| M   | 0°          | 8°   | 0°        | 8°    |

### SOLDERING FOOTPRINT\*

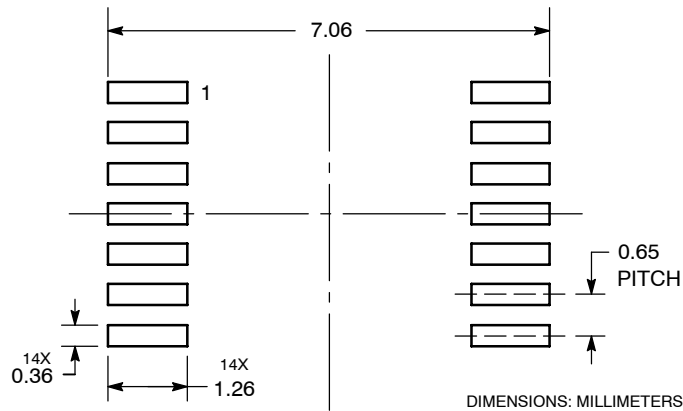

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

# MC74AC00, MC74ACT00

## PACKAGE DIMENSIONS

SOEIAJ-14  
CASE 965-01  
ISSUE A



### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS AND ARE MEASURED AT THE PARTING LINE. MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
4. TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
5. THE LEAD WIDTH DIMENSION (b) DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE LEAD WIDTH DIMENSION AT MAXIMUM MATERIAL CONDITION. DAMBAR CANNOT BE LOCATED ON THE LOWER RADIUS OR THE FOOT. MINIMUM SPACE BETWEEN PROTRUSIONS AND ADJACENT LEAD TO BE 0.46 (0.018).

| DIM            | MILLIMETERS |       | INCHES    |       |
|----------------|-------------|-------|-----------|-------|
|                | MIN         | MAX   | MIN       | MAX   |
| A              | ---         | 2.05  | ---       | 0.081 |
| A <sub>1</sub> | 0.05        | 0.20  | 0.002     | 0.008 |
| b              | 0.35        | 0.50  | 0.014     | 0.020 |
| c              | 0.10        | 0.20  | 0.004     | 0.008 |
| D              | 9.90        | 10.50 | 0.390     | 0.413 |
| E              | 5.10        | 5.45  | 0.201     | 0.215 |
| e              | 1.27 BSC    |       | 0.050 BSC |       |
| H <sub>E</sub> | 7.40        | 8.20  | 0.291     | 0.323 |
| 0.50           | 0.50        | 0.85  | 0.020     | 0.033 |
| L <sub>E</sub> | 1.10        | 1.50  | 0.043     | 0.059 |
| M              | 0°          | 10°   | 0°        | 10°   |
| Q <sub>1</sub> | 0.70        | 0.90  | 0.028     | 0.035 |
| Z              | ---         | 1.42  | ---       | 0.056 |

ON Semiconductor and are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

### PUBLICATION ORDERING INFORMATION

**LITERATURE FULFILLMENT:**  
Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
Email: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada  
**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910  
**Japan Customer Focus Center**  
Phone: 81-3-5773-3850

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)  
**Order Literature:** <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9