


## Automotive Turbo 2 ultrafast high voltage rectifier

Datasheet – production data

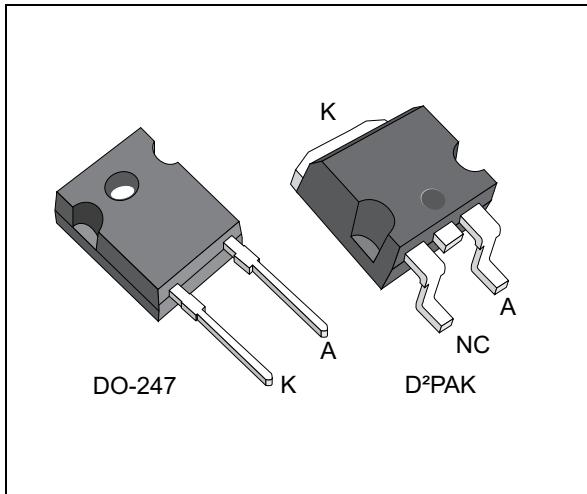

**Table 1. Device summary**

Symbol	Value
$I_{F(AV)}$	30 A
$V_{RRM}$	600 V
$t_{rr}$ (typ)	39 ns
$T_j$	-40 to +175 °C
$V_F$ (typ)	1.75 V

## Features

- Aluminum ribbon bonding
- Ultrafast switching
- Low reverse current
- Low thermal resistance
- Reduces switching and conduction losses
- ECOPACK®2 compliant component (DO-247)
- AEC-Q101 qualified

## Description

The STTH30ST06-Y, which uses ST Turbo 2, 600 V technology, is packaged in DO-247 and D²PAK with aluminum ribbon to ensure a high robustness. It especially suited for use in switching power supplies and automotive applications, industrial applications, as rectification and boost diode for circuits working in continuous conduction mode.

# 1 Characteristics

**Table 2. Absolute ratings (limiting values, at 25 °C, unless otherwise specified)**

Symbol	Parameter		Value	Unit
$V_{RRM}$	Repetitive peak reverse voltage		600	V
$V_{RRM}$	Repetitive peak reverse voltage, $T_j = -40^\circ\text{C}$		560	V
$I_{F(\text{RMS})}$	Forward rms current		64	A
$I_{F(\text{AV})}$	Average forward current, $\delta = 0.5$	$T_c = 65^\circ\text{C}$	30	A
$I_{FSM}$	Surge non repetitive forward current	$t_p = 10 \text{ ms sinusoidal}$	160	A
$T_{\text{stg}}$	Storage temperature range		-65 to + 175	°C
$T_j$	Maximum operating junction temperature		-40 to + 175	°C

**Table 3. Thermal resistance**

Symbol	Parameter	Value	Unit
$R_{\text{th(j-c)}}$	Junction to case (DO-247, D <sup>2</sup> PAK)	1.25	°C / W

**Table 4. Static electrical characteristics**

Symbol	Parameter	Test conditions		Min.	Typ	Max.	Unit
$I_R$ <sup>(1)</sup>	Reverse leakage current	$T_j = 25^\circ\text{C}$	$V_R = V_{RRM}$			50	μA
		$T_j = 125^\circ\text{C}$			50	500	
$V_F$ <sup>(2)</sup>	Forward voltage drop	$T_j = 25^\circ\text{C}$	$I_F = 30 \text{ A}$			3.6	V
		$T_j = 125^\circ\text{C}$			1.75	2.2	





1. Pulse test:  $t_p = 5 \text{ ms}$ ,  $\delta < 2\%$
2. Pulse test:  $t_p = 380 \mu\text{s}$ ,  $\delta < 2\%$

To evaluate the conduction losses use the following equation:


$$P = 1.45 \times I_{F(\text{AV})} + 0.025 I_{F(\text{RMS})}^2$$

**Table 5. Dynamic electrical characteristics**


Symbol	Parameter	Test conditions		Min.	Typ	Max.	Unit
I <sub>RM</sub>	Reverse recovery current	T <sub>j</sub> = 125 °C	I <sub>F</sub> = 30 A, V <sub>R</sub> = 400 V dI <sub>F</sub> /dt = -100 A/μs		4	5.5	A
S <sub>factor</sub>	Softness factor				0.3		
t <sub>rr</sub>	Reverse recovery time	T <sub>j</sub> = 25 °C	I <sub>F</sub> = 1 A, V <sub>R</sub> = 30 V dI <sub>F</sub> /dt = -50 A/μs		39	50	ns
			I <sub>F</sub> = 0.5 A, I <sub>rr</sub> = 0.25 A I <sub>R</sub> = 1 A			30	
t <sub>fr</sub>	Forward recovery time		I <sub>F</sub> = 30 A, V <sub>FR</sub> = 4 V dI <sub>F</sub> /dt = 300 A/μs			200	
V <sub>FP</sub>	Forward recovery voltage				7		V

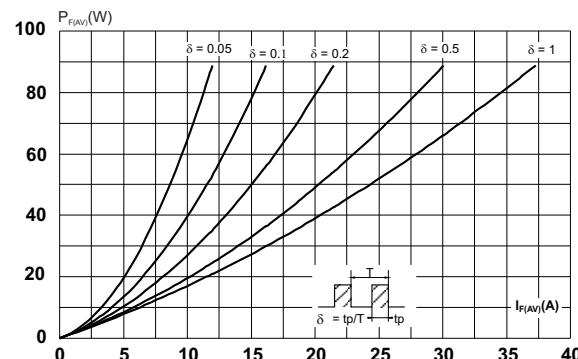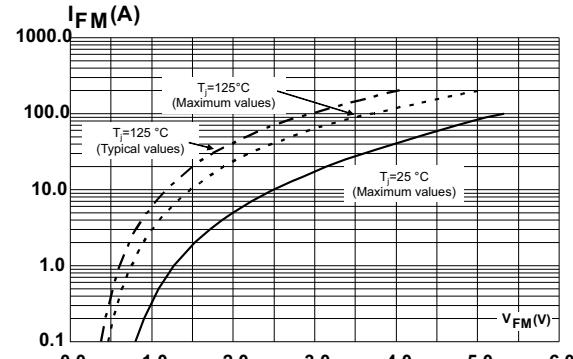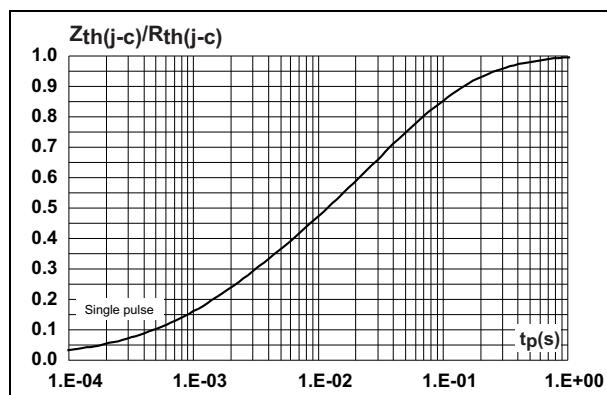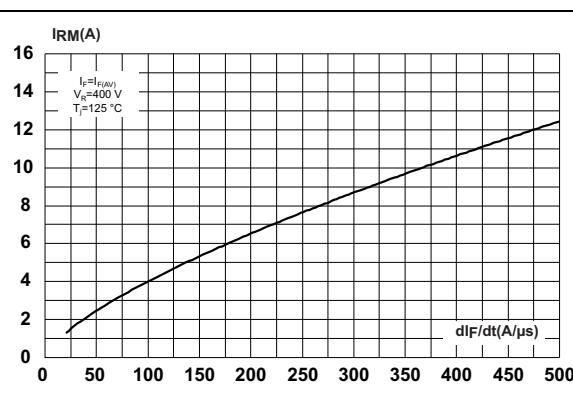**Figure 1. Average forward power dissipation versus average forward current****Figure 2. Forward voltage drop versus forward current****Figure 3. Relative variation of thermal impedance junction to case versus pulse duration****Figure 4. Peak reverse recovery current versus dI\_F/dt (typical values)**


**Figure 5. Reverse recovery time versus  $dI_F/dt$  (typical values)**

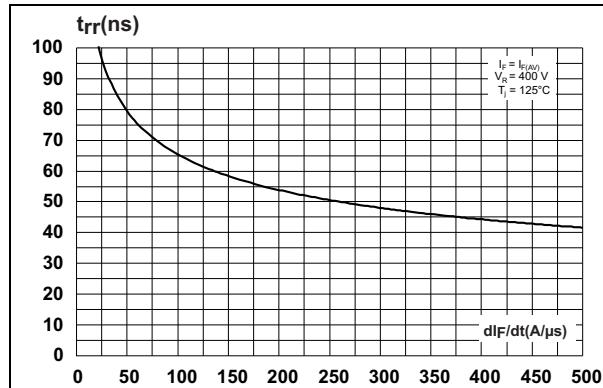


**Figure 6. Reverse recovery charges versus  $dI_F/dt$  (typical values)**

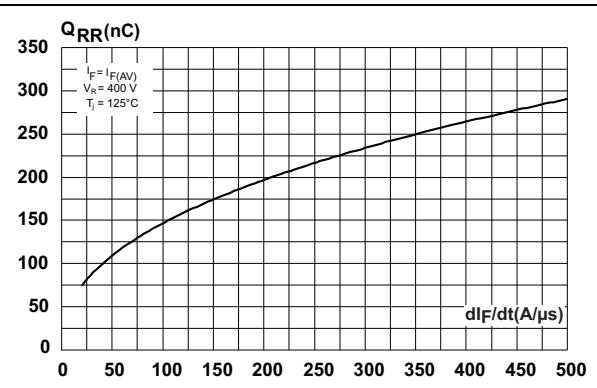


**Figure 7. Reverse recovery softness factor versus  $dI_F/dt$  (typical values)**

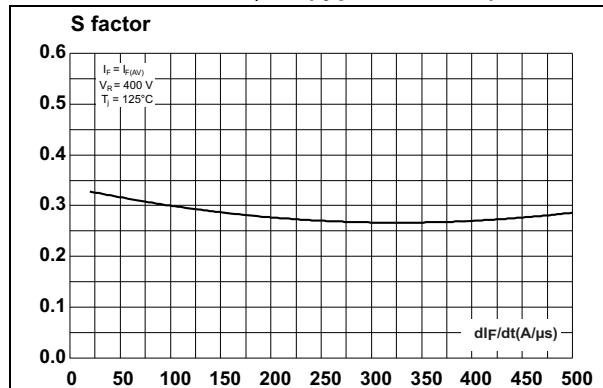


**Figure 8. Relative variation of dynamic parameters versus junction temperature**

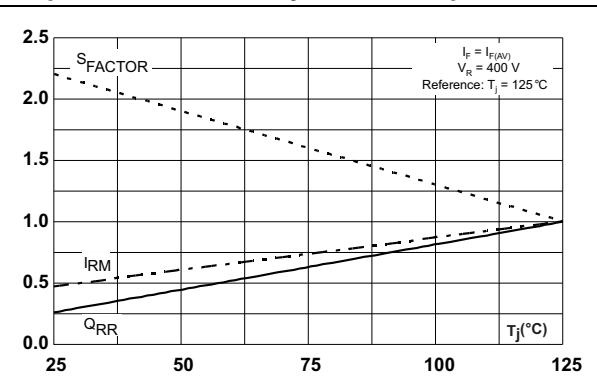


**Figure 9. Transient peak forward voltage versus  $dI_F/dt$  (typical values)**

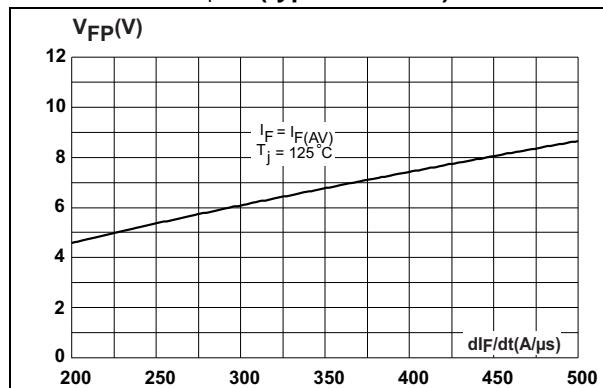


**Figure 10. Forward recovery time versus  $dI_F/dt$  (typical values)**

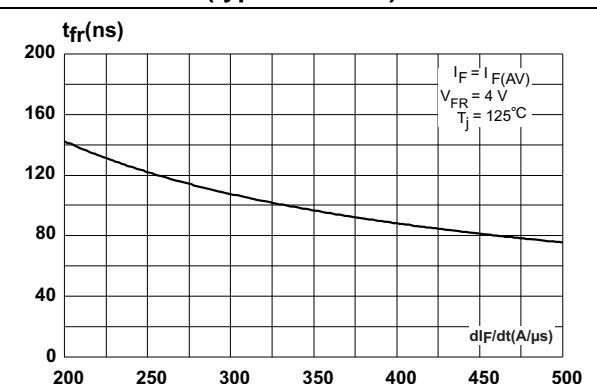

**Figure 11. Junction capacitance versus reverse voltage applied (typical values)**

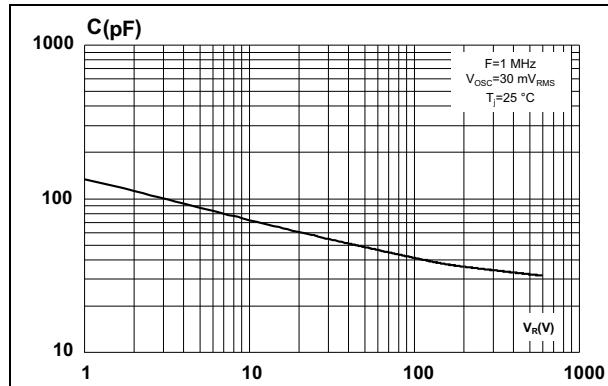

**Figure 12. Junction capacitance versus reverse voltage applied (typical values)**

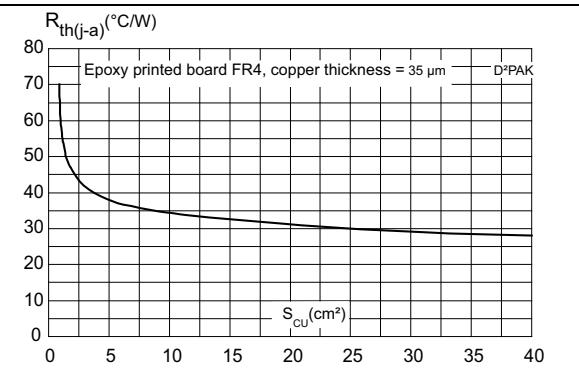


## 2 Package information

- Epoxy meets UL94, V0
- Lead-free package
- Cooling method: by conduction (C)
- Recommended torque value: 0.55 N·m (1.0 N·m maximum)

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com).  
ECOPACK® is an ST trademark.

Figure 13. D<sup>2</sup>PAK dimension definitions

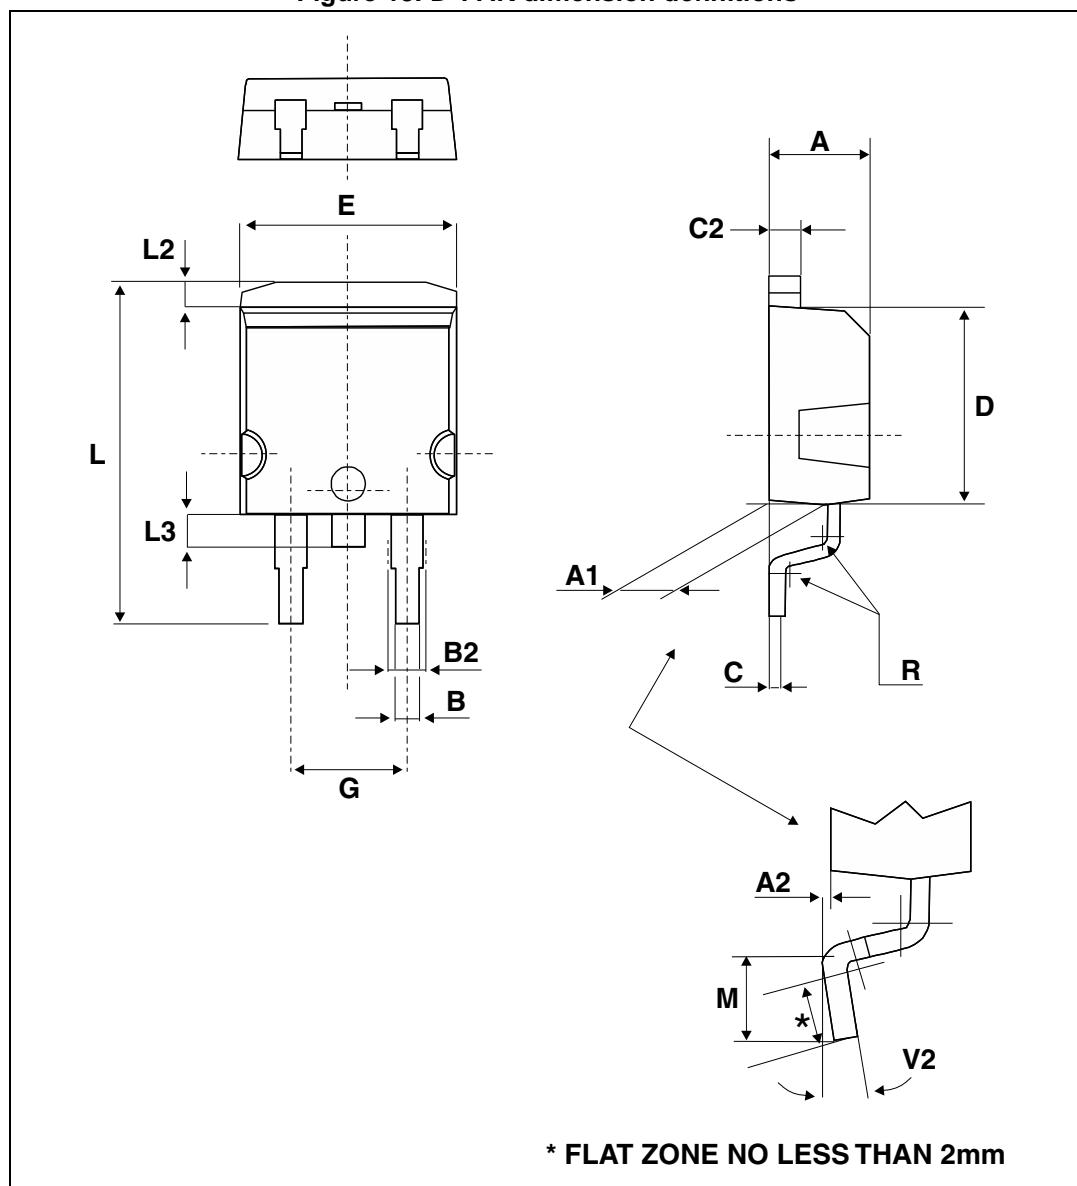

**Table 6. D<sup>2</sup>PAK dimension values**

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.40		4.60	0.173		0.181
A1	2.49		2.69	0.098		0.106
A2	0.03		0.23	0.001		0.009
B	0.70		0.93	0.027		0.037
B2	1.14		1.70	0.045		0.067
C	0.45		0.60	0.017		0.024
C2	1.23		1.36	0.048		0.054
D	8.95		9.35	0.352		0.368
E	10.00		10.40	0.393		0.409
G	4.88	16	5.28	0.192	0.63	0.208
L	15.00		15.85	0.590		0.624
L2	1.27		1.40	0.050		0.055
L3	1.40		1.75	0.055		0.069
M	2.40		3.20	0.094		0.126
R		0.40 typ.			0.016 typ.	
V2	0°		8°	0°		8°


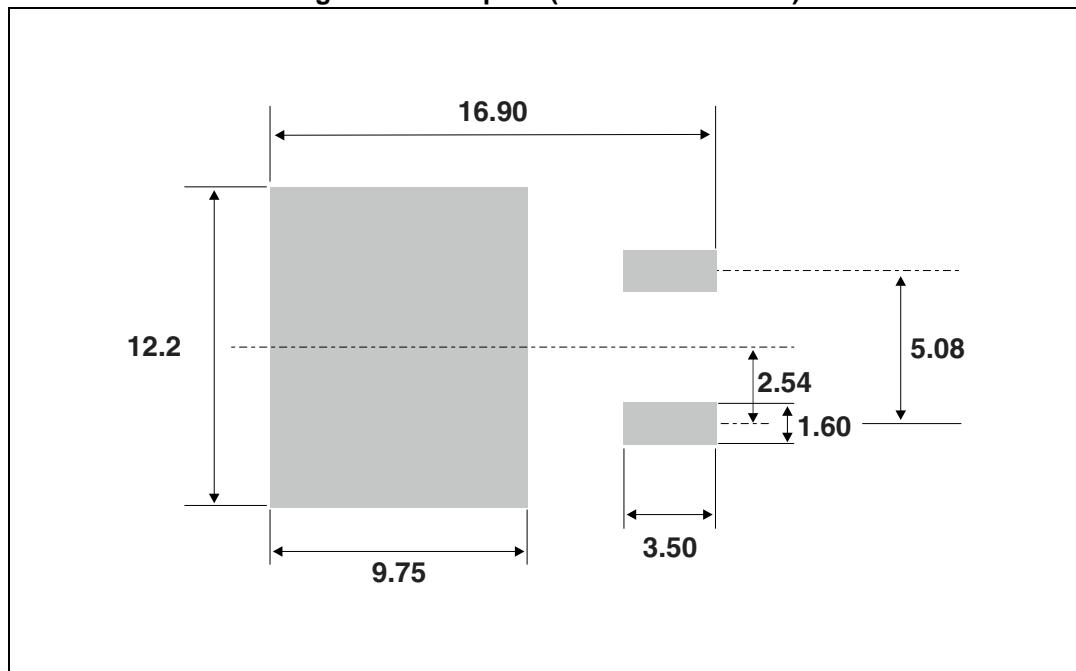
**Figure 14. Footprint (dimensions in mm)**

Figure 15. DO-247 dimension definitions

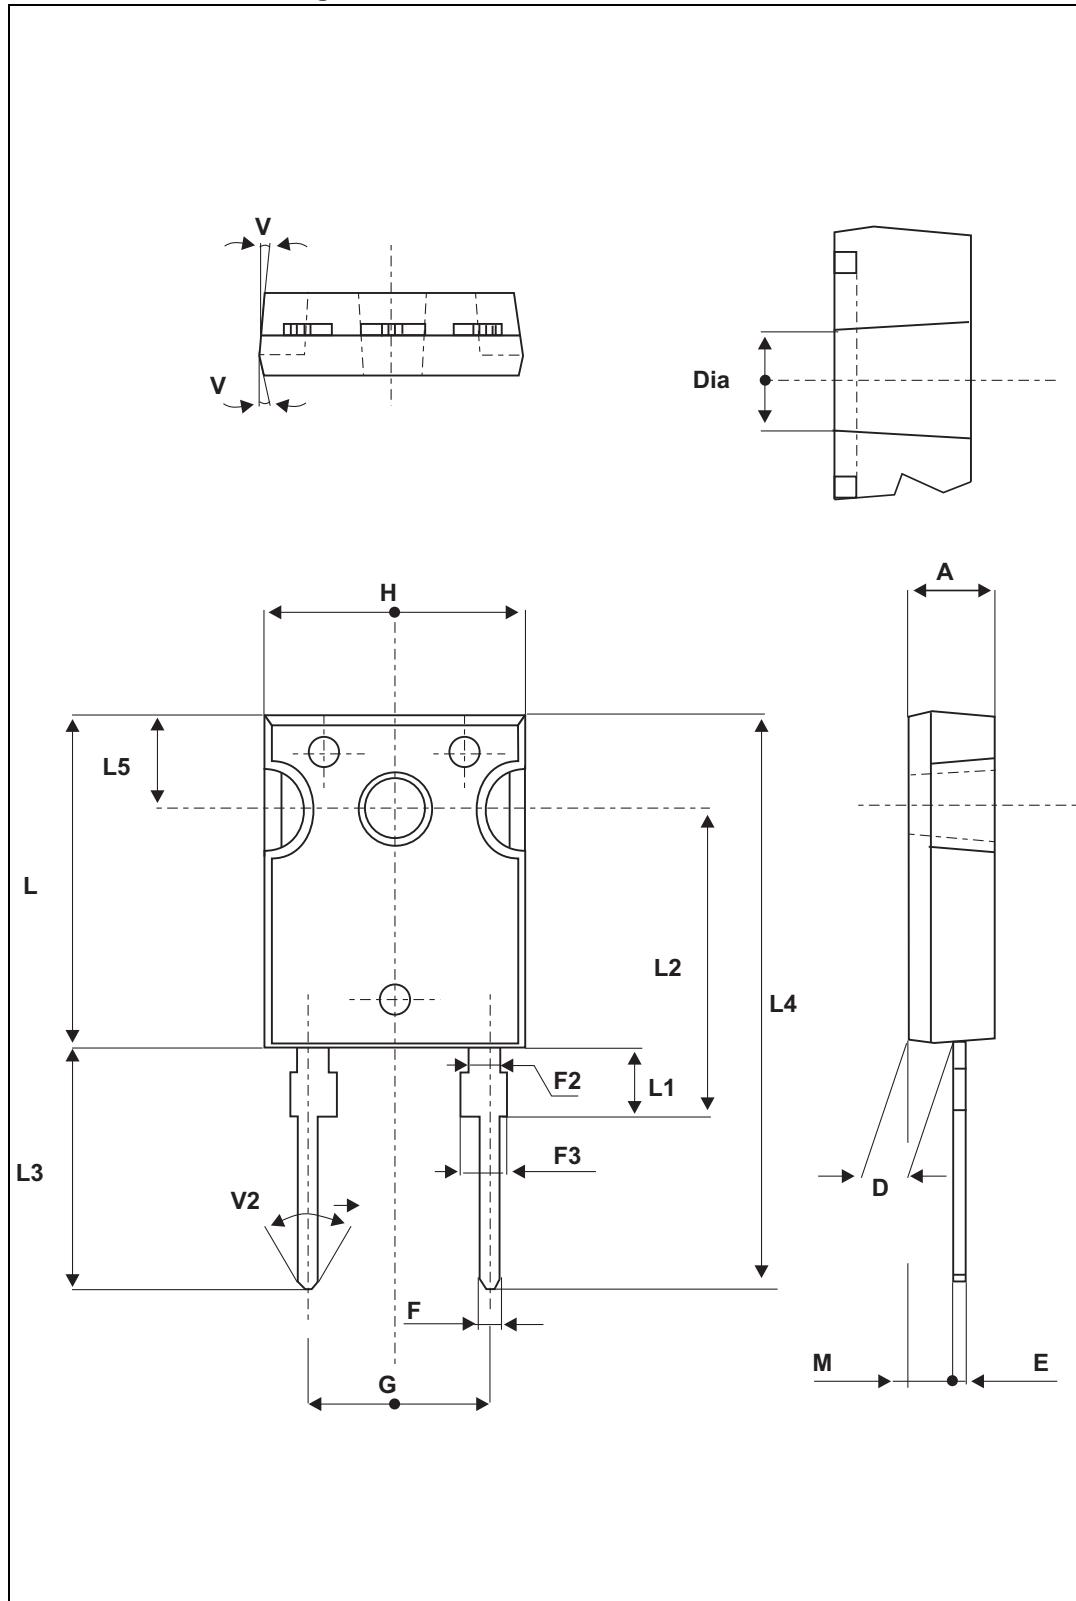

**Table 7. DO-247 dimension values**

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.85		5.15	0.191		0.203
D	2.20		2.60	0.086		0.102
E	0.40		0.80	0.015		0.031
F	1.00		1.40	0.039		0.055
F2		2.00			0.078	
F3	2.00		2.40	0.078		0.094
G		10.90			0.429	
H	15.45		15.75	0.608		0.620
L	19.85		20.15	0.781		0.793
L1	3.70		4.30	0.145		0.169
L2		18.50			0.728	
L3	14.20		14.80	0.559		0.582
L4		34.60			1.362	
L5		5.50			0.216	
M	2.00		3.00	0.078		0.118
V		5°			5°	
V2		60°			60°	
Dia.	3.55		3.65	0.139		0.143

### 3 Ordering information

**Table 8. Ordering information**

Ordering type	Marking	Package	Weight	Base qty	Delivery mode
STTH30ST06WY	STTH30ST06WY	DO-247	4.40 g	30	Tube
STTH30ST06GY-TR	STTH30ST06GY	D <sup>2</sup> PAK	1.48 g	1000	Tape and reel

### 4 Revision history

**Table 9. Document revision history**

Date	Revision	Changes
14-Jan-2015	1	First issue.

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2015 STMicroelectronics – All rights reserved

**Данный компонент на территории Российской Федерации****Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибуторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ Р В 0015-002 и ЭС РД 009

**Офис по работе с юридическими лицами:**

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru  
moschip.ru\_4

moschip.ru\_6  
moschip.ru\_9