

Features

- LO 2.0 TO 24 GHz
- RF 2.0 TO 24 GHz
- IF 1.0 TO 15 GHz
- LO DRIVE: +10 dBm (NOMINAL)
- HIGH COMPRESSION POINT

Description

MY51 is a triple balanced mixer, designed for use in military, commercial and test equipment applications. The design utilizes Schottky ring quad diodes and broadband soft dielectric baluns to attain excellent performance. The use of high temperature solder assembly processes used internally makes it ideal for use in manual, semi-automated assembly. Environmental screening available to MIL-STD-883, MIL-STD-202 or MIL-DTL-28837, consult factory.

Product Image



Ordering Information




Part Number	Package
MY51	Versapac
MY51C	SMA Connectorized

Electrical Specifications: $Z_0 = 50\Omega$ $Lo = +10$ dBm (Downconverter Application only)




Parameter	Test Conditions	Units	Typical	Guaranteed	
				+25°C	-54° to +85°C
SSB Conversion Loss (max) & SSB Noise Figure (max)	$f_R = 2.5$ to 18 GHz, $f_L = 2$ to 18 GHz, $f_I = 2$ to 10 GHz	dB	7.5	9.5	10.0
	$f_R = 2$ to 18 GHz, $f_L = 2$ to 24 GHz, $f_I = 1$ to 12 GHz	dB	8.0	10.5	11.0
	$f_R = 2$ to 24 GHz, $f_L = 2$ to 24 GHz, $f_I = 1$ to 15 GHz	dB	9.0	11.5	12.0
Isolation, L to R (min)	$f_L = 2$ to 3 GHz	dB	20	15	13
	$f_L = 3$ to 24 GHz	dB	30	20	18
Isolation, L to I (min)	$f_L = 2$ to 7 GHz	dB	22	15	13
	$f_L = 7$ to 24 GHz	dB	30	20	18
1 dB Conversion Comp.	$f_L = +10$ dBm	dBm	+5		
Input IP3	$f_{R1} = 5$ GHz at -6 dBm, $f_{R2} = 5.01$ GHz at -6 dBm, $f_L = 8$ GHz at +10 dBm	dBm	+15		
	$f_{R1} = 16$ GHz at -6 dBm, $f_{R2} = 16.01$ GHz at -6 dBm, $f_L = 18$ GHz at +10 dBm	dBm	+15		

Typical Performance Curves


Conversion Loss vs. Frequency
LO @ +10 dBm

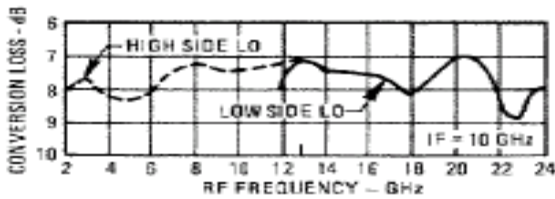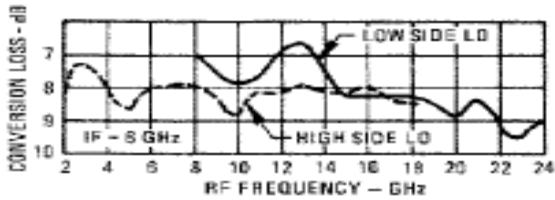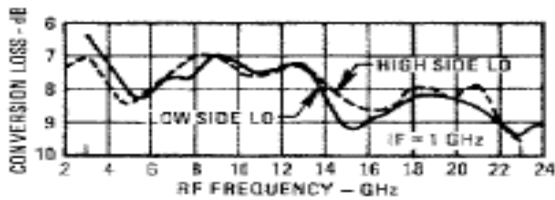



I-Port VSWR

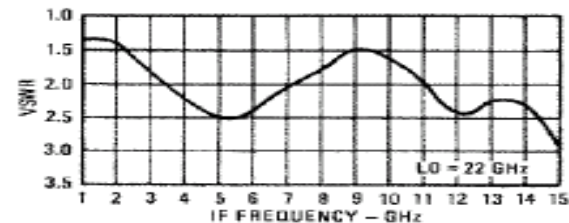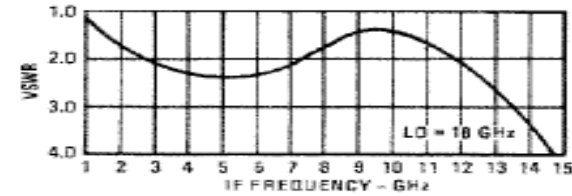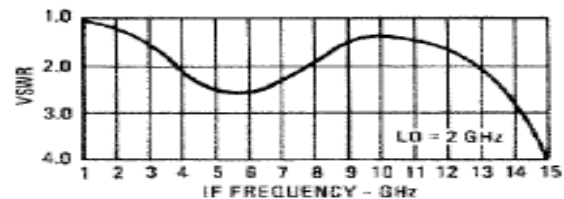



L-Port VSWR

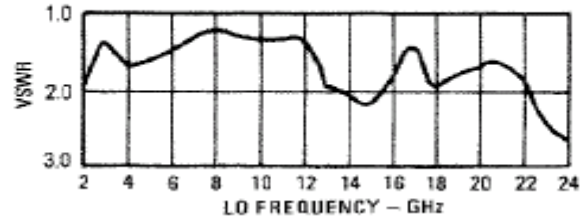



R-Port VSWR

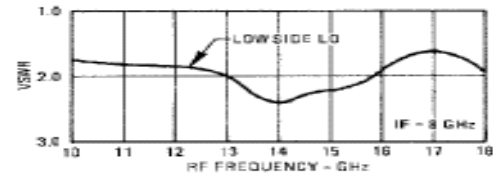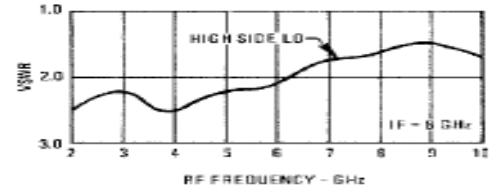

R-Port VSWR

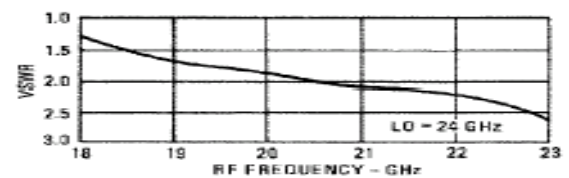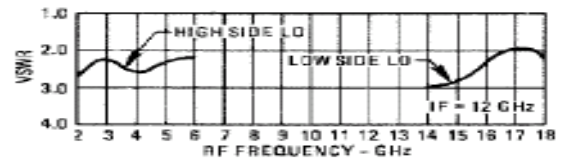

R-Port VSWR LO @ +10 dBm

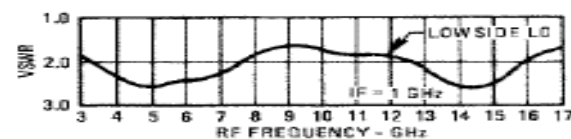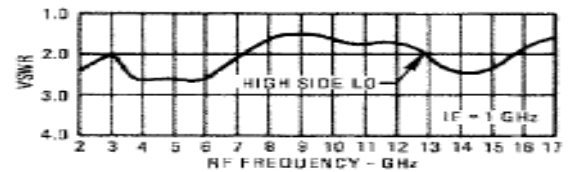


Triple-Balanced Mixer

Rev. V3


Absolute Maximum Ratings

Parameter	Absolute Maximum
Operating Temperature	-54°C to +100°C
Storage Temperature	-65°C to +100°C
Peak Input Power	+26 dBm max @ +25°C +22 dBm max @ +100°C


Outline Drawing: Versapac *

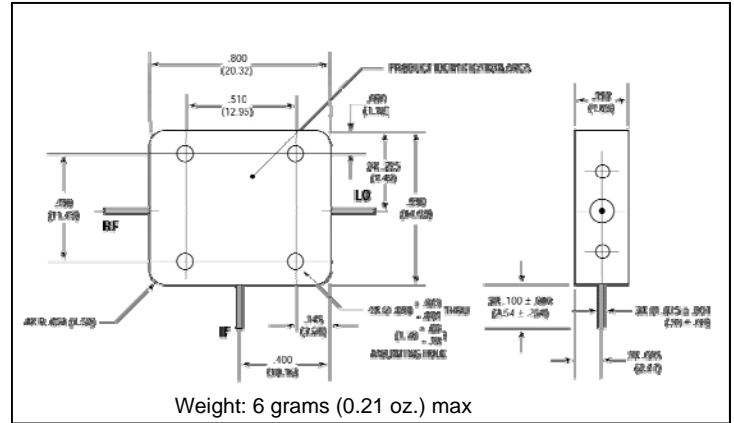


Outline Drawing: SMA Connectorized *

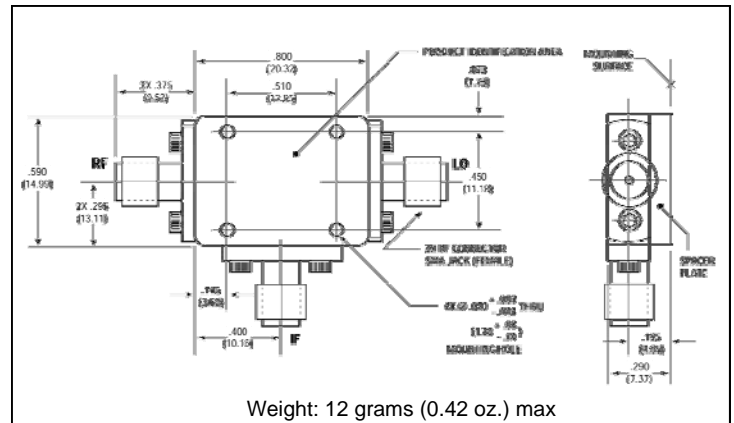

Drive Level

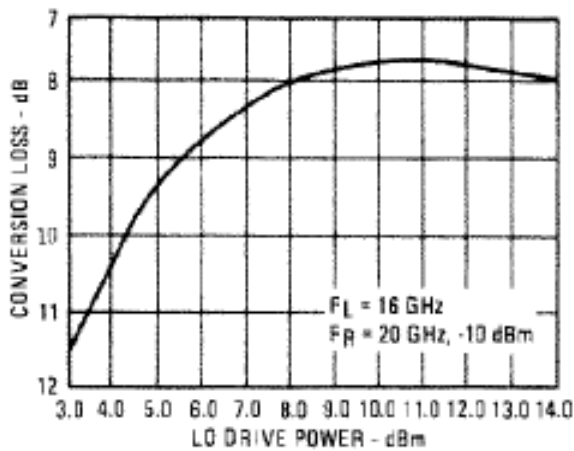

Isolation vs. Frequency

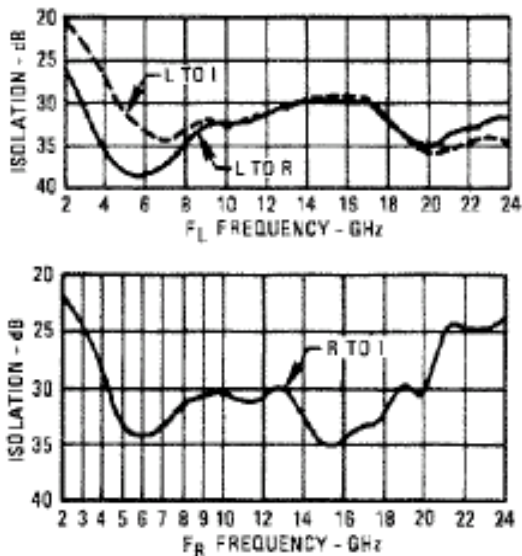

* Dimensions are inches (millimeters) ± 0.015 (0.38) unless otherwise specified.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9