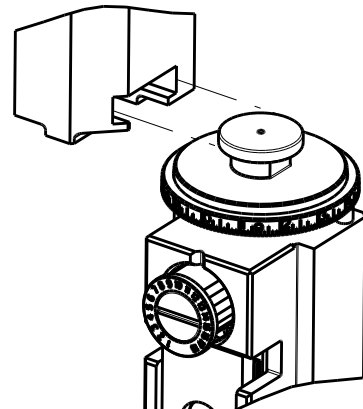


8		7		6		5		4		3		
THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION		28								
© COPYRIGHT 20		BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.										
	ATLANTIC VERSION TERMINATOR INTERFACE ADAPTER	PART NUMBER	REVISION	DESCRIPTION	FEED TYPE	APPLICATOR STYLE CONVERSION CHART						
						CONVERT TO	PART NUMBERS REQUIRED					
						PNEUMATIC FEED	2119950-1	1338685-1	5-18022-5	2119641-1	2119799-1	2063440-1
						SERVO LATCH PLATE	2119951-1	-	8-2151060-5	1901094-3	-	2168400-6 (QUANTITY 2)
						SMART APPLICATOR	2161326-1	-	8-2151060-4	-	-	-
						MECHANICAL FEED	2119949-1	1338685-1	5-18022-5	2119653-1	-	-
						SERVO LATCH PLATE	2119951-1	-	8-2151060-5	1901094-3	-	2168400-6 (QUANTITY 2)
						SMART APPLICATOR	2161326-1	-	8-2151060-4	-	-	-
						MECHANICAL FEED	2119949-1	1338685-1	5-18022-5	2119653-1	-	-
						PNEUMATIC FEED	2119950-1	1338685-1	5-18022-5	2119641-1	2119799-1	2063440-1
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	
						-	-	-	-	-	-	

APPLICATOR DATA		
CRIMP	SIZE	TYPE
WIRE	2.03 mm [.080]	F
INSUL	4.06 mm [.160]	O
APPLICATOR INSTRUCTIONS 408-10389		

TERMINAL DATA: TE TERMINAL		TE CRIMP SPECIFICATION		
TERMINAL NAME: AMP MCP 2.8K FLAT TYPE RECEPTACLE				
WIRE STRIP LENGTH 3.70-4.30 mm [.146-.169 IN]		INSULATION DIAMETER RANGE Ø1.40-2.70 mm [.055-.106 IN] 		
TERMINAL APPLICATION  (C) 114-18387		-	-	-
SPECIFICATION -		-	-	-
TERMINALS APPLIED				
TE TERMINAL	TE TERMINAL	TE SEAL	TE SEAL	CABLE DIAMETER
(C) 1241394-1	(C) 1241394-3	963294-1		Ø 1.2-2.0
(C) 1241394-2		963293-1		Ø 2.0-2.7

[illegible]

WIRE SIZE		CRIMP HEIGHT mm [INCH]		CRIMP HEIGHT REFERENCE SETTING
1.00mm2		1.20+/-0.05 [0.47+/-0.02]		6.5
0.75mm2		1.18+/-0.05 [0.46+/-0.02]		6.9
0.50mm2		1.15+/-0.05 [0.45+/-0.02]		7.2



- 1 RECOMMENDED SPARE PARTS
- 2 GREASE BEARING SURFACES LIGHTLY
3. LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.
- 4 APPLICATOR SPECIFIC DATA TO BE ENTERED INTO BLANK MEMORY CHIP AT ASSEMBLY. SEE BELOW FOR PART NUMBER:

MECHANICAL FEED WITH "SMART APPLICATOR" CONVERSION:	8-2151060-4
PNEUMATIC FEED WITH "SMART APPLICATOR" CONVERSION:	8-2151060-4
SERVO FEED WITH "FINE CRIMP HEIGHT ADJUST":	8-2151060-5
SERVO FEED WITH "NON-CRIMP HEIGHT ADJUST":	8-2151060-6
5. ADJUSTMENT OF THE STRIPPER MAY BE REQUIRED WHEN MOVING THE APPLICATOR BETWEEN BENCH AND LEADMAKER APPLICATIONS.
- 6 APPLY PART NUMBER 1-23419-5 LOCTITE TO THREADS OF ITEMS 62. APPLY PART NUMBER 2-23419-6 LOCTITE TO THREADS OF ITEMS 242. FOR -6 ONLY APPLY PART NUMBER 1-23419-5 LOCTITE TO THREADS OF ITEM 37.
- 7 GREASE THREADS, GROOVE AND O-RING ON ITEMS 35 & 252.
- 8 MAGNET, ITEM 166 MUST BE ORIENTED CORRECTLY IN ORDER TO PROPERLY ACTUATE THE COUNTER.
- 9 CRIMP HEIGHT REFERENCE SETTING WAS THE SETTING USED WHEN THE APPLICATOR WAS QUALIFIED AT THE FACTORY. ADJUSTMENT MAY BE NECESSARY WHEN RUNNING APPLICATOR IN THE FIELD.
- 10 SPARE FEED CAM STORAGE LOCATION REFER TO INSTRUCTION SHEET FOR ADDITIONAL INFORMATION.
- 11 TO CONVERT THE APPLICATOR TO A NON-CARRIER CUTTING STYLE, REMOVE ITEM 13 AND ATTACH TO THE LOCATION ON THE BACK SIDE OF THE HOUSING. REFER TO INSTRUCTION SHEET FOR ADDITIONAL INFORMATION.
- 12 WHEN ASSEMBLING -6 NON-CRIMP HEIGHT ADJUST APPLICATOR USE SHIM PACK 2119957-2 TO ALIGN APPLICATOR'S MAXIMUM WIRE CRIMP HEIGHT AT NORMAL TERMINATOR SHUT HEIGHT
- 13 THIS APPLICATOR APPLIES TERMINAL WITH A SEAL.
- 14 APPLY TORO-SEAL IN ALLEN SOCKET TO FILL HOLE AFTER FLAT HD HAS BEEN ADJUSTED TO CORRECT HEIGHT AT QUALIFICATION. APPLY #1-23419-5 LOC-TITE TO THREADS.

TERMINAL DATA: TE TERMINAL		TE CRIMP SPECIFICATION	
TERMINAL NAME: JUNIOR-POWER-TIMER CONTACT			
WIRE STRIP LENGTH 4.20-4.80 mm [.165-.189 IN]		INSULATION DIAMETER RANGE Ø1.40-2.70 mm [.055-.106 IN] 	
TERMINAL APPLICATION SPECIFICATION 	(A) 114-18050	-	-
	(B) 114-18051	-	-
TERMINALS APPLIED			
TE TERMINAL	TE TERMINAL	TE SEAL	TE SEAL
(A) 964286-1	(A) 6-964286-6	963294-1	Ø 1.2-2.0
(A) 964286-2	(B) 1-964300-3	963293-1	Ø 2.0-2.7
(A) 1-964286-1	(B) 2-964300-1		
(A) 2-964286-1	(B) 4-964300-1		
(A) 4-964286-1			

*WARNING
ON INSTALLATION, SEE
LARGEST WIRE SIZE S



BELOW MINIMUM REQUIREMENTS
WILL CAUSE DAMAGE TO

-	-	1	-	-	-	2119957-
77	7	6	5	2	1	PART M

-11	-1	-6	-5	-2	-1	PART N
-----	----	----	----	----	----	--------


ATLANTI
Shown on sheet

(Pacific version shown)[illegible]


TE CONNECTIVITY IT IS ADVISED TO CHANGE TO THE STANDARD UNITS OF MEASUREMENT AND TOLERANCES WHEN THE DIMENSIONS AND TOLERANCES ARE NOT SPECIFIED		DWG NO. 26AUG2011 HOFFER CHK T. ELBIN 29AUG2011 APP'D T. ELBIN 29AUG2011		 TE Connectivity Harrisburg, PA 17105-3608	
DIMENSIONS: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±.01 1 PLC ±0.5 2 PLC ±0.13 3 PLC ±0.013 4 PLC ±0.0001 ANGLES ±.0001 FINISH		NAME Ocean Side Feed Applicator	
MATERIAL: -		WEIGHT -		SIZE CASE CODE DRAWING NO RESTRICTED TO A 00779 C-2151060 -	
Customer Accessible Production Drawing				SCALE 1:2 SHEET 1 OF 4 REV 01	

LOC		DIST		REVISIONS			
A	66	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

FEED TYPE
MECHANICAL

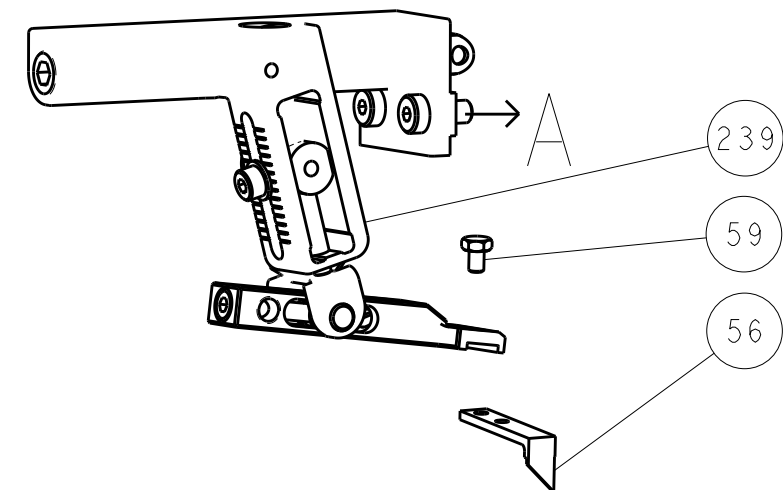

PNEUMATIC

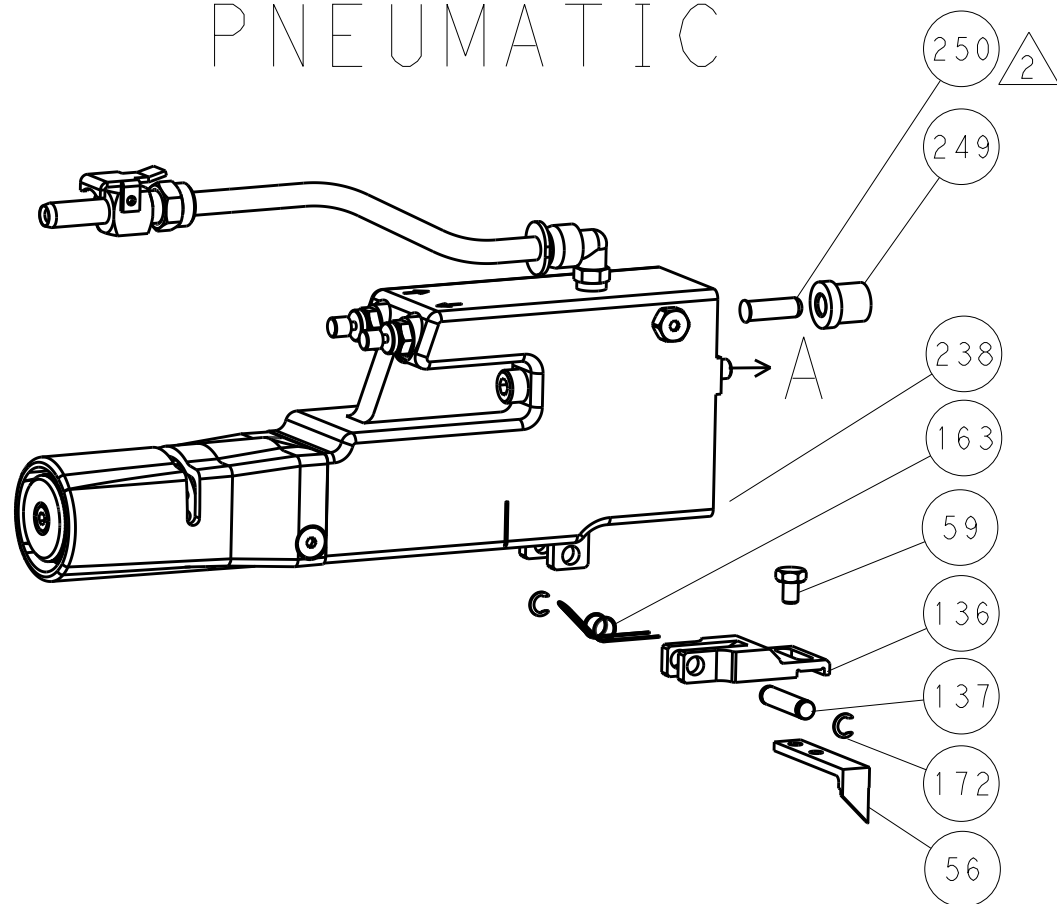





SERVO
LATCH PLATE




CAM POSITIONS



ATLANTIC VERSION
Shown on sheets 1 of 4 & 2 of 4
(Pacific version shown on sheets 3 of 4 & 4 of 4)

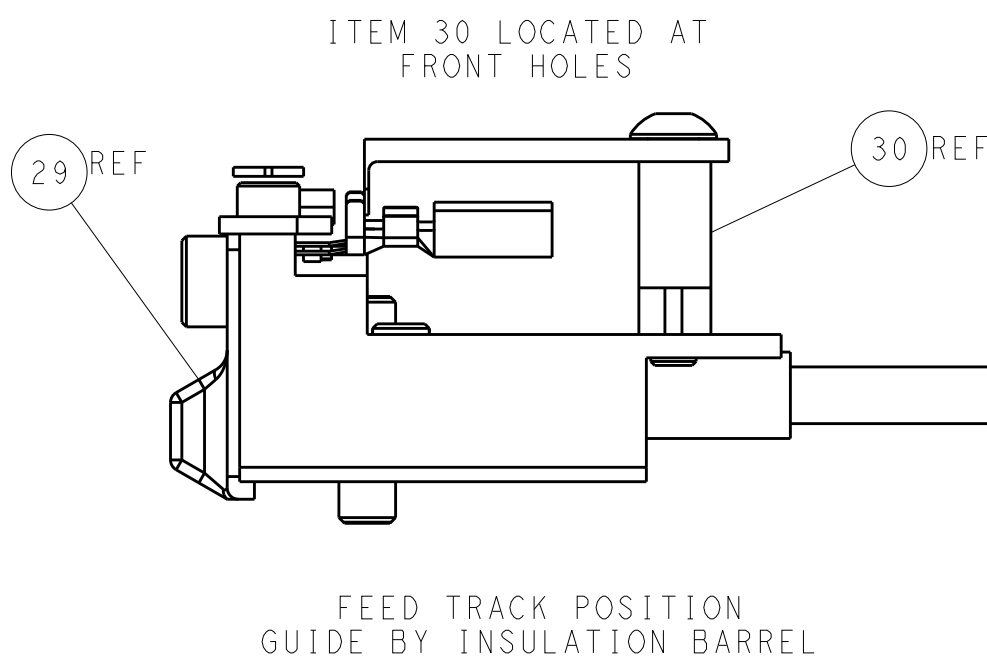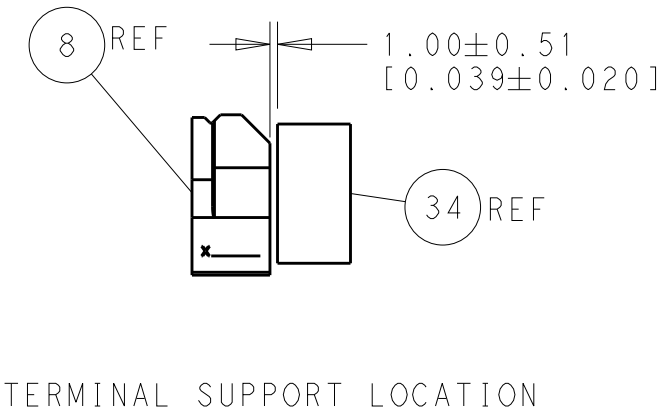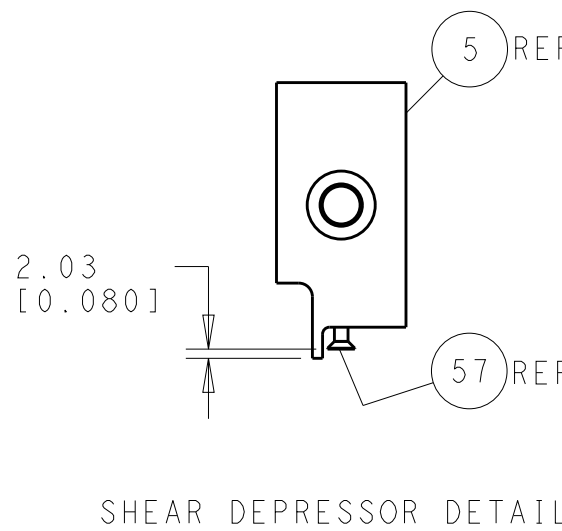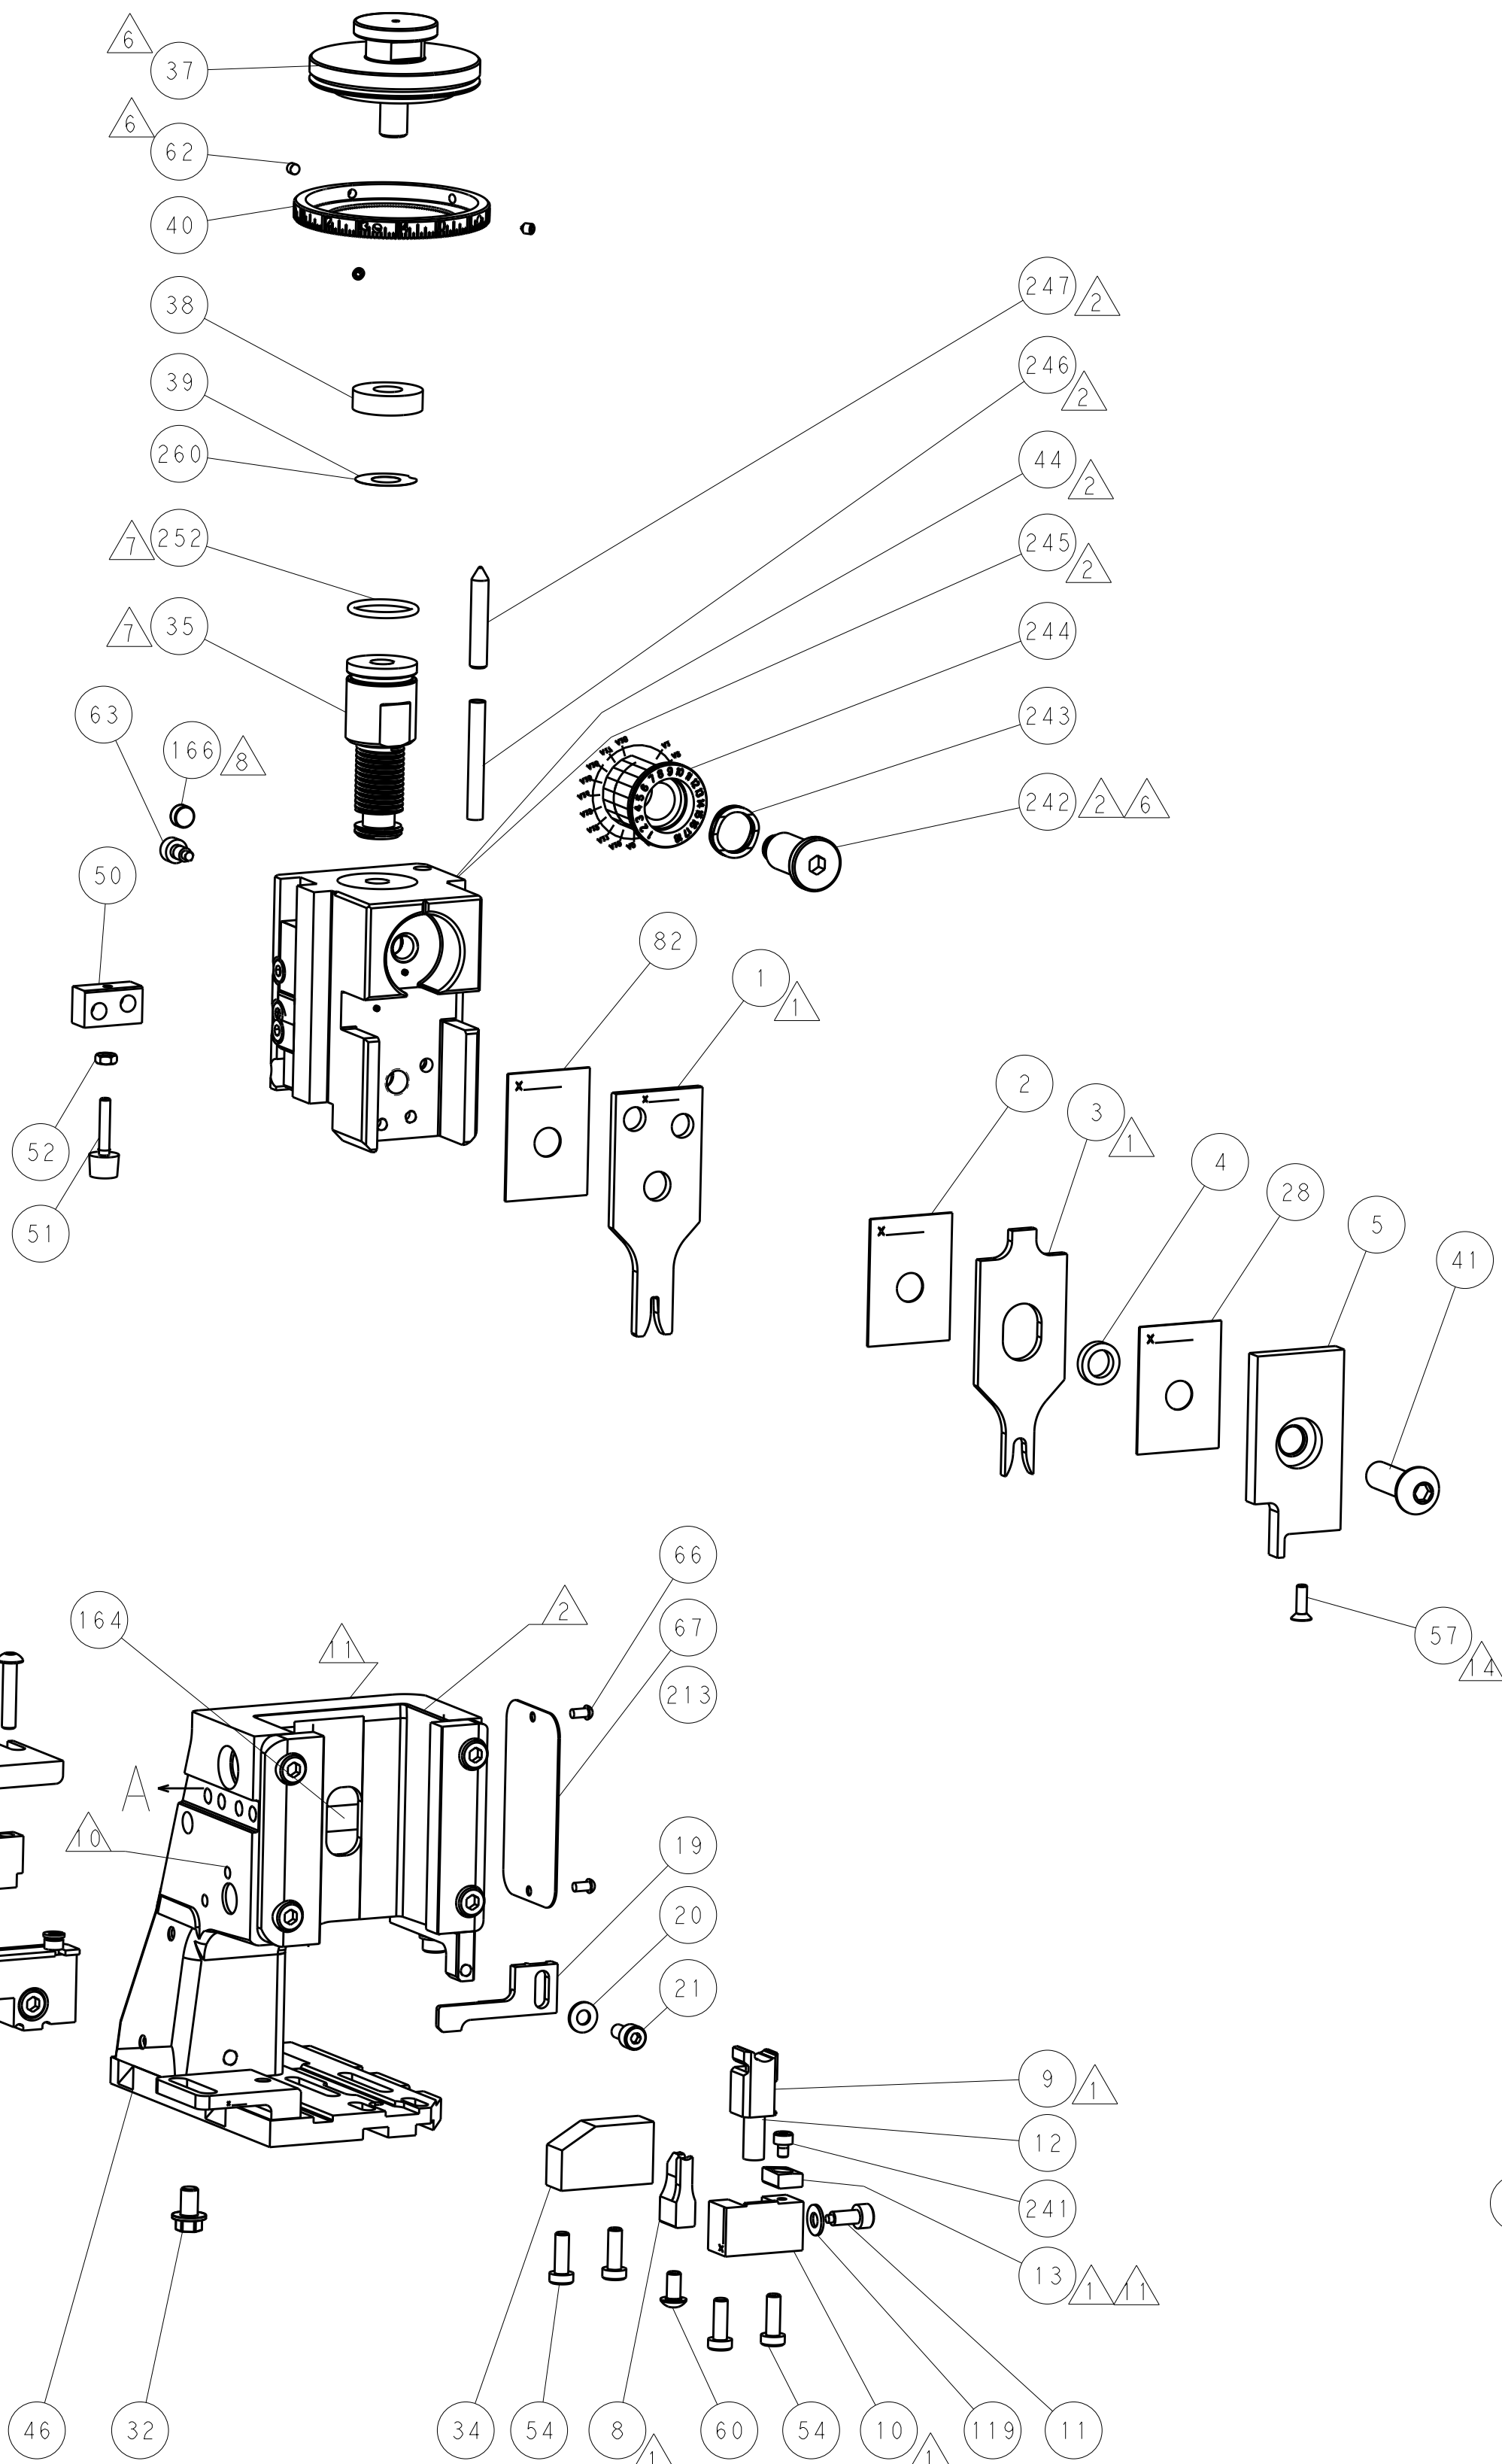

THIS DRAWING IS UNPUBLISHED. IT IS SUBJECT TO CHANGE AND SHOULD BE CONTACTED FOR THE LATEST REVISION.				OWN: HOFFNER 26AUG2011				TE Connectivity Harrisburg, PA 17105-3608			
DIMENSIONS:				CHK: TELBIN 29AUG2011				NAME: Ocean Side Feed Applicator			
mm				APVD: TELBIN 29AUG2011				SIZE: CAGE CODE: DRAWING NO: 00779 ©=2151060			
TOLERANCES UNLESS OTHERWISE SPECIFIED:				PRODUCT SPEC				RESTRICTED TO			
0 PLC ±0.5				APPLICATION SPEC				SCALE: 1:2 SHEET 2 OF 4 REV D1			
1 PLC ±0.13				WEIGHT				Customer Accessible Production Drawing			
2 PLC ±0.13				FINISH							
3 PLC ±0.013											
4 PLC ±0.0001											
ANGLES											

PACIFIC VERSION TERMINATOR INTERFACE ADAPTER	PART NUMBER	REVISION	DESCRIPTION	FEED TYPE	APPLICATOR STYLE CONVERSION CHART							
					CONVERT TO	PART NUMBERS REQUIRED						
	2-2151060-1	D	FINE CRIMP HEIGHT ADJUST	MECHANICAL	PNEUMATIC FEED	2119950-1	1338685-1	5-18022-5	2119641-2	2119799-1	2063440-1	
					SERVO LATCH PLATE	2119951-1	-	8-2151060-5	1901094-3	-	2168400-6 (QUANTITY 2)	
					SMART APPLICATOR	2161326-1	-	8-2151060-4	-	-	-	
	2-2151060-2	D	FINE CRIMP HEIGHT ADJUST	PNEUMATIC	MECHANICAL FEED	2119949-1	1338685-1	5-18022-5	2119653-2	-	-	
					SERVO LATCH PLATE	2119951-1	-	8-2151060-5	1901094-3	-	2168400-6 (QUANTITY 2)	
					SMART APPLICATOR	2161326-1	-	8-2151060-4	-	-	-	
	2-2151060-5	D	FINE CRIMP HEIGHT ADJUST	SERVO LATCH PLATE ⁴	MECHANICAL FEED	2119949-1	1338685-1	5-18022-5	2119653-2	-	-	
					PNEUMATIC FEED	2119950-1	1338685-1	5-18022-5	2119641-2	2119799-1	2063440-1	
	2-2151060-7	D	FINE CRIMP HEIGHT ADJUST	NONE	-	-	-	-	-	-	-	-
	7-2151060-7	A	CRIMP TOOLING KIT	-	-	-	-	-	-	-	-	-

APPLICATOR DATA		
CRIMP	SIZE	TYPE
WIRE	2.03 mm [.080]	F
INSUL	4.06 mm [.160]	O
APPLICATOR INSTRUCTIONS 408-10389		

TERMINAL DATA: TE TERMINAL		TE CRIMP SPECIFICATION		
TERMINAL NAME: AMP MCP 2.8K FLAT TYPE RECEPTACLE				
WIRE STRIP LENGTH 3.70-4.30 mm [.146-.169 IN]			INSULATION DIAMETER RANGE Ø1.40-2.70 mm [.055-.106 IN] 	
TERMINAL APPLICATION SPECIFICATION 		(C) 114-18387	-	-
		-	-	-
TERMINALS APPLIED				
TE TERMINAL	TE TERMINAL	TE SEAL	TE SEAL	CABLE DIAMETER
(C) 1241394-1	(C) 1241394-3	963294-1		Ø1.2-2.0
(C) 1241394-2		963293-1		Ø2.0-2.7

WIRE SIZE		CRIMP HEIGHT mm [INCH]	CRIMP HEIGHT REFERENCE SETTING ⁹
1.00mm2		1.20+/-0.05 [.047+/-0.002]	6.5
0.75mm2		1.18+/-0.05 [.046+/-0.002]	6.9
0.50mm2		1.15+/-0.05 [.045+/-0.002]	7.2



- RECOMMENDED SPARE PARTS
- GREASE BEARING SURFACES LIGHTLY
3. LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.
- APPLICATOR SPECIFIC DATA TO BE ENTERED INTO BLANK MEMORY CHIP AT ASSEMBLY. SEE BELOW FOR PART NUMBER:
MECHANICAL FEED WITH "SMART APPLICATOR" CONVERSION: 8-2151060-4
PNEUMATIC FEED WITH "SMART APPLICATOR" CONVERSION: 8-2151060-4
SERVO FEED WITH "FINE CRIMP HEIGHT ADJUST": 8-2151060-5
5. ADJUSTMENT OF THE STRIPPER MAY BE REQUIRED WHEN MOVING THE APPLICATOR BETWEEN BENCH AND LEADMAKER APPLICATIONS.
- APPLY PART NUMBER 1-23419-5 LOCTITE TO THREADS OF ITEMS 62.
APPLY PART NUMBER 2-23419-6 LOCTITE TO THREADS OF ITEMS 242.
- GREASE THREADS, GROOVE AND O-RING ON ITEMS 139 & 152.
- MAGNET MUST BE ORIENTED CORRECTLY IN ORDER TO PROPERLY ACTUATE THE COUNTER.
- CRIMP HEIGHT REFERENCE SETTING WAS THE SETTING USED WHEN THE APPLICATOR WAS QUALIFIED AT THE FACTORY. ADJUSTMENT MAY BE NECESSARY WHEN RUNNING APPLICATOR IN THE FIELD.
- SPARE FEED CAM STORAGE LOCATION REFER TO INSTRUCTION SHEET FOR ADDITIONAL INFORMATION.
- TO CONVERT THE APPLICATOR TO A NON-CARRIER CUTTING STYLE, REMOVE ITEM 13 AND ATTACH TO THE LOCATION ON BACK SIDE OF THE HOUSING. REFER TO INSTRUCTION SHEET FOR ADDITIONAL INFORMATION.
- THIS APPLICATOR APPLIES TERMINAL WITH A SEAL.
- APPLY TORO-SEAL IN ALLEN SOCKET TO FILL HOLE AFTER FLAT HD HAS BEEN ADJUSTED TO CORRECT HEIGHT AT QUALIFICATION.
APPLY #1-23419-5 LOC-TITE TO THREADS.

TERMINAL DATA: TE TERMINAL		TE CRIMP SPECIFICATION		
TERMINAL NAME: JUNIOR-POWER-TIMER CONTACT				
WIRE STRIP LENGTH 4.20-4.80 mm [.165-.189 IN]		INSULATION DIAMETER RANGE Ø1.40-2.70 mm [.055-.106 IN] 		
TERMINAL APPLICATION SPECIFICATION 	(A) 114-18050	-	-	
	(B) 114-18051	-	-	
TERMINALS APPLIED				
TE TERMINAL	TE TERMINAL	TE SEAL	TE SEAL	CABLE DIAMETER
(A) 964286-1	(A) 6-964286-6	963294-1		Ø 1.2-2.0
(A) 964286-2	(B) 1-964300-3	963293-1		Ø 2.0-2.7
(A) 1-964286-1	(B) 2-964300-1			
(A) 2-964286-1	(B) 4-964300-1			
(A) 4-964286-1				

*WARNING
ON INSTALLATION, SET WIRE DISC, ITEM 40 TO LARGEST WIRE SIZE SETTING. USE OF SETTINGS BELOW MINIMUM REQUIRED CRIMP HEIGHT SETTING WILL CAUSE DAMAGE TO CRIMP TOOLING.

PACIFIC VERSION
Shown on sheets 3 of 4 & 4 of 4
(Atlantic version shown on sheets 1 of 4 & 2 of 4)

SET UP GAUGE 2119599-1	LOC A	DIS 66	REVISIONS					
			P	LTR	DESCRIPTION	DATE	DWN	APVD
			-	-	SEE SHEET 1	-	-	-

-	1	1	1	1	2119782-1	FINE ADJUST HEAD ASM, PACIFIC STYLE	251
-	-	-	1	-	2119640-1	PUSH ROD, AIR FEED	250
-	-	-	1	-	2079988-1	BUSHING, LCH5-12, MISUMI	249
-	1	1	1	1	1-22279-3	SPRING, COMPRESSION	246
-	1	1	1	1	2119082-7	CAM, SNAIL, INSULATION ADJUSTMENT	244
-	1	1	1	1	2079764-1	WASHER, WAVE SPRING, CREST-TO-CREST	243
-	1	1	1	1	2119083-1	RETAINER, INSULATION DIAL	242
-	1	1	1	1	7-18023-7	SCR, SKT HD CAP M3 X 4.0	241
-	-	2	-	-	2168400-6	SHCS, LOW HEAD, RoHS, M5 X 16	240
-	-	-	-	1	2119580-1	MECHANICAL FEED ASSEMBLY	239
-	-	-	1	-	2063440-1	AIR FEED MODULE	238
-	-	-	-	-	2119740-2	TAG,IDENTIFICATION	213
-	-	1	-	-	1901094-3	SPACER, FEEDER	198
-	-	-	2	-	21045-3	RING, RETAIN, EXTERN, 3/16 CRESCENT	172
-	1	1	1	1	994969-1	MAGNET, RARE EARTH HIGH ENERGY	166
-	REF	REF	REF	REF	994970-2	COUNTER, MAGNETIC	164
-	-	-	1	-	240638-1	SPRING, FEED FINGER	163
-	1	1	1	1	8-21084-1	O-RING, .801 ID, .070 DIA. MAT.	152
-	-	-	1	-	2119641-2	FEED CAM, AIR FEED	151
-	1	1	1	1	2119798-2	DETENT PIN	145
-	1	1	1	1	2079383-8	SCR, BHSC, RoHS (M4 X 16)	144
-	4	4	4	4	2168400-5	SHCS, LOW HEAD, RoHS, M4 X 20	143
-	-	-	-	1	2119653-2	FEED CAM, POST FEED	142
-	1	1	1	1	1-2119656-0	APPLICATOR BASIC ASSEMBLY, SF	141
-	1	1	1	1	2119650-1	RAM, ASIAN STYLE, SIDE FEED	140
-	1	1	1	1	2119092-2	BOLT, ADJUSTMENT	139
-	-	-	1	-	3-23627-7	PIN, RETAIN, GRVD, 3/16 X .854	137
-	-	-	1	-	2119799-1	HOLDER,FEED FINGER, AF	136
-	-	REF	-	-	SEE NOTE 4	MEMORY CHIP, PROGRAMMED	135
-	-	1	-	-	1633743-1	SERVO FEED LATCH ASM	133
-	1	1	1	1	1-18028-2	WASHER, FLAT, REG M4	119
-	-	REF	-	-	2119944-1	FEED FINGER ASSEMBLY,SF	117
-	1	1	1	1	455888-5	SPACER, CRIMPER	82
-	1	1	1	1	2119956-1	DOCUMENTATION PACKAGE	71
-	1	-	1	1	2119740-1	TAG,IDENTIFICATION	67
-	2	2	2	2	2168078-1	SCREW, DRIVE, RH, RoHS, 2 x .188	66
-	1	1	1	1	2119793-1	LIMITER, ADJUSTMENT BOLT	63
-	3	3	3	3	992763-5	SCR, SET, SOC, CONE POINT, M3 x 4.0	62
-	-	-	1	1	5-18022-5	SCR, HEX HD CAP, M4 X 6.0	59
-	1	1	1	1	985575-3	SCR, FLT SKT HD CAP M3 X 10.0	57
-	-	-	1	1	1338685-1	PAWL, FEED	56
-	2	2	2	2	2168083-3	SCR, SKT HD CAP, RoHS, M4 X 12.0	53
-	1	1	1	1	5018030-1	NUT, HEX, REG, RoHS, M3	52
-	1	1	1	1	811242-5	BUMPER, HOLD DOWN	51
-	1	1	1	1	690753-2	SPACER, TONKER	50
-	-	-	1	2	18023-9	SCR, SKT HD CAP M4 X 6.0	49
-	-	-	-	1	2119652-1	FEED CAM, PRE FEED	48
-	1	1	1	1	2079383-7	SCR, BHSC, RoHS (M8 X 25)	41
-	1	1	1	1	2119645-1	DISC, NUMBERED FA WIRE ADJUSTMENT	40
-	1	1	1	1	2119957-1	APPLICATOR SHIM PACK	39
-	1	1	1	1	2119644-1	RAM WASHER, PRECISION	38
-	1	1	1	1	1-1752356-7	SUPPORT, TERMINAL	34
-	2	2	2	2	2079383-5	SCR, BHSC, RoHS (M4 X 20)	33
-	1	1	1	1	2161328-1	HEX HEAD, FLANGED, M5 x 8mm LONG	32
-	1	1	1	1	1-1320908-2	SPACER, STRIP GUIDE	30
-	1	1	1	1	2119959-2	ASSEMBLY, STRIP GUIDE	29
-	1	1	1	1	455888-4	SPACER, CRIMPER	28
-	1	1	1	1	1320928-2	STRIP GUIDE	24
-	1	1	1	1	2168083-2	SCR, SKT HD CAP, RoHS, M4 X 8.0	21
-	1	1	1	1	1-18028-2	WASHER, FLAT, REG M4	20
-	1	1	1	1	2119533-1	STRIPPER, SIDE FEED	19
-	1	1	1	1	2119806-1	INSERT, SHEAR	13
-	1	1	1	1	3-22280-3	SPRING, COMPRESSION	12
-	1	1	1	1	1-356885-4	STOP, SHEAR	11
-	1	1	1	1	2119805-1	SHEAR HOLDER, FRONT	10
-	1	1	1	1	318707-1	FLOATING SHEAR, FRONT	9
-	1	1	1	1	1333204-4	ANVIL, COMBINATION	8
-	1	1	1	1	2119781-1	DEPRESSOR, SHEAR	5
-	1	1	1	1	238011-9	BLOCK, CRIMPER SPACER	4
-	1	1	1	1	3-2119784-1	CRIMPER, INSULATION O PREMIUM	3
-	1	1	1	1	455888-5	SPACER, CRIMPER	2
-	1	1	1	1	1-456405-7	CRIMPER, WIRE PREMIUM	1
-77	-27	-25	-22	-21	PART NO	DESCRIPTION	ITEM NO

THIS DRAWING IS A CONTROLLED DOCUMENT FOR PRO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND TO BE CONTROLLED BY THE ISSUING ORGANIZATION. IT SHOULD BE CONTROLLED FOR THE LATEST EDITION.				DWN HOFFNER 26AUG2011	 TE Connectivity Harrisburg, PA 17105-3608			
DIMENSIONS:				CHK T.ELBIN 29AUG2011				
mm				APVD T.ELBIN 29AUG2011	NAME			
				PRODUCT SPEC	Ocean Side Feed Applicator			
				APPLICATION SPEC	SIZE			
0 PLC +.0					CAGE CODE			
1 PLC +.0 .5					DRAWING NO			
2 PLC +.0 .13					RESTRICTED TO			
3 PLC +.0 .013					A 00779 C=2151060			
4 PLC +.00001					-			
ANGLES					-			
FINISH				WEIGHT	-			
MATERIAL					Customer Accessible Production Drawing			
				SCALE	1:2		SHEET	3 OF 4
				REV	D1			

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
A	66	-	-	SEE SHEET 1	-	-	-

D

C

B

A

D

C


B

A

FEED TYPE MECHANICAL






PNEUMATIC

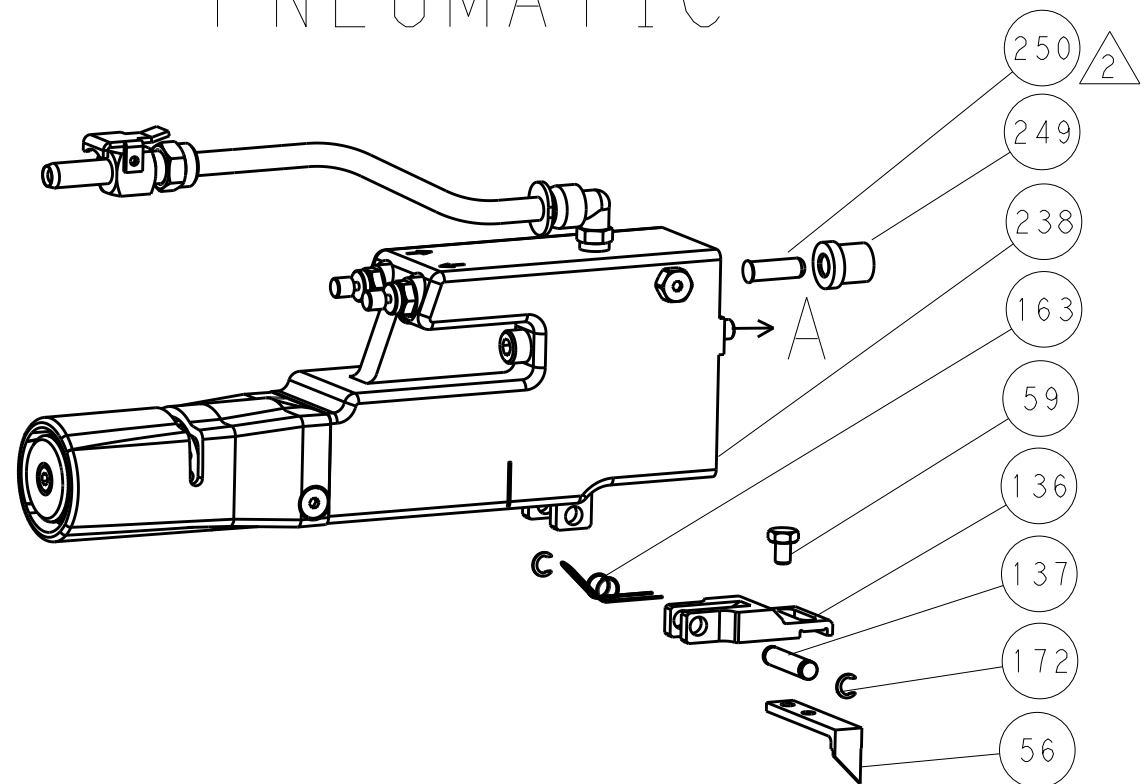


SERVO LATCH PLATE





CAM POSITIONS

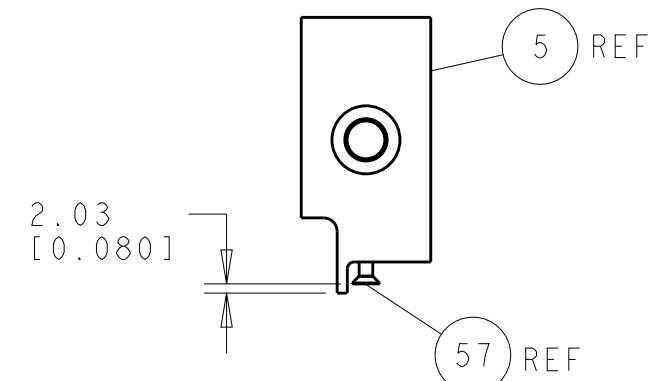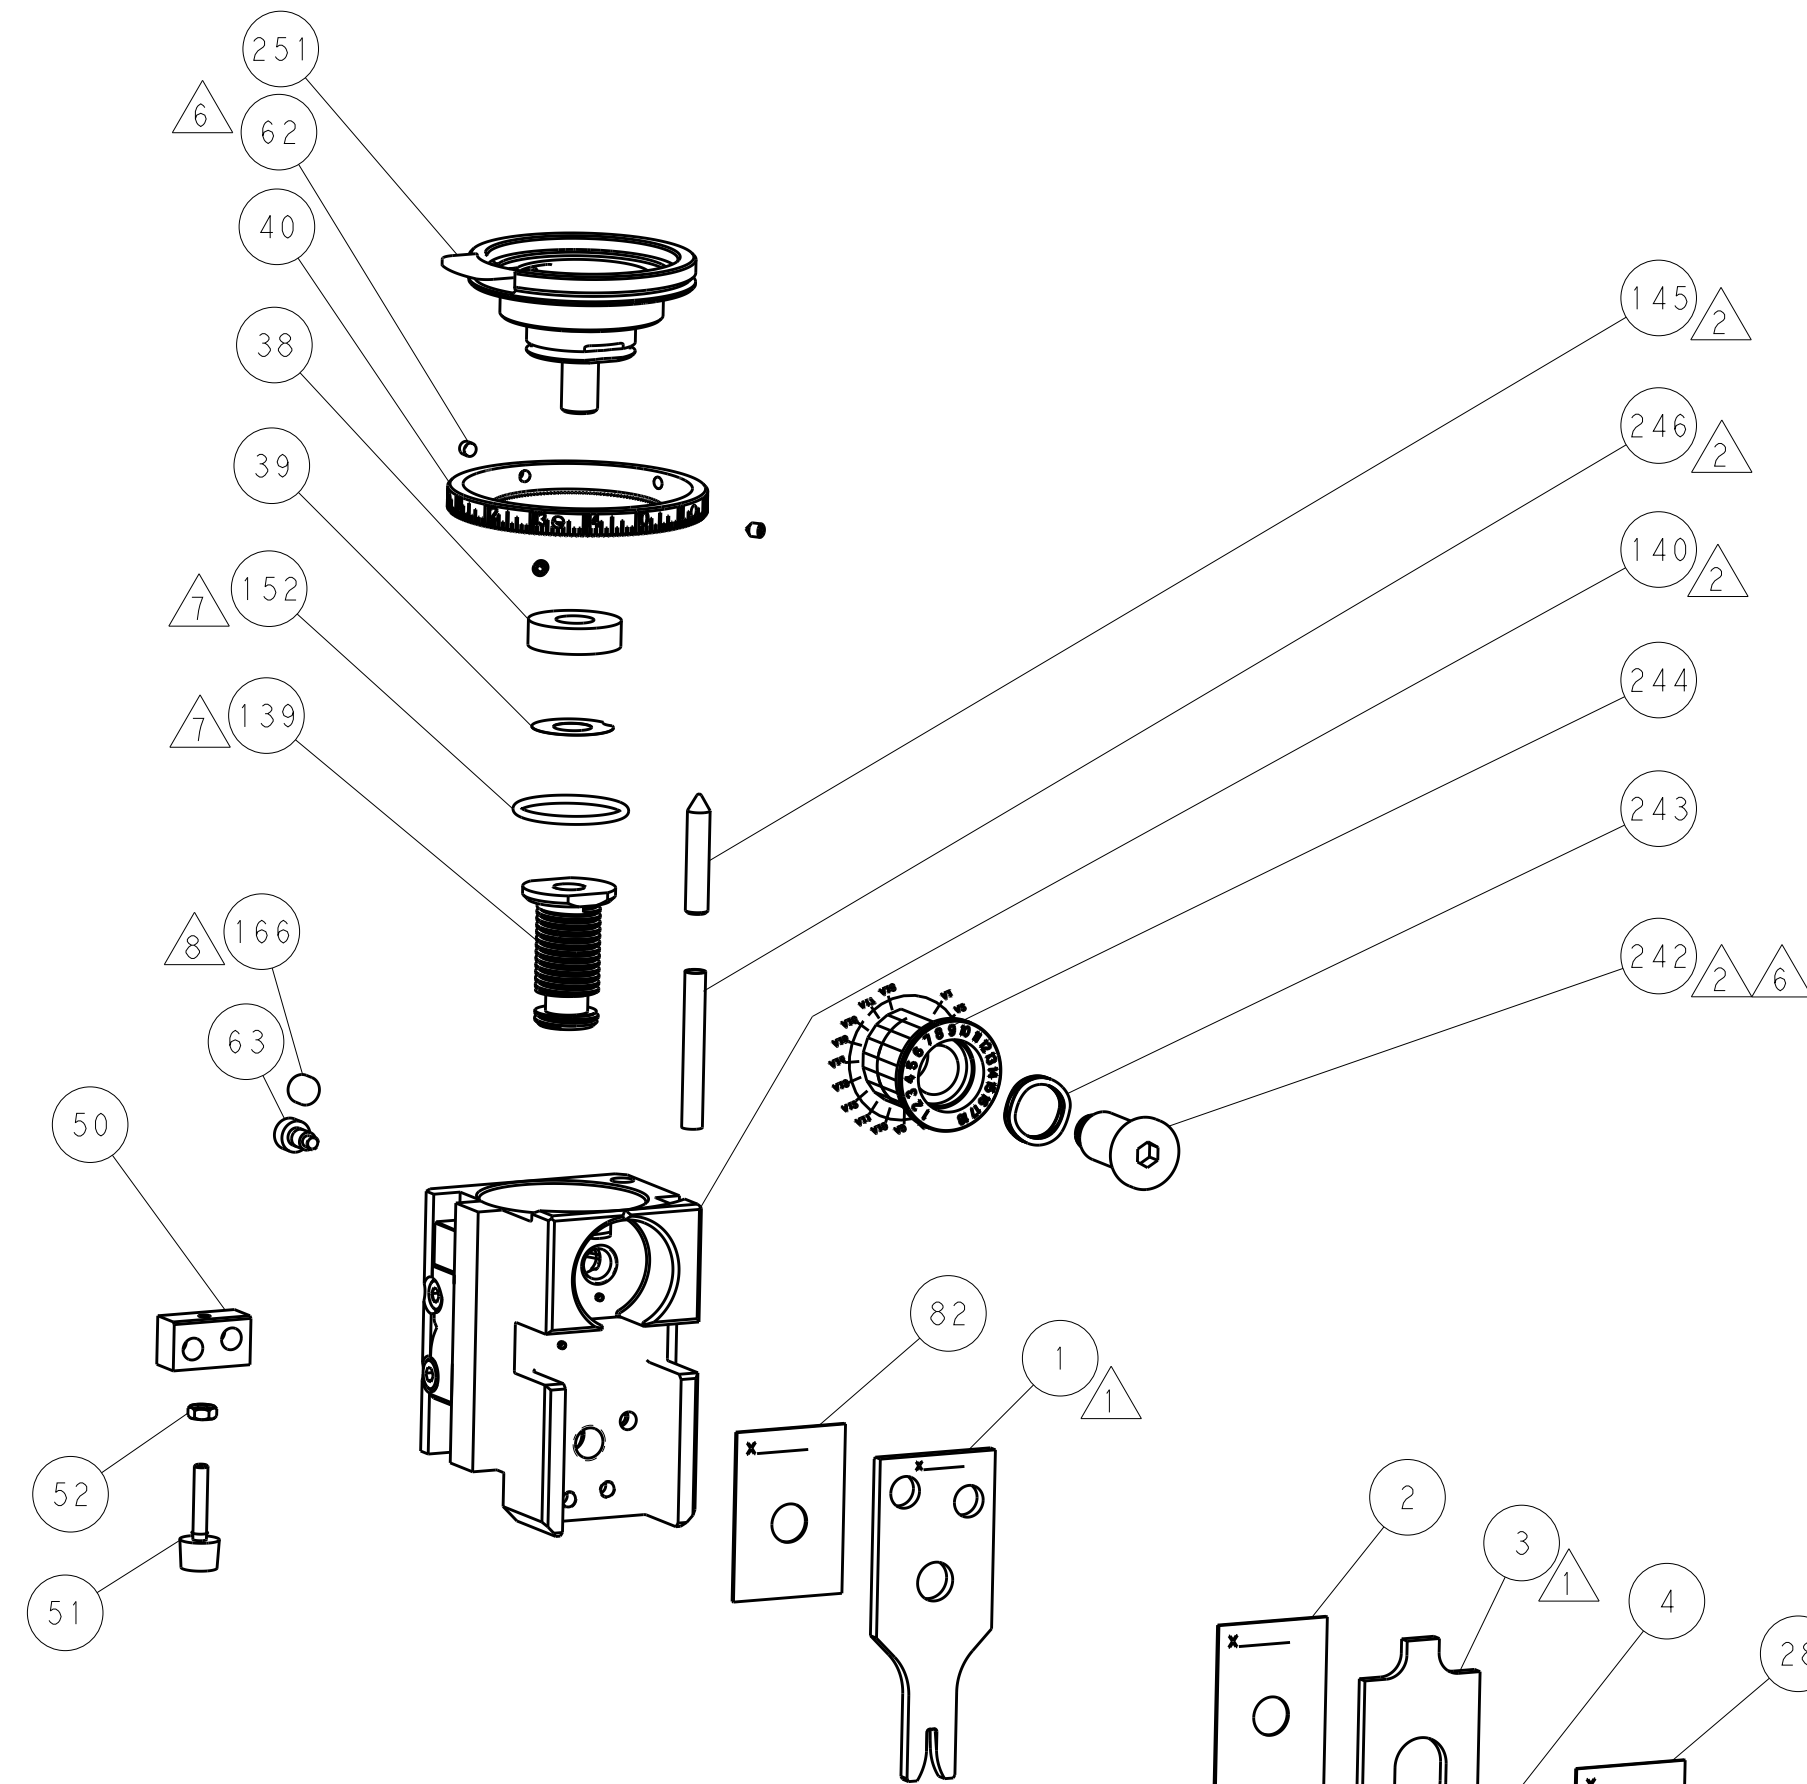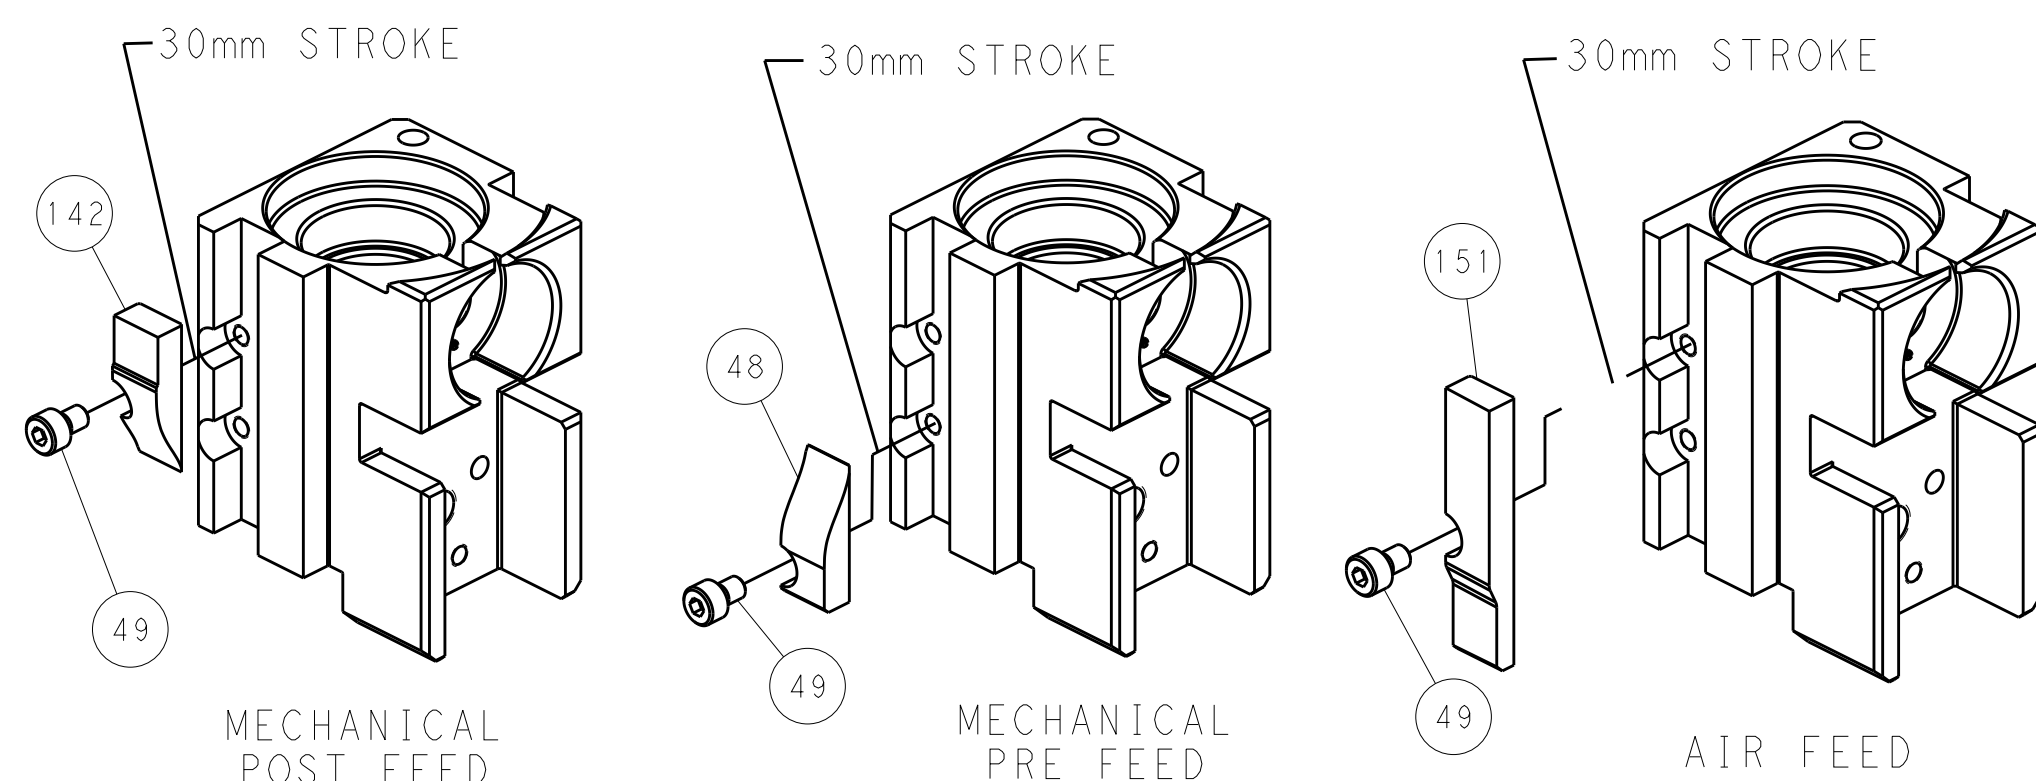

SHEAR DEPRESSOR DETAIL

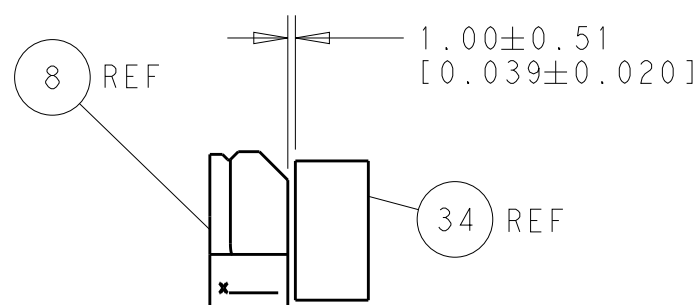

TERMINAL SUPPORT LOCATION

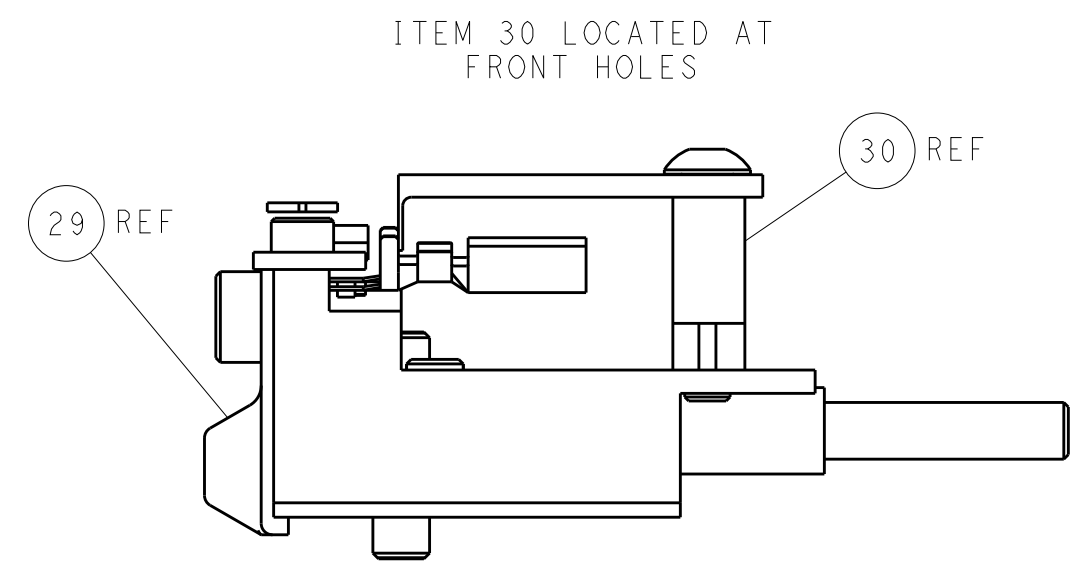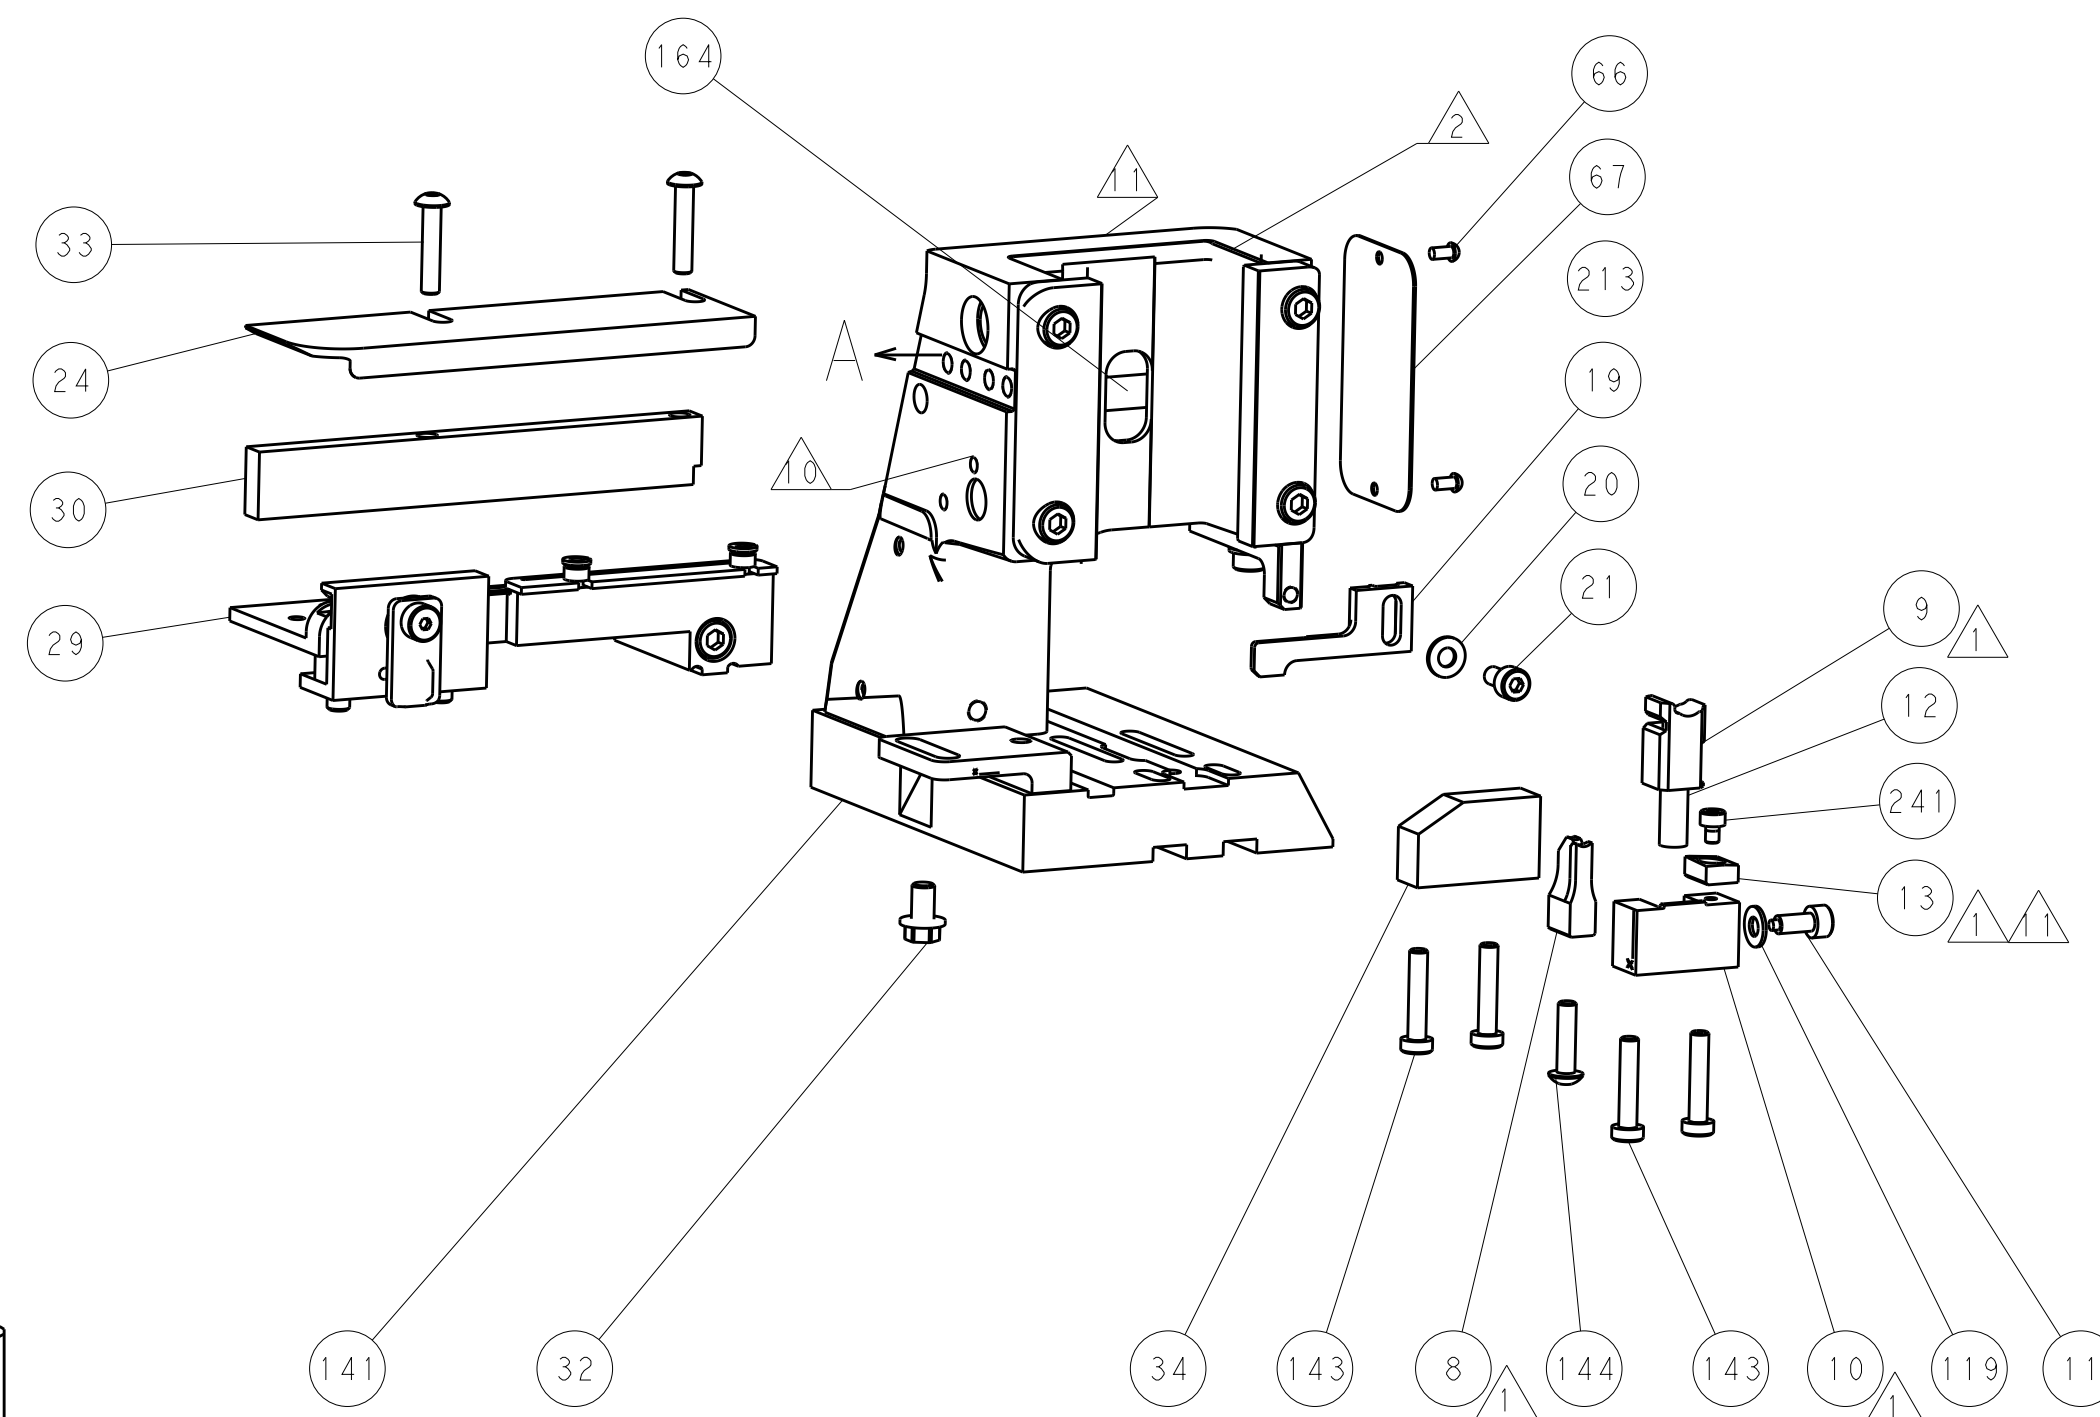

FEED TRACK POSITION
GUIDE BY INSULATION BARREL

PACIFIC VERSION
Shown on sheets 3 of 4 & 4 of 4
(Atlantic version shown on sheets 1 of 4 & 2 of 4)

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		OWN		TE Connectivity	
mm		0 PLC ±0.5		HOFFNER		Harrisburg, PA 17105-3608	
		1 PLC ±0.13		T.ELBIN		NAME	
		2 PLC ±0.13		T.ELBIN		Ocean Side Feed	
		3 PLC ±0.013		APVD		Applicator	
		4 PLC ±0.0001		PRODUCT SPEC		SIZE	
		ANGLES		APPLICATION SPEC		CAGE CODE	
		FINISH		WEIGHT		DRAWING NO	
				Customer Accessible Production Drawing		RESTRICTED TO	
				SCALE		SHEET	
				1:2		4 OF 4	
						REV	
						D1	

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9