

8

7

6

5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

ATLANTIC VERSION TERMINATOR INTERFACE ADAPTER

PART NUMBER


REVISION

DESCRIPTION

FEED TYPE

CONVERT TO

PART NUMBERS REQUIRED

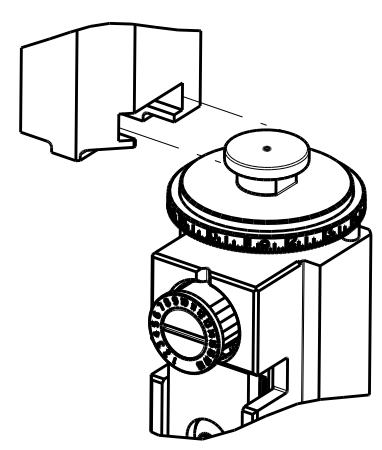

2151060-1

D

FINE CRIMP HEIGHT ADJUST

MECHANICAL

PNEUMATIC FEED

SERVO LATCH PLATE

SMART APPLICATOR

2119950-1

2119951-1

2161326-1

1338685-1

-

-

5-18022-5

8-2151060-5

8-2151060-4

2119641-1

1901094-3

-

2119799-1

-

-

2063440-1

2168400-6 (QUANTITY 2)

-

2151060-2

D

FINE CRIMP HEIGHT ADJUST

PNEUMATIC

MECHANICAL FEED

SERVO LATCH PLATE

SMART APPLICATOR

2119949-1

2119951-1

2161326-1

1338685-1

-

-

5-18022-5

8-2151060-5

8-2151060-4

2119653-1

1901094-3

-

-

-

-

-

-

-

-

-

-

2168400-6 (QUANTITY 2)

-

-

2151060-5

D

FINE CRIMP HEIGHT ADJUST

SERVO LATCH PLATE⁴

MECHANICAL FEED

PNEUMATIC FEED

2119949-1

2119950-1

1338685-1

-

5-18022-5

5-18022-5

2119653-1

2119641-1

-

-

-

-

-

2063440-1

2151060-6

D

NON-CRIMP HEIGHT ADJUST

SERVO LATCH PLATE⁴¹²

-

-

-

-

-

-

-

-

-

-

-

-

2151060-7

D

FINE CRIMP HEIGHT ADJUST

NONE

-

-

-

-

-

-

-

-

-

-

-

-

7-2151060-7

A

CRIMP TOOLING KIT

-

-

-

-

-

-

-

-

-

-

-

-

-

APPLICATOR DATA

CRIMP

SIZE

TYPE

WIRE

2.03 mm [.080]

F

INSUL

4.06 mm [1.60]

O

APPLICATOR INSTRUCTIONS

408-10389



TERMINAL DATA: TE TERMINAL

TE CRIMP SPECIFICATION

TERMINAL NAME: AMP MCP 2.8K FLAT TYPE RECEPTACLE

WIRE STRIP LENGTH

INSULATION DIAMETER RANGE

3.70-4.30 mm [1.46-.169 IN]

Ø1.40-2.70 mm [1.055-.106 IN] ⁴

TERMINAL APPLICATION SPECIFICATION

(C) 114-18387

-

-

TERMINALS APPLIED

TE TERMINAL

TE TERMINAL

TE SEAL

TE SEAL

CABLE DIAMETER

(C) 1241394-1

(C) 1241394-3

963294-1

Ø1.2-2.0

(C) 1241394-2

963293-1

Ø2.0-2.7

WIRE SIZE

CRIMP HEIGHT mm [INCH]

CRIMP HEIGHT REFERENCE SETTING

1.00mm2

1.20+/-0.05 [1.047+/-0.002]

6.5

0.75mm2

1.18+/-0.05 [1.046+/-0.002]

6.9

0.50mm2

1.15+/-0.05 [1.045+/-0.002]

7.2

1

RECOMMENDED SPARE PARTS

2

GREASE BEARING SURFACES LIGHTLY

3

LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.

4

APPLICATOR SPECIFIC DATA TO BE ENTERED INTO BLANK MEMORY CHIP AT ASSEMBLY. SEE BELOW FOR PART NUMBER:
MECHANICAL FEED WITH "SMART APPLICATOR" CONVERSION: 8-2151060-4
PNEUMATIC FEED WITH "SMART APPLICATOR" CONVERSION: 8-2151060-4
SERVO FEED WITH "FINE CRIMP HEIGHT ADJUST": 8-2151060-5
SERVO FEED WITH "NON-CRIMP HEIGHT ADJUST": 8-2151060-6

5

ADJUSTMENT OF THE STRIPPER MAY BE REQUIRED WHEN MOVING THE APPLICATOR BETWEEN BENCH AND LEADMAKER APPLICATIONS.

6

APPLY PART NUMBER 1-23419-5 LOCTITE TO THREADS OF ITEMS 62.
APPLY PART NUMBER 2-23419-6 LOCTITE TO THREADS OF ITEMS 242.
FOR -6 ONLY APPLY PART NUMBER 1-23419-5 LOCTITE TO THREADS OF ITEM 37.

7

GREASE THREADS, GROOVE AND O-RING ON ITEMS 35 & 252.

8

MAGNET, ITEM 166 MUST BE ORIENTED CORRECTLY IN ORDER TO PROPERLY ACTUATE THE COUNTER.

9

CRIMP HEIGHT REFERENCE SETTING WAS THE SETTING USED WHEN THE APPLICATOR WAS QUALIFIED AT THE FACTORY. ADJUSTMENT MAY BE NECESSARY WHEN RUNNING APPLICATOR IN THE FIELD.

10

SPARE FEED CAM STORAGE LOCATION REFER TO INSTRUCTION SHEET FOR ADDITIONAL INFORMATION.

11

TO CONVERT THE APPLICATOR TO A NON-CARRIER CUTTING STYLE, REMOVE ITEM 13 AND ATTACH TO THE LOCATION ON THE BACK SIDE OF THE HOUSING. REFER TO INSTRUCTION SHEET FOR ADDITIONAL INFORMATION.

12

WHEN ASSEMBLING -6 NON-CRIMP HEIGHT ADJUST APPLICATOR USE SHIM PACK 2119957-2 TO ALIGN APPLICATOR'S MAXIMUM WIRE CRIMP HEIGHT AT NORMAL TERMINATOR SHUT HEIGHT

13

THIS APPLICATOR APPLIES TERMINAL WITH A SEAL.

14

APPLY TORQ-SEAL IN ALLEN SOCKET TO FILL HOLE AFTER FLAT HD HAS BEEN ADJUSTED TO CORRECT HEIGHT AT QUALIFICATION.
APPLY #1-23419-5 LOC-TITE TO THREADS.

TERMINAL DATA: TE TERMINAL

TE CRIMP SPECIFICATION

TERMINAL NAME: JUNIOR-POWER-TIMER CONTACT

WIRE STRIP LENGTH

INSULATION DIAMETER RANGE

4.20-4.80 mm [1.65-.189 IN]

Ø1.40-2.70 mm [1.055-.106 IN] ⁴

TERMINAL APPLICATION SPECIFICATION

(A) 114-18050

-

-

(B) 114-18051

-

-

TERMINALS APPLIED

TE TERMINAL

TE TERMINAL

TE SEAL

TE SEAL

CABLE DIAMETER

(A) 964286-1

(A) 6-964286-6

963294-1

Ø1.2-2.0

(A) 964286-2

(B) 1-964300-3

963293-1

Ø2.0-2.7

(A) 1-964286-1

(B) 2-964300-1

(A) 2-964286-1

(B) 4-964300-1

(A) 4-964286-1

*WARNING

ON INSTALLATION, SET WIRE DISC, ITEM 40 TO LARGEST WIRE SIZE SETTING. USE OF SETTINGS BELOW MINIMUM REQUIRED CRIMP HEIGHT SETTING WILL CAUSE DAMAGE TO CRIMP TOOLING.

-

-

1

-

-

-

2119957-2

APPLICATOR SHIM PACK

260

-77

-7

-6

-5

-2

-1

PART NO

DESCRIPTION

ITEM NO

ATLANTIC VERSION

Shown on sheets 1 of 4 & 2 of 4

(Pacific version shown on sheets 3 of 4 & 4 of 4)

SET UP GAUGE

2119599-1

LOC

A

DIST

66

REV

P

LTR

DESCRIPTION

DATE

DWN

APVD

D

ECR-13-000080

03JAN2013

RK

GB

D1

ECR-15-001855

05FEB2015

KH

JT

-

1

-

1

1

1

8-21084-0

O-RING, .676 ID, .070 DIA. MAT.

252

-

-

-

-

1

-

2119640-1

PUSH ROD, AIR FEED

250

-

-

-

-

1

-

2079988-1

BUSHING, LCH5-12, MISUMI

249

-

-

-

-

1

-

2119641-1

FEED CAM, AIR FEED

248

-

1

-

1

1

1

2119798-1

DETENT PIN

247

-

1

-

1

1

1

1-22279-3

SPRING, COMPRESSION

246

-

-

1

-

-

-

2119758-1

RAM, AMP STYLE, SIDE FEED, NON-ADJ.

245

-

1

1

1

1

1

2119082-7

CAM, SNAIL, INSULATION ADJUSTMENT

244

-

1

1

1

1

1

2079764-1

WASHER, WAVE SPRING, CREST-TO-CREST

243

-

1

1

1

1

1

2119083-1

RETAINER, INSULATION DIAL

242

-

1

1

1

1

1

7-18023-7

SCR, SKT HD CAP M3 X 4.0

241

-

-

2

2

-

-

2168400-6

SHCS, LOW HEAD, RoHS, M5 X 16

240

-

-

-

-

-

1

2119580-1

MECHANICAL FEED ASSEMBLY

239

-

-

-

-

1

-

2063440-1

AIR FEED MODULE

238

-

-

-

-

-

2119740-2

TAG, IDENTIFICATION

213

-

-

1

1

-

-

1901094-3

SPACER, FEEDER

198

-

-

-

-

2

-

21045-3

RING, RETAIN, EXTERN, 3/16 CRESCENT

172

-

1

1

1

1

1

994969-1

MAGNET, RARE EARTH HIGH ENERGY

166

-

REF

REF

REF

REF

REF

994970-2

COUNTER, MAGNETIC

164

-

-

-

-

1

-

240638-1

SPRING, FEED FINGER

163

-

-

-

-

1

-

3-23627-7

PIN, RETAIN, GRVD, 3/16 X .854

137

-

-

-

-

1

-

2119799-1

HOLDER, FEED FINGER, AF

136

-

-

REF

REF

-

-

SEE NOTE 4

MEMORY CHIP, PROGRAMMED

135

-

-

1

1

-

-

1633743-1

SERVO FEED LATCH ASM

133

-

1

1

1

1

1

1-18028-2

WASHER, FLAT, REG M4

119

-

-

REF

REF

-

-

2119944-1

FEED FINGER ASSEMBLY, SF

117

-

1

1

1

1

1

455888-5

SPACER, CRIMPER

82

-

1

1

1

1

1

2119956-1

DOCUMENTATION PACKAGE

71

-

1

-

-

1

1

2119740-1

TAG, IDENTIFICATION

67

-

2

2

2

2

2

2168078-1

SCREW, DRIVE, RH, RoHS, 2 x .188

66

-

1

-

1

1

1

2119793-1

LIMITER, ADJUSTMENT BOLT

63

-

3

-

3

3

3

992763-5

SCR, SET, SOC, CONE POINT, M3 x 4.0

62

-

1

1

1

1

1

2079383-4

SCR, BHSC, RoHS (M4 X 8)

60

-

-

-

-

1

1

5-18022-5

SCR, HEX HD CAP, M4 X 6.0

59

-

1

1

1

1

1

985575-3

SCR, FLT SKT HD CAP M3 X 10.0

57

-

-

-

-

1

1

1338685-1

PAWL, FEED

56

-

4

4

4

4

4

2168400-1

SHCS, LOW HEAD, RoHS, M4 X 12

54

-

2

2

2

2

2

2168083-3

SCR, SKT HD CAP, RoHS, M4 X 12.0

53

-

1

1

1

1

1

5018030-1

NUT, HEX, REG, RoHS, M3

52

-

1

1

1

1

1

811242-5

BUMPER, HOLD DOWN

51

-

1

1

1

1

1

690753-2

SPACER, TONKER

50

-

-

-

-

1

2

18023-9

SCR, SKT HD CAP M4 X 6.0

49

-

-

-

-

-

1

2119652-1

FEED CAM, PRE FEED

48

-

-

-

-

-

1

2119653-1

FEED CAM, POST FEED

47

-

1

1

1

1

1

2119656-9

APPLICATOR BASIC ASSEMBLY, SF

46

-

1

-

1

1

1

2119370-1

RAM, AMP STYLE, SIDE FEED

44

-

1

1

1

1

1

2079383-7

SCR, BHSC, RoHS (M8 X 25)

41

-

1

-

1

1

1

2119645-1

DISC, NUMBERED FA WIRE ADJUSTMENT

40

-

1

-

1

1

1

2119957-1

APPLICATOR SHIM PACK

39

-

1

1

1

1

1

2119644-1

RAM WASHER, PRECISION

38

-

1

1

1

1

1

2119085-1

FA HEAD, ATLANTIC STYLE

37

-

1

-

1

1

1

2119092-1

BOLT, ADJUSTMENT

35

-

1

1

1

1

1

1-1752356-7

SUPPORT, TERMINAL

34

-

2

2

2

2

2

2079383-5

SCR, BHSC, RoHS (M4 X 20)

33

-

1

1

1

1

1

2161328-1

HEX HEAD, FLANGED, M5 x 8mm LONG

32

-

1

1

1

1

1

1-1320908-2

SPACER, STRIP GUIDE

30

-

1

1

1

1

1

2119959-2

ASSEMBLY, STRIP GUIDE

29

-

1

1

1

1

1

455888-4

SPACER, CRIMPER

28

-

1

1

1

1

1

1320928-2

STRIP GUIDE

24

-

1

1

1

1

1

2168083-2

SCR, SKT HD CAP, RoHS, M4 X 8.0

21

-

1

1

1

1

1

1-18028-2

WASHER, FLAT, REG M4

20

-

1

1

1

1

1

2119533-1

STRIPPER, SIDE FEED

19

-

1

1

1

1

1

2119806-1

INSERT, SHEAR

13

-

1

1

1

1

1

3-22280-3

SPRING, COMPRESSION

12

-

1

1

1

1

1

1-356885-4

STOP, SHEAR

11

-

1

1

1

1

1

2119805-1

SHEAR HOLDER, FRONT

10

-

1

1

1

1

1

318707-1

FLOATING SHEAR, FRONT

9

-

1

1

1

1

1

1333204-4

ANVIL, COMBINATION

8

-

1

1

1

1

1

2119781-1

DEPRESSOR, SHEAR

5

-

1

1

1

1

1

238011-9

BLOCK, CRIMPER SPACER

4

-

1

1

1

1

1

3-2119784-1

CRIMPER, INSULATION O PREMIUM

3

-

1

1

1

1

1

455888-5

SPACER, CRIMPER

2

-

1

1

1

1

1

1-456405-7

CRIMPER, WIRE PREMIUM

1

Customer Accessible Production Drawing

SCALE

1:2

SHEET

1

OF

4

REV

D1

TE Connectivity

Harrisburg, PA 17105-3608

Ocean Side Feed

Applicator

00779

©=2151060

AMP 4805 REV 31MAR2000

1

2

3

4

5



6

7




8

SHEETS 3 & 4 ARE NOT REQUIRED FOR ATLANTIC VERSION


PNEUMATIC

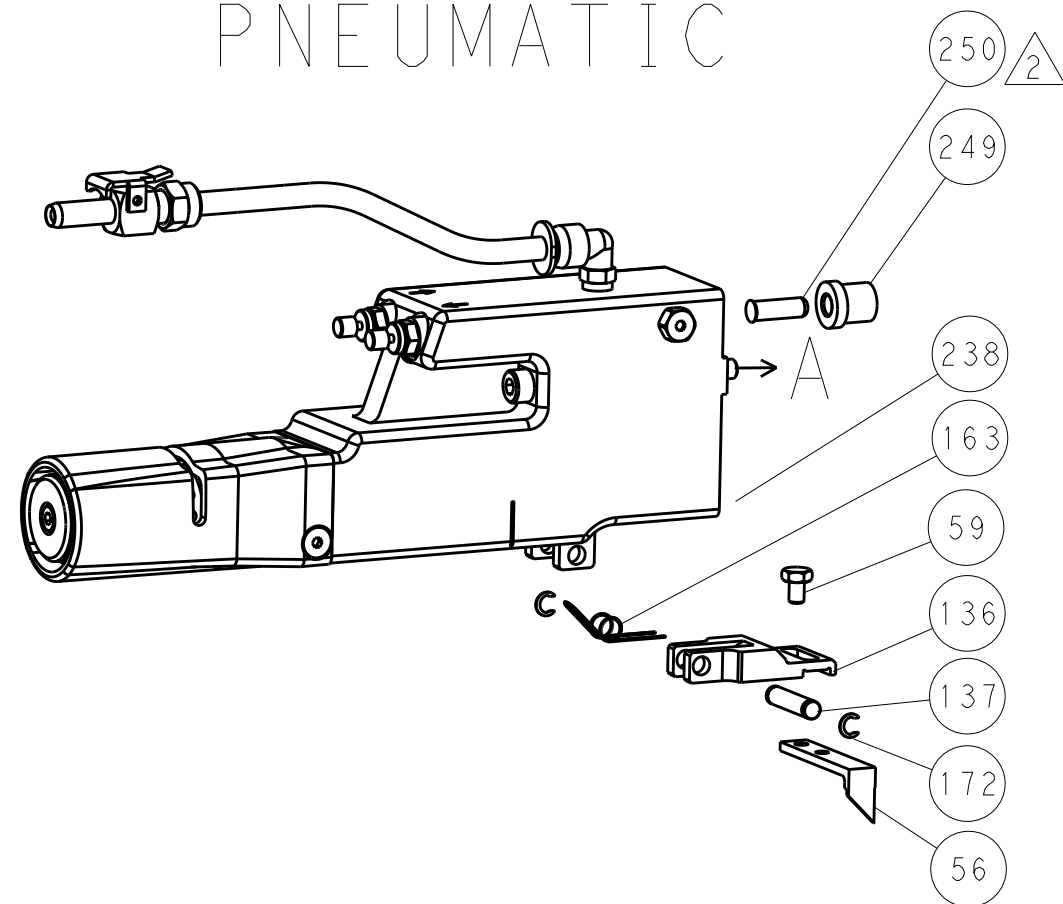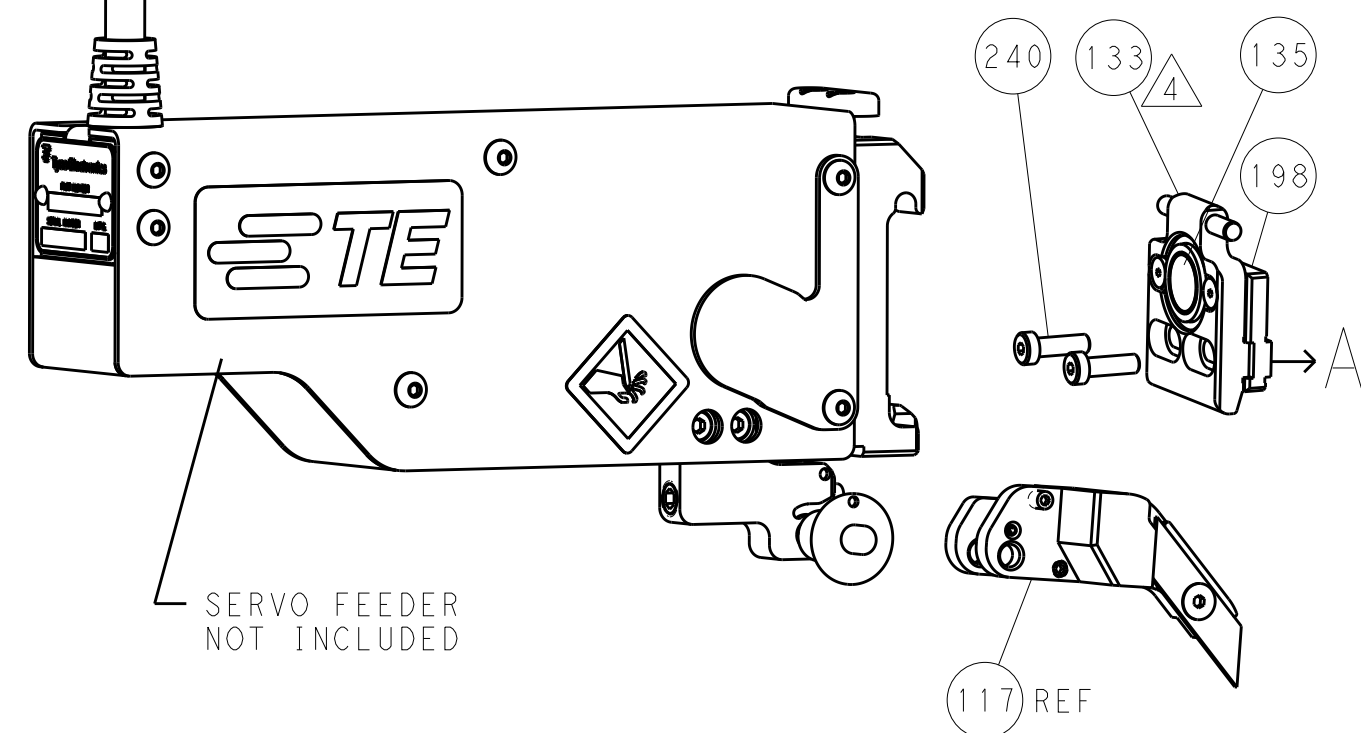SERVO
LATCH PLATE


CAM POSITIONS

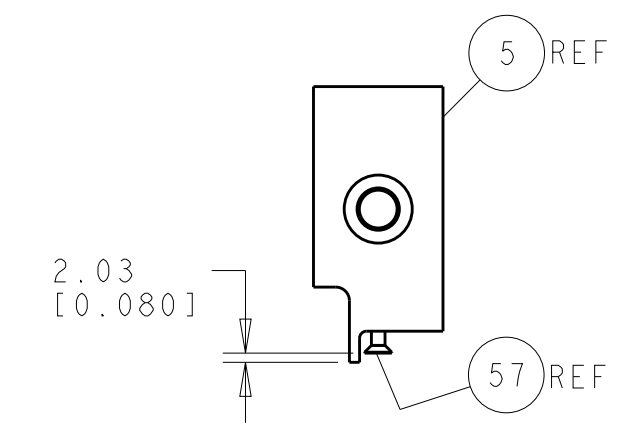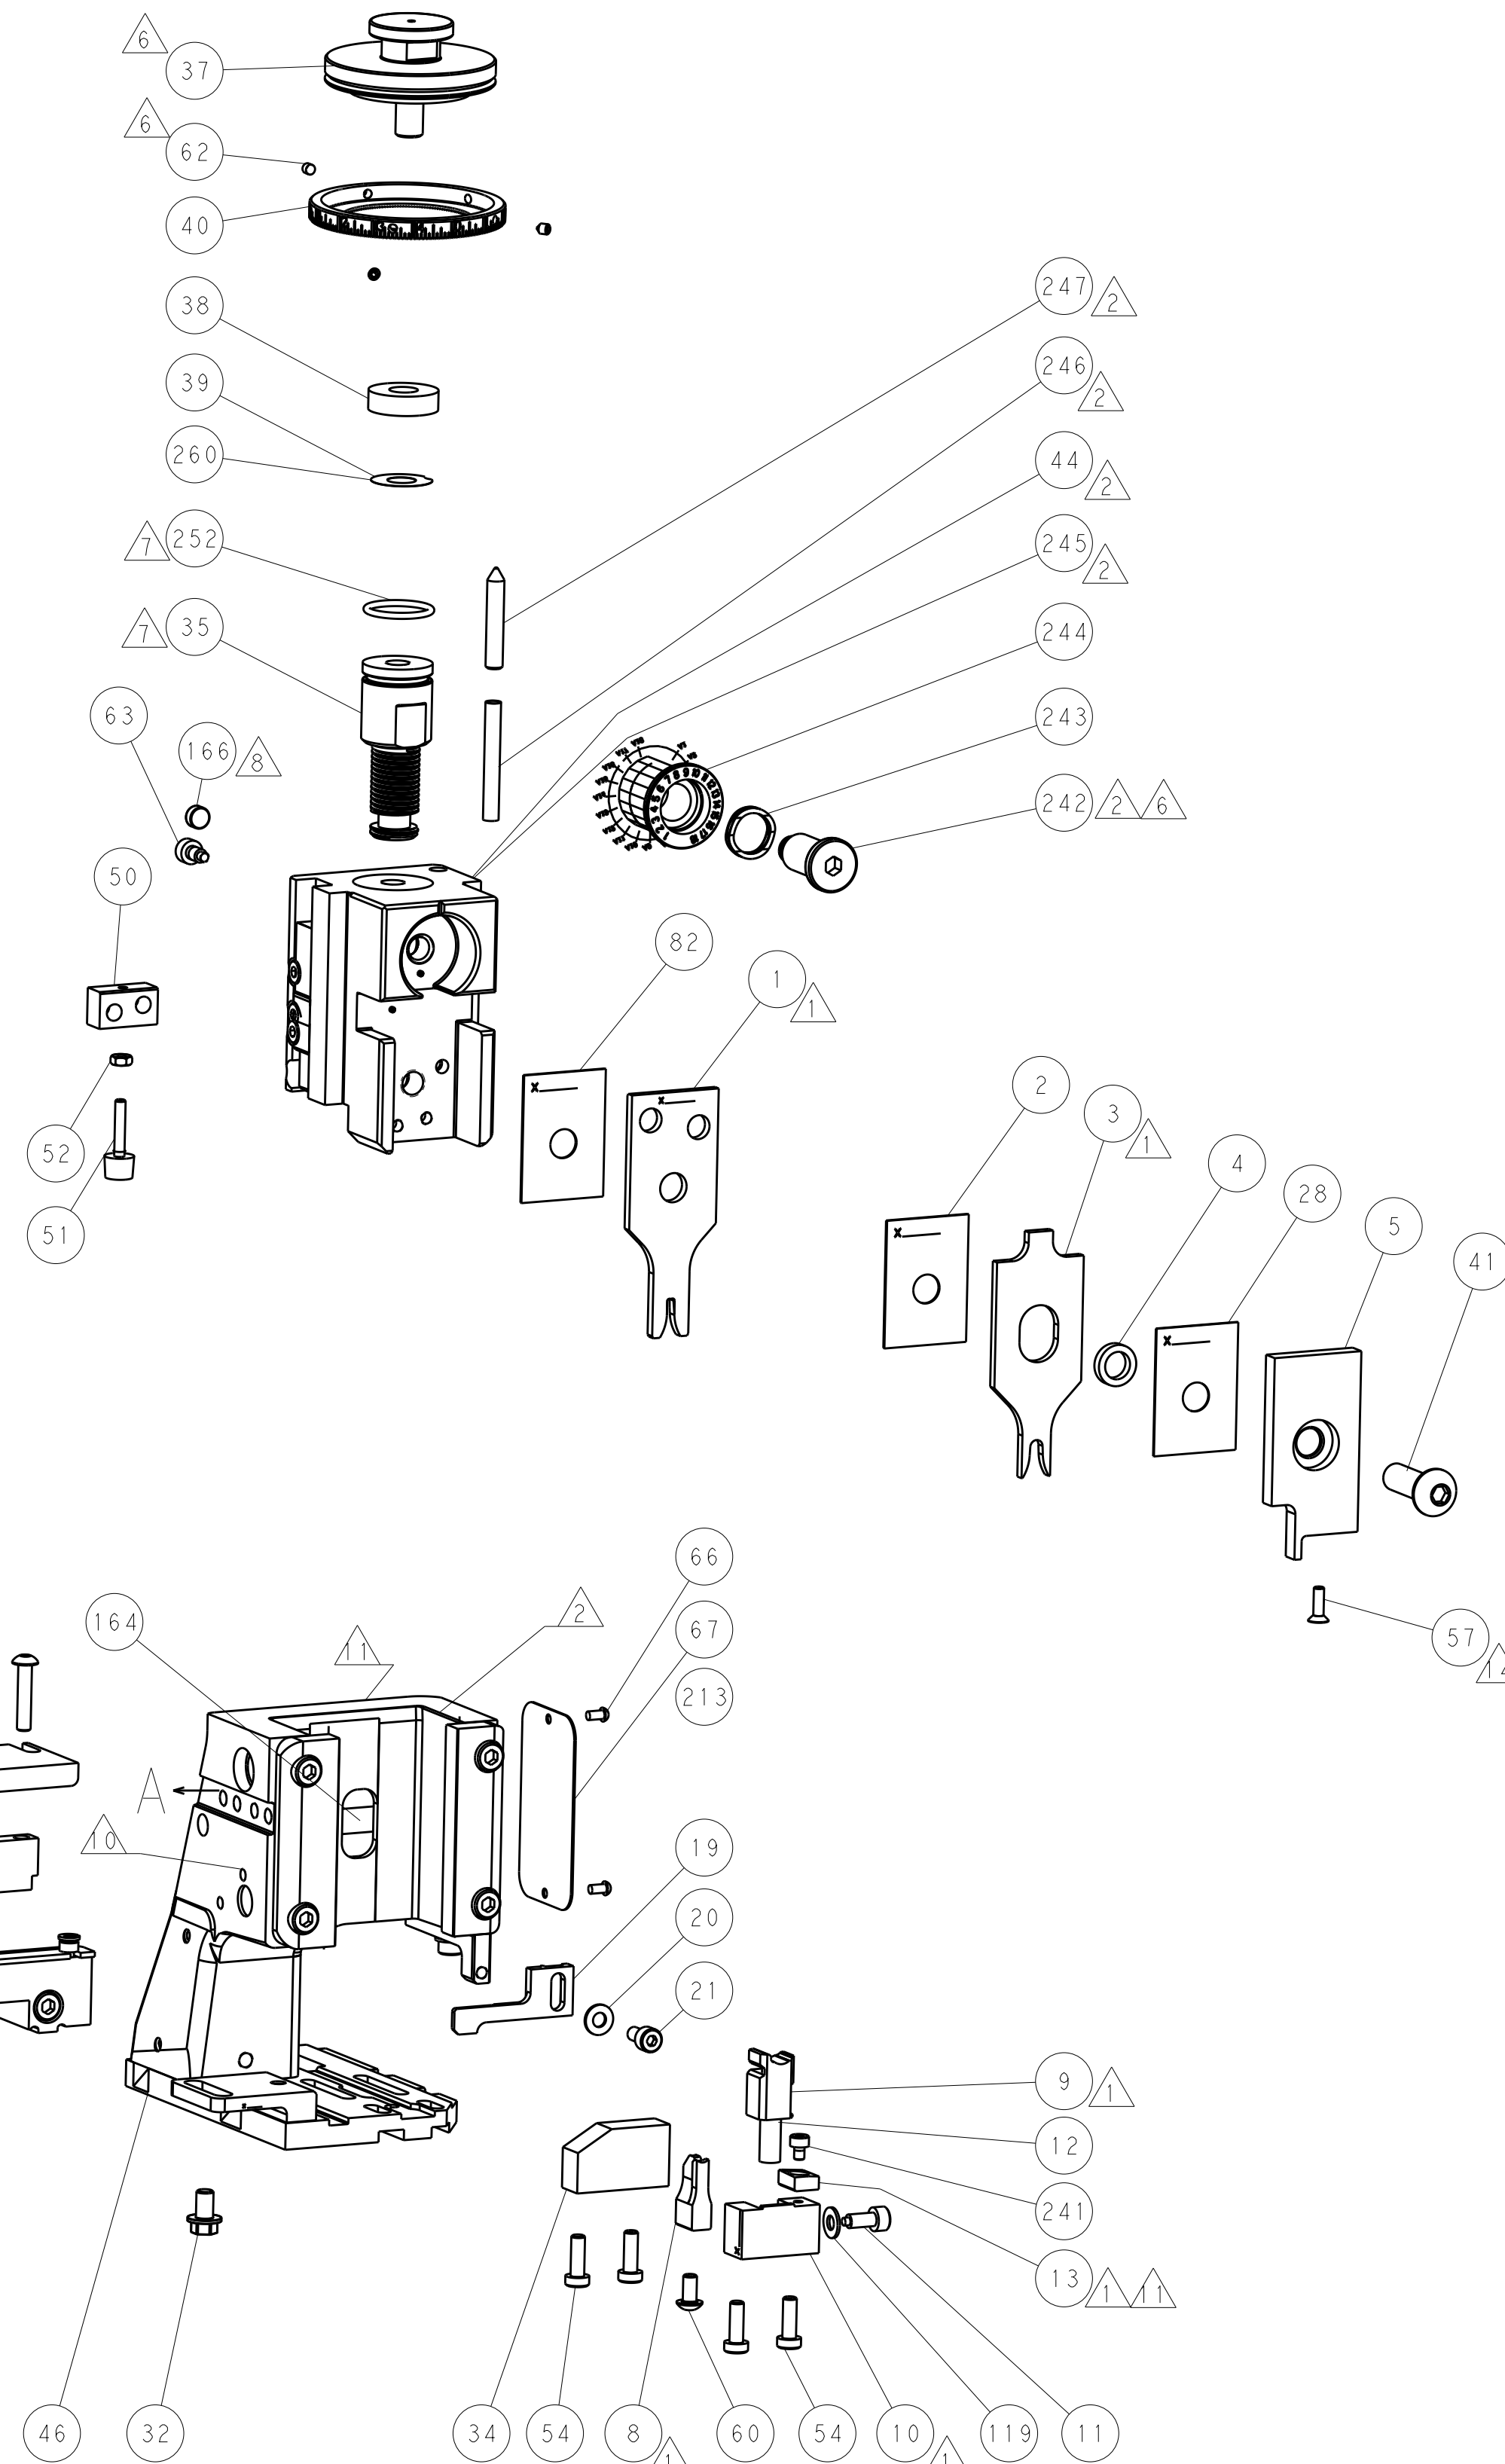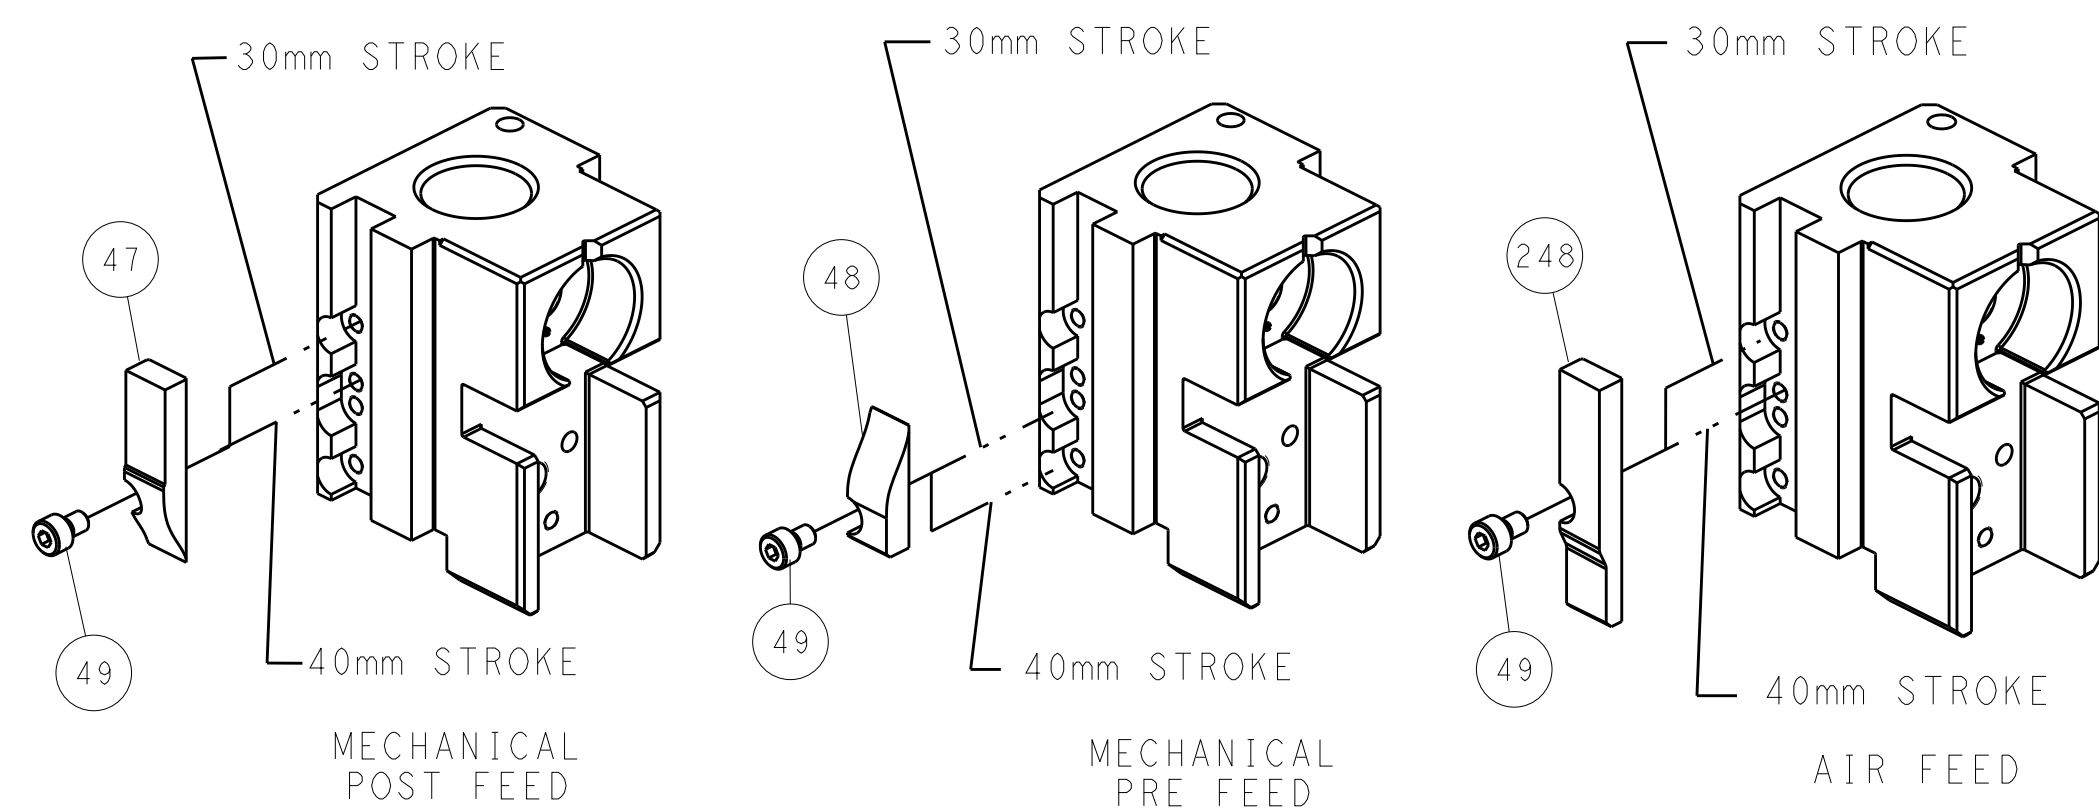

SHEAR DEPRESSOR DETAIL

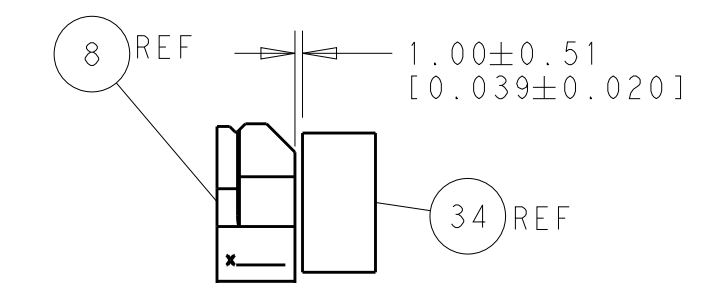



TERMINAL SUPPORT LOCATION

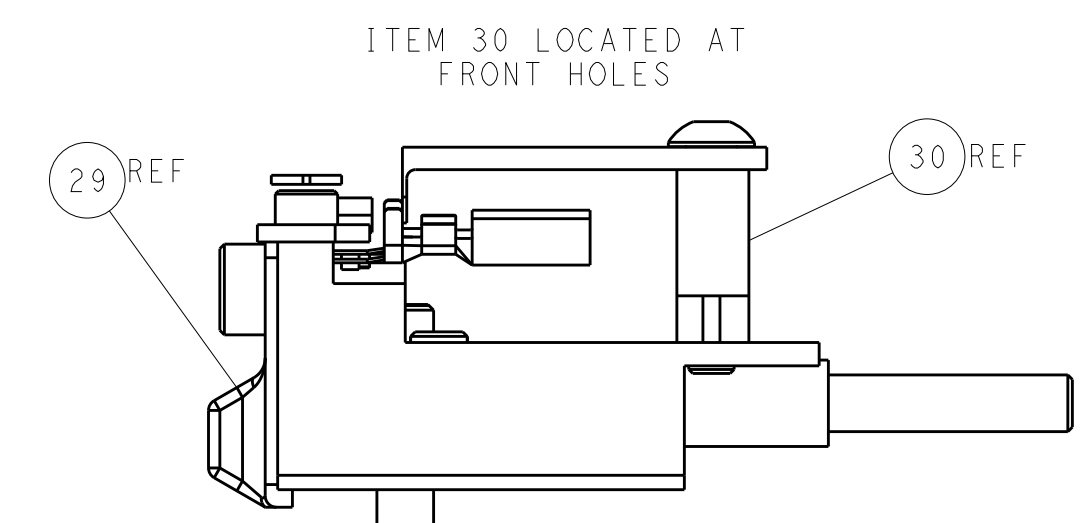


FEED TRACK POSITION GUIDE BY INSULATION BARREL

ATLANTIC VERSION

Shown on sheets 1 of 4 & 2 of 4
(Pacific version shown on sheets 3 of 4 & 4 of 4)

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TETRA TECH ENGINEERING CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROL PLAN/ENGINEERING ORGANIZATION MAY BE MODIFIED FOR THE LATEST REVISION		DWN 26AUG2011 CHK HOFNER 29AUG2011 T. ELBIN 29AUG2011		 TE Connectivity Harrisburg, PA 17105-3608	
DIMENSIONS: mm		TOLERANCES, UNLESS OTHERWISE SPECIFIED: 0 PLC ±.1 1 PLC ±0.5 2 PLC ±0.13 3 PLC ±0.013 4 PLC ±0.0001 ANGLES ±.1		NAME Ocean Side Feed Applicator PRODUCT SPEC - APPLICATION SPEC -	
		WEIGHT -		SIZE CAGE CODE DRAWING NO RESTRICTED TO A1 00779 C=2151060 -	
MATERIAL -		FINISH -		Customer Accessible Production Drawing SCALE 1:2 SHEET 2 OF 4 REV D1	

8		7		6		5		4		3		
THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION		20								
© COPYRIGHT 20		BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.										
	PACIFIC VERSION TERMINATOR INTERFACE ADAPTER	PART NUMBER	REVISION	DESCRIPTION	FEED TYPE	APPLICATOR STYLE CONVERSION CHART						
						CONVERT TO	PART NUMBERS REQUIRED					
						PNEUMATIC FEED	2119950-1	1338685-1	5-18022-5	2119641-2	2119799-1	2063440-1
						SERVO LATCH PLATE	2119951-1	-	8-2151060-5	1901094-3	-	2168400-6 (QUANTITY 2)
						SMART APPLICATOR	2161326-1	-	8-2151060-4	-	-	-
						MECHANICAL FEED	2119949-1	1338685-1	5-18022-5	2119653-2	-	-
						SERVO LATCH PLATE	2119951-1	-	8-2151060-5	1901094-3	-	2168400-6 (QUANTITY 2)
						SMART APPLICATOR	2161326-1	-	8-2151060-4	-	-	-
						MECHANICAL FEED	2119949-1	1338685-1	5-18022-5	2119653-2	-	-
						PNEUMATIC FEED	2119950-1	1338685-1	5-18022-5	2119641-2	2119799-1	2063440-1
						-	-	-	-	-	-	
						-	-	-	-	-	-	

APPLICATOR DATA		
CRIMP	SIZE	TYPE
WIRE	2.03 mm [.080]	F
INSUL	4.06 mm [.160]	O
APPLICATOR INSTRUCTIONS 408-10389		

TERMINAL DATA: TE TERMINAL		TE CRIMP SPECIFICATION		
TERMINAL NAME: AMP MCP 2.8K FLAT TYPE RECEPTACLE				
WIRE STRIP LENGTH 3.70-4.30 mm [.146-.169 IN]		INSULATION DIAMETER RANGE Ø1.40-2.70 mm [.055-.106 IN] 		
TERMINAL APPLICATION SPECIFICATION 		(C) 114-18387	-	-
TERMINALS APPLIED				
TE TERMINAL	TE TERMINAL	TE SEAL	TE SEAL	CABLE DIAMETER
(C) 1241394-1	(C) 1241394-3	963294-1		Ø1.2-2.0
(C) 1241394-2		963293-1		Ø2.0-2.7

TERMINAL DATA: TE TERMINAL		TE CRIMP SPECIFICATION		
TERMINAL NAME: JUNIOR-POWER-TIMER CONTACT				
WIRE STRIP LENGTH 4.20-4.80 mm [.165-.189 IN]		 INSULATION DIAMETER RANGE $\varnothing 1.40-2.70$ mm [.055-.106 IN] 		
 TERMINAL APPLICATION SPECIFICATION	(A) 114-18050	-	-	
	(B) 114-18051	-	-	
TERMINALS APPLIED				
TE TERMINAL	TE TERMINAL	TE SEAL	TE SEAL	CABLE DIAMETER
(A) 964286-1	(A) 6-964286-6	963294-1		$\varnothing 1.2-2.0$
(A) 964286-2	(B) 1-964300-3	963293-1		$\varnothing 2.0-2.7$
(A) 1-964286-1	(B) 2-964300-1			
(A) 2-964286-1	(B) 4-964300-1			
(A) 4-964286-1				

WIRE SIZE		CRIMP HEIGHT mm [INCH]		CRIMP HEIGHT REFERENCE SETTING
1.00mm2		1.20+/-0.05 [1.047+/- .002]		6.5
0.75mm2		1.18+/-0.05 [1.046+/- .002]		6.9
0.50mm2		1.15+/-0.05 [1.045+/- .002]		7.2



1. RECOMMENDED SPARE PARTS
2. GREASE BEARING SURFACES LIGHTLY
3. LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.
4. APPLICATOR SPECIFIC DATA TO BE ENTERED INTO BLANK MEMORY CHIP AT ASSEMBLY. SEE BELOW FOR PART NUMBER:
 MECHANICAL FEED WITH "SMART APPLICATOR" CONVERSION: 8-2151060-4
 PNEUMATIC FEED WITH "SMART APPLICATOR" CONVERSION: 8-2151060-4
 SERVO FEED WITH "FINE CRIMP HEIGHT ADJUST": 8-2151060-5
5. ADJUSTMENT OF THE STRIPPER MAY BE REQUIRED WHEN MOVING THE APPLICATOR BETWEEN BENCH AND LEADMAKER APPLICATIONS.
6. APPLY PART NUMBER 1-23419-5 LOCTITE TO THREADS OF ITEMS 62.
 APPLY PART NUMBER 2-23419-6 LOCTITE TO THREADS OF ITEMS 242.
7. GREASE THREADS, GROOVE AND O-RING ON ITEMS 139 & 152.
8. MAGNET MUST BE ORIENTED CORRECTLY IN ORDER TO PROPERLY ACTUATE THE COUNTER.
9. CRIMP HEIGHT REFERENCE SETTING WAS THE SETTING USED WHEN THE APPLICATOR WAS QUALIFIED AT THE FACTORY. ADJUSTMENT MAY BE NECESSARY WHEN RUNNING APPLICATOR IN THE FIELD.
10. SPARE FEED CAM STORAGE LOCATION REFER TO INSTRUCTION SHEET FOR ADDITIONAL INFORMATION.
11. TO CONVERT THE APPLICATOR TO A NON-CARRIER CUTTING STYLE, REMOVE ITEM 13 AND ATTACH TO THE LOCATION ON BACK SIDE OF THE HOUSING. REFER TO INSTRUCTION SHEET FOR ADDITIONAL INFORMATION.
12. THIS APPLICATOR APPLIES TERMINAL WITH A SEAL.
13. APPLY TORO-SEAL IN ALLEN SOCKET TO FILL HOLE AFTER FLAT HD HAS BEEN ADJUSTED TO CORRECT HEIGHT AT QUALIFICATION.
 APPLY #1-23419-5 LOC-TITE TO THREADS.

```
*WARNING
ON INSTALLATION, SET WIRE DISC, ITEM 40 TO
LARGEST WIRE SIZE SETTING. USE OF SETTINGS
BELOW MINIMUM REQUIRED CRIMP HEIGHT SETTING
WILL CAUSE DAMAGE TO CRIMP TOOLING.
```

[illegible]

TEST DRAWING: IS A CONVEYED DOCUMENT FOR TEST/ELECTRONIC CONVEYANCE ONLY. IT IS SUBJECT TO CHANGE AND THE CONSUMER AND SUPPLIER AGREEMENTATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN: 26AUG2011 CHG: 29AUG2011 T.ELBIN		 TE Connectivity Harrisburg, PA 17105-3608	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ±0.5 2 PLC ±0.13 3 PLC ±0.013 4 PLC ±0.0001 ANGLES ±°		NAME: Ocean Side Feed Applicator PRODUCT SPEC: - APPLICATION SPEC: -	
		MATERIAL: FINISH:		WEIGHT: - SIZE: A 00779 C=2151060 DRAWING NO: - RESTRICTED TO: -	
Customer Accessible Production Drawing				SCALE: 1:2 SHEET 3 of 4 REV: D1	

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
A	66	-	-	SEE SHEET 1	-	-	-

D

C

B

A


D

C


B

A


FEED TYPE MECHANICAL

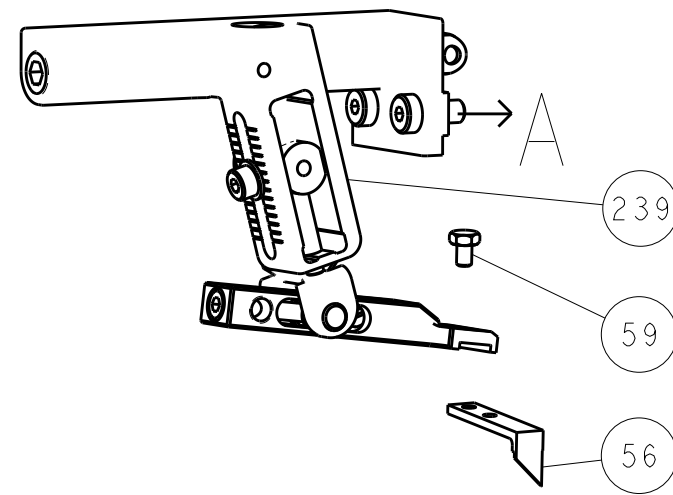




PNEUMATIC

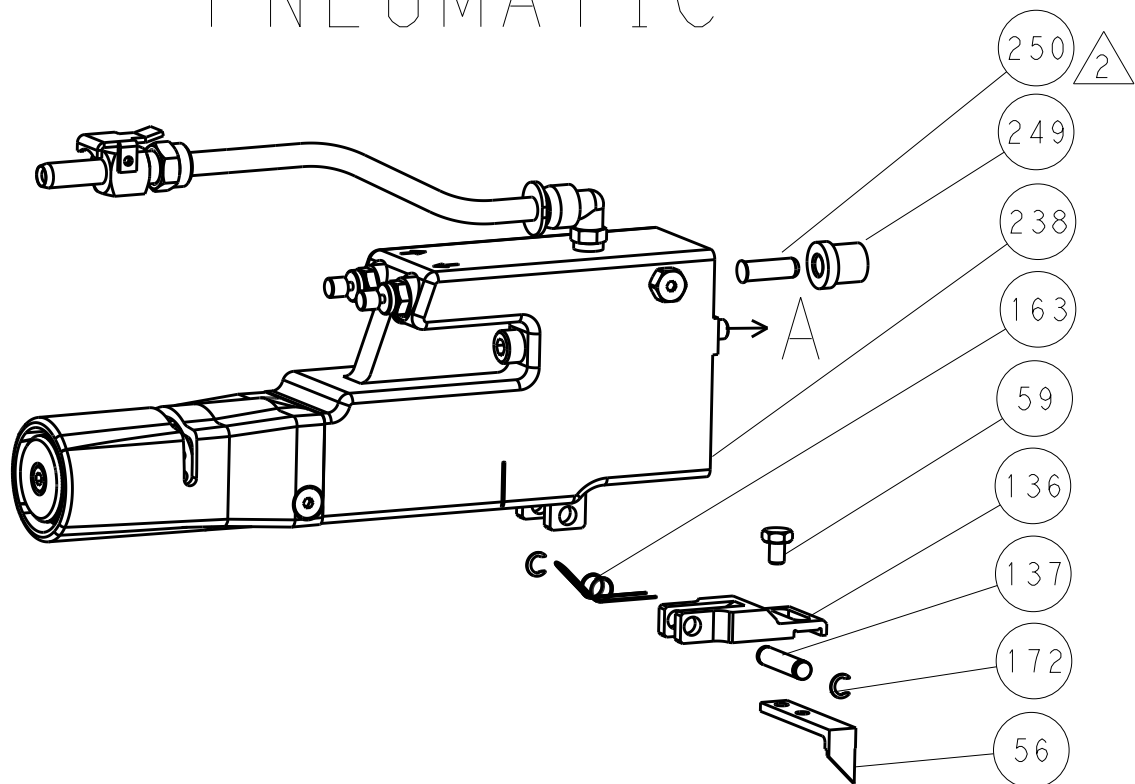


SERVO LATCH PLATE

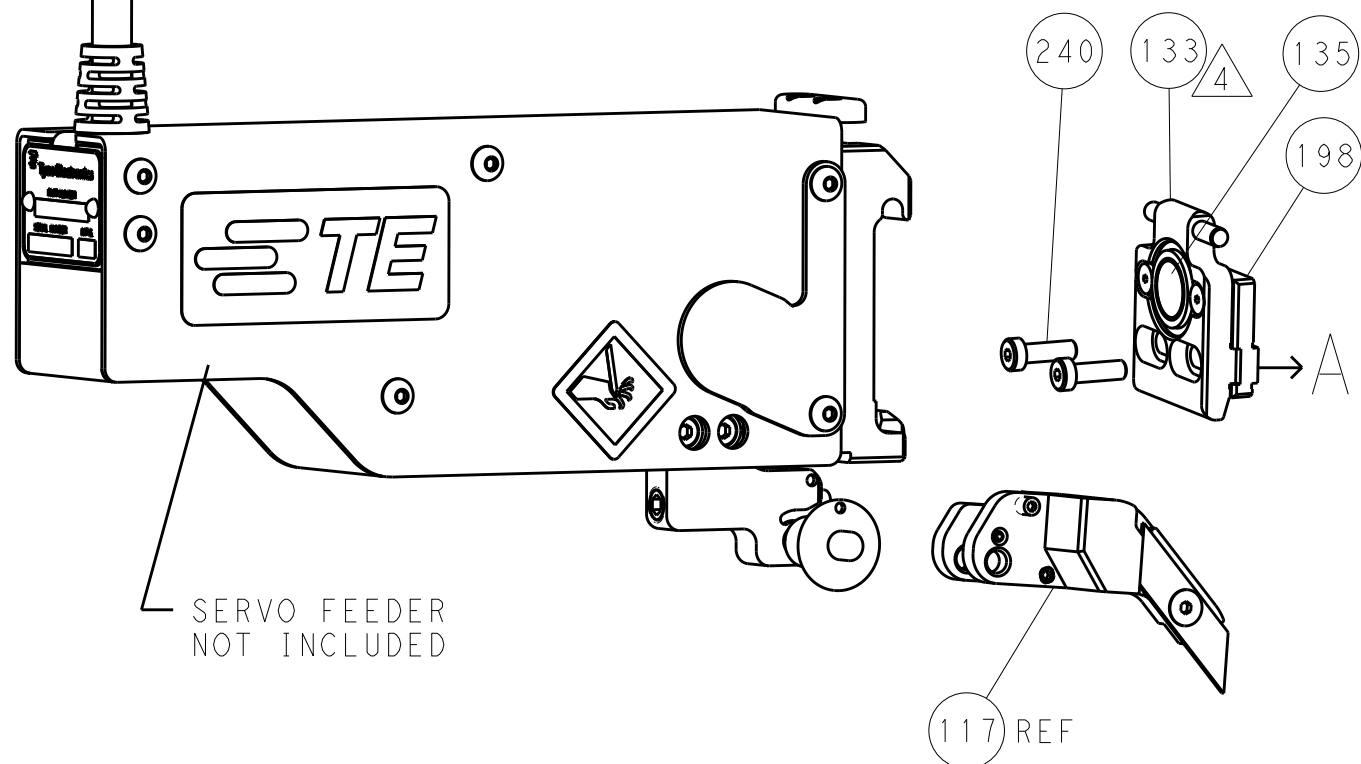



CAM POSITIONS

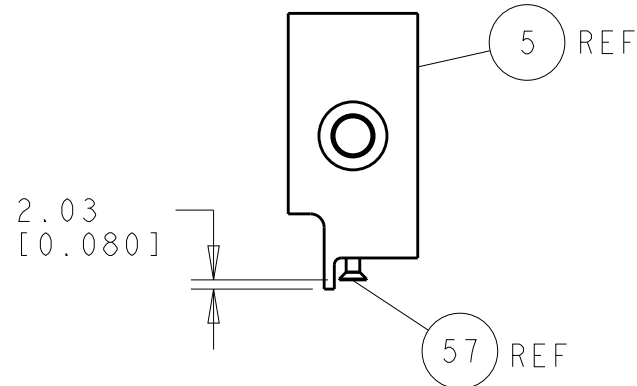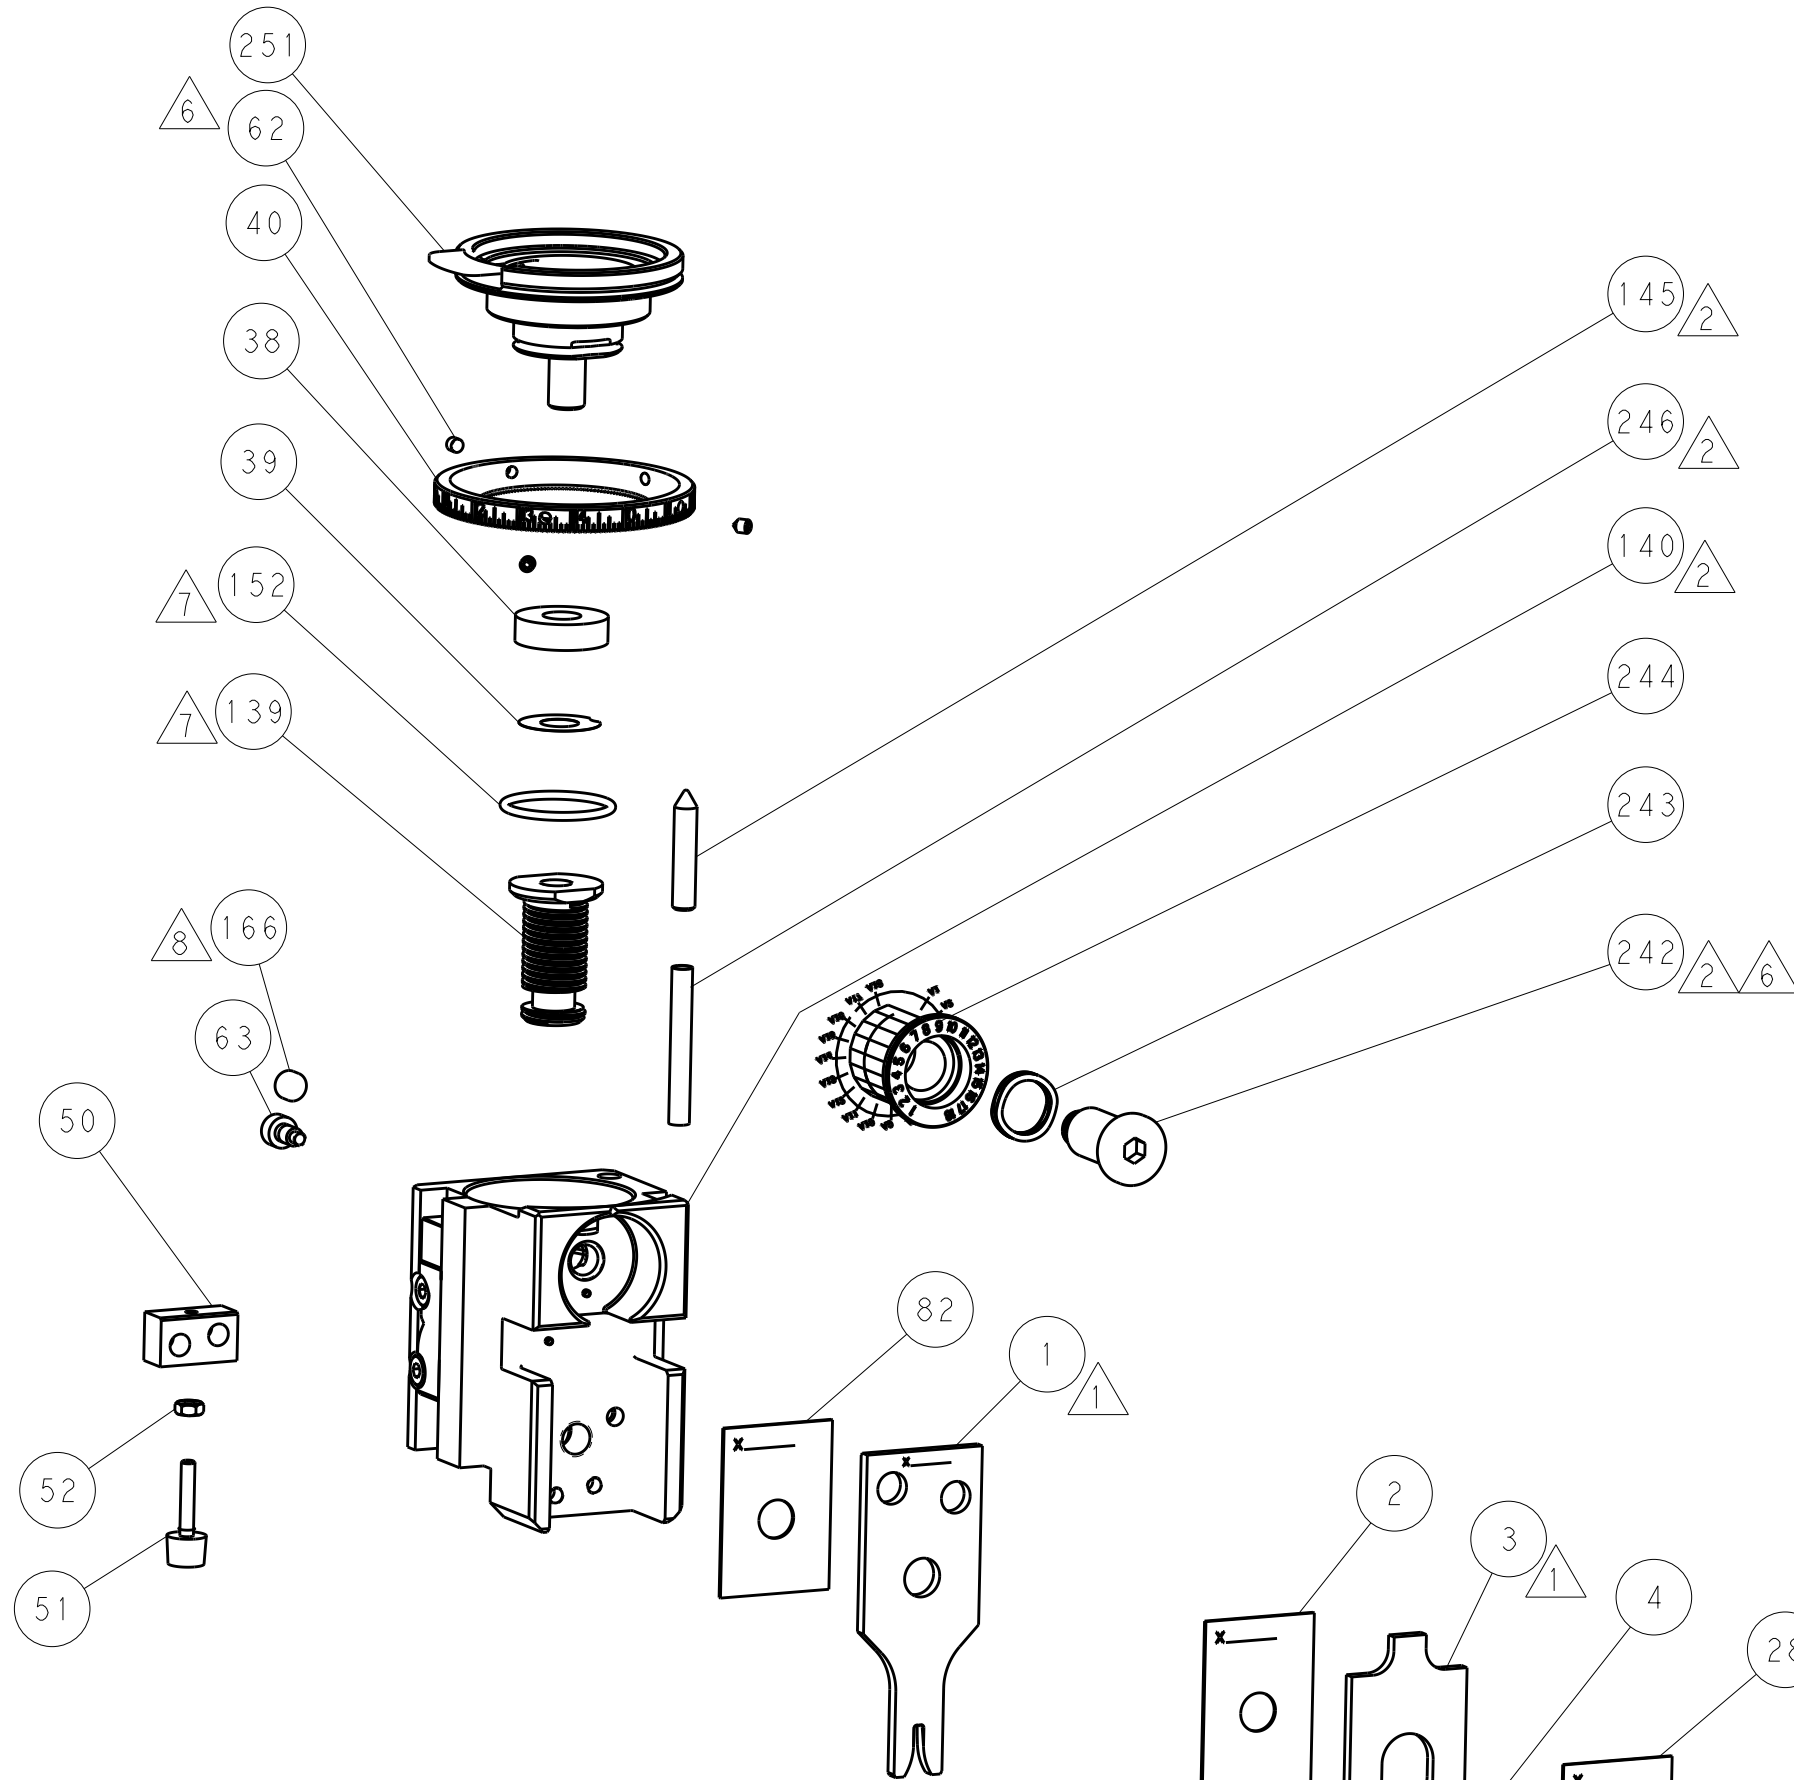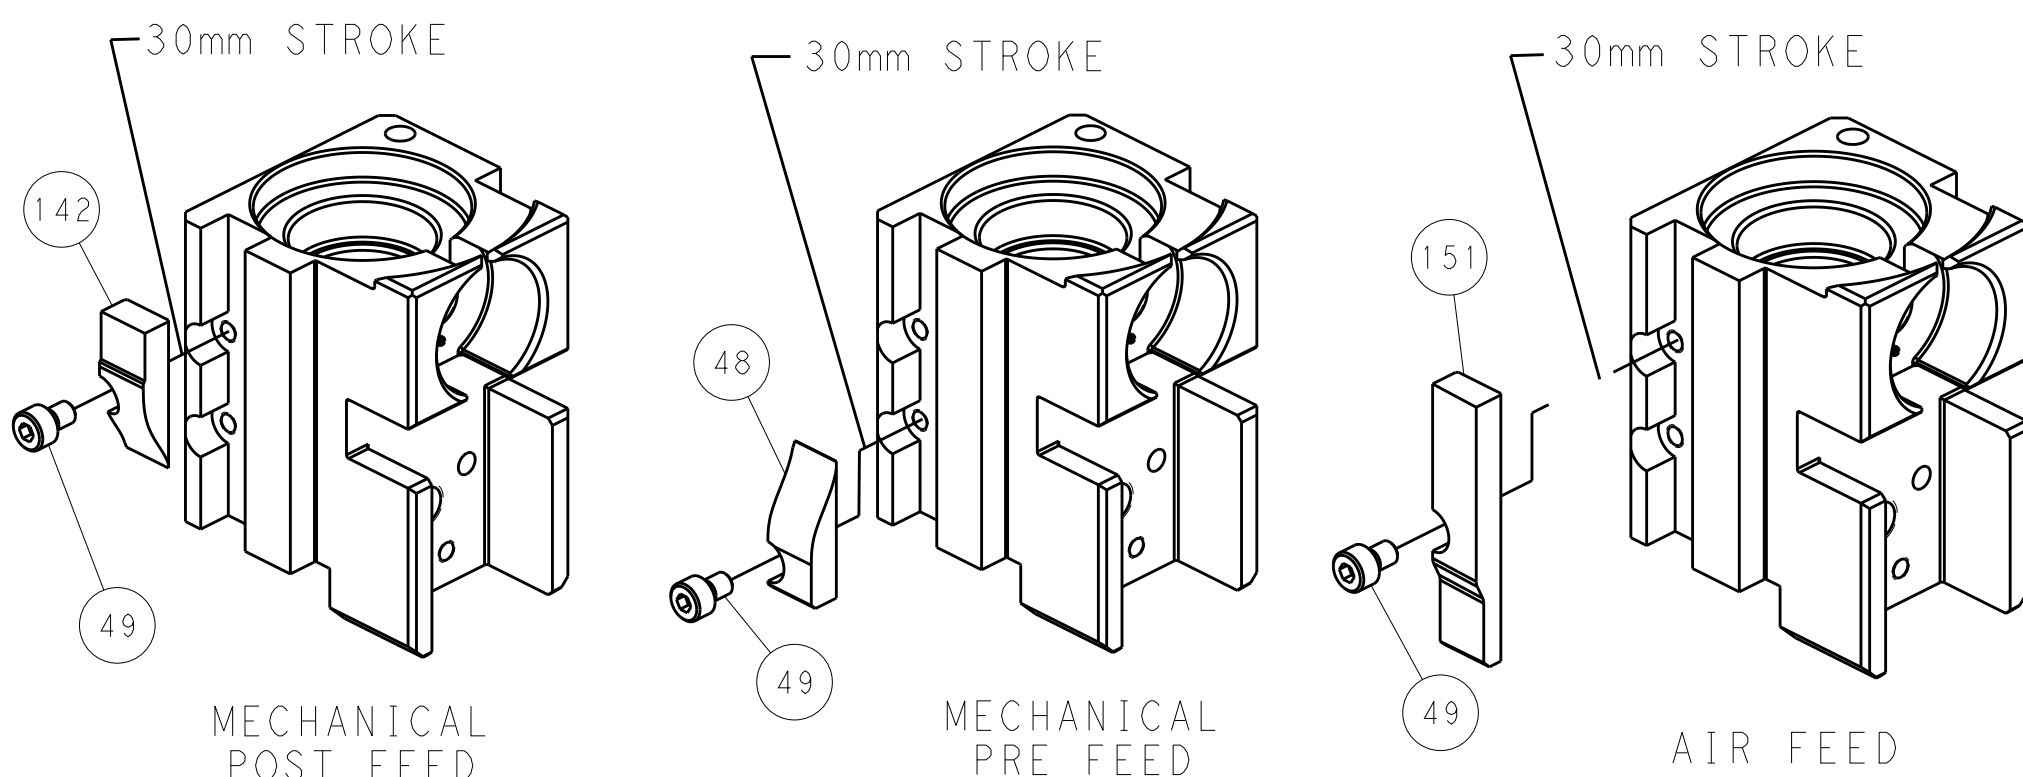

SHEAR DEPRESSOR DETAIL

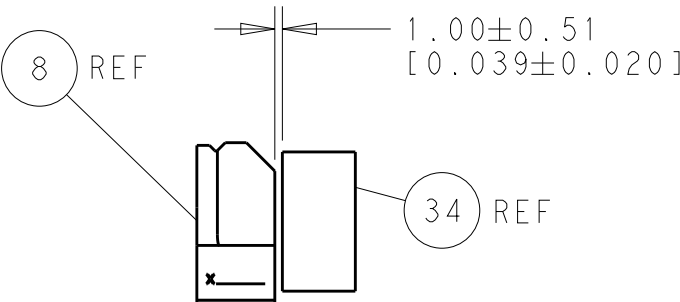

TERMINAL SUPPORT LOCATION

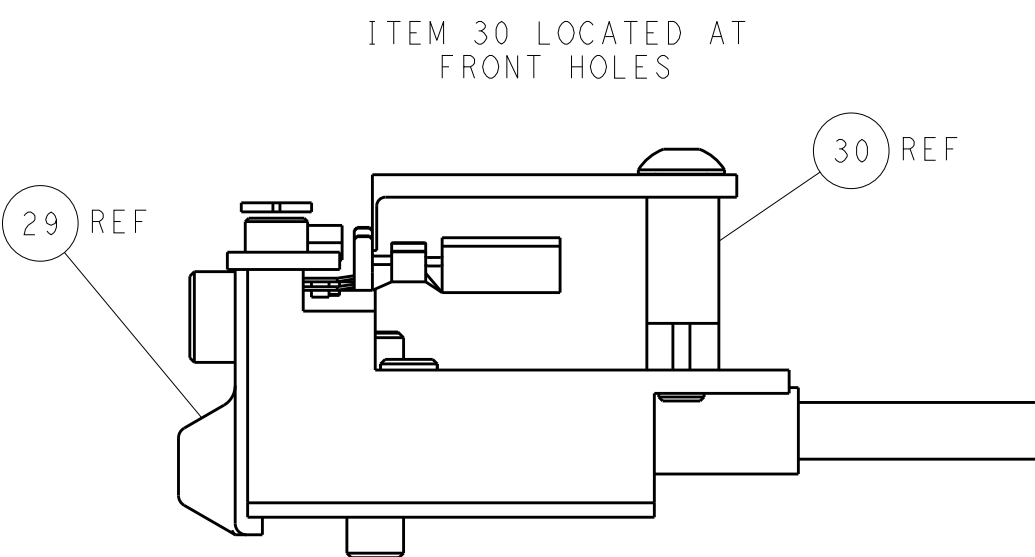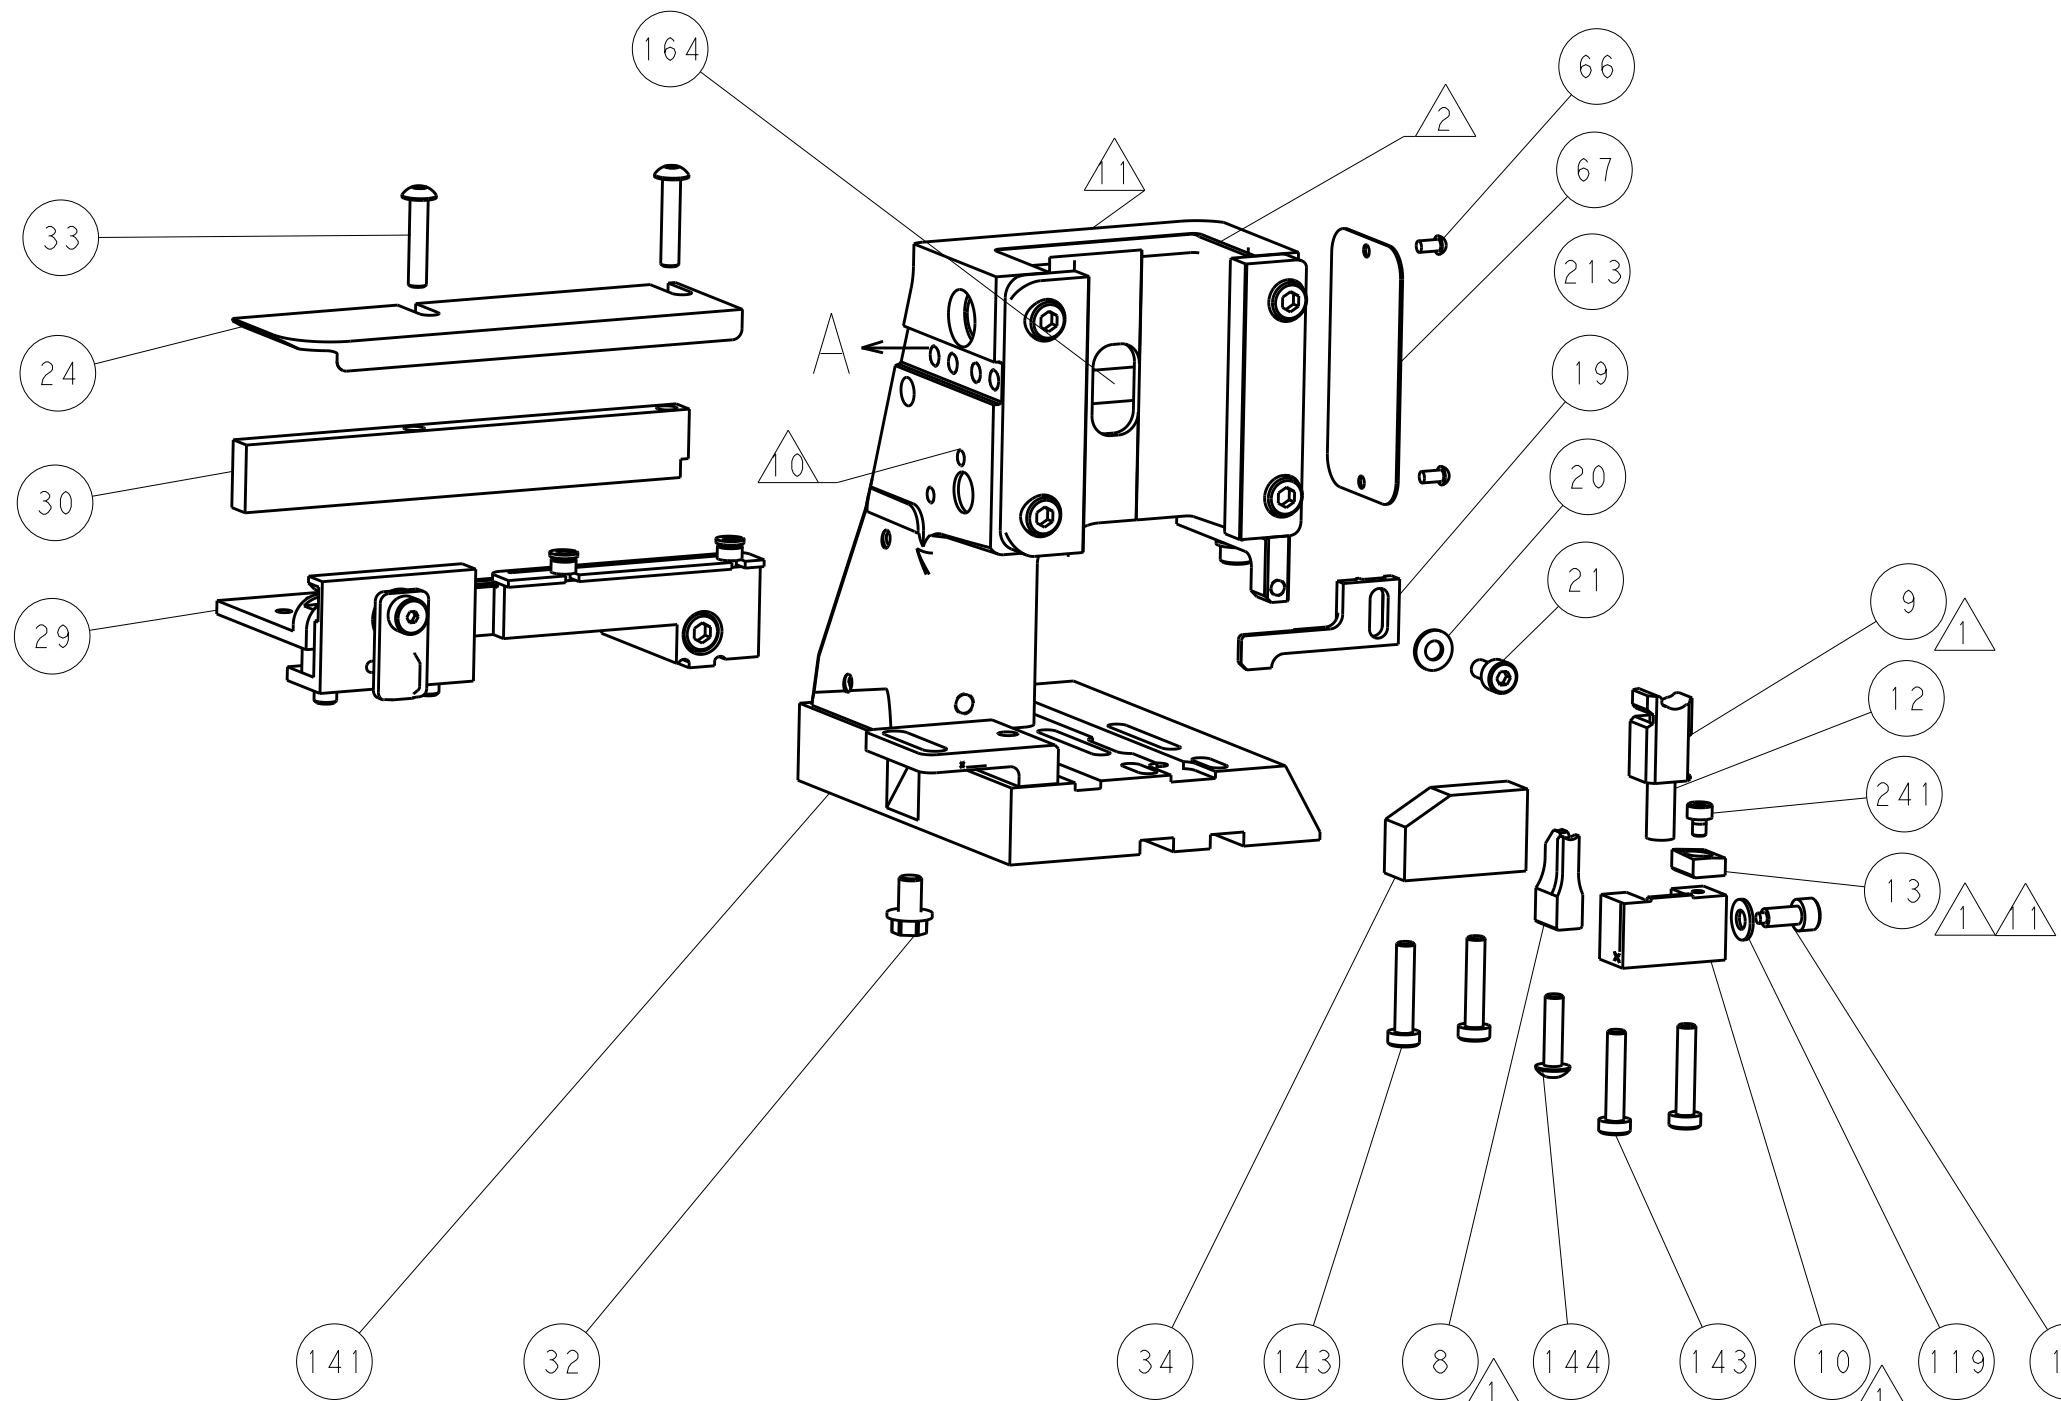

FEED TRACK POSITION
GUIDE BY INSULATION BARREL

PACIFIC VERSION
Shown on sheets 3 of 4 & 4 of 4
(Atlantic version shown on sheets 1 of 4 & 2 of 4)

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		OWN		TE Connectivity	
mm		0 PLC ±.5		HOFFNER		Harrisburg, PA 17105-3608	
		1 PLC ±0.13		T.ELBIN		NAME	
		2 PLC ±0.13		T.ELBIN		Ocean Side Feed	
		3 PLC ±0.013		T.ELBIN		Applicator	
		4 PLC ±0.0001		T.ELBIN		SIZE	
		ANGLES FINISH		T.ELBIN		CAGE CODE	
				T.ELBIN		DRAWING NO	
				T.ELBIN		RESTRICTED TO	
				T.ELBIN		A1 00779 C=2151060	
				T.ELBIN		Customer Accessible Production Drawing	
				T.ELBIN		SCALE 1:2	
				T.ELBIN		SHEET 4 OF 4	
				T.ELBIN		REV D1	

SHEETS 1 & 2 ARE NOT REQUIRED FOR PACIFIC VERSION

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9