

Feed-through terminal block - HDFKV 16/Z - 0714079

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)




Feed-through terminal block, Connection method: Screw connection, Load current : 101 A, Cross section: 0.5 mm² - 25 mm², Connection direction of the conductor to plug-in direction: 90 °, Width: 12.1 mm, Color: gray

Product description

Feed-through terminal block, Connection method: Screw connection, Load current : 101 A, Cross section: 0.5 mm² - 25 mm², Connection direction of the conductor to plug-in direction: 90 °, Width: 12.1 mm, Color: gray



Key commercial data

| | |
|--------------------------------------|---------------------------------------------------------------------------------------------------------|
| Packing unit | 0 |
| Minimum order quantity | 1 |
| Catalog page | Page 629 (CC-2009) |
| GTIN |  4 046356 180184 |
| Weight per piece (including packing) | 0.0 GRM |
| Weight per Piece (excluding packing) | 41.58 GRM |
| Country of origin | GREECE |

Technical data

General

| | |
|-----------------------------------------|------|
| Number of levels | 1 |
| Number of connections | 2 |
| Color | gray |
| Insulating material | PA |
| Inflammability class according to UL 94 | V0 |

Dimensions

| | |
|--------|---------|
| Width | 12.1 mm |
| Length | 64.6 mm |

Technical data

| | |
|----------------------|-------|
| Maximum load current | 101 A |
| Rated surge voltage | 6 kV |
| Pollution degree | 3 |

Feed-through terminal block - HDFKV 16/Z - 0714079

Technical data

Technical data

| | |
|----------------------------------|---------------|
| Surge voltage category | III |
| Insulating material group | I |
| Connection in acc. with standard | IEC 60947-7-1 |
| Nominal current I _N | 76 A |
| Nominal voltage U _N | 500 V |

Connection data

| | |
|-----------------------------------------------------------------------------------------|---------------------|
| Conductor cross section solid min. | 0.5 mm ² |
| Conductor cross section solid max. | 25 mm ² |
| Conductor cross section stranded min. | 0.5 mm ² |
| Conductor cross section stranded max. | 16 mm ² |
| Conductor cross section AWG/kcmil min. | 20 |
| Conductor cross section AWG/kcmil max | 4 |
| Conductor cross section stranded, with ferrule without plastic sleeve min. | 0.5 mm ² |
| Conductor cross section stranded, with ferrule without plastic sleeve max. | 16 mm ² |
| Conductor cross section stranded, with ferrule with plastic sleeve min. | 0.5 mm ² |
| Conductor cross section stranded, with ferrule with plastic sleeve max. | 16 mm ² |
| 2 conductors with same cross section, solid min. | 0.5 mm ² |
| 2 conductors with same cross section, solid max. | 6 mm ² |
| 2 conductors with same cross section, stranded min. | 0.5 mm ² |
| 2 conductors with same cross section, stranded max. | 6 mm ² |
| 2 conductors with same cross section, stranded, ferrules without plastic sleeve, min. | 0.5 mm ² |
| 2 conductors with same cross section, stranded, ferrules without plastic sleeve, max. | 6 mm ² |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, min. | 0.5 mm ² |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max. | 6 mm ² |
| Connection method | Screw connection |
| Stripping length | 16 mm |
| Internal cylindrical gage | B 7 |
| Screw thread | M5 |
| Tightening torque, min | 2 Nm |
| Tightening torque max | 2.3 Nm |

Classifications

eClass

| | |
|------------|----------|
| eClass 4.0 | 27141131 |
| eClass 4.1 | 27141131 |
| eClass 5.0 | 27141134 |

Feed-through terminal block - HDFKV 16/Z - 0714079

Classifications

eclass

| | |
|------------|----------|
| eClass 5.1 | 27141134 |
| eClass 6.0 | 27141134 |

etim

| | |
|----------|----------|
| ETIM 2.0 | EC001283 |
| ETIM 3.0 | EC001283 |
| ETIM 4.0 | EC001283 |

unspsc

| | |
|---------------|----------|
| UNSPSC 6.01 | 30211811 |
| UNSPSC 7.0901 | 39121410 |
| UNSPSC 11 | 39121410 |
| UNSPSC 12.01 | 39121410 |
| UNSPSC 13.2 | 39121410 |

Approvals

Certificates

Certification

UL Recognized / cUL Recognized / PRS / GOST / cULus Recognized

Certification EX

Certification submitted

Approval details

| | |
|--------------------------------|-------|
| UL Recognized | |
| mm ² /AWG/kcmil | 20-4 |
| Nominal current I _N | 85 A |
| Nominal voltage U _N | 600 V |

| | |
|--------------------------------|-------|
| cUL Recognized | |
| mm ² /AWG/kcmil | 20-4 |
| Nominal current I _N | 85 A |
| Nominal voltage U _N | 600 V |

Feed-through terminal block - HDFKV 16/Z - 0714079

Approvals

PRS

GOST

cULus Recognized

Accessories

Accessories

Marking


Zack marker strip - ZB10:SO/CMS - 1050525




Zack marker strip, white, For terminal block width: 10 mm

Drawings

Dimensioned drawing

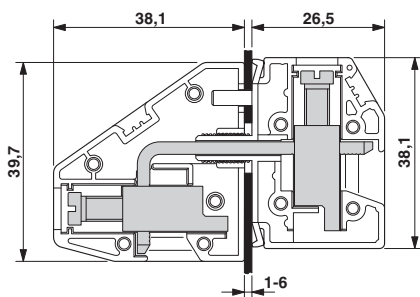

Dimensioned drawing

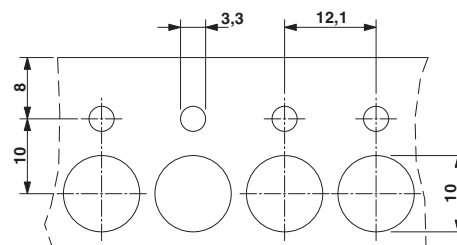

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9