


Part Number	Description
TS24D2G	2A, 275 Vac Solid-State Relay



**Part Number Explanation**

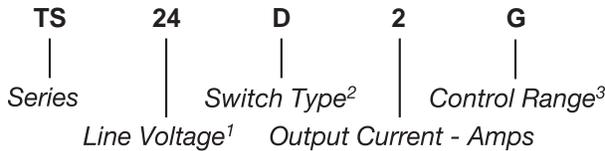

**NOTES**

- Line Voltage (nominal): 24 = 240 Vac;  
3 = 30 Vdc (3–30 Vdc/Vac for TS3R1G)
- Switch Type: D = Zero-cross turn-on; R = Random turn-on
- Control Range: G = 12–30 Vdc/Vac (TS24D2G, TS3R1G)  
G = 12–30 Vdc (TS3R2G)

**MECHANICAL SPECIFICATION**

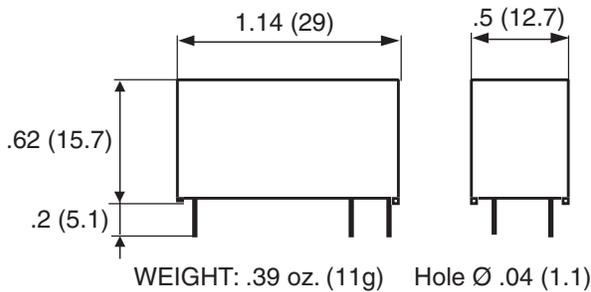


Figure 1 — TS relays; dimensions in inches (mm)

**ELECTRICAL SPECIFICATIONS**

(+25°C ambient temperature unless otherwise specified)

**INPUT (CONTROL) SPECIFICATIONS**

	Min	Max	Units
<b>Control Range</b>			
TS242G, TS3R1G	12	30	Vac/Vdc
TS3R2G	12	30	Vdc
<b>Input Current Range</b>	4.1	13	mA
(See Figure 2)			
<b>Must Turn-Off Voltage</b>		2.5	V
<b>Input Resistance (Typical)</b>		2100	Ω

**FEATURES/BENEFITS**

- Pin-to-pin compatible with electromechanical relays
- AC and DC control
- AC and DC output
- Random and zero-cross turn-on
- Compact size
- High inrush capabilities
- Integrated clamping voltage

**DESCRIPTION**

The Series TS relays provide AC/DC switching in a compact size. The TS relays also provide an AC/DC control. These relays can withstand high surge currents. The TS relays are pin-to-pin compatible with electromechanical relays and may be used as replacements.

**APPLICATIONS**

- Interface applications
- Vending machines
- Light/lamp control
- Contactor driver
- Fan speed control

**APPROVALS**

All models are UL recognized.  
UL File Number E128555.

**CONTROL CHARACTERISTIC**

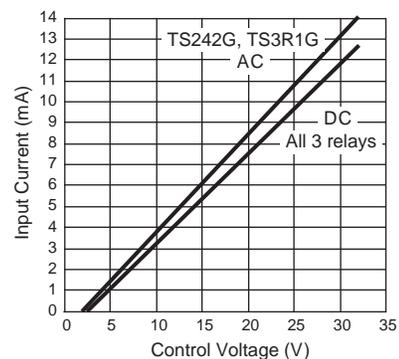


Figure 2

BLOCK DIAGRAM

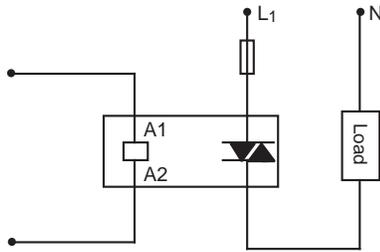


Figure 3a — TS24D2G

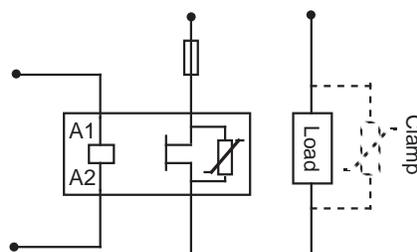


Figure 3b — TS3R1G




Figure 3c — TS3R2G

GRID DIAGRAM




Figure 4a — TS24D2G




Figure 4b — TS3R1G




Figure 4c — TS3R2G

ELECTRICAL SPECIFICATIONS  
(+25°C ambient temperature unless otherwise specified)

OUTPUT (LOAD) SPECIFICATIONS

	Min	Max	Units
<b>Operating Range</b>			
TS24D2G	12	275	Vrms
TS3R2G	0	30	Vdc
TS3R1G	0	30	Vac/Vdc
<b>Peak Voltage</b>			
TS24D2G		600	V
TS3R2G		60	V
TS3R1G		60	V
<b>Load Current Range</b>			
TS24D2G	.05	2	Arms
TS3R2G	.001	2.5	Arms
TS3R1G	.001	1	Arms
<b>Maximum Surge Current Rating (Non-Repetitive)</b>			
TS24D2G		100	A
TS3R2G		12	A
TS3R1G		2.4	A

OUTPUT (LOAD) SPECIFICATIONS (Continued)

	Min	Max	Units
<b>On-State Voltage Drop</b>			
TS24D2G		1.0	V
TS3R2G		0.5	V
TS3R1G		0.9	V
<b>Zero-Cross Window (Typical)</b>			
TS24D2G		±10	V
TS3R2G		NA	
TS3R1G		NA	
<b>Off-State Leakage Current (60Hz)</b>			
All Relays		1	mA
<b>Operating Frequency Range</b>			
TS24D2G	1	440	Hz
TS3R1G	0	50	KHz
<b>Turn-On Time (60Hz)</b>			
TS24D2G		10	ms
TS3R2G		50	µs
TS3R1G		5	ms

OUTPUT (LOAD) SPECIFICATIONS (Continued)

	Min	Max	Units
Turn-Off Time (60Hz)			
TS24D2G		17	ms
TS3R2G		600	$\mu$ s
TS3R1G		10	ms

Off-State dv/dt			
TS24D2G		500	V/ $\mu$ s

Switching Frequency			
TS3R2G		100	Hz
TS3R1G		10	ms

I <sup>2</sup> t for Match Fusing (<8.3ms)			
TS24D2G		50	A <sup>2</sup> s

ENVIRONMENTAL SPECIFICATIONS

	Min	Max	Units
Junction Temperature		125	$^{\circ}$ C

Operating Temperature			
TS24D2G	-40	100	$^{\circ}$ C
TS3R2G	-40	100	$^{\circ}$ C
TS3R1G	-40	90	$^{\circ}$ C

Input-Output Isolation			
TS24D2G	4000		V
TS3R2G	2500		V
TS3R1G	4000		V

Junction-Case Thermal Resistance			
TS24D2G		12	$^{\circ}$ C/W
TS3R2G		12	$^{\circ}$ C/W
TS3R1G		44	$^{\circ}$ C/W

Junction-Ambient Thermal Resistance			
TS24D2G		44	$^{\circ}$ C/W
TS3R2G		44	$^{\circ}$ C/W
TS3R1G		88	$^{\circ}$ C/W

Maximum Soldering Heat (1mm case)		260	$^{\circ}$ C
-----------------------------------	--	-----	--------------

THERMAL CURVE

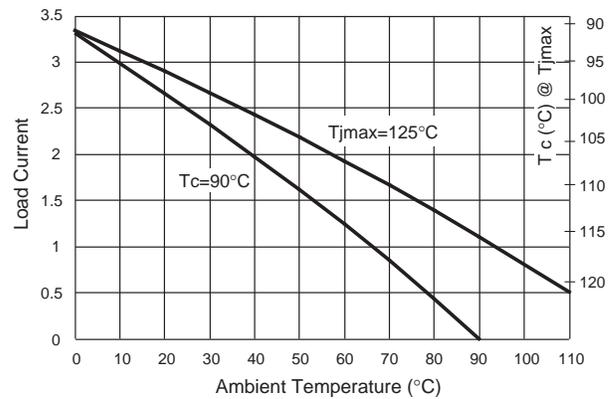


Figure 5a — TS24D2G

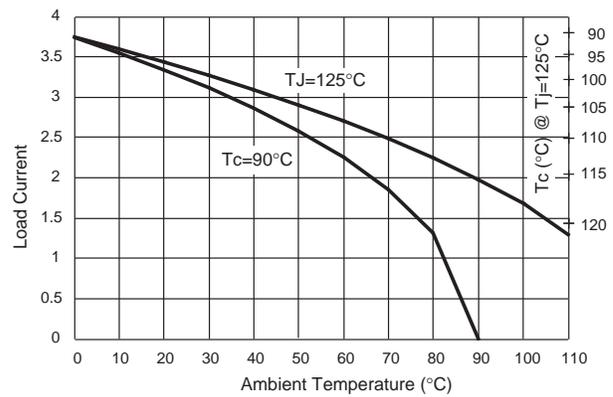


Figure 5b — TS3R2G

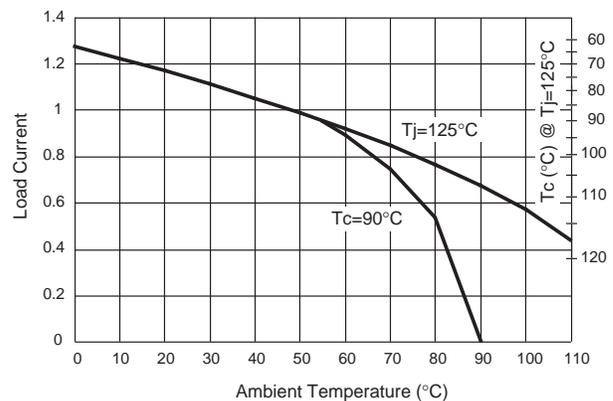


Figure 5c — TS3R1G

NON-REPETITIVE SURGE CURRENT

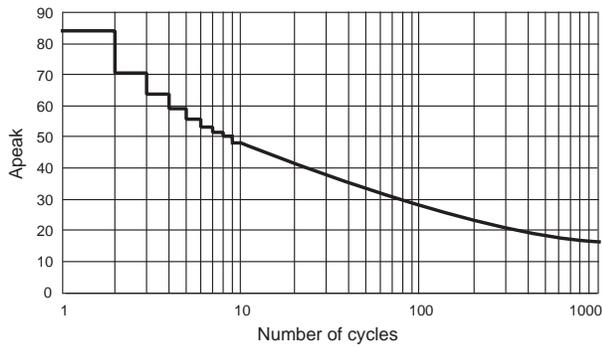


Figure 6a — TS24D2G

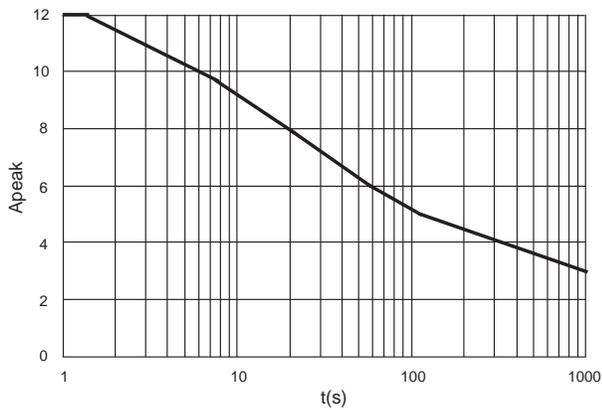


Figure 6b — TS3R2G

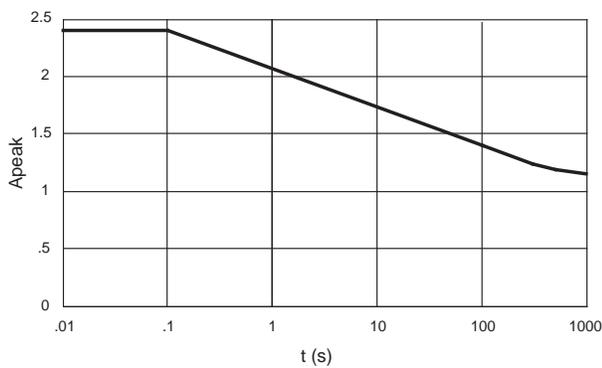


Figure 6c — TS3R1G

NOTES:

1. On inductive loads, a free-wheeling diode (or clamp) is recommended.
2. Electrical specifications at 25°C unless otherwise specified.
3. TS3R2G no polarity on the control pins.
4. For additional/custom options, contact factory.

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9